

Prediction of Pedestrian Speed with Artificial Neural Networks



Antoine Tordeux, Mohcine Chraibi, Armin Seyfried,
and Andreas Schadschneider

Abstract Pedestrian behaviours tend to depend on the type of facility. Accurate predictions of pedestrian movement in complex geometries (including corridor, bottleneck or intersection) are difficult to achieve for models with few parameters. Artificial neural networks have multiple parameters and are able to identify various types of patterns. They could be a suitable alternative for forecasts. We aim in this paper to present first steps testing this approach. We compare estimations of pedestrian speed with a classical model and a neural network for combinations of corridor and bottleneck experiments. The results show that the neural network is able to differentiate the two geometries and to improve the estimation of pedestrian speeds.

1 Introduction

Microscopic pedestrian models are frequently used in traffic engineering to predict crowd dynamics. Classical operational approaches are in general decision-based, velocity-based or force-based models (see [24] and the references therein). Such models consider physical as well as social or psychological factors. They are basic rules or generic functions depending locally on the environment. Few parameters having generally physical interpretations allow to adjust the model.

A. Tordeux (✉) · A. Seyfried
Forschungszentrum Jülich, Jülich, Germany
e-mail: a.tordeux@fz-juelich.de; tordeux@uni-wuppertal.de; a.seyfried@fz-juelich.de
University of Wuppertal, Wuppertal, Germany

M. Chraibi
Forschungszentrum Jülich, Jülich, Germany
e-mail: m.chraibi@fz-juelich.de

A. Schadschneider
University of Cologne, Cologne, Germany
e-mail: as@thp.uni-koeln.de

Before applying simulations to make predictions, the model parameters have to be calibrated and the models have to be validated, experimentally or statistically by using real data. The validation can be carried out by checking whether the models are able to describe the dynamics accurately for configurations different from the ones used for the calibration (cross-validation) [28]. A good model should provide realistic dynamics in different conditions (i.e. different geometries, initial or boundary conditions) for the same setting of the parameters.

The parameter for the convection part of the models (for instance, desired speed or time gap) can be referred to the fundamental diagram (FD), a phenomenological relation between speed and surrounding distance spacing to the neighbours and obstacles [25]. This relation can be explicitly used to model the speed of the pedestrian and is then related to *optimal velocity*, a concept borrowed from traffic modelling [2], see, e.g., [15, 18, 19]. It is also used as an implicit relation (see, e.g., [3, 10, 11]) that is determined by considering uni-dimensional flows [4]. By neglecting anisotropic effects in the models (such as the vision-based effect), microscopic models can be characterised at an aggregated level by fundamental diagrams determining a speed to a local density given by the mean distance spacing to the closest neighbours [6]. In the following we refer a model simply based on a fundamental diagram as *FD-based model*.

Despite of their simplicity, microscopic models can describe realistic pedestrian flows, as well as self-organisation phenomena such as lane formation or alternation of flow at a bottleneck in bi-directional streams [12, 24]. However, the prediction of pedestrian movement in complex spatial structures (e.g. buildings like stadia or stations) remains problematic. Observations show that pedestrians tend to adapt their behaviour according to the facilities [5]. For instance, the flow tends to locally increase at bottlenecks [20, 26, 30]. This leads to geometry-dependent characteristics and makes aggregated models based on a single fundamental diagram unable to accurately describe transitions between different types of facilities (such as corridor, T-junction, crossing or bottleneck), as well as from platforms to stairs.

An alternative data-driven approach for the prediction of pedestrian dynamics in complex geometries could be provided by using artificial neural networks (ANN). Neural networks have already proven their efficiency for motion planning in robotic or autonomous vehicles [13, 23], and start to be used for pedestrian dynamics as well [1, 6, 8, 16]. Such approach is data based and, by opposition to classical models, has artificially a very large number of parameters with no explicit physical meaning (see Fig. 1). ANN can reproduce complex patterns that FD-based models, describing dynamics at an aggregated level, cannot.

The aim of this work is to evaluate whether ANN could accurately describe pedestrian behaviour for different types of geometries. A feed-forward neural network is compared to a FD-based model with data gained by experiments at bottleneck and corridor with closed boundary conditions (in the following ‘bottleneck’ and ‘ring’ experiments) [7, 27]. The performances (i.e. the fundamental diagram) significantly differ according to the spatial structure. Training and testing (cross-validation) are carried out for different combinations of bottleneck and ring experiments. The results show that the neural network is able to identify the spatial

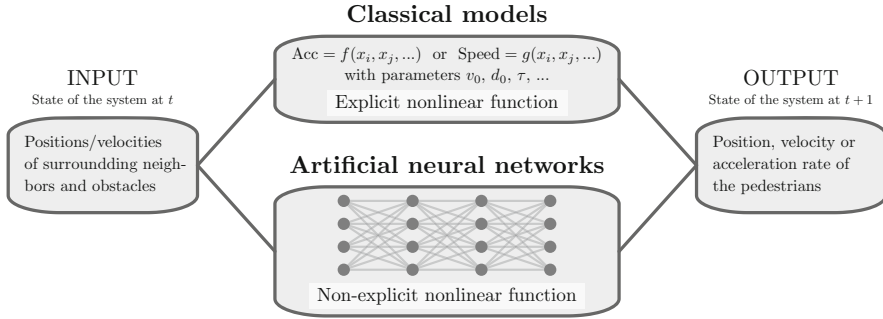


Fig. 1 Minimalistic illustrative scheme for the distinction between FD-based models, which are explicit non-linear functions calibrated by few meaningful parameters, and neural networks, for which the non-linear function is data based and has deliberately a large number of parameters

structure of the facility and improve the prediction in case of mixed structures. The data and the models used are presented in Sects. 2 and 3. The fitting of the neural network is proposed in Sect. 4 while the comparison to the FD-based model over combinations of bottleneck and ring experiments is given in Sect. 5. Conclusions are presented in Sect. 6.

2 Models

The pedestrian modelling approaches are continuous speed models based on the $K = 10$ closest neighbours. We denote in the following (x, y) as the position of the considered agent, v as its speed and $((x_i, y_i), i = 1, \dots, K)$ as the positions of the K closest neighbours.

The first modelling approach is the Weidmann model for the fundamental diagram [29] for which the speed is a function of the mean spacing (i.e. the local density)

$$v = \text{FD}(\bar{s}_K, v_0, T, \ell) = v_0 \left(1 - e^{-\frac{\ell - \bar{s}_K}{v_0 T}} \right). \tag{1}$$

Here $\bar{s}_K = \frac{1}{K} \sum_{i=1}^K \sqrt{(x - x_i)^2 + (y - y_i)^2}$ is the mean spacing with the $K = 10$ closest neighbours while the time gap T , the pedestrian size ℓ and the desired speed v_0 are the parameters of the model.

The second modelling approach is a feed-forward artificial neural network with hidden layers H

$$v = \text{NN}(H, \bar{s}_K, (x_i - x, y_i - y, 1 \leq i \leq K)). \tag{2}$$

The network has $2K + 1$ inputs: the mean spacing and the K relative positions. The number of parameters in the network depends on the number of nodes in the hidden layers.

3 Data

Two datasets obtained in laboratory conditions are used to compare the FD-based and ANN modelling approaches. The data are available on the internet (see [27]). They are part of the online database of pedestrian experiments [7]. The first dataset, denoted R and called the ring experiment, comes from an experiment done on a closed geometry of length 30 m and width 1.8 m for different density levels (ranging from 0.25 to 2 ped/m²—the participant number ranges from 15 to 230). The second dataset, denoted B, is an experiment for a bottleneck geometry. The width of the system in front of the bottleneck is 1.8 m while the width of the bottleneck varies (from 0.70, 0.95, 1.20 to 1.80 m—150 participants by experiment). See [27] for details on the data. The flow and density are measured every 10 s to deal with pseudo-independent measurements. Each sample contains around $N = 2000$ observations.

The two datasets describe two different interaction behaviours (see Fig. 2). The speed for a given mean spacing tends to be higher in the bottleneck than on the ring when the system is congested. Consequently the estimation of the time gap significantly differs according to the geometry (see Table 1).

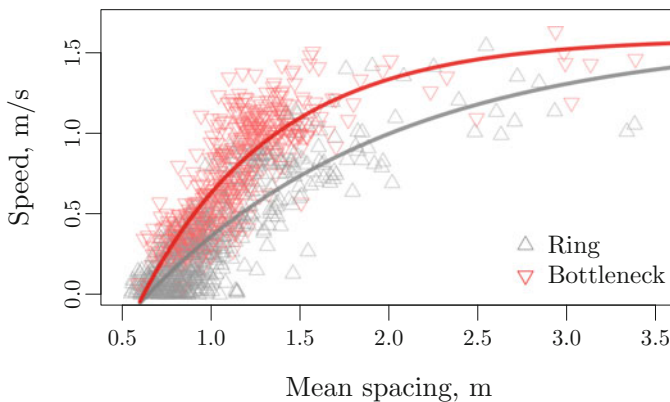


Fig. 2 Observations of the pedestrian speeds as function of the mean spacing with the ten closest neighbours for the ring and bottleneck experiments. Two distinct relationships can be identified

Table 1 Fitting of the time gap T , the pedestrian size ℓ and the desired speed v_0 parameters of the Weidmann model on the ring and bottleneck experiment

Experiment	R	B
ℓ (m)	0.64	0.61
T (s)	0.86	0.48
V_0 (m/s)	1.60	1.58

The time gap significantly differs according to the geometry

4 Fitting the Neural Network

The neural network is fitted with cross-validation and bootstrap [14, 17] over 50 sub-samples. The training is performed using half of the data while the network is tested on the remaining. The training is carried out with the back-propagation method [22] on the normalised data, by minimising from the top to the bottom of the network the mean square error

$$MSE = \frac{1}{N} \sum_i (v_i - \tilde{v}_i)^2, \tag{3}$$

with v_i the observed speed, \tilde{v}_i the predicted speed and N the number of observations. The computation is done with the statistical software R [21] and the package `neuralnet` [9].

The different hidden layers (1), (2), (3), (4,2), (5,2), (5,3), (6,3), (10,4) and (12,5) are tested (see Fig. 3). As expected, the training error tends to decrease as the complexity of the network increases, while the testing error shows a minimum before overfitting. Such a minimum is reached for the single hidden layer $H = (3)$ with three nodes. Note that here the calibration is done on a combination of the ring and bottleneck experiment datasets. Yet similar results are obtained when calibrating separately on the ring and on the bottleneck datasets.

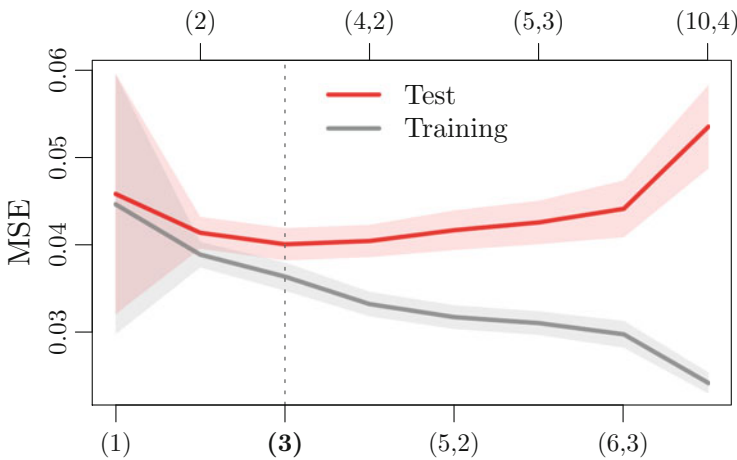


Fig. 3 Training and testing errors according to different hidden layer in the network. The curves correspond to the average of 50-bootstrap estimates while the bands describe the standard deviation. The training error systematically decreases as network complexity increases while the testing error admits a minimum for hidden $H = (3)$

5 Model Comparison

The calibrated FD-model and the trained neural network with $H = 3$ are compared to different combinations of data of the ring R and bottleneck B experiments. Here the first argument in the notation ‘./.’ corresponds to the training phase, while the second argument corresponds to the testing phase. The testing errors are presented in Fig. 4. The modelling approaches are firstly analysed on the identical sets R/R and B/B. Here the network is slightly better than the FD-model. For the ring experiment, the performances are relatively homogeneous and the MSE is only approximately 5% smaller by using the network. While for the bottleneck, the performances fluctuate more and the improvement is more significant (around 15%). The improvement is also significant when the approaches deal with unobserved situations, i.e. for the datasets R/B and B/R (around 15%). The best results are obtained when training the models on the combination of ring and bottleneck experiments, i.e. the scenarios R/R+B, B/R+B and R+B/R+B. As shown in Fig. 5 and Table 2, the network is able in such situation to partially differentiate the two geometries and to improve the speed estimation by a factor of approximately 20%. The orders of improvement are similar to the ones obtained in [1] with the social LSTM neural network and the social force pedestrian model [11].

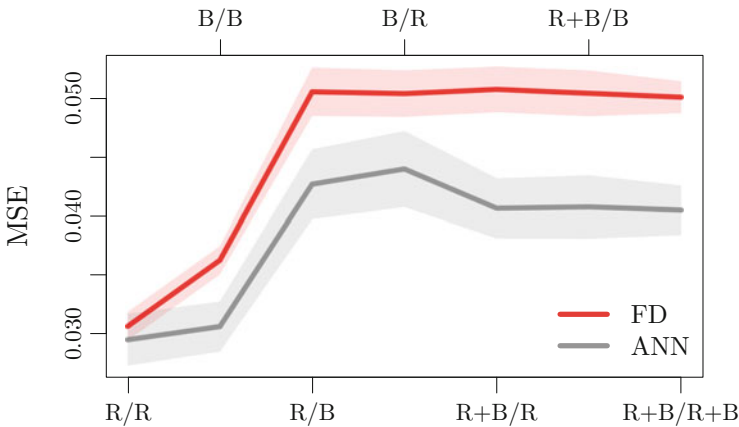


Fig. 4 Testing error of the FD-model and the neural network according to combinations of the ring R and bottleneck B experiments. The curves correspond to the average of 50-bootstrap estimates while the bands describe the standard deviation. The improvement of the speed is significant by using the network when the experiments are mixed (i.e. R+B)

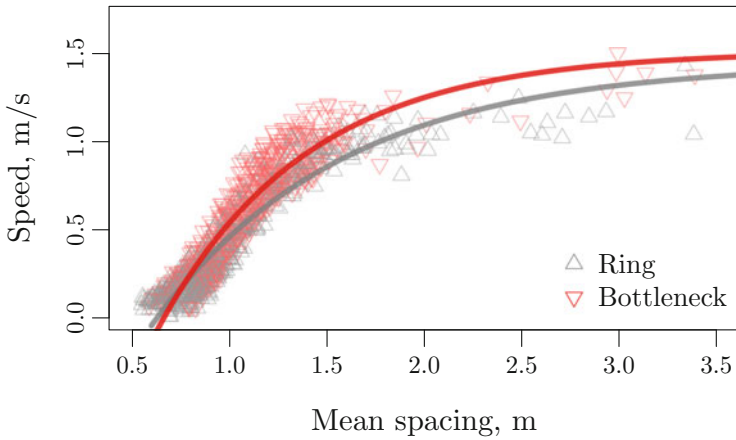


Fig. 5 Prediction by the neural network of the pedestrian speed for the R+B/R+B training and testing datasets. The network is able to, at least partially, identify the two geometries. As observed in the real data, the speed for a given mean spacing is in average in the bottleneck higher than the flow in the corridor for congested situations

Table 2 Fitting of the time gap T , the pedestrian size ℓ and the desired speed v_0 parameters for the data predicted by the neural network

Experiment	R	B
ℓ (m)	0.63	0.66
T (s)	0.68	0.50
V_0 (m/s)	1.44	1.51

6 Conclusion

The data-driven approach using an artificial neural network is able to distinguish pedestrian performances in ring and bottleneck experiments from the relative positions of the $K = 10$ closest neighbours and the mean spacing. Consequently, we observe that the speed prediction for mixed data can be improved by a factor up to 20% by using a network compared to an aggregated model based on fundamental diagrams.

The results are first steps suggesting that neural networks could be suitable tools for the prediction of pedestrian dynamics in complex geometries. Yet, the simulation of the networks remains to be carried out over full trajectories and compared to the performances obtained with existing models and notably anisotropic models. Furthermore, other inputs, hidden layers and training on different geometries have to be investigated. Especially, one remains to test the complexity necessary to the network for accurate precisions regarding to the size and heterogeneity of the datasets.

Acknowledgements Financial supports by the German Science Foundation (DFG) under grants SCHA 636/9-1 and SE 1789/4-1 are gratefully acknowledged.

References

1. Alahi, A., Goel, K., Ramanathan, V., Robicquet, A., Fei-Fei, L., Savarese, S.: Social LSTM: human trajectory prediction in crowded spaces. In: IEEE ICCV Conference, pp. 961–971 (2016)
2. Bando, M., Hasebe, K., Nakayama, A., Shibata, A., Sugiyama, Y.: Dynamical model of traffic congestion and numerical simulation. *Phys. Rev. E* **51**(2), 1035–1042 (1995)
3. Chraïbi, M., Seyfried, A., Schadschneider, A.: Generalized centrifugal-force model for pedestrian dynamics. *Phys. Rev. E* **82**(4), 046111 (2010)
4. Chraïbi, M., Ezaki, T., Tordeux, A., Nishinari, K., Schadschneider, A., Seyfried, A.: Jamming transitions in force-based models for pedestrian dynamics. *Phys. Rev. E* **92**, 042809 (2015)
5. Daamen, W.: Modelling passenger flows in public transport facilities. Dissertation, TU Delft (2004)
6. Das, P., Parida, M., Katiyar, V.K.: Analysis of interrelationship between pedestrian flow parameters using artificial neural network. *J. Mod. Transport.* **23**(4), 298–309 (2015)
7. Forschungszentrum Jülich: Dataset of experiments with pedestrians. <http://ped.fz-juelich.de/database>
8. Fragkiadaki, K., Levine, S., Felsen, P., Malik, J.: Recurrent network models for human dynamics. In: IEEE ICCV Conference, pp. 4346–4354 (2015)
9. Fritsch, S., Guenther, F., Suling, M.: neuralnet: training of neural networks. <http://CRAN.R-project.org/package=neuralnet> (2012)
10. Guo, R., Wong, S., Huang, H., Zhang, P., Lam, W.: A microscopic pedestrian-simulation model and its application to intersecting flows. *Physica A* **389**(3), 515–526 (2010)
11. Helbing, D., Molnár, P.: Social force model for pedestrian dynamics. *Phys. Rev. E* **51**(5), 4282–4286 (1995)
12. Helbing, D., Buzna, L., Johansson, A., Werner, T.: Self-organized pedestrian crowd dynamics: experiments, simulations, and design solutions. *Transport. Sci.* **39**(1), 1–24 (2005)
13. Jackel, L., Hackett, D., Krotkov, E., Perschbacher, M., Pippine, J., Sullivan, C.: How DARPA structures its robotics programs to improve locomotion and navigation. *Commun. ACM* **50**(11), 55–59 (2007)
14. Kohavi, R.: A study of cross-validation and bootstrap for accuracy estimation and model selection. In: IJCAI'95 Conference, pp. 1137–1143. Morgan Kaufmann, San Francisco (1995)
15. Lv, W., Song, W.G., Ma, J., Fang, Z.M.: A two-dimensional optimal velocity model for unidirectional pedestrian flow based on pedestrian's visual hindrance field. *IEEE Trans. Intell. Transp. Syst.* **14**(4), 1753–1763 (2013)
16. Ma, Y., Lee, E.W.M., Yuen, R.K.K.: An artificial intelligence-based approach for simulating pedestrian movement. *IEEE Trans. Intell. Transp. Syst.* **17**(11), 3159–3170 (2016)
17. Mooney, C., Duval, R.: Bootstrapping: A Nonparametric Approach to Statistical Inference. 94–95. Sage Publications, Thousand Oaks (1993)
18. Moussaïd, M., Guilloit, E., Moreau, M., Fehrenbach, J., Chabiron, O., Lemerrier, S., Pettré, J., Appert-Rolland, C., Degond, P., Theraulaz, G.: Traffic instabilities in self-organized pedestrian crowds. *PLOS Comput. Biol.* **8**(3), 1–10 (2012)
19. Nakayama, A., Hasebe, K., Sugiyama, Y.: Instability of pedestrian flow and phase structure in a two-dimensional optimal velocity model. *Phys. Rev. E* **71**, 036121 (2005)
20. Parisi, D., Patterson, G.: Influence of bottleneck lengths and position on simulated pedestrian egress. *Pap. Phys.* **9**, 090001 (2017)
21. R Core Team: R: A Language and Environment for Statistical Computing. R Foundation for Statistical Computing (2014). <http://www.R-project.org/>

22. Rumelhart, D., Hinton, G., Williams, R.: Learning representations by back-propagating errors. *Nature* **323**, 533–536 (1986)
23. Sadati, N., Taheri, J.: Solving robot motion planning problem using Hopfield neural network in a fuzzified environment. In: *IEEE FS Conference*, vol. 2, pp. 1144–1149 (2002)
24. Schadschneider, A., Klingsch, W., Klüpfel, H., Kretz, T., Rogsch, C., Seyfried, A.: Evacuation dynamics: empirical results, modeling and applications. In: *Encyclopedia of Complexity and Systems Science*, pp. 3142–3176. Springer, New York (2009)
25. Seyfried, A., Steffen, B., Klingsch, W., Boltes, M.: The fundamental diagram of pedestrian movement revisited. *J. Stat. Mech. Theory Exp.* **2005**(10), P10002 (2005)
26. Seyfried, A., Passon, O., Steffen, B., Boltes, M., Rupperecht, T., Klingsch, W.: New insights into pedestrian flow through bottlenecks. *Transport. Sci.* **43**(3), 395–406 (2009)
27. Tordeux, A., Chraïbi, M., Seyfried, A., Schadschneider, A.: Data from: Prediction of pedestrian speed with artificial neural networks (2017). <https://doi.org/10.5281/zenodo.1054017>
28. Treiber, M., Kesting, A.: *Traffic Flow Dynamics*. Springer, Berlin (2013)
29. Weidmann, U.: *Transporttechnik der Fußgänger*. Technical Report, Schriftenreihe des IVT Nr. 90 (ETH Zürich) (1994)
30. Zhang, J., Seyfried, A.: Experimental studies of pedestrian flows under different boundary conditions. In: *ITSC IEEE Conference*, pp. 542–547 (2014)