

Non-intrusive Polynomial Chaos Method Applied to Full-Order and Reduced Problems in Computational Fluid Dynamics: A Comparison and Perspectives



Saddam Hijazi, Giovanni Stabile, Andrea Mola, and Gianluigi Rozza

Abstract In this work, Uncertainty Quantification (UQ) based on non-intrusive Polynomial Chaos Expansion (PCE) is applied to the CFD problem of the flow past an airfoil with parameterized angle of attack and inflow velocity. To limit the computational cost associated with each of the simulations required by the non-intrusive UQ algorithm used, we resort to a Reduced Order Model (ROM) based on Proper Orthogonal Decomposition (POD)-Galerkin approach. A first set of results is presented to characterize the accuracy of the POD-Galerkin ROM developed approach with respect to the Full Order Model (FOM) solver (OpenFOAM). A further analysis is then presented to assess how the UQ results are affected by substituting the FOM predictions with the surrogate ROM ones.

1 Introduction

Many methods have been developed to assess how uncertainties of input parameters propagate, through Computational Fluid Dynamics (CFD) numerical simulations, into the outputs of interest. The aim of this work is to carry out a study on the application of non-intrusive Polynomial Chaos Expansion (PCE) to CFD problems. The PCE method is a way of representing random variables or random processes in terms of orthogonal polynomials. One important feature of PCE is the possibility of decomposing the random variable into separable deterministic and stochastic components [20, 25]. By a computational stand point, the main problem in PCE consists in finding the deterministic coefficients of the expansion. In non-intrusive PCE, no changes are made in the simulations code, and the coefficients are computed in a post processing phase which follows the simulations. Thus, the

S. Hijazi · G. Stabile · A. Mola · G. Rozza (✉)
mathLab, Mathematics Area, SISSA, Trieste, Italy
e-mail: shijazi@sissa.it; gstabile@sissa.it; amola@sissa.it; grozza@sissa.it

© National Technology & Engineering Solutions of Sandia, and The Editor(s), under exclusive licence to Springer Nature Switzerland AG 2020
M. D'Elia et al. (eds.), *Quantification of Uncertainty: Improving Efficiency and Technology*, Lecture Notes in Computational Science and Engineering 137, https://doi.org/10.1007/978-3-030-48721-8_10

217

deterministic terms in the expansion are obtained via a sampling based approach such as the one used in [21, 32]. In this framework, samples of the input parameters are prescribed and then numerical simulations are carried out for each sample.

Once the output of the simulations corresponding to each sample is evaluated, it is used to obtain the PCE coefficients. In the projection approach, the orthogonality of the polynomials is exploited to compute the deterministic coefficients in the expansion through integrals in the sampling space. As the sampling points chosen are quadrature points for such integrals, the computational cost will grow exponentially as the parameter space dimension increases. This is of course quite undesirable, given the considerable computational cost of the CFD simulations associated to the output evaluation at each sampling point. To avoid such problem, in this work the PCE expansion coefficients are computed using a regression approach which is based on least squares minimization.

To explore even further reductions of the computational cost associated with sample points output evaluations, in the present work we apply the PCE algorithm both to the full order CFD model and to a reduced order model based on POD-Galerkin approach. In the last decade, there have been several efforts to develop reduced order models and apply them to industrial continuous mechanics problems governed by parameterized PDEs. We refer the interested readers to [11, 17, 30] for detailed theory on ROMs for parameterized PDE problems. More in particular, the solution of parameterized Navier–Stokes problem in a reduced order setting is discussed in [31]. In such work, the FOM discretization was based on Finite Element Method (FEM). Projection-based Reduced Order Methods (ROMs) have in fact been mainly developed for FEM, but in the last years many efforts have been dedicated to extend them to Finite Volume Method (FVM) and to CFD problems with high Reynolds numbers. Some examples of the application of ROMs based on the Reduced Basis (RB) method to a finite volume setting are found in [12, 15, 16]. In this work, we instead focus on POD-Galerkin methods applied to CFD computations based on FVM discretization. A large variety of works related to POD-Galerkin can be found in the literature, and here we refer only to some of them [2, 3, 6, 7, 24, 28], as examples. As for POD-Galerkin approach applied to Navier–Stokes flows discretized via FVM, we mention [26], in which the authors treat the velocity pressure coupling in the reduced model using the same set of coefficients for both velocity and pressure fields. In [35], the coefficients of velocity and pressure are instead different, and Poisson equation for pressure is added to close the system at reduced order level. In [36] a stabilization method for the finite volume ROM model is presented. In [8] a study on conservative reduced order model for finite volume method is discussed. For applications of ROMs to UQ problems we refer the readers to [9, 10, 14].

PCE is a tool that is independent of the output evaluator and in this work we will apply it to output parameters both obtained from the full order solution and to its POD-Galerkin reduced order counterpart. In this regard, the objective of the present work is to assess whether PCE results are significantly influenced by the use of a POD-Galerkin based model reduction approach. To this end, we will apply POD model reduction to CFD simulations based on incompressible steady Navier–

Stokes equations, and compare the PCE coefficients and sensitivities obtained for the reduced order solution to the ones resulting from the full order simulations.

This article is organized as follows: in Sect. 2 the physical problem under study is described at the full order level. In Sect. 3 the reduced order model is introduced. In particular, the most relevant notions on projection based methods are reported in Sect. 3.1, while boundary conditions treatment is discussed in Sect. 3.2. The theory of the non intrusive PCE is summarized in Sect. 4 with direct reference to the quantities of interest in the present work. Numerical results are presented in Sect. 5, starting with the ones of the reduced order model in Sect. 5.1 and then the PCE results in Sect. 5.2. Finally, conclusions and possible directions of future work are discussed in Sect. 6.

2 The Physical Problem

In this section, we describe the physical problem of interest which consists into the flow around an airfoil subjected to variations of the angle of attack and inflow velocity. In aerospace engineering, the angle of attack is the angle that lies between the flow velocity vector at infinite distance from the airfoil (U_∞) and the chord of the airfoil, see Fig. 1. We are interested in finding the angle of attack that produces the maximum lift coefficient before stall happens. Figure 2 depicts for the lift coefficient curve of the airfoil NACA 0012 – 64 [1, 34] at a fixed Reynolds number of 10^6 . The

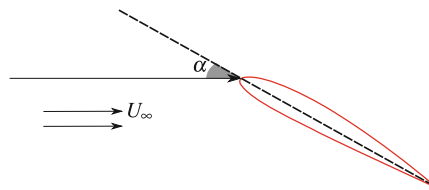


Fig. 1 The angle of attack on an airfoil

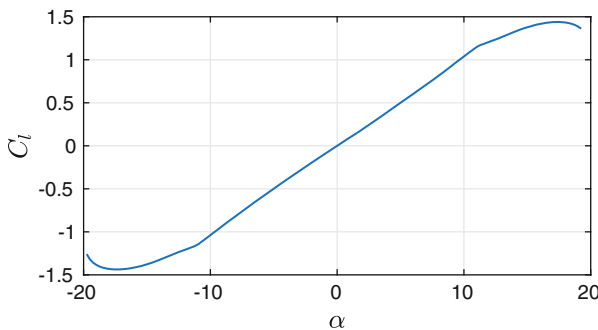


Fig. 2 The lift coefficient curve for the airfoil NACA0012

plot suggests that as the angle of attack increases, the lift coefficient grows until flow separation occurs leading to a loss of the lift force. At laminar flow regimes such as the ones that will be analyzed later in Sect. 5, such stall phenomenon happens in a mild fashion, as opposed to more abrupt stalls observed at higher velocities like the one in Fig. 2. It can be noticed from the plot that the lift coefficient reaches its maximum value when the angle is about 17° before stall happens. For lower Reynolds numbers, the maximum in the C_L - α curve is observed at higher angles of attack. The fluid dynamic problem is mathematically governed by the steady Navier-Stokes equations which read as follows:

$$\begin{cases} (\mathbf{u} \cdot \nabla)\mathbf{u} - \nabla \cdot \nu \nabla \mathbf{u} = -\nabla p & \text{in } \Omega_f, \\ \nabla \cdot \mathbf{u} = \mathbf{0} & \text{in } \Omega_f, \\ \mathbf{u}(x) = \mathbf{f}(x, \boldsymbol{\mu}) & \text{on } \Gamma_{In}, \\ \mathbf{u}(x) = \mathbf{0} & \text{on } \Gamma_0, \\ (\nu \nabla \mathbf{u} - p \mathbf{I})\mathbf{n} = \mathbf{0} & \text{on } \Gamma_{Out}, \end{cases} \quad (1)$$

where $\Gamma = \Gamma_{In} \cup \Gamma_0 \cup \Gamma_{Out}$ is the boundary of the fluid domain Ω_f and is composed by three different parts Γ_{In} , Γ_{Out} and Γ_0 , indicating respectively inlet boundary, outlet boundary and wing. In the flow equations \mathbf{u} is the flow velocity vector, ν is the fluid kinematic viscosity, and p is the normalized pressure, which is divided by the fluid density ρ_f . As for the boundary conditions in which \mathbf{f} is a generic function that prescribes the value of the velocity on the inlet Γ_{In} and it is parameterized through the vector quantity $\boldsymbol{\mu}$. In the present work the problem is solved using a finite volume discretization technique [5, 23, 27, 39], the standard approach is to work with a Poisson equation for pressure, rather than directly with the continuity equation. System (1) is then modified into:

$$\begin{cases} (\mathbf{u} \cdot \nabla)\mathbf{u} - \nabla \cdot \nu \nabla \mathbf{u} = -\nabla p & \text{in } \Omega_f, \\ \Delta p = -\nabla \cdot (\mathbf{u} \cdot \nabla)\mathbf{u} & \text{in } \Omega_f, \\ \mathbf{u}(x) = \mathbf{f}(x, \boldsymbol{\mu}) & \text{on } \Gamma_{In}, \\ \mathbf{u}(x) = \mathbf{0} & \text{on } \Gamma_0, \\ (\nabla \mathbf{u})\mathbf{n} = \mathbf{0} & \text{on } \Gamma_{Out}, \\ \nabla p \cdot \mathbf{n} = 0 & \text{on } \Gamma \setminus \Gamma_{Out}, \\ p = 0 & \text{on } \Gamma_{Out}. \end{cases} \quad (2)$$

In the above system of equations all the quantities assume the same meaning of those presented in (1). The Poisson equation for pressure is obtained taking the divergence of the momentum equation, and then exploiting the divergence free constraint on velocity. The two equations are solved in a segregated fashion, making use of the SIMPLE algorithm [29]. Historically, the FVM discretization technique has been widely used in industrial applications and for flows characterized by higher values

of the *Reynolds* number. One important feature of the FVM is that it ensures that conservative laws are satisfied at local level. In this work the Full Order Model (FOM) simulations are carried out making use of the finite volume open source C++ library OpenFOAM[®] (OF) [40].

3 The Reduced Order Model

The FOM simulations carried out by OpenFOAM present a high computational cost. In the framework of a many query problem such as the one associated with non-intrusive PCE employed in this work, the search for ways to reduce the computational cost becomes paramount. For this reason, we resort to reduce order modelling and we couple it with PCE in the next sections. In This section, we recall the notion of ROM and the POD approach to build the reduced order spaces. Here, only few details are addressed, while for further information on how to adapt ROM for finite volume discretization method the reader may refer to [26, 35, 36].

The key assumption of ROMs is that one can find a low dimensional space in which it is possible to express the solution of the full order problem with good approximation properties. That space is spanned by the reduced order modes [17]. The latter assumption translates to the following decomposition of the velocity and pressure fields:

$$\mathbf{u}(\mathbf{x}, \boldsymbol{\mu}) \approx \mathbf{u}_r(\mathbf{x}, \boldsymbol{\mu}) = \sum_{i=1}^{N_u} a_i(\boldsymbol{\mu}) \boldsymbol{\phi}_i(\mathbf{x}), \quad (3)$$

$$p(\mathbf{x}, \boldsymbol{\mu}) \approx p_r(\mathbf{x}, \boldsymbol{\mu}) = \sum_{i=1}^{N_p} b_i(\boldsymbol{\mu}) \chi_i(\mathbf{x}), \quad (4)$$

where $\mathbf{u}_r(\mathbf{x}, \boldsymbol{\mu})$ and $p_r(\mathbf{x}, \boldsymbol{\mu})$ are the reduced order approximations of velocity and pressure, respectively, a_i and b_i are scalar coefficients that depend on the parameter value $\boldsymbol{\mu}$, $\boldsymbol{\phi}_i$ and χ_i are the basis functions of the reduced basis spaces for velocity and pressure, respectively. N_u and N_p represent the dimension of the reduced basis spaces for velocity and pressure, respectively, obviously N_u and N_p are not supposed to have the same value.

The next step in constructing the reduced order model is to generate the reduced order space. For such step we resort to a POD approach. The POD space is constructed by solving the following minimization problem:

$$\mathbb{V}_{POD} = \arg \min \frac{1}{N_s} \sum_{n=1}^{N_s} \|\mathbf{u}_n - \sum_{i=1}^{N_s} (\mathbf{u}_n, \boldsymbol{\phi}_i)_{L^2(\Omega)} \boldsymbol{\phi}_i\|_{L^2(\Omega)}^2, \quad (5)$$

where \mathbf{u}_n is a solution snapshot obtained for a certain parameter value $\boldsymbol{\mu}_n$ and N_s is the total number of solution snapshots. One can see that the reduced order space (or \mathbb{V}_{POD}) is optimal in the sense that it is spanned by the modes that minimize the projection error between the fields and their projection into the modes. For further details on how the problem (5) is solved one can refer to [35].

3.1 Projection Based ROM

The next step in building the reduced order model (this procedure is referred as POD-Galerkin projection) is to project the momentum equation of (1) onto the POD space spanned by the POD velocity modes, namely:

$$(\boldsymbol{\phi}_i, (\mathbf{u} \cdot \nabla)\mathbf{u} - \nu \Delta \mathbf{u} + \nabla p)_{L^2(\Omega)} = 0. \quad (6)$$

Inserting the approximations (3) and (4) into (6) yields the following reduced system:

$$\nu \mathbf{B}\mathbf{a} - \mathbf{a}^T \mathbf{C}\mathbf{a} - \mathbf{H}\mathbf{b} = 0, \quad (7)$$

where \mathbf{a} and \mathbf{b} are the vectors of coefficients for reduced velocity and reduced pressure respectively, while \mathbf{B} , \mathbf{C} , \mathbf{H} are the reduced discretized differential operators which are computed as follows:

$$B_{ij} = (\boldsymbol{\phi}_i, \Delta \boldsymbol{\phi}_j)_{L^2(\Omega)}, \quad (8)$$

$$C_{ijk} = (\boldsymbol{\phi}_i, (\boldsymbol{\phi}_j \cdot \nabla)\boldsymbol{\phi}_k)_{L^2(\Omega)}, \quad (9)$$

$$H_{ij} = (\boldsymbol{\phi}_i, \nabla \chi_j)_{L^2(\Omega)}. \quad (10)$$

To solve the system (7), one needs N_p additional equations. The continuity equation cannot be directly used because the snapshots are divergence free and so are the velocity POD modes. The available approaches to tackle this problem are either the use of the Poisson equation [35, 36] or the use of the supremizer stabilization method [4, 33], which consists into the enrichment of the velocity space by the usage of supremizer modes. These modes are computed such that a reduced version of the inf-sup condition is fulfilled. The latter approach usually employed in a finite element context has been also extended to a FV formulations [36]. In this work we rely on the supremizer stabilization method. After a proper enrichment of the POD velocity space it is possible to project the continuity equation onto the space spanned by the pressure modes giving rise to the following system:

$$\begin{cases} \nu \mathbf{B}\mathbf{a} - \mathbf{a}^T \mathbf{C}\mathbf{a} - \mathbf{H}\mathbf{b} = 0, \\ \mathbf{P}\mathbf{a} = 0, \end{cases} \quad (11)$$

where the new matrix \mathbf{P} , is computed as follows:

$$P_{ij} = (\chi_i, \nabla \cdot \boldsymbol{\phi}_j)_{L^2(\Omega)}. \quad (12)$$

System (11) can be solved respect to \mathbf{a} and \mathbf{b} in order to obtain the reduced order solution for velocity and pressure respectively.

3.2 Treatment of Boundary Conditions

The current problem involves non-homogeneous Dirichlet boundary conditions at the inlet Γ_{In} . The term $\mathbf{f}(\mathbf{x}, \boldsymbol{\mu})$ in (1) becomes $\mathbf{f}(\mathbf{x}, \boldsymbol{\mu}) = (\mu_x, \mu_y)$ where μ_x and μ_y are the components of the velocity at Γ_{In} along the x and y directions respectively. Non-homogeneous Dirichlet boundary conditions have been treated making use of the so called lifting control function. In this method the POD procedure is applied on a modified set of snapshots which have been homogenized in the following way:

$$\mathbf{u}'_i = \mathbf{u}_i - \mu_x \boldsymbol{\phi}_{c_x} - \mu_y \boldsymbol{\phi}_{c_y}, \quad \text{for } i = 1, \dots, N_s, \quad (13)$$

where $\boldsymbol{\phi}_{c_x}$ and $\boldsymbol{\phi}_{c_y}$ are the two lifting functions which have at the inlet Γ_{In} the following values $(1, 0)$ and $(0, 1)$ respectively. The approach used in this work to obtain the lifting functions involves solving two linear potential flow problems with the initial boundary conditions at Γ_{In} being $(1, 0)$ and $(0, 1)$ respectively for $\boldsymbol{\phi}_{c_x}$ and $\boldsymbol{\phi}_{c_y}$.

The POD is then applied to the snapshots matrix $\mathcal{U}' = [\mathbf{u}'_1, \mathbf{u}'_2, \dots, \mathbf{u}'_{N_s}]$ that contains only snapshots with homogeneous boundary conditions. It has to be noted that the way the lifting functions have been computed assures that they are divergence free and thus the new set of snapshots has the same property.

At the reduced order level, it is then possible to deal with any boundary velocity at Γ_{In} (obviously the results will be more accurate if the prescribed velocity values are sufficiently close to the ones used during the training stage). If the new sample $\boldsymbol{\mu}^*$ (which has the new boundary velocity) is introduced in the online stage, one can compute the reduced velocity field as follows:

$$\mathbf{u}(\mathbf{x}, \boldsymbol{\mu}^*) \approx \mu_x^* \boldsymbol{\phi}_{c_x} + \mu_y^* \boldsymbol{\phi}_{c_y} + \sum_{i=1}^{N_u} a_i(\boldsymbol{\mu}^*) \boldsymbol{\phi}_i(\mathbf{x}). \quad (14)$$

4 Non-intrusive PCE

According to Polynomial Chaos (PC) theory which was formulated by Wiener [41], real-valued multivariate Random Variables (RVs), such as the one considered in this

work (the lift coefficient C_l) can be decomposed into an infinite sum of separable deterministic coefficients and orthogonal polynomials [22]. These polynomials are stochastic terms which depend on some mutually orthogonal Gaussian random variables. Once applied to our output of interest—the lift coefficient C_l —such decomposition assumption reads

$$C_l^*(\boldsymbol{\zeta}) = \sum_{i=0}^{\infty} C_{li} \psi_i(\boldsymbol{\zeta}). \tag{15}$$

Here the random variable $\boldsymbol{\psi} = (\alpha, U)$ is used to express the uncertainty in the angle of attack and inflow velocity. $\psi_i(\boldsymbol{\zeta})$ is the i th polynomial and C_{li} is the so-called i th stochastic mode. In practical application this series is truncated and only its first $P + 1$ values are computed, namely

$$C_l^*(\boldsymbol{\zeta}) = \sum_{i=0}^P C_{li} \psi_i(\boldsymbol{\zeta}). \tag{16}$$

In this work the orthogonal polynomial are called Hermite polynomials. These polynomials form an orthogonal set of basis functions in terms of Gaussian distribution [13]. In (16) $P + 1$ is the number of Hermite polynomials used in the expansion and has to depend on the order of the polynomials chosen and the on dimension n of the random variable vector $\boldsymbol{\zeta} = \{\zeta_1, \dots, \zeta_n\}$. More specifically, in an n -dimensional space, the number P of Hermite polynomials of degree p is given by $P + 1 = \frac{(p+n)!}{p!n!}$ [13].

4.1 Coefficients Computation

The estimation of the coefficients $C_{li}(x)$ in (15) can be carried out in different ways. Among others, we mention the sampling based method and the quadrature method. The one here used is based on the sampling approach, following the methodology proposed by Hosder et al. [20]. The coefficient calculation algorithm starts from a discretized version of Eq. (16), namely

$$\begin{bmatrix} C_{l0}^* \\ C_{l1}^* \\ \vdots \\ C_{lN}^* \end{bmatrix} = \begin{bmatrix} \psi_1(\boldsymbol{\zeta}_0) & \psi_2(\boldsymbol{\zeta}_0) & \dots & \psi_P(\boldsymbol{\zeta}_0) \\ \psi_1(\boldsymbol{\zeta}_1) & \psi_2(\boldsymbol{\zeta}_1) & \dots & \psi_P(\boldsymbol{\zeta}_1) \\ \vdots & \ddots & & \\ \psi_1(\boldsymbol{\zeta}_N) & \psi_2(\boldsymbol{\zeta}_N) & \dots & \psi_P(\boldsymbol{\zeta}_N) \end{bmatrix} \begin{bmatrix} C_{l0} \\ C_{l1} \\ \vdots \\ C_{lP} \end{bmatrix},$$

where N is the number of the samples taken. If N coincides with the number of Hermite polynomials $P + 1$ needed for the PCE expansion, the system above presents a square matrix and can be solved to determine the coefficients C_{li} from the

known output coefficients $C_{l_i}^*$. In the most common practice, a redundant number of samples are considered and the system is solved in a least squares sense, namely

$$\mathbf{C}_1 = (\mathbf{L}^T \mathbf{L})^{-1} \mathbf{L}^T \mathbf{C}_1^*, \quad (17)$$

where \mathbf{L} , \mathbf{C}_1 and \mathbf{C}_1^* denote the rectangular matrix in (4.1), the PCE coefficients vector and output vector, respectively.

5 Numerical Results

This section presents the results for the simulations carried out with the POD-Galerkin ROM and PCE for UQ described in the previous sections. The first part of the analysis will be focused on the results obtained with the POD-Galerkin ROM. In the second part we will assess the performance of the UQ technique on the airfoil problem, both when FOM and ROM simulation results are used to feed the PCE algorithm. The overall objective of the present section is in fact twofold. The first aim is to understand the influence of the samples distribution used to train the ROM in the results of the POD-Galerkin ROM. The second aim is to compare between the PCE UQ results obtained using full order model to those obtained with POD Galerkin-ROM.

5.1 ROM Results

The FOM model used to generate the POD snapshots has been set up as reported in Sect. 2. Making use of the computational grid shown in Fig. 3, a set of simulations was carried out, selecting a Gauss linear numerical scheme for the approximation

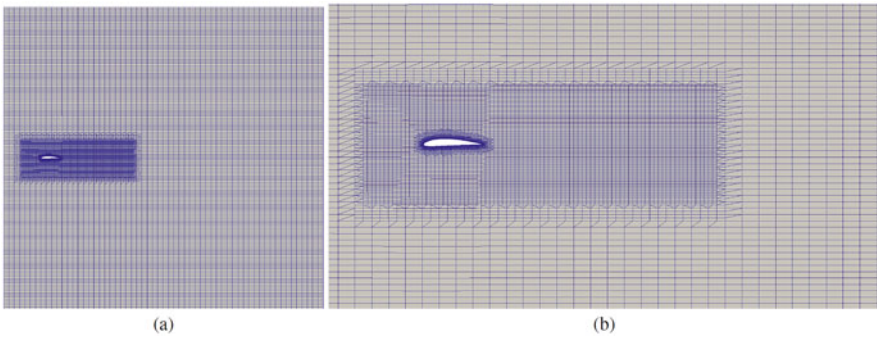


Fig. 3 (a) The OpenFOAM mesh used in the simulations. (b) A picture of the mesh zoomed near the airfoil

of gradients and Laplacian terms, and a bounded Gauss upwind scheme for the convective term approximation.

As mentioned, the parameters considered in the ROM investigation are the airfoil angle of attack and the magnitude of the inflow velocity at the inlet. The training of the POD-Galerkin ROM requires a suitable amount of snapshots (FOM solutions) to be available. Thus, 520 samples have been produced and a single FOM simulation is launched for each sampling point. As for the distribution in the parameters space, the samples are obtained making use of the Latin Hyper Cube (LHC) [37] sampling algorithm. Figure 4 depicts the lift coefficient against the angle of attack curve obtained from a first FOM simulation campaign in which the 520 samples were generated imposing mean values of 100 m/s and 0° and variances of 20 m/s and 300, for velocity and angle of attack, respectively. As can be appreciated in the picture, the lift coefficient values do not significantly depend on the inflow velocity. In fact sampling points with equal α and different U_∞ values, result in practically identical output. For this reason, the input-output relationship appears like a curve in the C_l - α plane. We also point out that this is a consequence of considering a nondimensionalized force a C_l as our output, rather than the corresponding dimensional lift values.

The POD modes are generated after applying POD onto the snapshots matrices of the flow fields obtained in the simulation campaign. After such offline phase, the computation of the reduced order fields is performed in the online stage, as presented in Sect. 3. In this first reproduction test, we performed a single reduced simulation in correspondence with the velocity and the angle of attack used to generate each offline snapshot. This means that we used the same sample values both in the online stage and in the offline one. The ROM results of the reproduction test for the lift

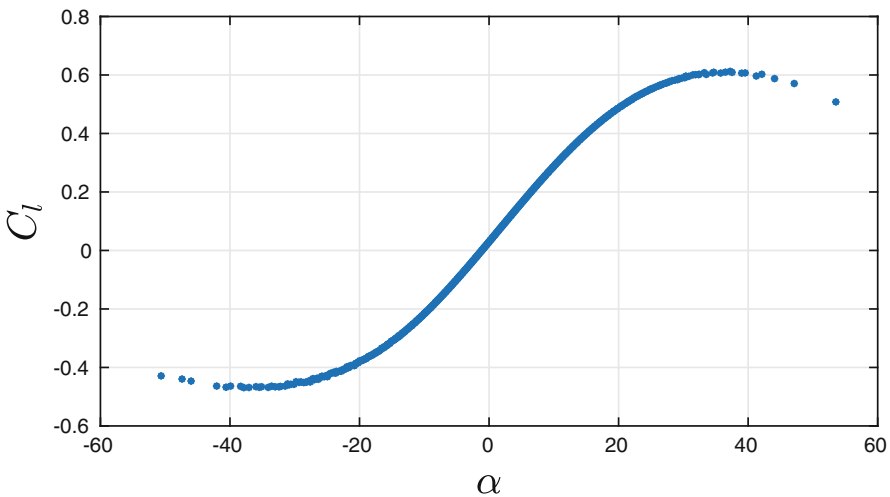


Fig. 4 The FOM lift coefficient for the first case, as it can be seen in the plot the vast majority of the samples is clustered around $\alpha = 0$

coefficient are reported in Fig. 5. The figure refers to the ROM results obtained considering 10 modes for the discretization of velocity, pressure and supremizer fields. The plot shows that the reconstruction of the lift coefficient is only accurate in the central region. In the lateral regions the lift coefficient computed with the ROM solution does not match the corresponding FOM solution. The poor quality of the ROM prediction on the lift coefficient, as well as of the forces acting on the airfoil, is a direct consequence of the fact that the fields were not reconstructed in an accurate way. For the particular physical phenomenon this inaccuracy may be even more undesirable, since the stall occurs in these regions. One might originally guess that the problem can be mitigated by increasing the amount of POD modes. Yet, as Fig. 6 clearly shows, even increasing the modes for velocity to 30 is not solving the problem. In this particular case adding more modes will not solve the problem since the energy added by considering more modes is negligible. An explanation of the poor performances of the ROM model in the stall region may be instead associated to the distribution of the offline samples used to generate the POD snapshots. In fact, the samples generated with LHC are distributed around a mean value of the angle of attack of 0° and their density is rather coarse in the stall regions.

To confirm such deduction, we tried to generate the snapshots by means of a different set of samples generated so as to be more dense in the stall regions. More specifically, we have generated thirteen different groups of samples in which the velocity mean and variance were kept fixed at values of 100 and 20 m/s respectively, while the mean and the variance for the angle of attack were varied in each set as summarized in Table 1. As illustrated in Figs. 7 and 8 for angle of attack and velocity respectively, the overall training data for the ROM offline phase has been generated

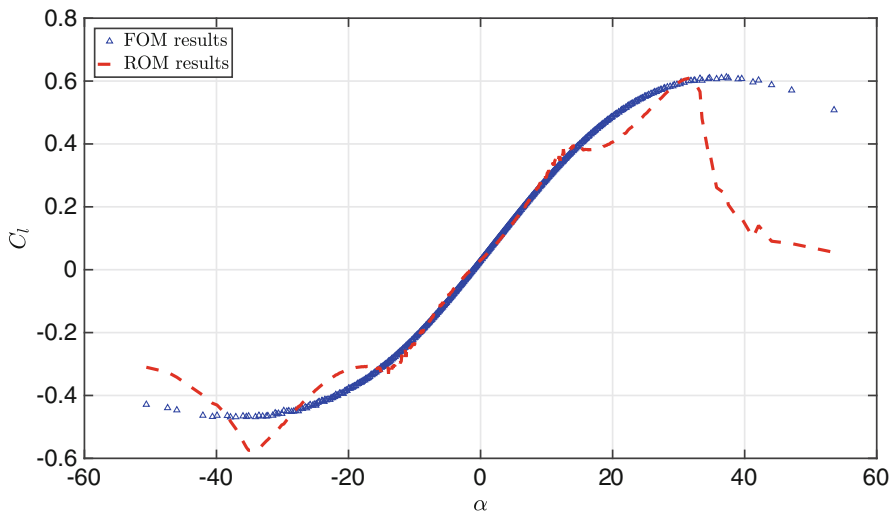


Fig. 5 The first sampling case: the full order lift coefficients curve versus the ROM reconstructed one with 10 modes used for each of velocity, pressure and supremizer fields

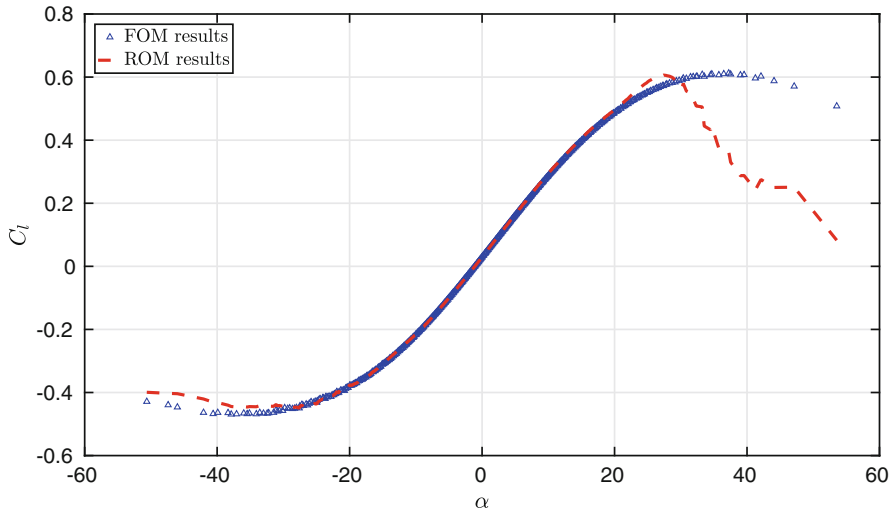


Fig. 6 The first sampling case: the full order lift coefficients curve versus the ROM reconstructed one with 30, 10 and 10 modes are used for velocity, pressure and supremizer fields respectively

Table 1 The mean and variance for the group of samples that form the training set in the second case

Group number	N	$E(\alpha)$ in $^\circ$	$\sigma(\alpha)$ in $^\circ$
1	90	0	20
2	20	-10	2
3	20	10	2
4	50	-15	2
5	50	15	2
6	40	-22	5
7	40	22	5
8	40	-30	10
9	40	30	10
10	20	-38	2
11	20	38	2
12	50	-45	5
13	40	45	5

combining into a single sample set all the 13 groups generated by means of LHC algorithm. Finally, Figs. 9 and 10 depict the Probability Density Function (PDF) of the overall input parameters set.

After running the offline phase, we applied POD-Galerkin reduced order approach on the new set of snapshots generated. Table 2 shows the cumulative eigenvalues for the correlation matrices built by the snapshots obtained for velocity, pressure and supremizer fields. Only the values of the cumulative eigenvalues up to

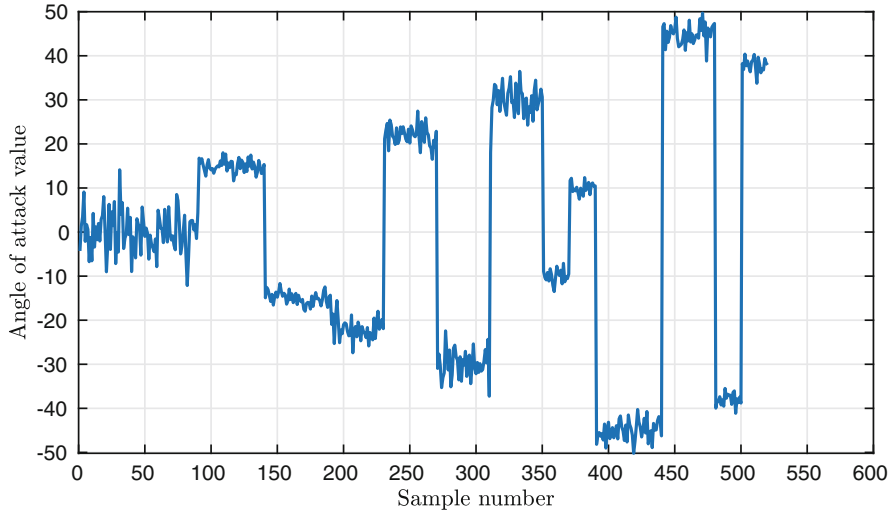


Fig. 7 The angle of attack samples for the second case

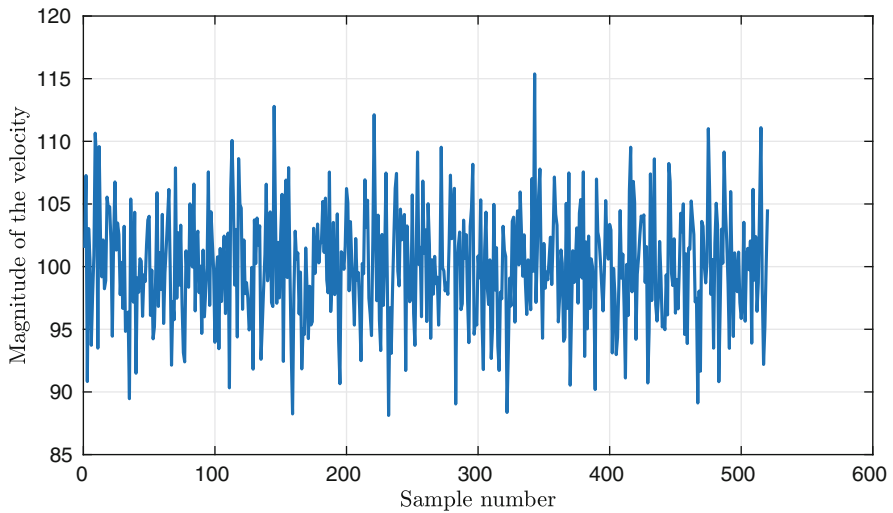


Fig. 8 The magnitude of velocity samples for the second case

the fifteenth mode are listed. Yet, such data indicate that by using 15 modes in the online phase, we can recover 99.9% of the energy embedded in the system.

Figure 11 displays the FOM lift coefficients of the airfoil corresponding to the set of angles of attack previously introduced in Table 1. Figure 12 shows the results obtained with the reduced order model trained with the samples summarized in Table 1. Here, the online phase was carried out using the same samples used in the offline stage. To provide a quantitative evaluation of the results, we used L^2

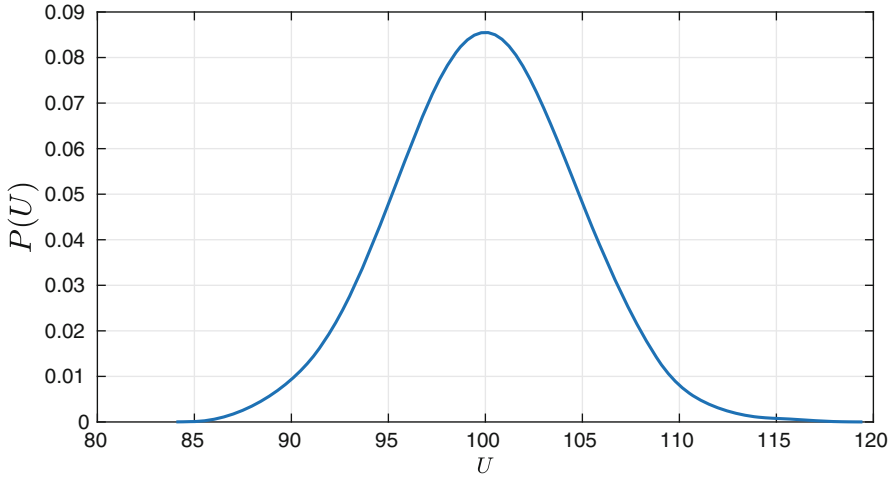


Fig. 9 The PDF of the input data set for the magnitude of the velocity

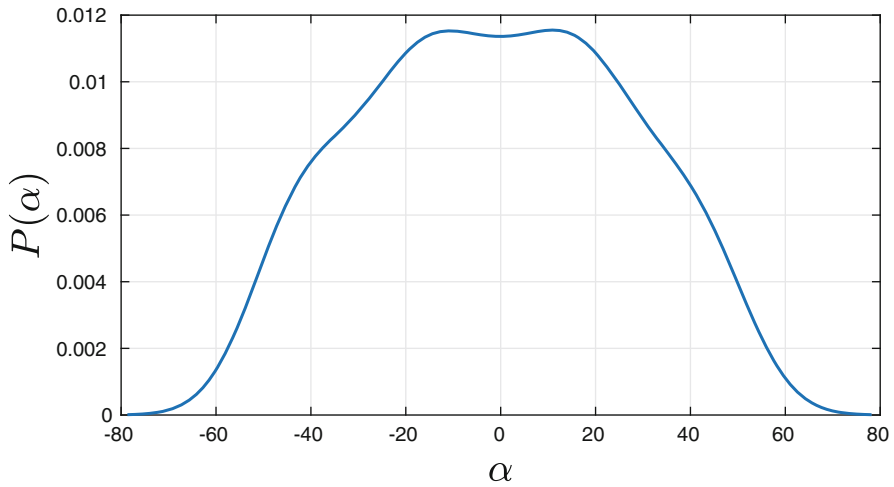


Fig. 10 The PDF of the input data set for the angle of attack

relative error, computed as follows:

$$\varepsilon = 100 \frac{\sqrt{\sum_{t=1}^n (C_{l_t}^{FOM} - C_{l_t}^{ROM})^2}}{\sqrt{\sum_{t=1}^n (C_{l_t}^{FOM})^2}} \%, \quad (18)$$

where n is the number of sampling points, $C_{l_t}^{FOM}$ and $C_{l_t}^{ROM}$ are the t -th sample point lift coefficients for FOM and ROM, respectively. In this case we have a relative

Table 2 Cumulative Eigenvalues of the correlation matrices for velocity, pressure and supremizer fields

N modes	\mathbf{u}	p	\mathbf{u}_{sup}
1	0.679635	0.738828	0.557189
2	0.930038	0.960781	0.987862
3	0.955239	0.990746	0.995984
4	0.971768	0.998833	0.999228
5	0.981370	0.999730	0.999796
6	0.987603	0.999880	0.999927
7	0.992311	0.999945	0.999975
8	0.994793	0.999963	0.999983
9	0.996651	0.999976	0.999990
10	0.997914	0.999982	0.999993
11	0.998679	0.999987	0.999995
12	0.999165	0.999991	0.999997
13	0.999492	0.999993	0.999998
14	0.999700	0.999995	0.999999
15	0.999806	0.999996	0.999999

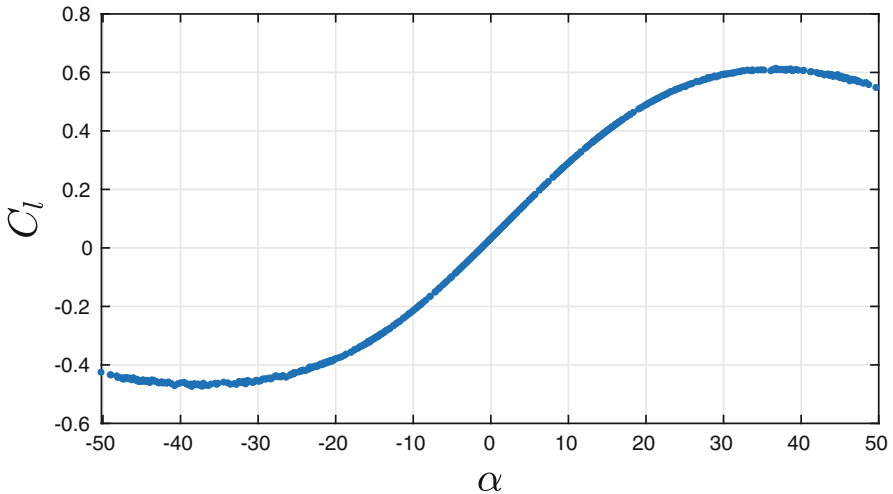


Fig. 11 The FOM lift coefficient as a function of the angle of attack α for the second case. Compared to Fig. 4, the samples span a wider range with sufficient accuracy sought by the ROM reconstruction

error of 6.69% in L^2 norm between the FOM and the ROM lift coefficients, when 10 modes have been used in the online phase for each of velocity, pressure and supremizer fields. Using 10 additional modes for velocity, results instead in a 3.75% error. The corresponding plots in Fig. 12 clearly suggest that the qualitative behavior of the ROM lift output was substantially improved with respect to the first case. This improvement in the prediction of the ROM lift coefficients is due to a more accurate reproduction of the ROM fields. This is highlighted by Fig. 13, which

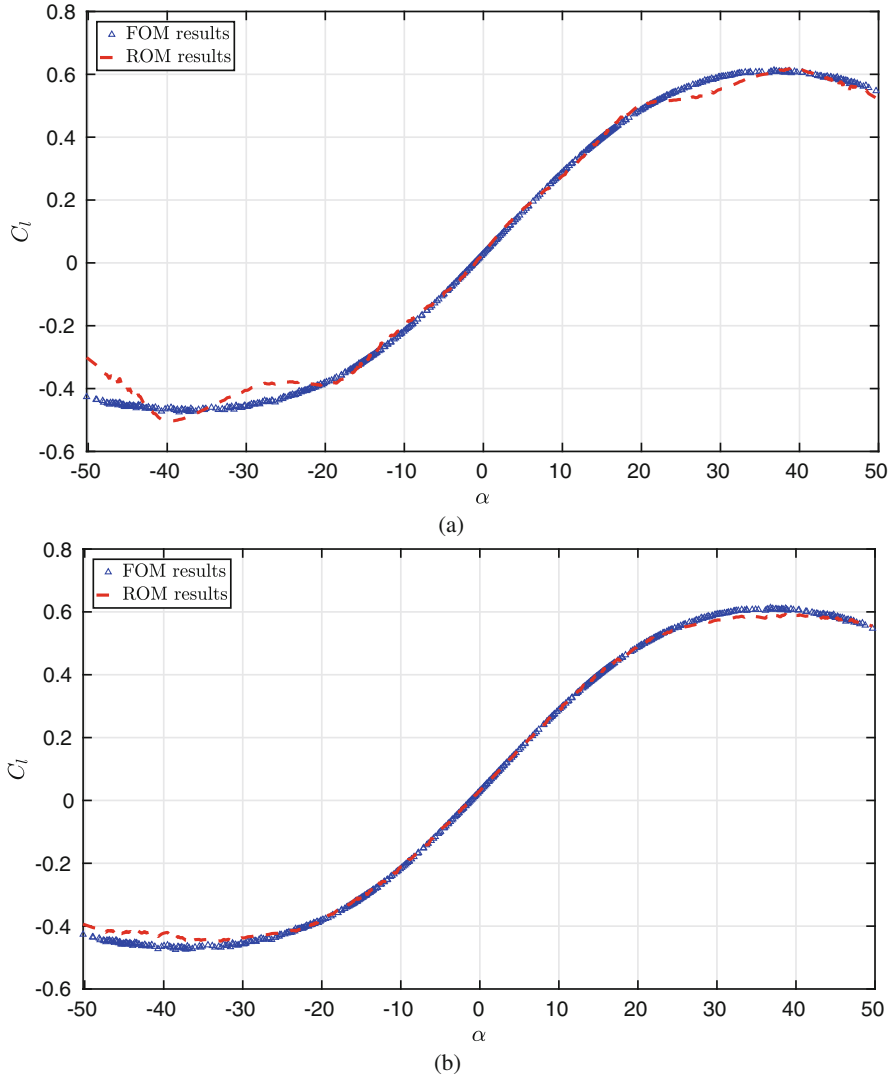


Fig. 12 A comparison between FOM and ROM reconstructed lift coefficients for the second case **(a)** 10 modes are used for each of velocity, pressure and supremizer fields. **(b)** 20, 10 and 10 modes are used for velocity, pressure and supremizer fields, respectively. In both figures we have online parameters set that coincide with the offline ones

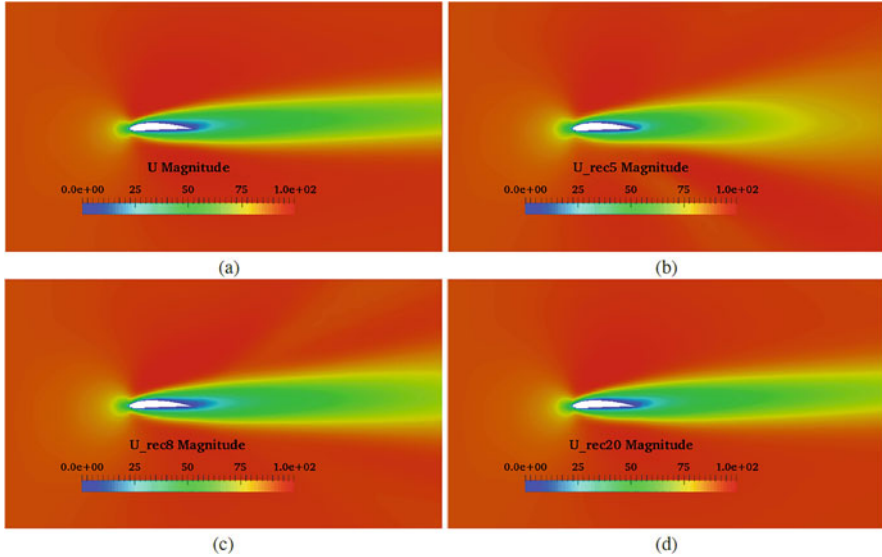



Fig. 13 The full order velocity field for the parameter $\bar{\mu} = (90.669, 5.4439 \text{ m/s})$ and a comparison with the reconstructed field by means of different number of modes for velocity, pressure and supremizer fields. (a) FOM field (b) ROM velocity field with 3, 10 and 10 modes used. (c) ROM velocity field with 8, 10 and 10 modes used. (d) ROM velocity field with 20, 10 and 10 modes used

shows the FOM velocity field along with different reconstructed surrogate fields obtained employing different number of modes at the projection stage.


5.2 PCE Results

The aim of the present section is to evaluate the performance of the PCE algorithm implemented for the fluid dynamic problem at hand. To better describe the amount of simulations carried out to both train and validate the UQ PCE model implemented, we present in Fig. 14 a conceptual scheme of the simulation campaign carried out in this work.

As mentioned, one of the main features of non intrusive PCE is that it can use any deterministic simulation software as a black box input source. We will then present different tests in which PCE has been fed with the output of fluid dynamic simulations based on models characterized by different fidelity levels. In a first test we in fact generated a PCE based on the FOM, and evaluate its performance in a prediction test. The second test consisted in generating a PCE based on the ROM described in the previous section. The latter test allows for an evaluation of how the PCE results are affected when the expansion is based on a surrogate ROM model rather than the FOM one. Given the relatively high number of samples required for the PCE setup, in fact it is interesting to understand if ROM can be used to reduce

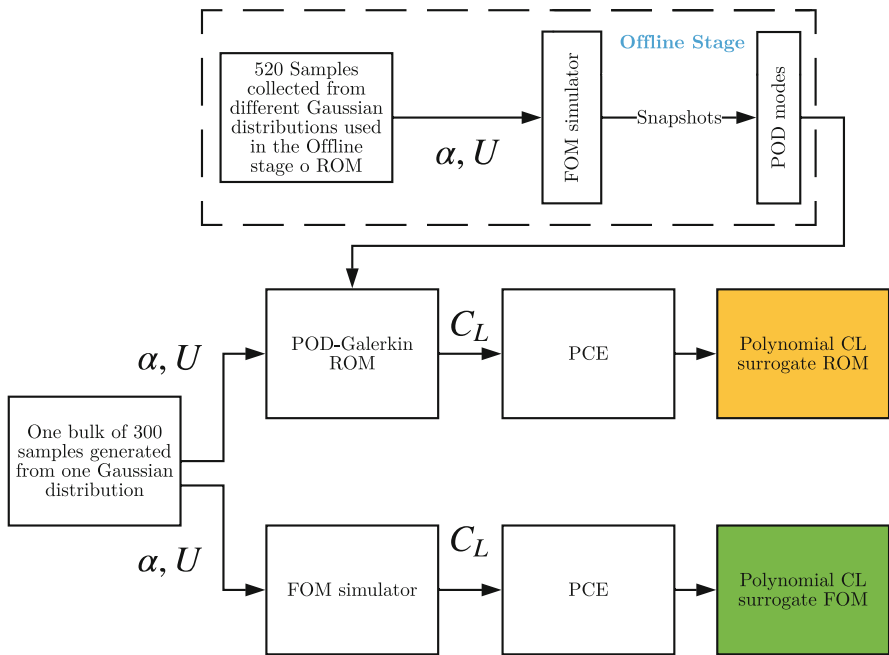

(a)

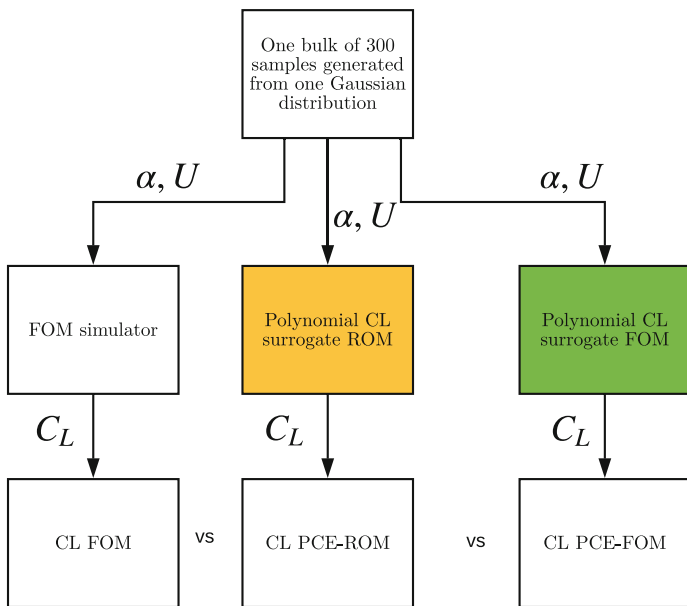

(b)

Fig. 14 The flowcharts describing procedure followed in the numerical simulations for the UQ model generation and validation campaign respectively. The top scheme in (a) focuses on the

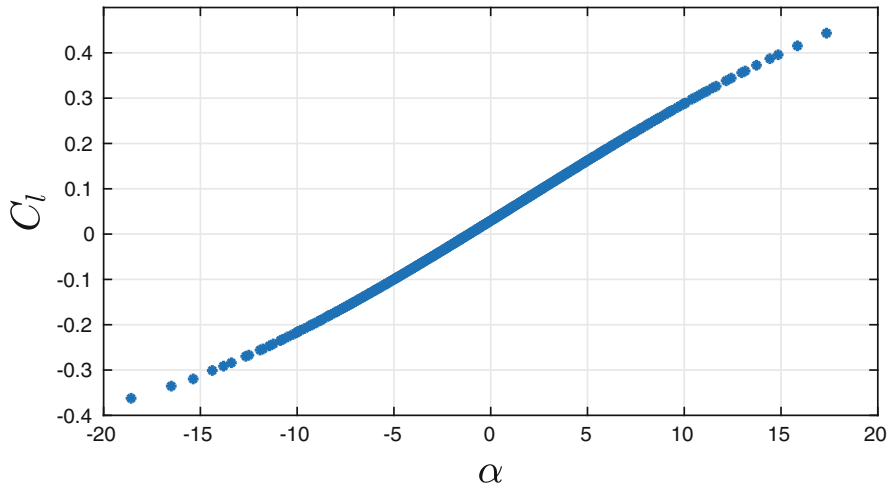


Fig. 15 The FOM lift coefficient for the UQ case

the computational cost for their generation of the system output at each sample, without a significant loss in terms of accuracy.

One of the main assumptions of the non intrusive PCE algorithm implemented is that of operating on Gaussian distributed input parameters. For such reason, the tests in the present section were generated with a set of 300 sampling points consisting of a single Gaussian distributed bulk. Making use of LHC algorithm, the samples have been randomly generated around angle of attack and velocity magnitude means of 0° and 100 m/s respectively. As for the variances, we prescribed 40° and 20 m/s, for angle of attack and velocity magnitude respectively. The FOM lift coefficient curve obtained with the input sampling points described can be seen in Fig. 15.

The samples, which have been just mentioned above, will be used as cross validation test for the ROM model developed in the previous subsection. As mentioned earlier, the first test will be to feed PCE with FOM output data and then to conduct a prediction test. PCE is used to predict the value of the lift coefficient



Fig. 14 (continued) procedure adopted for the generation of the UQ model, and in particular on the identification of the PCE coefficients. The polynomial surrogate based on the full order model (indicated in green) has been generated using 300 Gaussian distributed samples in the α, U space. The same samples have been used to obtain the polynomial surrogate input-output relationship for the POD-Galerkin ROM (denoted by the yellow box). Note that the ROM used in this simulation campaign has been trained by means of 520 samples in the α, U space, organized in 13 Gaussian distributed bulks, as reported in Table 1. Finally, the bottom flowchart in (b) illustrates the PCE validation campaign. Here, 300 sample points in the input space have been used to obtain the corresponding output with the full order model, with the polynomial UQ surrogate trained with the FOM simulations (green box), and with the polynomial UQ surrogate trained with the ROM simulations (yellow box)

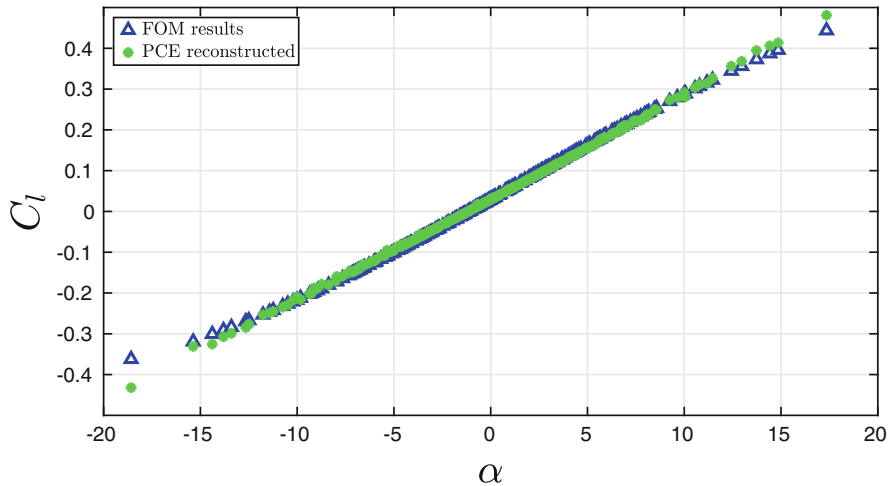


Fig. 16 PCE reconstructed lift coefficient versus FOM one, here polynomials of second degree have been used

for 200 samples which differ of the 100 samples used for the PCE coefficients evaluation. Thus the first 100 samples with their corresponding FOM lift coefficient values were used to build the matrix system (4.1), which has been solved in the least squares sense. Figure 16 displays the C_l values computed with both FOM and PCE in correspondence with all the samples used for check. The overall error in L^2 norm between FOM and PCE predications is 5.04%.

In the second test we have used ROM data as input for PCE. After using 100 samples to compute the PCE coefficients, we used the PCE to predict the lift coefficients at 200 additional samples used for check. We then compared the value of the predicted PCE coefficients in this case to both ROM values and FOM values.

The result of the aforementioned test are reported in Fig. 17. The figure includes comparison of the PCE predicted C_l curve with both its ROM and FOM counterparts. The plots show a similar behaviour of the PCE predictions obtained using ROM and FOM output data. By a quantitative standpoint, the PCE predictions present a 4.4% error with respect to the ROM predictions, while the L^2 norm of the error with respect to the FOM predictions is 5.14%. A summary of the comparisons made is reported in Table 3.

6 Conclusions and Future Developments

In this work, we studied two popular techniques which are used often in the fields of ROM and UQ which are the POD and PCE, respectively. The study aimed at comparing the accuracy of the two techniques in reconstructing the outputs of

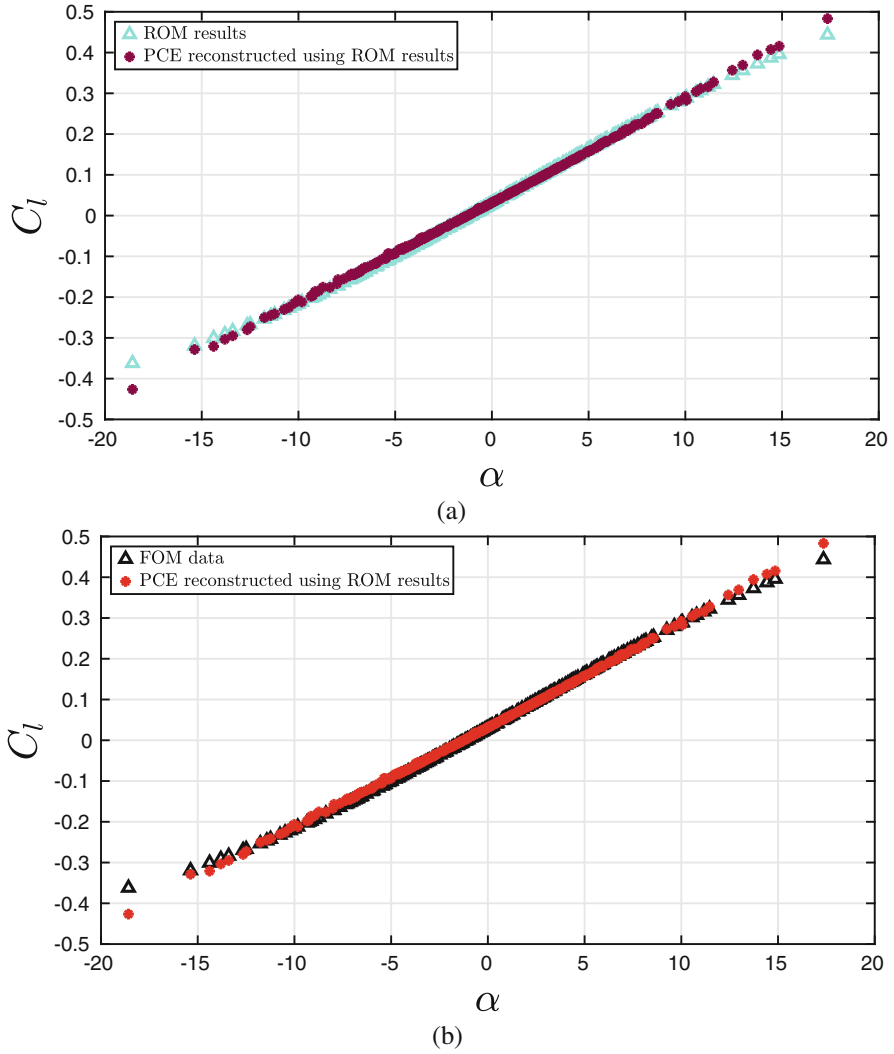


Fig. 17 (a) The ROM lift coefficient versus PCE lift coefficient curve when PCE has been applied on ROM output with 30, 10 and 10 modes used for velocity, pressure and supremizer fields respectively. (b) The FOM lift coefficient versus PCE lift coefficient curve when PCE has been applied on ROM output with same number of modes as in (a)

Table 3 A comparison between the relative error in L^2 norm for the results obtained from ROM and PCE, with PCE being used on both FOM and ROM results

First data	Second data	Error
FOM	ROM	1.53%
FOM	PCE on FOM	5.04%
ROM	PCE on ROM	4.4%
FOM	PCE on ROM	5.14%

We remark that the number of POD modes used (if apply) are 30, 10 and 10 for velocity, pressure and supremizer fields, respectively, for all cases. We underline also that 200 samples have been used for testing the PCE wherever it is used

interest of viscous fluid dynamic simulations. We have concluded the work with combining the two approaches so as to exploit ROM to speed up the many query problem needed to obtain the PCE coefficients. POD can be a reliable output evaluator for PCE, as the value of relative error PCE had when it was based on ROM results was 5.14% while the error was 5.04% when PCE was based on FOM outputs. The last result speaks positively for POD and makes it a valid tool to be possibly used in the field of uncertainty quantification.

The work can be extended in the direction of merging the two approaches in a different way, where one can assume the coefficients in the ROM expansion are not deterministic, but rather dependent on some random variables. The latter assumption can bring UQ into play and one may use techniques such as intrusive/non-intrusive PCE. Our interest is also to extend the proposed methodology, still in the context of reduced order models, to more complex and turbulent flow patterns such as those presented in [18, 19, 38].

Acknowledgments We acknowledge the support provided by the European Research Council Consolidator Grant project Advanced Reduced Order Methods with Applications in Computational Fluid Dynamics—GA 681447, H2020-ERC COG 2015 AROMA-CFD (PI: Prof. G. Rozza), MIUR (Italian Ministry of Education, Universities and Research) FARE-X-AROMA-CFD and INdAM-GNCS projects.

References

1. Abbott, I.: Theory of Wing Sections: Including a Summary of Airfoil Data. Dover Publications, Mineola (1999)
2. Akhtar, I., Nayfeh, A.H., Ribbens, C.J.: On the stability and extension of reduced-order Galerkin models in incompressible flows. *Theor. Comput. Fluid Dyn.* **23**(3), 213–237 (2009). <https://doi.org/10.1007/s00162-009-0112-y>
3. Baiges, J., Codina, R., Idelsohn, S.: Reduced-order modelling strategies for the finite element approximation of the incompressible Navier-Stokes equations. *Comput. Methods Appl. Sci.* **33**, 189–216 (2014). https://doi.org/10.1007/978-3-319-06136-8_9

4. Ballarin, F., Manzoni, A., Quarteroni, A., Rozza, G.: Supremizer stabilization of POD-Galerkin approximation of parametrized steady incompressible Navier-Stokes equations. *Int. J. Numer. Methods Eng.* **102**(5), 1136–1161 (2014). <https://doi.org/10.1002/nme.4772>
5. Barth, T., Ohlberger, M.: *Finite Volume Methods: Foundation and Analysis*. Wiley, Hoboken (2004). <https://doi.org/10.1002/0470091355.ecm010>
6. Bergmann, M., Bruneau, C.H., Iollo, A.: Enablers for robust POD models. *J. Comput. Phys.* **228**(2), 516–538 (2009). <https://doi.org/10.1016/j.jcp.2008.09.024>
7. Burkardt, J., Gunzburger, M., Lee, H.C.: POD and CVT-based reduced-order modeling of Navier-Stokes flows. *Comput. Methods Appl. Mech. Eng.* **196**(1–3), 337–355 (2006). <https://doi.org/10.1016/j.cma.2006.04.004>
8. Carlberg, K., Choi, Y., Sargsyan, S.: Conservative model reduction for finite-volume models. *J. Comput. Phys.* **371**, 280–314 (2018). <https://doi.org/10.1016/j.jcp.2018.05.019>
9. Chen, P., Quarteroni, A., Rozza, G.: Comparison between reduced basis and stochastic collocation methods for elliptic problems. *J. Sci. Comput.* **59**(1), 187–216 (2014)
10. Chen, P., Quarteroni, A., Rozza, G.: Reduced basis methods for uncertainty quantification. *SIAM/ASA J. Uncertain. Quantif.* **5**(1), 813–869 (2017)
11. Chinesta, F., Huerta, A., Rozza, G., Willcox, K.: Model reduction methods. *Encyclopedia of Computational Mechanics Second Edition*, pp. 1–36 (2017)
12. Drohmann, M., Haasdonk, B., Ohlberger, M.: Reduced basis approximation for nonlinear parametrized evolution equations based on empirical operator interpolation. *SIAM J. Sci. Comput.* **34**(2), A937–A969 (2012). <https://doi.org/10.1137/10081157X>
13. Ghanem, R.G., Spanos, P.D.: *Stochastic Finite Elements: A Spectral Approach*. Courier Corporation, North Chelmsford (2003)
14. Gunzburger, M.D., Peterson, J.S., Shadid, J.N.: Reduced-order modeling of time-dependent PDEs with multiple parameters in the boundary data. *Comput. Methods Appl. Mech. Eng.* **196**(4), 1030–1047 (2007)
15. Haasdonk, B., Ohlberger, M.: Reduced basis method for finite volume approximations of parametrized linear evolution equations. *Math. Model. Numer. Anal.* **42**(2), 277–302 (2008). <https://doi.org/10.1051/m2an:2008001>
16. Haasdonk, B., Ohlberger, M., Rozza, G.: A reduced basis method for evolution schemes with parameter-dependent explicit operators. *ETNA Electron. Trans. Numer. Anal.* **32**, 145–161 (2008)
17. Hesthaven, J.S., Rozza, G., Stamm, B.: *Certified Reduced Basis Methods for Parametrized Partial Differential Equations*. Springer, Berlin (2016). <https://doi.org/10.1007/978-3-319-22470-1>
18. Hijazi, S., Ali, S., Stabile, G., Ballarin, F., Rozza, G.: The effort of increasing Reynolds number in projection-based reduced order methods: from laminar to turbulent flows. In: *Lecture Notes in Computational Science and Engineering*, Springer International Publishing, pp. 245–264 (2020). https://doi.org/10.1007/978-3-030-30705-9_22
19. Hijazi, S., Stabile, G., Mola, A., Rozza, G.: Data-driven POD–Galerkin reduced order model for turbulent flows. *J. Comput. Phys.* **416**, 109513 (2020)
20. Hosder, S., Walters, R., Perez, R.: A non-intrusive polynomial chaos method for uncertainty propagation in CFD simulations. In: *44th AIAA Aerospace Sciences Meeting and Exhibit*, p. 891 (2006)
21. Isukapalli, S.S.: *Uncertainty analysis of transport-transformation models*. Unpublished Ph.D. Dissertation, New Brunswick, NJ: Rutgers, The State University of New Jersey, Department of Chemical and Biochemical Engineering (1999)
22. Janya-Anurak, C.: *Framework for Analysis and Identification of Nonlinear Distributed Parameter Systems Using Bayesian Uncertainty Quantification Based on Generalized Polynomial Chaos*, vol. 31. KIT Scientific Publishing, Karlsruhe (2017)
23. Jasak, H.: *Error analysis and estimation for the finite volume method with applications to fluid flows*. Ph.D. Thesis, Imperial College, University of London (1996). <http://powerlab.fsb.hr/ped/kturbo/OpenFOAM/docs/HrvojeJasakPhD.pdf>

24. Kunsch, K., Volkwein, S.: Galerkin proper orthogonal decomposition methods for a general equation in fluid dynamics. *SIAM J. Numer. Anal.* **40**(2), 492–515 (2002). <https://doi.org/10.1137/S0036142900382612>
25. Loeve, M.: *Probability Theory vol. II (Graduate Texts in Mathematics)*. Springer, Berlin (1994)
26. Lorenzi, S., Cammi, A., Luzzi, L., Rozza, G.: POD-Galerkin method for finite volume approximation of Navier-Stokes and RANS equations. *Comput. Methods Appl. Mech. Eng.* **311**, 151–179 (2016). <http://dx.doi.org/10.1016/j.cma.2016.08.006>
27. Moukalled, F., Mangani, L., Darwish, M.: *The Finite Volume Method in Computational Fluid Dynamics: An Advanced Introduction with OpenFOAM and Matlab*, 1st edn. Springer, Berlin (2015)
28. Noack, B.R., Eckelmann, H.: A low-dimensional Galerkin method for the three-dimensional flow around a circular cylinder. *Phys. Fluids* **6**(1), 124–143 (1994). <https://doi.org/10.1063/1.868433>
29. Patankar, S., Spalding, D.: A calculation procedure for heat, mass and momentum transfer in three-dimensional parabolic flows. *Int. J. Heat Mass Transf.* **15**(10), 1787–1806 (1972). [http://dx.doi.org/10.1016/0017-9310\(72\)90054-3](http://dx.doi.org/10.1016/0017-9310(72)90054-3)
30. Quarteroni, A., Manzoni, A., Negri, F.: *Reduced Basis Methods for Partial Differential Equations*. Springer, Berlin (2016). <https://doi.org/10.1007/978-3-319-15431-2>
31. Quarteroni, A., Rozza, G.: Numerical solution of parametrized Navier–Stokes equations by reduced basis methods. *Numer. Methods Partial Differ. Equ.* **23**(4), 923–948 (2007). <https://doi.org/10.1002/num.20249>
32. Reagana, M.T., Najm, H.N., Ghanem, R.G., Knio, O.M.: Uncertainty quantification in reacting-flow simulations through non-intrusive spectral projection. *Combust. Flame* **132**(3), 545–555 (2003)
33. Rozza, G., Veroy, K.: On the stability of the reduced basis method for Stokes equations in parametrized domains. *Comput. Methods Appl. Mech. Eng.* **196**(7), 1244–1260 (2007). <https://doi.org/10.1016/j.cma.2006.09.005>
34. Sarkar, S., Witteveen, J., Loeven, A., Bijl, H.: Effect of uncertainty on the bifurcation behavior of pitching airfoil stall flutter. *J. Fluids Struct.* **25**(2), 304–320 (2009). <https://doi.org/10.1016/j.jfluidstructs.2008.06.006>
35. Stabile, G., Hijazi, S., Mola, A., Lorenzi, S., Rozza, G.: POD-Galerkin reduced order methods for CFD using finite volume discretisation: vortex shedding around a circular cylinder. *Commun. Appl. Ind. Math.* **8**(1), (2017). <https://doi.org/10.1515/caim-2017-0011>
36. Stabile, G., Rozza, G.: Finite volume POD-Galerkin stabilised reduced order methods for the parametrised incompressible Navier–Stokes equations. *Comput. Fluids* **173**, 273–284 (2018). <https://doi.org/10.1016/j.compfluid.2018.01.035>
37. Stein, M.: Large sample properties of simulations using latin hypercube sampling. *Technometrics* **29**(2), 143–151 (1987). <https://doi.org/10.1080/00401706.1987.10488205>
38. Tezzele, M., Demo, N., Mola, A., Rozza, G.: An integrated data-driven computational pipeline with model order reduction for industrial and applied mathematics. Submitted, Special Issue ECMI (2018)
39. Versteeg, H.K., Malalasekera, W.: *An Introduction to Computational Fluid Dynamics. The Finite Volume Method*. Longman, London (1995)
40. Weller, H.G., Tabor, G., Jasak, H., Fureby, C.: A tensorial approach to computational continuum mechanics using object-oriented techniques. *Comput. Phys.* **12**(6), 620–631 (1998)
41. Wiener, N.: The homogeneous chaos. *Am. J. Math.* **60**(4), 897–936 (1938)