

# Chapter 13

## In Situ Measurements of Contact Pressure for Jointed Interfaces During Dynamic Loading Experiments

M.R.W. Brake, J.G. Stark, S.A. Smith, D.P.T. Lancereau, T.W. Jerome, and T. Dossogne

**Abstract** One of the greatest challenges for developing and validating models for the dynamics of jointed interfaces is measuring and characterizing the contact pressure within a joint. Previous approaches have focused on static measurements, typically taken separately from the dynamic testing of a jointed system. In this research, an electrical contact pressure measurement system is used to measure the contact pressures within a jointed interface during dynamic testing of the jointed system. These experiments invalidate a previously held modeling assumption: that the static pressure distribution is representative of the contact pressure during service of a jointed interface. In fact, for the measurements reported, the extent and magnitude of contact pressures dramatically change across the interface during sinusoidal excitation of the jointed system with more than a quarter of the interface oscillating between being in and out of contact during each period of excitation. While preliminary and scoping in nature, these experiments corroborate recent numerical studies that predict that the contact pressures across an interface significantly change over time as a function of the applied loading. The ramifications of these results are that the energy dissipation mechanisms within a jointed interface significantly evolve over time, resulting in more energy being dissipated in the interface away from the bolts than previously anticipated. This, in turn, necessitates a new constitutive modeling approach for reduced order modeling representations of joints in which the local kinematics are not regularized (such as in traditional Iwan models) and the normal contact forces are directly modeled and allowed to vary with load (contrary to most of the current modeling approaches).

**Keywords** Joint mechanics • Bolted joints • Interfacial mechanics • Frictional dissipation • Wave propagation • Dynamic contact

### 13.1 Introduction

The modeling and prediction of the response of jointed structures is a challenging engineering problem for multiple reasons. First, the frictional interactions within the interface of a jointed structure are not well understood: Coulomb friction breaks down when used to describe the frictional energy dissipation and is unable to capture both macroslip and microslip effects within the same model [3, 17]. Further, the frictional characteristics of a jointed structure change over time as wear is accumulated [1, 11–15].

---

M.R.W. Brake (✉)  
Sandia National Laboratories, Albuquerque, NM, USA  
William Marsh Rice University, Houston, TX, USA  
e-mail: [brake@rice.edu](mailto:brake@rice.edu)

J.G. Stark  
Sensor Products Inc., Madison, NJ, USA

S.A. Smith  
University of Maryland, Baltimore County, 1000 Hilltop Circle, 21250, Baltimore, MD, USA  
Sandia National Laboratories, PO Box 5800, 87185, Albuquerque, NM, USA

D.P.T. Lancereau  
Cranfield University, SN6 8LA, Shrivenham, Swindon, UK

T.W. Jerome  
Graduate Program in Acoustics, The Pennsylvania State University, State College, 16801, PA, USA  
Sandia National Laboratories, PO Box 5800, 87185, Albuquerque, NM, USA

T. Dossogne  
University of Liège, 9, Allée de la Découverte B52/3, 4000, Liège, Belgium

Second, the extent and evolution of the contact patch during dynamic excitation is unknown. Recent numerical studies have highlighted that the contact patch dynamically evolves over a period of excitation [5]. Complicating matters, though, is that the contact patch is unable to be directly measured during use as it is internal to a system. Methods to infer what may be occurring internal to the joint, by their very nature, change what the response will be (not unlike the observer effect in quantum physics [9]). Nonetheless, any information regarding how the contact patch evolves during dynamic excitation would be able to provide crucial insights to modeling. Allowing the contact patch to evolve in a dynamic model yields a much higher degree of agreement with experimental measurements [10].


This research seeks to develop new insights into the evolution of the contact patch by measuring the contact pressure within the interface in real time during dynamic excitation. While the measurement method (a polymer contact film inserted between the two mating surfaces) changes the response of the system, it is expected that meaningful insights can be developed from these results in order to improve the dynamic modeling and prediction of jointed structures. In what follows, Sect. 13.2 details the experimental setup, and the measurements are detailed in Sect. 13.3. Lastly, the ramifications of these results are discussed in Sect. 13.4.

## 13.2 Experimental Setup


To study the evolution of the contact pressure in the interface of a jointed system, the benchmark system of the Brake-Reuß beam is used [2–4, 18]. The Brake-Reuß beam (Fig. 13.1) consists of two stainless steel beams joined via a three bolt lap joint. While the system is straightforward to manufacture, the nonlinearity introduced by the lap joint yields a highly nonlinear response.

The system is setup similar to Fig. 13.2. The Brake-Reuß beam is suspended via two bungee cords connected to fishing lines to approximate free-free boundary conditions. An electromagnetic shaker is attached via stinger to the beam on one side of the interface. A force transducer and accelerometer at the stinger attachment location are used to control the shaker. In the following experiments, the shaker is operated in an amplitude control mode.

Pressure films developed by Sensor Products Inc that are 1 in by 1 in with 256 sensors (on a 16 by 16 grid) are used to measure the contact pressure in the interface in real time during the dynamic excitation of the system. In the following experiments, data is acquired at a rate of 488 Hz. In order to accommodate the pressure films, the interface configuration is modified from Fig. 13.2. The limitations of the pressure film used restrict the experiments to only 500 Psi in the interface. Thus, in order to not permanently damage the pressure film, the bolts are only tightened to 2 Nm. Additionally, only two bolts are used, with the pressure film centered about the third bolt hole (i.e. the bolt closest to the shaker location). Further, to relieve stresses in the pressure film, shims made from a similar material are inserted into the interface around the other two bolt holes such that there is an equally thick layer of material across the entire interface. While this changes the nature of the contact mechanics within the interface, the results from the following experiments are expected to still yield meaningful insights into how the contact pressure within the interface evolves during dynamic excitation.

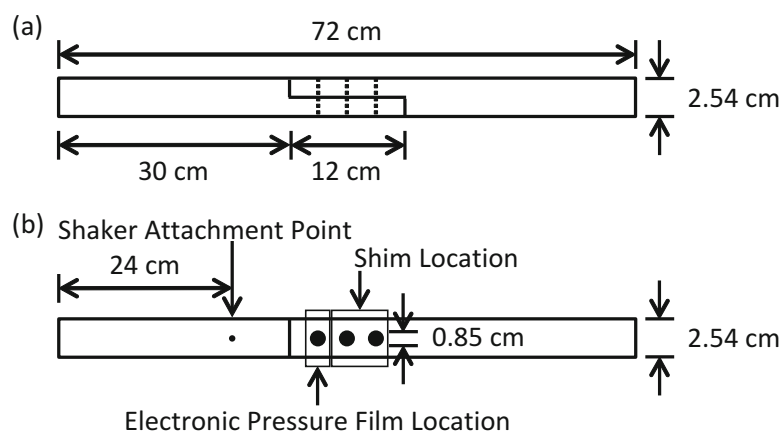

**Fig. 13.1** The geometry of the Brake-Reuß beam for (a) top view and (b) side view. Note that the shaker acts in the direction orthogonal to the interface surface in view (a)

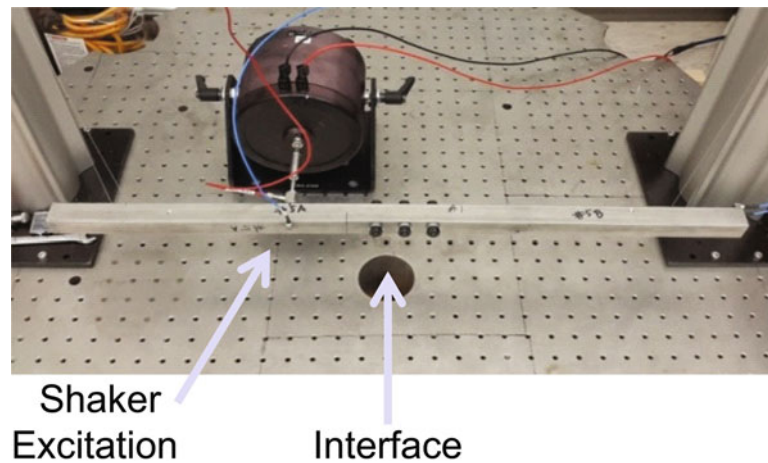

**Fig. 13.2** The typical experimental setup for the Brake-Reuß beam

For each experiment, the shaker is used to excite the Brake-Reuß beam over a narrow band of frequencies centered about the first natural frequency in order to study the transition through resonance. Real time measurements of the contact pressure in the interface were recorded, and are presented in Sect. 13.3.

In what follows, several caveats are important to keep in mind:

- The bolt torques are 2.0 Nm, compared to the nominal 20 Nm.
- Only two bolts are used to connect the interface.
- The interface contains a polymeric material, which changes the contact from metal on metal to metal on polymeric on metal.

### 13.3 Results and Discussion


As an initial inspection of the system, an experiment is conducted in which the excitation frequency is swept from 100–160 Hz at a rate of 1 Hz/s with the shaker amplitude set to 4 N. The primary resonance of the system (including the pressure film) is located near 124 Hz. As the excitation sweeps through resonance (near 30 s), a significant change is observable in the contact area (Fig. 13.3). The contact area transitions from being a nearly constant value of  $0.3 \text{ in}^2$  to varying between 0.05 and  $0.35 \text{ in}^2$ . After resonance has passed, the contact area returns to the nearly constant value of  $0.3 \text{ in}^2$ .

The contact force for the studied portion of the interface is calculated by summing the contact pressures over the interface and multiplying by the area of each pressure sensor ( $1/16 \text{ in}^2$ ). The contact forces are observed to vary significantly about resonance. Below resonance, the contact force in the left quarter of the interface is observed to be constant at approximately 60 lbs. Near resonance, however, the contact force varies between 2 and 70 lbs. At frequencies above resonance, the contact force returns to a constant value (though increasing slightly with frequency) of approximately 62 lbs (Fig. 13.4).


To understand the evolution of the contact pressure during resonance, a second set of experiments were conducted in which the excitation frequency was swept from 123–125 Hz at a rate of 0.05 Hz/s. Three different excitation amplitudes were used: 1, 2, and 3 N (denoted as low, medium, and high in what follows).

As before, a significant variation in the contact area is observed in the measurements for all three excitation amplitudes (Fig. 13.5 for low, Fig. 13.6 for medium, and Fig. 13.7 for high). As the excitation amplitude is increased from low to high, the maximum contact area changes from  $0.3$  to  $0.7 \text{ in}^2$  at resonance (approximately 15 s), with a minimum contact area of  $0 \text{ in}^2$  in all cases.

Likewise, the peak contact forces (Fig. 13.8 for low, Fig. 13.9 for medium, and Fig. 13.10 for high) are observed to vary from 50 lbs for the low excitation force to 84 lbs for the high excitation force. Both before and after the forced excitation, the contact forces are measured as approximately 18 lbs. Thus, significant variations are observed in the specific conditions of the contact interface during dynamic excitation near resonance, and the contact area is significantly different than the static measurement of the contact area.

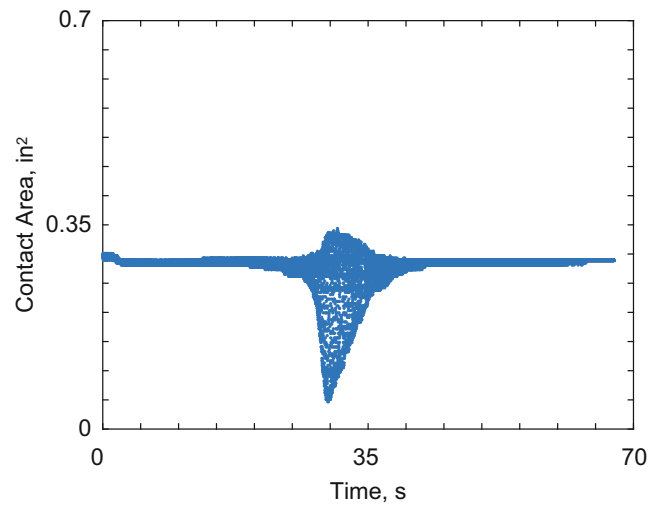

**Fig. 13.3** Contact area as a function of time over the left quarter of the interface for the 100–160 Hz sweep

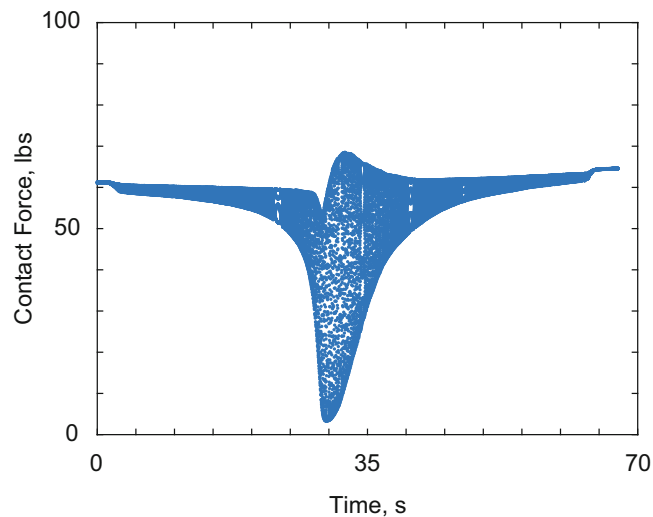


**Fig. 13.4** Contact force as a function of time over the left quarter of the interface for the 100–160 Hz sweep


To further visualize the evolution of the contact interface during dynamic excitation near resonance, Figs. 13.11, 13.12, and 13.13 (for the low, medium, and high excitations respectively), show the two-dimensional contact pressure maps at four different phases during a period of excitation. The coordinate system is setup such that the left hand side of the plots are the edge of the contact pressure film closest to the middle bolt hole, and the right hand side is the edge of the contact pressure film closest to the shaker. The contact pressure (and correspondingly contact area) is observed to be zero at one point in time for all three excitation amplitudes (Figs. 13.11a, 13.12a, and 13.13a). As the phase increases, the interface is observed to come into contact around the unused bolt hole (as evident by the dark circular region in Fig. 13.13d). Due to the asymmetric loading of the interface (as a result of the particular experimental setup), the lower corner of the contact pressure film never is fully engaged. For both the low (Fig. 13.11) and medium (Fig. 13.12) excitation amplitudes, the interfacial contact is never observed to fully encircle the bolt hole.

## 13.4 Discussion and Conclusions


As has previously been observed in numerical studies [5], this research experimentally confirms that the contact patch evolves during dynamic excitation. While several caveats exist, the extent of the contact patch in the present research is observed to change by over an inch (note that the contact pressure sensor is only one inch in width). For larger bolt torques, of course,

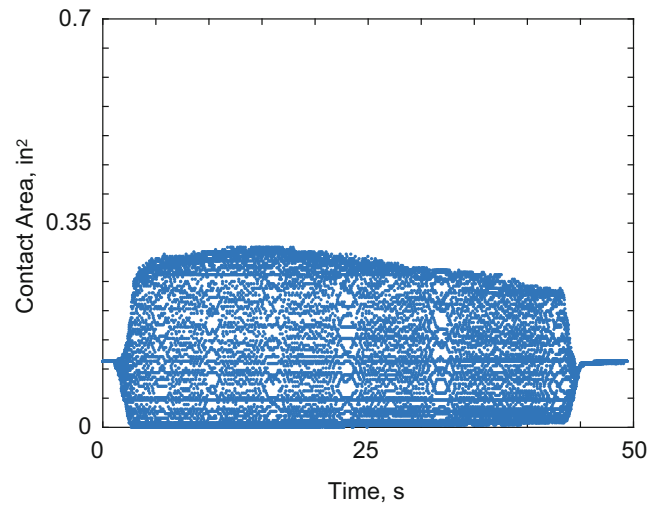


**Fig. 13.5** Contact area as a function of time over the left quarter of the interface for the 123–125 Hz sweep at a low excitation amplitude

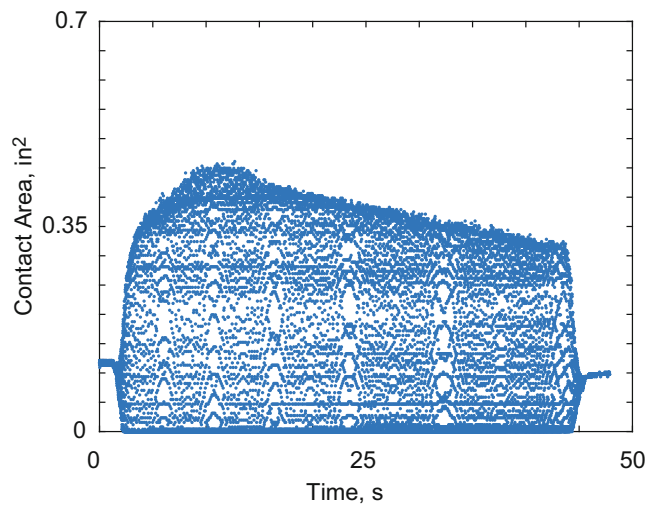


**Fig. 13.6** Contact area as a function of time over the left quarter of the interface for the 123–125 Hz sweep at a medium excitation amplitude

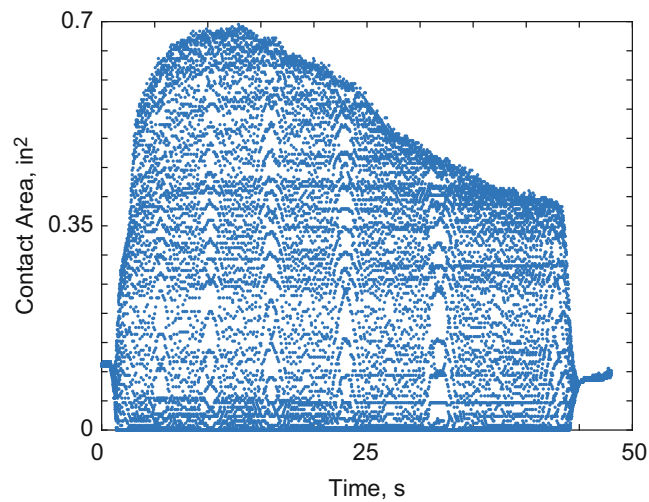

**Fig. 13.7** Contact area as a function of time over the left quarter of the interface for the 123–125 Hz sweep at a high excitation amplitude

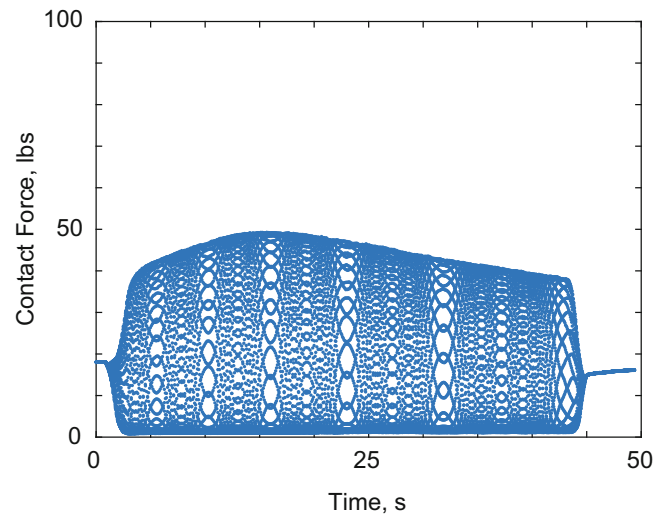


**Fig. 13.8** Contact force as a function of time over the left quarter of the interface for the 123–125 Hz sweep at a low excitation amplitude

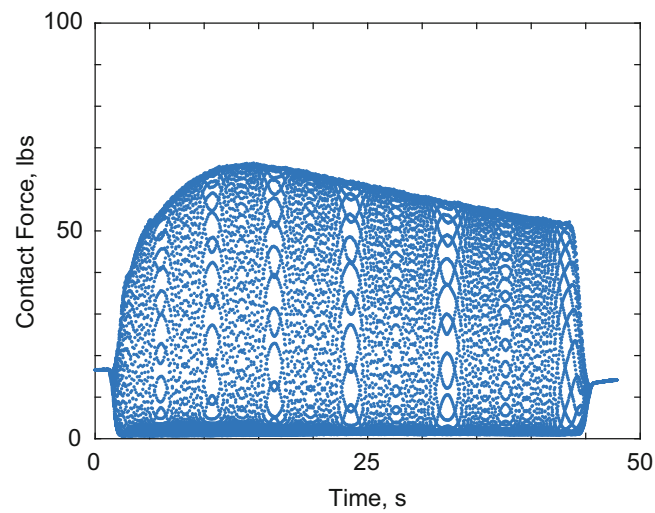


**Fig. 13.9** Contact force as a function of time over the left quarter of the interface for the 123–125 Hz sweep at a medium excitation amplitude

the magnitude of the contact area change is expected to decrease; nonetheless, this series of experiments shows that the interface cannot be assumed to be static during dynamic excitation as had been previously assumed. Instead, models of jointed structures must be able to capture the evolution of the contact patch during dynamic excitation. Further, as the energy dissipated in an interface is dominated by the regions away from the bolts where contact pressure is lowest [6–8], it may be imperative to model the extent of these regions accurately.

When coupled with the findings of the numerical study of [10], in which it was shown that better agreement between experiments and models could be achieved by allowing the contact patch to evolve during dynamic excitation, there is, perhaps, a significant and far-reaching ramification: interface models must be improved to capture the local kinematics of contact. This conclusion is somewhat contrary to one of the main approaches for modeling jointed structures, namely the typical manner in which Iwan elements are employed [3, 16, 17]. Typically, Iwan elements are used to represent an entire interface, which necessitates that the local kinematics of an interface be regularized to a single (or a small number of) contact patches. This regularization, though, has the potential to go too far and neglect effects such as the evolution of the contact patch during excitation. The advantage of this modeling approach is a significant reduction in the number of degrees of freedom used to represent the interface of a jointed structure. Other methods that are able to incorporate the evolution of the contact patch require orders of magnitude more degrees of freedom in the contact patch than the Iwan modeling approach [10].

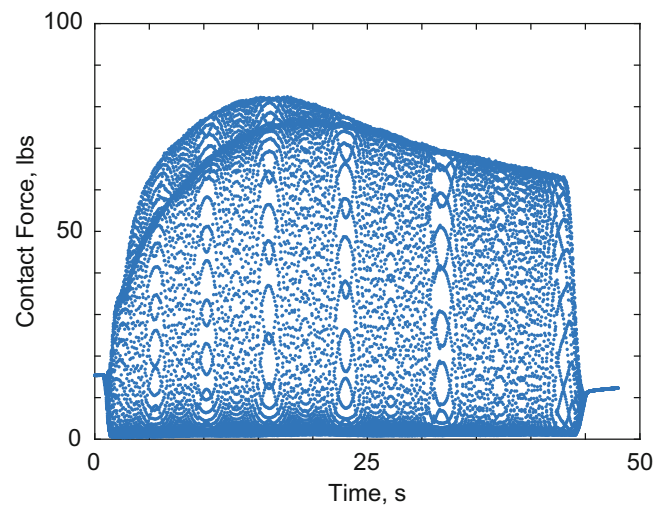


**Fig. 13.10** Contact force as a function of time over the left quarter of the interface for the 123–125 Hz sweep at a high excitation amplitude

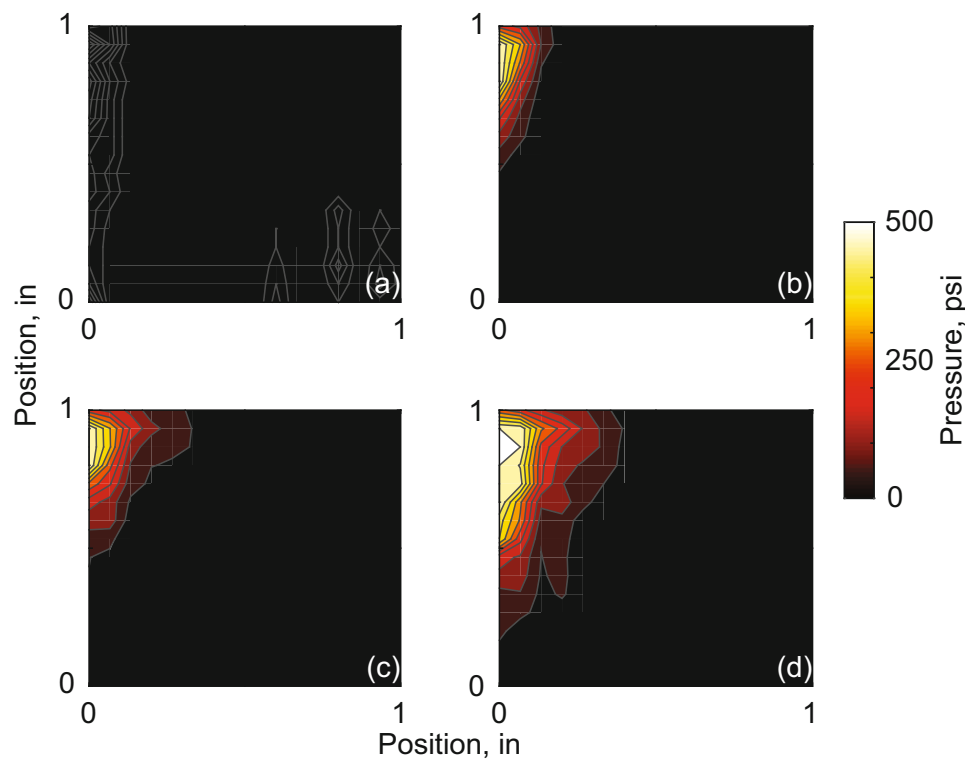


**Fig. 13.11** Contact pressure at four different phases during an excitation of 124 Hz at a low excitation amplitude

Future work, therefore, must further study the importance of capturing the local kinematics in modeling jointed structures. If it is further confirmed that the modeling of the local kinematics are essential for *predicting* the response of a jointed structure, then a compromise is needed between the different numerical approaches – one where the local kinematics are able to be preserved while reducing the total number of degrees of freedom necessary to represent them accurately. One potential avenue may be to use multiple contact patches defined over an interface (such as in [10], but perhaps to a greater extent) over which both an Iwan model is defined for the tangential forces and a normal contact model is defined (unlike in [10]) to capture the local kinematics. A second potential avenue may require a fundamentally different approach from Iwan elements altogether, which requires novel constitutive modeling insights.

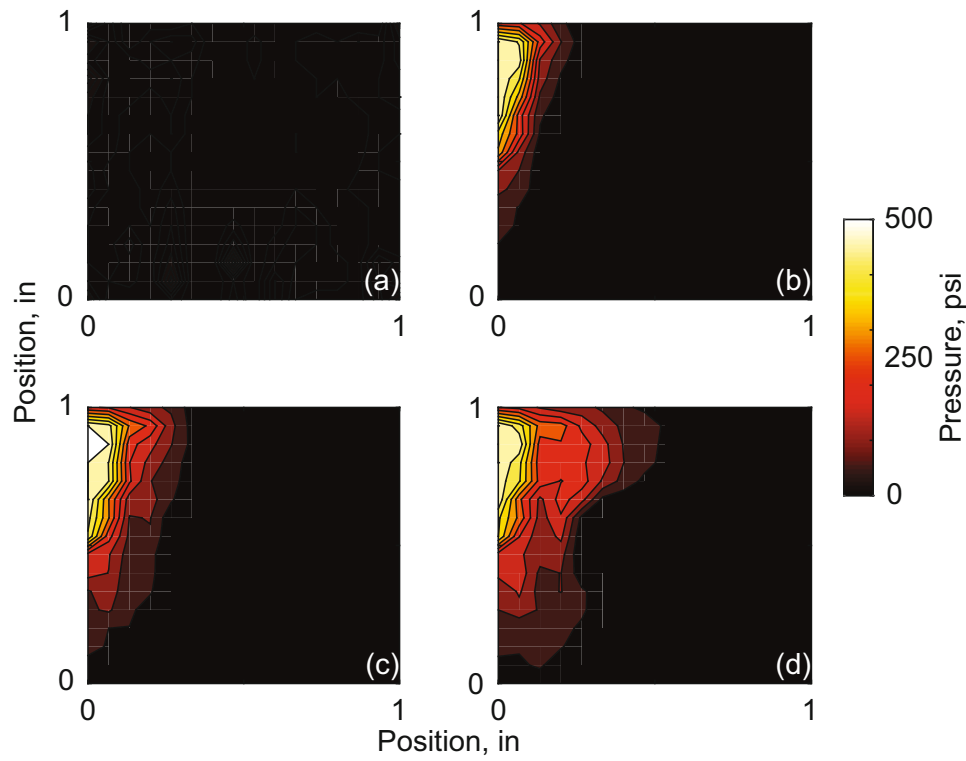

**Fig. 13.12** Contact pressure at four different phases during an excitation of 124 Hz at a medium excitation amplitude

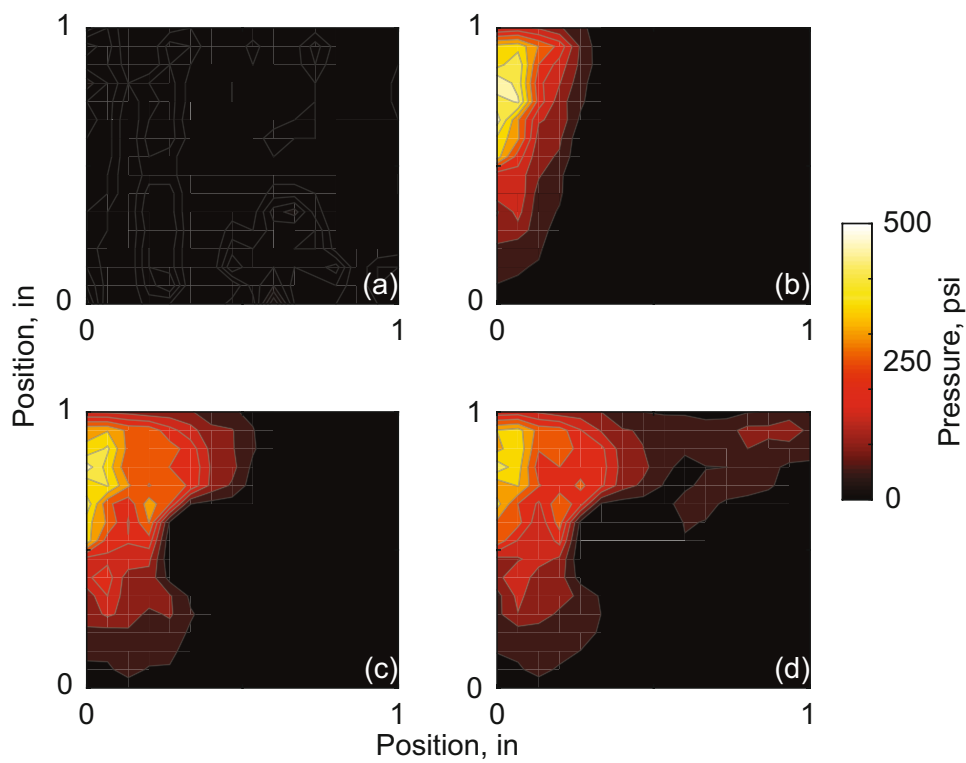

**Fig. 13.13** Contact pressure at four different phases during an excitation of 124 Hz at a high excitation amplitude



**Acknowledgements** This research was conducted at the Nonlinear Mechanics and Dynamics (NOMAD) Research Institute hosted by Sandia National Laboratories in Albuquerque, NM, and funded through the WSEAT program of the NNSA. Sandia National Laboratories is a multi-mission laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.

## References

1. Bode, K., Ostermeyer, G.P.: A comprehensive approach for the simulation of heat and heat-induced phenomena in friction materials. *Wear* **311**, 47–56 (2014)
2. Brake, M.R., et al.: Variability and repeatability of jointed structures with frictional interfaces. In: 32nd International Modal Analysis Conference (IMAC XXXII), Orlando (2014)
3. Brake, M.R.W. (ed.): *The Mechanics of Jointed Structures*. Springer, New York, USA (2017)
4. Catalfamo, S., et al.: Effects of experimental methods on the measurement of a nonlinear system. In: 34th International Modal Analysis Conference (IMAC XXXIV), Orlando (2016)
5. Flicek, R.C., et al.: Stress waves propagating through jointed connections. In: 34th International Modal Analysis Conference (IMAC XXXIV), Orlando (2016)
6. Goyder, H.G.D., Ind, P., Brown, D.: Measurement of damping due to bolted joints. In: ASME International Design Engineering Technical Conferences IDETC/CIE, Portland (2013)
7. Goyder, H.G.D., Ind, P., Brown, D.: Measurement of damping in a chain of bolted joints. In: ASME International Design Engineering Technical Conferences IDETC/CIE, Buffalo (2014)
8. Goyder, H.G.D., Ind, P., Brown, D.: Damping in a composite beam with a jointed interface. In: ASME International Design Engineering Technical Conferences IDETC/CIE, Boston (2015)
9. Heisenberg, W.: *Physics and Philosophy: The Revolution in Modern Science*. George Allen and Unwin LTD, London (1959)
10. Lacayo, R.M., et al.: A numerical round robin to predict the dynamics of an experimentally-measured brake-reuss beam. In: 35th International Modal Analysis Conference (IMAC XXXV), Garden Grove (2017)
11. Müller, M., Ostermeyer, G.P.: A cellular automation model to describe the three-dimensional friction and wear mechanism of brake systems. *Wear* **263**, 1175–1188 (2007)
12. Müller, M., Ostermeyer, G.P.: Cellular automata method for macroscopic surface and friction dynamics in brake systems. *Tribol. Int.* **40**, 942–952 (2007)
13. Mulvihill, D.M., et al.: Investigation of non-coulomb friction behaviour in reciprocating sliding. *Wear* **271**, 802–816 (2011)
14. Ostermeyer, G.P., Müller, M.: Dynamic interaction of friction and surface topography in brake systems. *Tribol. Int.* **39**, 370–380 (2006)
15. Schwingshackl, C.W., Petrov, E.P., Ewins, D.J.: Measured and estimated friction interface parameters in a nonlinear dynamic analysis. *Mech. Syst. Signal Process.* **28**, 574–584 (2012)
16. Segalman, D.J.: A four-parameter Iwan model for lap-type joints. *ASME J. Appl. Mech.* **72**, 752–760 (2005)
17. Segalman, D.J., et al.: *Handbook on Dynamics of Jointed Structures*. Technical report SAND2009-4164. Sandia National Laboratories, Albuquerque (2009)
18. Smith, S.A., et al.: The effects of boundary conditions, measurement techniques, and excitation type on measurements of the properties of mechanical joints. In: 33rd International Modal Analysis Conference (IMAC XXXIV), Orlando (2015)