

Bosch Professional Automotive
Information



BOSCH
Invented for life

Konrad Reif *Ed.*

Diesel Engine Management

Systems and Components

 Springer Vieweg

The Springer Vieweg logo, featuring a stylized horse head, is located at the bottom center of the cover.



Bosch Professional Automotive Information

Bosch Professional Automotive Information is a definitive reference for automotive engineers. The series is compiled by one of the world's largest automotive equipment suppliers. All topics are covered in a concise but descriptive way backed up by diagrams, graphs, photographs and tables enabling the reader to better comprehend the subject.

There is now greater detail on electronics and their application in the motor vehicle, including electrical energy management (EEM) and discusses the topic of intersystem networking within vehicle. The series will benefit automotive engineers and design engineers, automotive technicians in training and mechanics and technicians in garages.

Konrad Reif
Editor

Diesel Engine Management

Systems and Components

 Springer Vieweg

Editor

Prof. Dr.-Ing. Konrad Reif
Duale Hochschule Baden-Württemberg
Friedrichshafen, Germany
reif@dhbw-ravensburg.de

ISBN 978-3-658-03980-6

ISBN 978-3-658-03981-3 (eBook)

DOI 10.1007/978-3-658-03981-3

Library of Congress Control Number: 2014945110

Springer Vieweg

© Springer Fachmedien Wiesbaden 2014

This work is subject to copyright. All rights are reserved, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilm or in any other way, and storage in data banks. Duplication of this publication or parts thereof is permitted only under the provisions of the German Copyright Law of September 9, 1965, in its current version, and permission for use must always be obtained from Springer. Violations are liable to prosecution under the German Copyright Law.

The use of general descriptive names, registered names, trademarks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

Printed on acid-free paper

Springer is part of Springer Science+Business Media
www.springer.com



This reference book provides a comprehensive insight into today's diesel injection systems and electronic control. It focusses on minimizing emissions and exhaust-gas treatment. Innovations by Bosch in the field of diesel-injection technology have made a significant contribution to the diesel boom. Calls for lower fuel consumption, reduced exhaust-gas emissions and quiet engines are making greater demands on the engine and fuel-injection systems.

Complex technology of modern motor vehicles and increasing functions need a reliable source of information to understand the components or systems. The rapid and secure access to these informations in the field of Automotive Electrics and Electronics provides the book in the series "Bosch Professional Automotive Information" which contains necessary fundamentals, data and explanations clearly, systematically, currently and application-oriented. The series is intended for automotive professionals in practice and study which need to understand issues in their area of work. It provides simultaneously the theoretical tools for understanding as well as the applications.



| | |
|--|---|
| 2 History of the diesel engine | |
| 3 Rudolf Diesel | |
| 4 Mixture formation in the first diesel engines | |
| 5 Use of the first vehicle diesel engines | |
| 8 Bosch diesel fuel injection | |
| 12 Areas of use for diesel engines | |
| 12 Suitability criteria | |
| 12 Applications | |
| 15 Engine characteristic data | |
| 16 Basic principles of the diesel engine | |
| 16 Method of operation | |
| 19 Torque and power output | |
| 20 Engine efficiency | |
| 23 Operating statuses | |
| 27 Operating conditions | |
| 29 Fuel-injection system | |
| 30 Combustion chambers | |
| 34 Fuels | |
| 34 Diesel fuel | |
| 41 Alternative fuels for diesel engines | |
| 46 Cylinder-charge control systems | |
| 46 Overview | |
| 47 Turbochargers and superchargers | |
| 56 Swirl flaps | |
| 57 Intake air filters | |
| 60 Basic principles of diesel fuel injection | |
| 60 Mixture distribution | |
| 62 Fuel-injection parameters | |
| 71 Nozzle and nozzle holder designs | |
| 72 Overview of diesel fuel-injection systems | |
| 72 Designs | |
| 78 Fuel supply system to the low-pressure stage | |
| 78 Overview | |
| 80 Fuel filter | |
| 82 Fuel-supply pump | |
| 86 Miscellaneous components | |
| 88 Supplementary valves for in-line fuel-injection pumps | |
| 90 Overview of discrete cylinder systems | |
| 90 Type PF discrete injection pumps | |
| | 92 Unit injector system (UIS) and unit pump system (UPS) |
| | 94 System diagram of UIS for passenger cars |
| | 96 System diagram of UIS/UPS for commercial vehicles |
| | 98 Unit injector system (UIS) |
| | 98 Installation and drive |
| | 99 Design |
| | 102 Method of operation of UI for passenger cars |
| | 105 Method of operation of UI for commercial vehicles |
| | 107 High-pressure solenoid valve |
| | 110 Unit pump system (UPS) |
| | 110 Installation and drive |
| | 110 Design |
| | 112 Current-controlled rate shaping (CCRS) |
| | 114 Overview of common-rail systems |
| | 114 Areas of application |
| | 115 Design |
| | 116 Operating concept |
| | 120 Common-rail system for passenger cars |
| | 125 Common-rail system for commercial vehicles |
| | 128 High-pressure components of common-rail system |
| | 128 Overview |
| | 130 Injector |
| | 142 High-pressure pumps |
| | 148 Fuel rail (high-pressure accumulator) |
| | 149 High-pressure sensors |
| | 150 Pressure-control valve |
| | 151 Pressure-relief valve |
| | 152 Injection nozzles |
| | 154 Pintle nozzles |
| | 156 Hole-type nozzles |
| | 160 Future development of the nozzle |
| | 162 Nozzle holders |
| | 164 Standard nozzle holders |
| | 165 Stepped nozzle holders |
| | 166 Two-spring nozzle holders |
| | 167 Nozzle holders with needle-motion sensors |

168 High-pressure lines

- 168 High-pressure connection fittings
- 169 High-pressure delivery lines

172 Start-assist systems

- 172 Overview
- 173 Preheating systems

178 Minimizing emissions inside of the engine

- 179 Combustion process
- 181 Other impacts on pollutant emissions
- 183 Development of homogeneous combustion processes
- 184 Diesel fuel injection
- 196 Exhaust-gas recirculation
- 199 Positive crankcase ventilation

200 Exhaust-gas treatment

- 201 NO_x storage catalyst
- 204 Selective catalytic reduction of nitrogen oxides
- 210 Diesel Particulate Filter (DPF)
- 218 Diesel oxidation catalyst

220 Electronic Diesel Control (EDC)

- 220 System overview
- 223 In-line fuel-injection pumps
- 224 Helix and port-controlled axial-piston distributor pumps
- 225 Solenoid-valve-controlled axial-piston and radial-piston distributor pumps
- 226 Unit Injector System (UIS) for passenger cars
- 227 Unit Injector System (UIS) and Unit Pump System (UPS) for commercial vehicles
- 228 Common Rail System (CRS) for passenger cars
- 229 Common Rail System (CRS) for commercial vehicles
- 230 Data processing
- 232 Fuel-injection control
- 243 Further special adaptations
- 244 Lambda closed-loop control for passenger-car diesel engines
- 249 Torque-controlled EDC systems
- 252 Control and triggering of the remaining actuators
- 253 Substitute functions
- 254 Data exchange with other systems

- 255 Serial data transmission (CAN)

- 260 Application-related adaptation ¹⁾ of car engines

- 264 Application-related adaptation ¹⁾ of commercial vehicle engines

- 269 Calibration tools

272 Electronic Control Unit (ECU)

- 272 Operating conditions
- 272 Design and construction
- 272 Data processing

278 Sensors

- 278 Automotive applications
- 278 Temperature sensors
- 280 Micromechanical pressure sensors
- 283 High-pressure sensors
- 284 Inductive engine-speed sensors
- 285 Rotational-speed (rpm) sensors and incremental angle-of-rotation sensors
- 286 Hall-effect phase sensors
- 288 Accelerator-pedal sensors
- 290 Hot-film air-mass meter HFM5
- 292 LSU4 planar broad-band Lambda oxygen sensor
- 294 Half-differential short-circuiting-ring sensors
- 295 Fuel-level sensor

296 Fault diagnostics

- 296 Monitoring during vehicle operation (on-board diagnosis)
- 299 On-board diagnosis system for passenger cars and light-duty trucks
- 306 On-board diagnosis system for heavy-duty trucks

308 Service technology

- 308 Workshop business
- 312 Diagnostics in the workshop
- 314 Testing equipment
- 316 Fuel-injection pump test benches
- 318 Testing in-line fuel-injection pumps
- 322 Testing helix and portcontrolled distributor injection pumps
- 326 Nozzle tests

328 Exhaust-gas emissions

- 328 Overview

- 328 Major components
- 330 Combustion byproducts
- 332 Emission-control legislation**
 - 332 Overview
 - 334 CARB legislation (passenger cars/LDT)
 - 338 EPA legislation (passenger cars/LDT)
 - 340 EU legislation (passenger cars/LDT)
 - 342 Japanese legislation (passenger cars/LDTs)
 - 343 U.S. legislation (heavy-duty trucks)
 - 344 EU legislation (heavy-duty trucks)
 - 346 Japanese legislation (heavy-duty trucks)
 - 347 U.S. test cycles for passenger cars and LDTs
- 349 European test cycle for passenger cars and LDTs
- 349 Japanese test cycle for passenger cars and LDTs
- 350 Test cycles for heavy-duty trucks
- 352 Exhaust-gas measuring techniques**
 - 352 Exhaust-gas test for type approval
 - 355 Exhaust-gas measuring devices
 - 357 Exhaust-gas measurement in engine development
 - 359 Emissions testing (opacity measurement)



History of the diesel engine

Dipl.-Ing. Karl-Heinz Dietsche.

Areas of use for diesel engines

Dipl.-Ing. Joachim Lackner,
Dr.-Ing. Herbert Schumacher,
Dipl.-Ing. (FH) Hermann Grieshaber.

Basic principles of the diesel engine

Dr.-Ing. Thorsten Raatz,
Dipl.-Ing. (FH) Hermann Grieshaber.

Fuels, Diesel fuel

Dr. rer. nat. Jörg Ullmann.

Fuels, Alternative Fuels

Dipl.-Ing. (FH) Thorsten Allgeier,
Dr. rer. nat. Jörg Ullmann.

Cylinder-charge control systems

Dr.-Ing. Thomas Wintrich,
Dipl.-Betriebsw. Meike Keller.

Basic principles of diesel fuel injection

Dipl.-Ing. Jens Olaf Stein,
Dipl.-Ing. (FH) Hermann Grieshaber.

Overview of diesel fuel-injection systems

Dipl.-Ing. (BA) Jürgen Crepin.

Fuel supply system to the low-pressure stage

Dipl.-Ing. (FH) Rolf Ebert,
Dipl.-Betriebsw. Meike Keller,
Ing. grad. Peter Schelhas,
Dipl.-Ing. Klaus Ortner,
Dr.-Ing. Ulrich Projahn.

Overview of discrete cylinder systems

Unit injector system (UIS)

Unit pump system (UPS)

Dipl.-Ing. (HU) Carlos Alvarez-Avila,
Dipl.-Ing. Guilherme Bittencourt,
Dipl.-Ing. Dipl.-Wirtsch.-Ing. Matthias Hickl,
Dipl.-Ing. (FH) Guido Kampa,
Dipl.-Ing. Rainer Merkle,
Dipl.-Ing. Roger Potschin,
Dr.-Ing. Ulrich Projahn,
Dipl.-Ing. Walter Reinisch,

Dipl.-Ing. Nestor Rodriguez-Amaya,
Dipl.-Ing. Ralf Wurm.

Overview of common-rail systems

Dipl.-Ing. Felix Landhäußer,
Dr.-Ing. Ulrich Projahn,
Dipl.-Inform. Michael Heinzlmann,
Dr.-Ing. Ralf Wirth.

High-pressure components of common-rail system

Dipl.-Ing. Sandro Soccol,
Dipl.-Ing. Werner Brühmann.

Injection nozzles

Dipl.-Ing. Thomas Kügler.

Nozzle holders

Dipl.-Ing. Thomas Kügler.

High-pressure lines

Kurt Sprenger.

Start-assist systems

Dr. rer. nat. Wolfgang Dreßler.

Minimizing emissions inside of the engine

Dipl.-Ing. Jens Olaf Stein.

Exhaust-gas treatment

Dr. rer. nat. Norbert Breuer,
Priv.-Doz. Dr.-Ing. Johannes K. Schaller,
Dr. rer. nat. Thomas Hauber,
Dr.-Ing. Ralf Wirth,
Dipl.-Ing. Stefan Stein.

Electronic Diesel Control (EDC)

Electronic Control Unit (ECU)

Dipl.-Ing. Felix Landhäußer,
Dr.-Ing. Andreas Michalske,
Dipl.-Ing. (FH) Mikel Lorente Susaeta,
Dipl.-Ing. Martin Grosser,
Dipl.-Inform. Michael Heinzlmann,
Dipl.-Ing. Johannes Feger,
Dipl.-Ing. Lutz-Martin Fink,
Dipl.-Ing. Wolfram Gerwing,
Dipl.-Ing. (BA) Klaus Grabmaier,
Dipl.-Math. techn. Bernd Illg,

Authors

Dipl.-Ing. (FH) Joachim Kurz,
Dipl.-Ing. Rainer Mayer,
Dr. rer. nat. Dietmar Ottenbacher,
Dipl.-Ing. (FH) Andreas Werner,
Dipl.-Ing. Jens Wiesner,
Dr. Ing. Michael Walther.

Sensors

Dipl.-Ing. Joachim Berger.

Fault diagnostics

Dr.-Ing. Günter Driedger,
Dr. rer. nat. Walter Lehle,
Dipl.-Ing. Wolfgang Schauer.

Service technology

Dipl.-Wirtsch.-Ing. Stephan Sohnle,
Dipl.-Ing. Rainer Rehage,
Rainer Heinzmann,
Rolf Wörner,
Günter Mauderer,
Hans Binder.

Exhaust-gas emissions

Dipl.-Ing. Karl-Heinz Dietsche.

Emission-control legislation

Dr.-Ing. Stefan Becher,
Dr.-Ing. Torsten Eggert.

Exhaust-gas measuring techniques

Dipl.-Ing. Andreas Kreh,
Dipl.-Ing. Bernd Hinner,
Dipl.-Ing. Rainer Pelka.

Basics

History of the diesel engine

As early as 1863, the Frenchman Etienne Lenoir had test-driven a vehicle which was powered by a gas engine which he had developed. However, this drive plant proved to be unsuitable for installing in and driving vehicles. It was not until Nikolaus August Otto's four-stroke engine with magneto ignition that operation with liquid fuel and thereby mobile application were made possible. But the efficiency of these engines was low. Rudolf Diesel's achievement was to theoretically develop an engine with comparatively much higher efficiency and to pursue his idea through to readiness for series production.

In 1897, in cooperation with Maschinenfabrik Augsburg-Nürnberg (MAN), Rudolf Diesel built the first working prototype of a combustion engine to be run on inexpensive heavy fuel oil. However, this first diesel engine weighed approximately 4.5 tonnes and was three meters high. For this reason, this engine was not yet considered for use in land vehicles.

"It is my firm conviction that the automobile engine will come, and then I will consider my life's work complete."
(Quotation by Rudolf Diesel shortly before his death)


However, with further improvements in fuel injection and mixture formation, Diesel's invention soon caught on and there were no longer any viable alternatives for marine and fixed-installation engines.

2 Rudolf Diesel



UANI0147-1Y

1 Patent document for the diesel engine and its first design from 1894

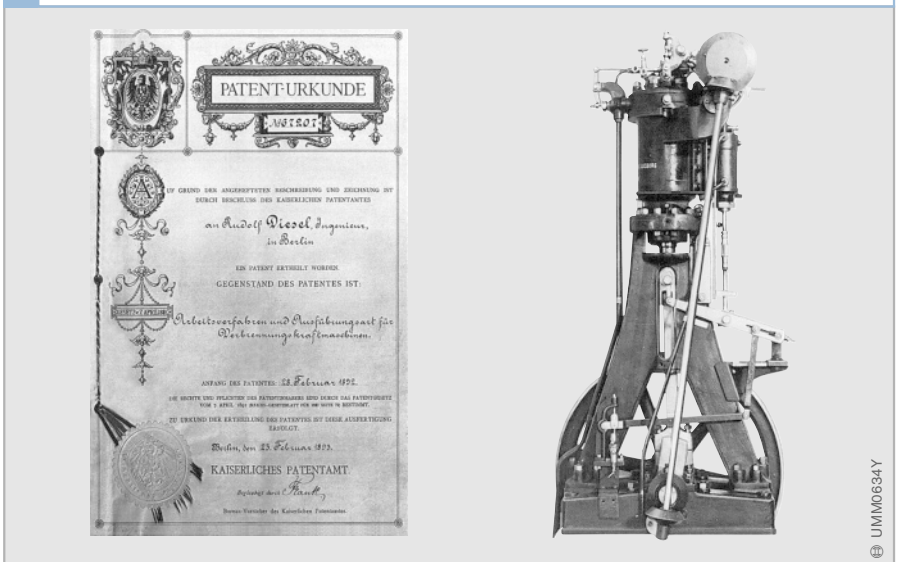

UMIM0634Y

Rudolf Diesel

Rudolf Diesel (1858–1913), born in Paris, decided at 14 that he wanted to become an engineer. He passed his final examinations at Munich Polytechnic with the best grades achieved up to that point.

Idea for a new engine

Diesel's idea was to design an engine with significantly greater efficiency than the steam engine, which was popular at the time. An engine based on the isothermal cycle should, according to the theory of the French physicist Sadi Carnot, be able to be operated with a high level of efficiency of over 90%.

Diesel developed his engine initially on paper, based on Carnot's models. His aim was to design a powerful engine with comparatively small dimensions. Diesel was absolutely convinced by the function and power of his engine.

Diesel's patent

Diesel completed his theoretical studies in 1890 and on 27 February 1892 applied to the Imperial Patent Office in Berlin for a patent on "New rational thermal engines". On 23 February 1893, he received patent document DRP 67207 entitled "Operating Process and Type of Construction for Combustion Engines", dated 28 February 1892.

This new engine initially only existed on paper. The accuracy of Diesel's calculations had been verified repeatedly, but the engine manufacturers remained skeptical about the engine's technical feasibility.

Realizing the engine

The companies experienced in engine building, such as Gasmotoren-Fabrik Deutz AG, shied away from the Diesel project. The required compression pressures of 250 bar were beyond what appeared to be technically feasible. In 1893, after many months of endeavor, Diesel finally succeeded in reaching an agreement to work with Maschinenfabrik Augsburg-Nürnberg (MAN). However, the agreement contained concessions by Diesel in re-

spect of the ideal engine. The maximum pressure was reduced from 250 to 90 bar, and then later to 30 bar. This lowering of the pressure, required for mechanical reasons, naturally had a disadvantageous effect on combustibility. Diesel's initial plans to use coal dust as the fuel were rejected.

Finally, in Spring 1893, MAN began to build the first, uncooled test engine. Kerosene was initially envisaged as the fuel, but what came to be used was gasoline, because it was thought (erroneously) that this fuel would auto-ignite more easily. The principle of auto-ignition – i.e. injection of the fuel into the highly compressed and heated combustion air during compression – was confirmed in this engine.

In the second test engine, the fuel was not injected and atomized directly, but with the aid of compressed air. The engine was also provided with a water-cooling system.

It was not until the third test engine – a new design with a single-stage air pump for compressed-air injection – that the breakthrough made. On 17 February 1897, Professor Moritz Schröder of Munich Technical University carried out the acceptance tests. The test results confirmed what was then for a combustion engine a high level of efficiency of 26.2%.

Patent disputes and arguments with the Diesel consortium with regard to development strategy and failures took their toll, both mentally and physically, on the brilliant inventor. He is thought to have fallen overboard on a Channel crossing to England on 29 September 1913.

Mixture formation in the first diesel engines

Compressed-air injection

Rudolf Diesel did not have the opportunity to compress the fuel to the pressures required for spray dispersion, spray disintegration and droplet formation. The first diesel engine from 1897 therefore worked with compressed-air injection, whereby the fuel was introduced into the cylinder with the aid of compressed air. This process was later used by Daimler in its diesel engines for trucks.

The fuel injector had a port for the compressed-air feed (Fig. 1, 1) and a port for the fuel feed (2). A compressor generated the compressed air, which flowed into the valve. When the nozzle (3) was open, the air blasting into the combustion chamber also swept the fuel in and in this two-phase flow generated the fine droplets required for fast droplet vaporization and thus for auto-ignition.

A cam ensured that the nozzle was actuated in synchronization with the crankshaft. The amount of fuel to be injected as controlled by the fuel pressure. Since the injection pressure was generated by the compressed air, a low fuel pressure was sufficient to ensure the efficacy of the process.

The problem with this process was – on account of the low pressure at the nozzle – the low penetration depth of the air/fuel mixture into the combustion chamber. This type of mixture formation was therefore not suitable for higher injected fuel quantities (higher engine loads) and engine speeds. The limited spray dispersion prevented the amount of air utilization required to increase power and, with increasing injected fuel quantity, resulted in local over-enrichment with a drastic increase in the levels of smoke. Furthermore, the vaporization time of the relatively large fuel droplets did not permit any significant increase in engine speed. Another disadvantage of this engine was the enormous amount of space taken up by the compressor. Nevertheless, this principle was used in trucks at that time.

Precombustion-chamber engine

The Benz diesel was a precombustion-chamber engine. Prosper L'Orange had already applied for a patent on this process in 1909. Thanks to the precombustion-chamber principle, it was possible to dispense with the complicated and expensive system of air injection. Mixture formation in the main combustion chamber of this process, which is still

1 Fuel injector for compressed-air injection from the time of origin of the diesel engine (1895)

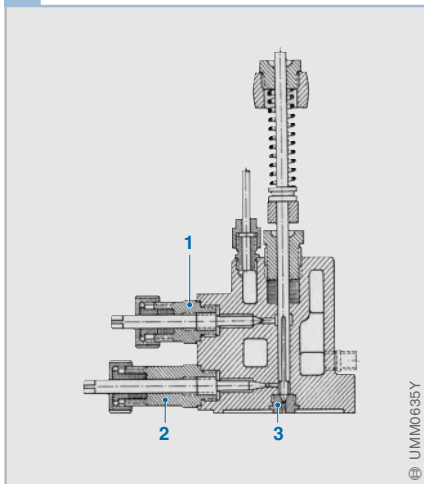


Fig. 1


- 1 Compressed-air feed
- 2 Fuel feed
- 3 Nozzle

Fig. 2

(Picture source: DaimlerChrysler)

- 1 Fuel valve
- 2 Glow filament for heating precombustion chamber
- 3 Precombustion chamber
- 4 Ignition insert

2 Principle of the precombustion-chamber engine

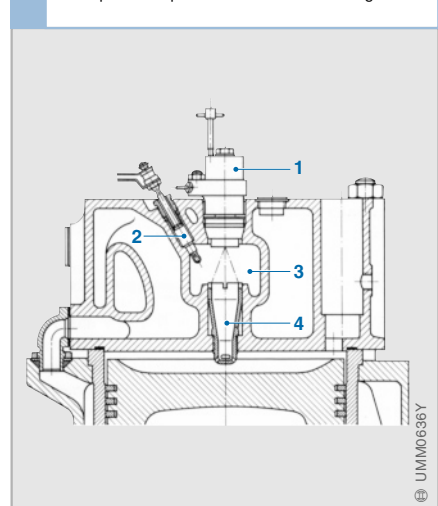

UMM0636Y

used to this day, is ensured by partial combustion in the precombustion chamber. The precombustion-chamber engine has a specially shaped combustion chamber with a hemispherical head. The precombustion chamber and combustion chamber are interconnected by small bores. The volume of the precombustion chamber is roughly one fifth of the compression chamber.

The entire quantity of fuel is injected at approximately 230 to 250 bar into the precombustion chamber. Because of the limited amount of air in the precombustion chamber, only a small amount of the fuel is able to combust. As a result of the pressure increase in the precombustion chamber caused by the partial combustion, the unburned or partially cracked fuel is forced into the main combustion chamber, where it mixes with the air in the main combustion chamber, ignites and burns.

The function of the precombustion chamber here is to form the mixture. This process – also known as indirect injection – finally caught on and remained the predominant process until developments in fuel injection were able to deliver the injection pressures required to form the mixture in the main combustion chamber.

Direct injection

The first MAN diesel engine operated with direct injection, whereby the fuel was forced directly into the combustion chamber via a nozzle. This engine used as its fuel a very light oil, which was injected by a compressor into the combustion chamber. The compressor determined the huge dimensions of the engine.

In the commercial-vehicle sector, direct-injection engines resurfaced in the 1960s and gradually superseded precombustion-chamber engines. Passenger cars continued to use precombustion-chamber engines because of their lower combustion-noise levels until the 1990s, when they were swiftly superseded by direct-injection engines.


Use of the first vehicle diesel engines

Diesel engines in commercial vehicles

Because of their high cylinder pressures, the first diesel engines were large and heavy and therefore wholly unsuitable for mobile applications in vehicles. It was not until the beginning of the 1920s that the first diesel engines were able to be deployed in commercial vehicles.

Uninterrupted by the First World War, Prosper L'Orange – a member of the executive board of Benz & Cie – continued his development work on the diesel engine. In 1923 the first diesel engines for road vehicles were installed in five-tonne trucks. These four-cylinder precombustion-chamber engines with a piston displacement of 8.8 l delivered 45...50 bhp. The first test drive of the Benz truck took place on 10 September with brown-coal tar oil serving as the fuel. Fuel consumption was 25% lower than benzene engines. Furthermore, operating fluids such as brown-coal tar oil cost much less than benzene, which was highly taxed.

The company Daimler was already involved in the development of the diesel engine prior to

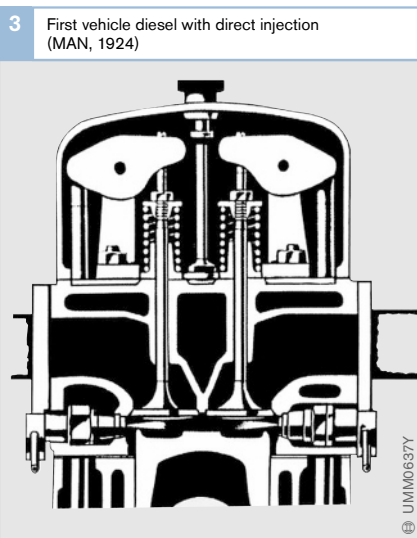

4 The most powerful diesel truck in the world from 1926 from MAN with 150bhp (110kW) for a payload of 10t



the First World War. After the end of the war, the company was working on diesel engines for commercial vehicles. The first test drive was conducted on 23 August 1923 – at virtually the same time as the Benz truck. At the end of September 1923, a further test drive was conducted from the Daimler plant in Berlin to Stuttgart and back.

The first truck production models with diesel engines were exhibited at the Berlin Motor Show in 1924. Three manufacturers were represented, each with different systems, having driven development of the diesel forward with their own ideas:

- The Daimler diesel engine with compressed-air injection
- The Benz diesel with precombustion chamber
- The MAN diesel engine with direct injection

Diesel engines became increasingly powerful with time. The first types were four-cylinder units with a power output of 40 bhp. By 1928, engine power-output figures of more than 60 bhp were no longer unusual. Finally, even more powerful engines with six and eight cylinders were being produced for heavy

commercial vehicles. By 1932, the power range stretched up to 140 bhp.

The diesel engine's breakthrough came in 1932 with a range of trucks offered by the company Daimler-Benz, which came into being in 1926 with the merger of the automobile manufacturers Daimler and Benz. This range was led by the Lo2000 model with a payload of 2 t and a permissible total weight of almost 5 t. It housed the OM59 four-cylinder engine with a displacement of 3.8 l and 55 bhp. The range extended up to the L5000 (payload 5 t, permissible total weight 10.8 t). All the vehicles were also available with gasoline engines of identical power output, but these engines proved unsuccessful when up against the economical diesel engines.

To this day, the diesel engine has maintained its dominant position in the commercial-vehicle sector on account of its economic efficiency. Virtually all heavy goods vehicles are driven by diesel engines. In Japan, large-displacement conventionally aspirated engines are used almost exclusively. In the USA and Europe, however, turbocharged engines with charge-air cooling are favored.

Diesel engines in passenger cars

A few more years were to pass before the diesel engine made its debut in a passenger car. 1936 was the year, when the Mercedes 260D appeared with a four-cylinder diesel engine and a power output of 45 bhp.


The diesel engine as the power plant for passenger cars was long relegated to a fringe existence. It was too sluggish when compared with the gasoline engine. Its image was to change only in the 1990s. With exhaust-gas turbocharging and new high-pressure fuel-injection systems, the diesel engine is now on an equal footing with its gasoline counterpart. Power output and environmental performance are comparable. Because the diesel engine, unlike its gasoline counterpart, does not knock, it can also be turbocharged in the lower speed range, which results in high torque and very good driving performance. Another advantage of the diesel engine is, naturally, its excellent efficiency. This has led to it becoming increasingly accepted among car drivers – in Europe, roughly every second newly registered car is a diesel.

Further areas of application

When the era of steam and sailing ships crossing the oceans came to an end at the


beginning of the 20th century, the diesel engine also emerged as the drive source for this mode of transport. The first ship to be fitted with a 25-bhp diesel engine was launched in 1903. The first locomotive to be driven by a diesel engine started service in 1913. The engine power output in this case was 1,000 bhp. Even the pioneers of aviation showed interest in the diesel engine. Diesel engines provided the propulsion on board the Graf Zeppelin airship.

6 Bosch in-line fuel-injection pump on the engine of the Mercedes 260D

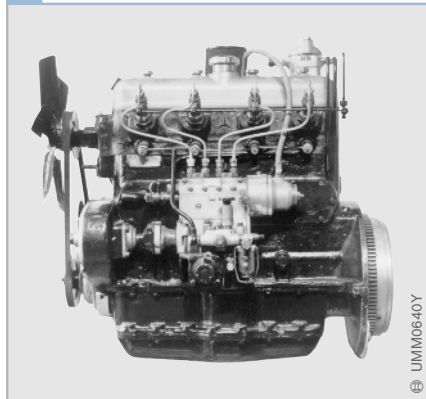


UMM0640Y

5 First diesel car: Mercedes-Benz 260D from 1936 with an engine power output of 45 bhp (33 kW) and a fuel consumption of 9.5 l/100 km

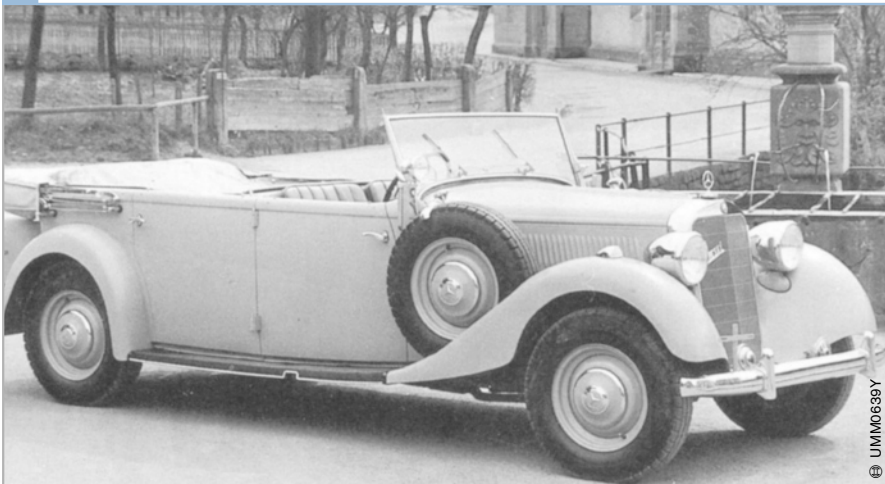

UMM0639Y

Bosch diesel fuel injection

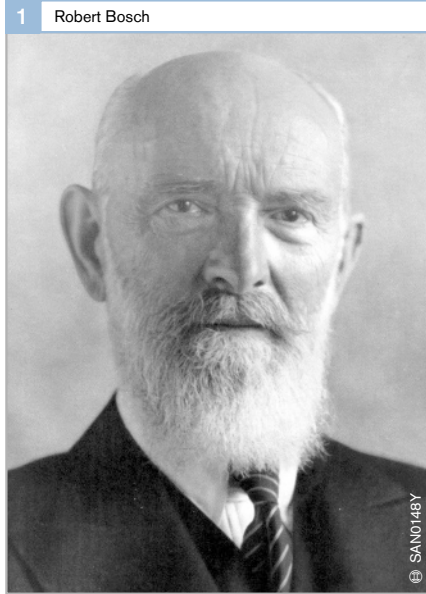

Bosch's emergence onto the diesel-technology stage

In 1886, Robert Bosch (1861–1942) opened a “workshop for light and electrical engineering” in Stuttgart. He employed one other mechanic and an apprentice. At the beginning, his field of work lay in installing and repairing telephones, telegraphs, lightning conductors, and other light-engineering jobs.

The low-voltage magneto-ignition system developed by Bosch had provided reliable ignition in gasoline engines since 1897. This product was the launching board for the rapid expansion of Robert Bosch's business. The high-voltage magneto ignition system with spark plug followed in 1902. The armature of this ignition system is still to this day incorporated in the logo of Robert Bosch GmbH.

In 1922, Robert Bosch turned his attention to the diesel engine. He believed that certain accessory parts for these engines could similarly make suitable objects for Bosch high-volume precision production like magnetos and spark plugs. The accessory parts in ques-

tion for diesel engines were fuel-injection pumps and nozzles.

Even Rudolf Diesel had wanted to inject the fuel directly, but was unable to do this because the fuel-injection pumps and nozzles needed to achieve this were not available. These pumps, in contrast to the fuel pumps used in compressed-air injection, had to be suitable for back-pressure reactions of up to several hundred atmospheres. The nozzles had to have quite fine outlet openings because now the task fell upon the pump and the nozzle alone to meter and atomize the fuel.

The injection pumps which Bosch wanted to develop should match not only the requirements of all the heavy-oil low-power engines with direct fuel injection which existed at the time but also future motor-vehicle diesel engines. On 28 December 1922, the decision was taken to embark on this development.

Demands on the fuel-injection pumps

The fuel-injection pump to be developed should be capable of injecting even small amounts of fuel with only quite small differences in the individual pump elements. This would facilitate smoother and more uniform engine operation even at low idle speeds. For full-load requirements, the delivery quantity would have to be increased by a factor of four or five. The required injection pressures were at that time already over 100 bar. Bosch demanded that these pump properties be guaranteed over 2,000 operating hours.

These were exacting demands for the then state-of-the-art technology. Not only did some feats of fluid engineering have to be achieved, but also this requirement represented a challenge in terms of production engineering and materials application technology.

Development of the fuel-injection pump

Firstly, different pump designs were tried out. Some pumps were spool-controlled, while others were valve-controlled. The injected fuel quantity was regulated by altering the plunger lift. By the end of 1924, a pump design was available which, in terms of its delivery rate, its durability and its low space requirement, satisfied the demands both of the Benz precombustion-chamber engine presented at the Berlin Motor Show and of the MAN direct-injection engine.

In March 1925, Bosch concluded contracts with Acro AG to utilize the Acro patents on a diesel-engine system with air chamber and the associated injection pump and nozzle. The Acro pump, developed by Franz Lang in Munich, was a unique fuel-injection pump. It had a special valve spool with helix, which was rotated to regulate the delivery quantity. Lang later moved this helix to the pump plunger.

The delivery properties of the Acro injection pump did not match what Bosch's own test pumps had offered. However, with the Acro engine, Bosch wanted to come into contact with a diesel engine which was particularly suitable for small cylinder units and high speeds and in this way gain a firm foothold for developing injection pumps and nozzles. At the same time, Bosch was led by the idea of granting licenses in the Acro patents to engine factories to promote the spread of the vehicle diesel engine and thereby contribute to the motorization of traffic.

After Lang's departure from the company in October 1926, the focus of activity at Bosch was again directed toward pump development. The first Bosch diesel fuel-injection pump ready for series production appeared soon afterwards.

2 Design of a Bosch fuel-injection pump from 1923/1924

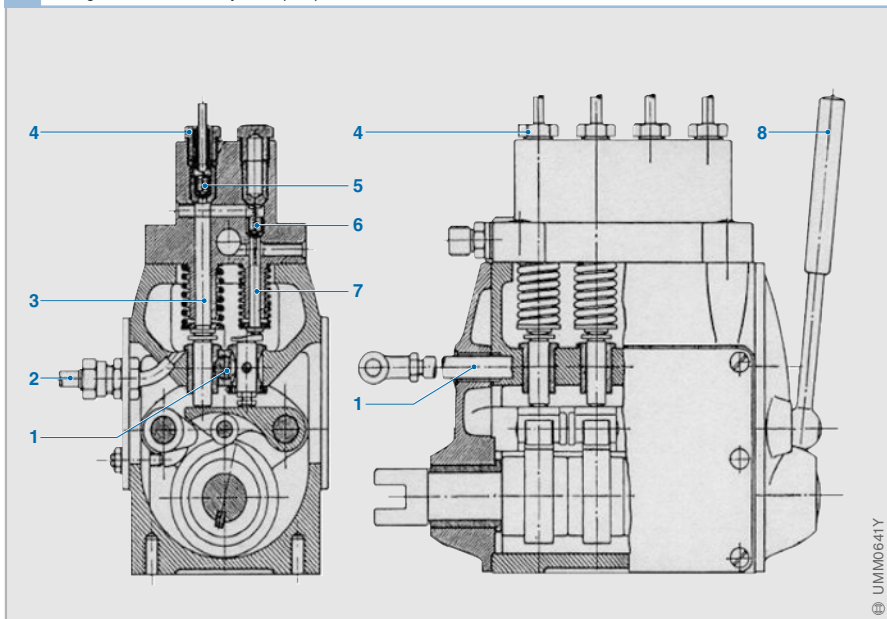


Fig. 2

- 1 Control rack
- 2 Inlet port
- 3 Pump plunger
- 4 Pressure-line port
- 5 Delivery valve
- 6 Suction valve
- 7 Valve tappet
- 8 Shutdown and pumping lever

Bosch diesel fuel-injection pump ready for series production

In accordance with the design engineer's plans of 1925 and like the modified Acro pump, the Bosch fuel-injection pump featured a diagonal helix on the pump plunger. Apart from this, however, it differed significantly from all its predecessors.

The external lever apparatus of the Acro pump for rotating the pump plunger was replaced by the toothed control rack, which engaged in pinions on control sleeves of the pump elements.

In order to relieve the load on the pressure line at the end of the injection process and to prevent fuel dribble, the delivery valve was provided with a suction plunger adjusted to fit in the valve guide. In contrast to the load-relieving techniques previously used, this new approach achieved increased steadiness of delivery at different speeds and quantity settings and significantly simplified and shortened the

adjustment of multicylinder pumps to identical delivery by all elements.

The pump's simple and clear design made it easier to assemble and test. It also significantly simplified the replacement of parts compared with earlier designs. The housing conformed first and foremost to the requirements of the foundry and other manufacturing processes. The first specimens of this Bosch fuel-injection pump really suitable for volume production were manufactured in April 1927. Release for production in greater batch quantities and in versions for two-, four- and six-cylinder engines was granted on 30 November 1927 after the specimens had passed stringent tests at Bosch and in practical operation with flying colors.

3 First series-production diesel fuel-injection pump from Bosch (1927)

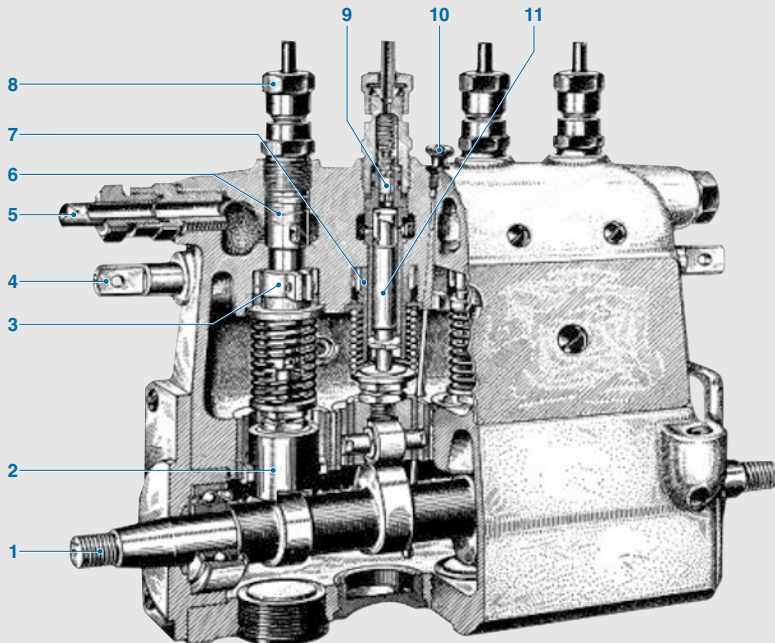


Fig. 3

- 1 Camshaft
- 2 Roller tappet
- 3 Control-sleeve gear
- 4 Control rack
- 5 Inlet port
- 6 Pump cylinder
- 7 Control sleeve
- 8 Pressure-line port
- 9 Delivery valve with plunger
- 10 Oil level
- 11 Pump plunger

Nozzles and nozzle holders

The development of nozzles and nozzle holders was conducted in parallel to pump development. Initially, pintle nozzles were used for precombustion-chamber engines. Hole-type nozzles were added at the start of 1929 with the introduction of the Bosch pump in the direct-injection diesel engine.

The nozzles and nozzle holders were always adapted in terms of their size to the new pump sizes. It was not long before the engine manufacturers also wanted a nozzle holder and nozzle which could be screwed into the cylinder head in the same way as the spark plug on a gasoline engine. Bosch adapted to this request and started to produce screw-in nozzle holders.

Governor for the fuel-injection pump


Because a diesel engine is not self-governing like a gasoline engine, but needs a governor to maintain a specific speed and to provide protection against overspeed accompanied by self-destruction, vehicle diesel engines had to be equipped with such devices right from the start. The engine factories initially manufactured these governors themselves. However, the request soon came to dispense with the drive for the governor, which was without exception a mechanical governor, and to combine it with the injection pump. Bosch complied with this request in 1931 with the introduction of the Bosch governor.

Spread of Bosch diesel fuel-injection technology

By August 1928, one thousand Bosch fuel-injection pumps had already been supplied. When the upturn in the fortunes of the vehicle diesel engine began, Bosch was well prepared and fully able to serve the engine factories with a full range of fuel-injection equipment. When the Bosch pumps and nozzles proved their worth, most companies saw no further need to continue manufacturing their own accessories in this field.

Bosch's expertise in light engineering (e.g., in the manufacture of lubricating pumps) stood it in good stead in the development of diesel fuel-injection pumps. Its products could not be manufactured "in accordance with the pure principles of mechanical engineering". This helped Bosch to obtain a market advantage. Bosch had thus made a significant contribution towards enabling the diesel engine to develop into what it is today.

4 Bosch fuel-injection pump with mounted mechanical governor

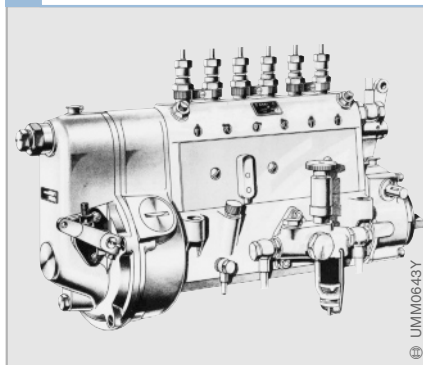

5 Billboard advertisement for Bosch diesel fuel injection



Areas of use for diesel engines

No other internal-combustion engine is as widely used as the diesel engine¹⁾. This is due primarily to its high degree of efficiency and the resulting fuel economy.

The chief areas of use for diesel engines are

- Fixed-installation engines
- Cars and light commercial vehicles
- Heavy goods vehicles
- Construction and agricultural machinery
- Railway locomotives and
- Ships

Diesel engines are produced as inline or V-configuration units. They are ideally suited to turbocharger or supercharger aspiration as – unlike the gasoline engine – they are not susceptible to knocking (refer to the chapter “Cylinder-charge control systems”).

Suitability criteria

The following features and characteristics are significant for diesel-engine applications (examples):

- Engine power
- Specific power output
- Operational safety
- Production costs
- Economy of operation
- Reliability
- Environmental compatibility
- User-friendliness
- Convenience (e.g. engine-compartment design)

The relative importance of these characteristics affect engine design and vary according to the type of application.

Applications

Fixed-installation engines

Fixed-installation engines (e.g. for driving power generators) are often run at a fixed speed. Consequently, the engine and fuel-injection system can be optimized specifically

¹⁾ Named after Rudolf Diesel (1858 to 1913) who first applied for a patent for his “New rational thermal engines” in 1892. A lot more development work was required, however, before the first functional diesel engine was produced at MAN in Augsburg in 1897.

1 Car diesel engine with unit injector system (example)

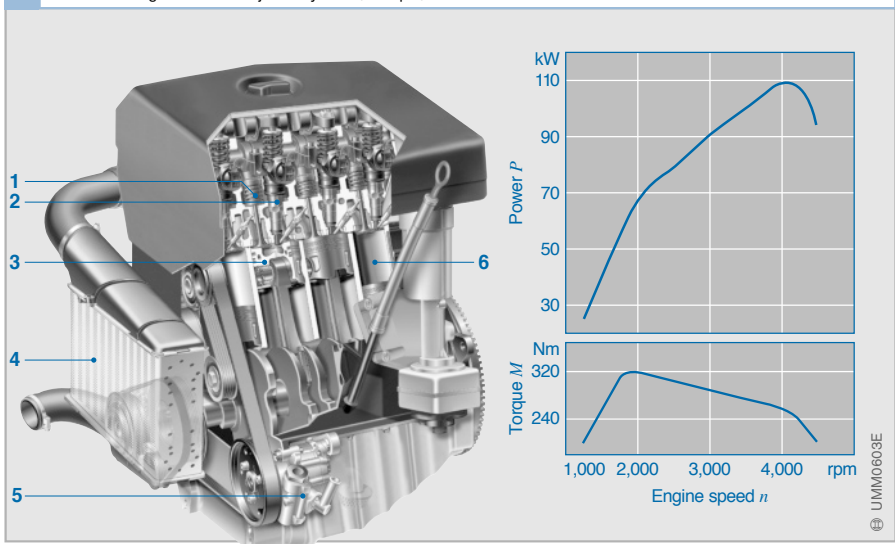


Fig. 1

- 1 Valve gear
- 2 Injector
- 3 Piston with gudgeon pin and conrod
- 4 Intercooler
- 5 Coolant pump
- 6 Cylinder

for operation at that speed. An engine governor adjusts the quantity of fuel injected dependent on engine load. For this type of application, mechanically governed fuel-injection systems are still used.

Car and commercial-vehicle engines can also be used as fixed-installation engines. However, the engine-control system may have to be modified to suit the different conditions.


Cars and light commercial vehicles

Car engines (Fig. 1) in particular are expected to produce high torque and run smoothly. Great progress has been made in these areas by refinements in engine design and the development of new fuel-injection with Electronic Diesel Control (EDC). These advances have paved the way for substantial improvements in the power output and torque characteristics of diesel engines since the early 1990s. And as a result, the diesel engine has forced its way into the executive and luxury-car markets.

Cars use fast-running diesel engines capable of speeds up to 5,500 rpm. The range of sizes extends from 10-cylinder 5-liter units used in large saloons to 3-cylinder 800-cc models for small subcompacts.

In Europe, all new diesel engines are now Direct-Injection (DI) designs as they offer fuel consumption reductions of 15 to 20% in comparison with indirect-injection engines. Such engines, now almost exclusively fitted with turbochargers, offer considerably better torque characteristics than comparable gasoline engines. The maximum torque available to a vehicle is generally determined not by the engine but by the power-transmission system.

The ever more stringent emission limits imposed and continually increasing power demands require fuel-injection systems with extremely high injection pressures. Improving emission characteristics will continue to be a major challenge for diesel-engine developers in the future. Consequently, further innovations can be expected in the area of exhaust-gas treatment in years to come.

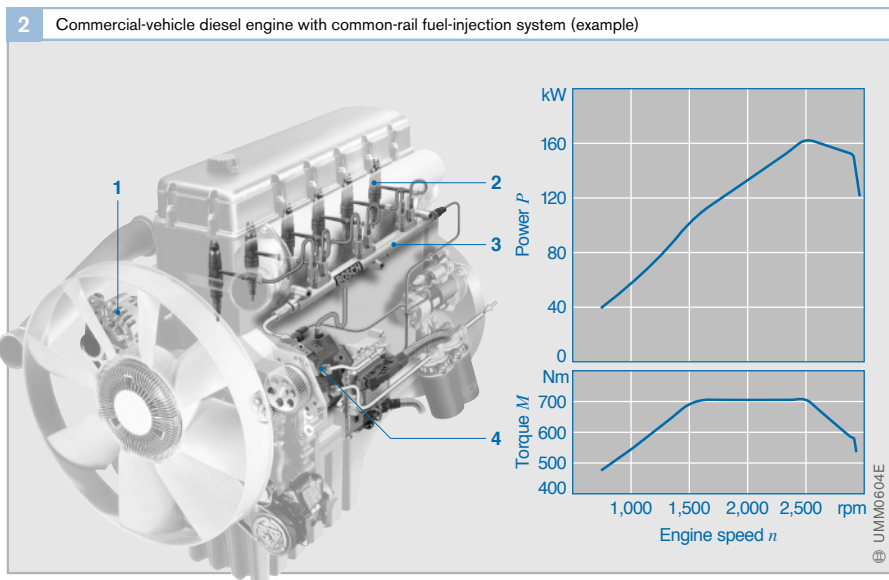

Heavy goods vehicles

The prime requirement for engines for heavy goods vehicles (Fig. 2) is economy. That is why diesel engines for this type of application are exclusively direct-injection (DI) designs. They are generally medium-fast engines that run at speeds of up to 3,500 rpm.

For large commercial vehicles too, the emission limits are continually being lowered. That means exacting demands on the fuel-injection system used and a need to develop new emission-control systems.

Construction and agricultural machinery

Construction and agricultural machinery is the traditional domain of the diesel engine. The design of engines for such applications places particular emphasis not only on economy but also on durability, reliability and ease of maintenance. Maximizing power utilization and minimizing noise output are less important considerations than they would be for car engines, for example.

For this type of use, power outputs can range from around 3 kW to the equivalent of HGV engines.

Many engines used in construction-industry and agricultural machines still have mechanically governed fuel-injection systems. In contrast with all other areas of application, where water-cooled engines are the norm, the ruggedness and simplicity of the air-cooled engine remain important factors in the building and farming industries.

Railway locomotives

Locomotive engines, like heavy-duty marine diesel engines, are designed primarily with continuous-duty considerations in mind. In addition, they often have to cope with poorer quality diesel fuel. In terms of size, they range from the equivalent of a large truck engine to that of a medium-sized marine engine.

Ships

The demands placed on marine engines vary considerably according to the particular type of application. There are out-and-out high-performance engines for fast naval vessels or speedboats, for example. These tend to be 4-stroke medium-fast engines that run at speeds of 400...1,500 rpm and have up to 24 cylinders (Fig. 3). At the other end of

3 Marine diesel engine with single-plunger fuel-injection pumps (example)

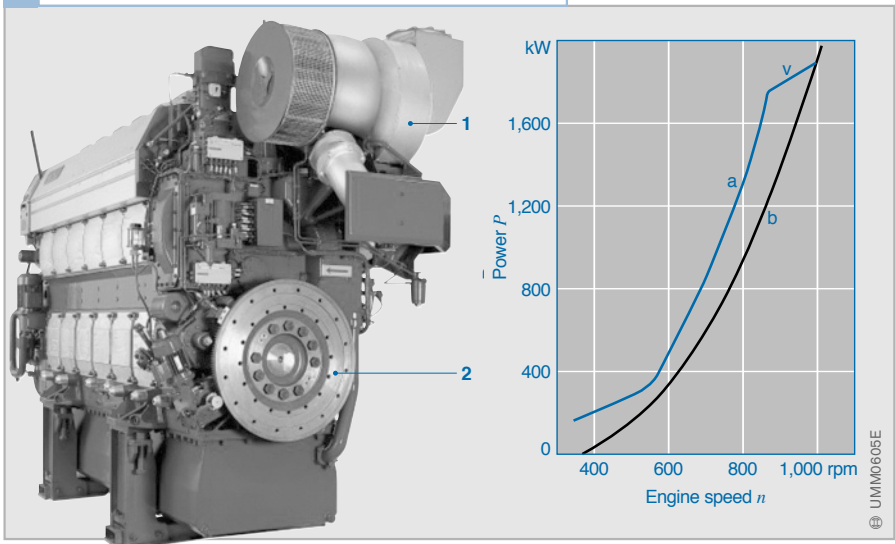


Fig. 3

- 1 Turbocharger
- 2 Flywheel

- a Engine power output
- b Running-resistance curve
- v Full-load limitation zone

the scale there are 2-stroke heavy-duty engines designed for maximum economy in continuous duty. Such slow-running engines (< 300 rpm) achieve effective levels of efficiency of up to 55%, which represent the highest attainable with piston engines.

Large-scale engines are generally run on cheap heavy oil. This requires pretreatment of the fuel on board. Depending on quality, it has to be heated to temperatures as high as 160°C. Only then is its viscosity reduced to a level at which it can be filtered and pumped.

Smaller vessels often use engines originally intended for large commercial vehicles. In that way, an economical propulsion unit with low development costs can be produced. Once again, however, the engine management system has to be adapted to the different service profile.

Multi-fuel engines

For specialized applications (such as operation in regions with undeveloped infrastructures or for military use), diesel engines capable of running on a variety of different fuels including diesel, gasoline and others have been developed. At present they are of virtually no significance whatsoever within the overall picture, as they are incapable of meeting the current demands in respect of emissions and performance characteristics.

Engine characteristic data

Table 1 shows the most important comparison data for various types of diesel and gasoline engine.

The average pressure in petrol engines with direct fuel injection is around 10% higher than for the engines listed in the table with inlet-manifold injection. At the same time, the specific fuel consumption is up to 25% lower. The compression ratio of such engines can be as much as 13:1.

| 1 Comparison of diesel and gasoline engines | | | | | | | |
|---|---|---------------------------------|--|---|---|---|--|
| Fuel-injection system | Rated speed n_{rated} [rpm] | Compression ratio ϵ | Mean pressure ¹⁾ p_e [bar] | Specific power output $P_{e, \text{spec.}}$ [kW/l] | Power-to-weight ratio $m_{\text{spec.}}$ [kg/kW] | Specific fuel consumption ²⁾ i_{fs} [g/kWh] | |
| Diesel engines | | | | | | | |
| IDI ³⁾ conventionally aspirated car engines | 3,500...5,000 | 20...24:1 | 7...9 | 20...35 | 1:5...3 | 320...240 | |
| IDI ³⁾ turbocharged car engines | 3,500...4,500 | 20...24:1 | 9...12 | 30...45 | 1:4...2 | 290...240 | |
| DI ⁴⁾ conventionally aspirated car engines | 3,500...4,200 | 19...21:1 | 7...9 | 20...35 | 1:5...3 | 240...220 | |
| DI ⁴⁾ turbocharged car engines with i/cir ⁵⁾ | 3,600...4,400 | 16...20 | 8...22 | 30...60 | 4...2 | 210...195 | |
| DI ⁴⁾ convent. aspirated comm. veh. engines | 2,000...3,500 | 16...18:1 | 7...10 | 10...18 | 1:9...4 | 260...210 | |
| DI ⁴⁾ turbocharged comm. veh. engines | 2,000...3,200 | 15...18:1 | 15...20 | 15...25 | 1:8...3 | 230...205 | |
| DI ⁴⁾ turboch. comm. veh. engines with i/cir ⁵⁾ | 1,800...2,600 | 16...18 | 15...25 | 25...35 | 5...2 | 225...190 | |
| Construct. and agricultural machine engines | 1,000...3,600 | 16...20:1 | 7...23 | 6...28 | 1:10...1 | 280...190 | |
| Locomotive engines | 750...1,000 | 12...15:1 | 17...23 | 20...23 | 1:10...5 | 210...200 | |
| Marine engines (4-stroke) | 400...1,500 | 13...17:1 | 18...26 | 10...26 | 1:16...13 | 210...190 | |
| Marine engines (2-stroke) | 50...250 | 6...8:1 | 14...18 | 3...8 | 1:32...16 | 180...160 | |
| Gasoline engines | | | | | | | |
| Conventionally aspirated car engines | 4,500...7,500 | 10...11:1 | 12...15 | 50...75 | 1:2...1 | 350...250 | |
| Turbocharged car engines | 5,000...7,000 | 7...9:1 | 11...15 | 85...105 | 1:2...1 | 380...250 | |
| Comm. veh. engines | 2,500...5,000 | 7...9:1 | 8...10 | 20...30 | 1:6...3 | 380...270 | |

Table 1

1) The average pressure p_e can be used to calculate the specific torque $M_{\text{spec.}}$ [Nm]:

$$M_{\text{spec.}} = \frac{25}{\pi \cdot p_e}$$

2) Best consumption
 3) Indirect Injection
 4) Direct Injection
 5) Intercooler

Basic principles of the diesel engine

The diesel engine is a compression-ignition engine in which the fuel and air are mixed inside the engine. The air required for combustion is highly compressed inside the combustion chamber. This generates high temperatures which are sufficient for the diesel fuel to spontaneously ignite when it is injected into the cylinder. The diesel engine thus uses heat to release the chemical energy contained within the diesel fuel and convert it into mechanical force.

The diesel engine is the internal-combustion engine that offers the greatest overall efficiency (more than 50% in the case of large, slow-running types). The associated low fuel consumption, its low-emission exhaust and quieter running characteristics assisted, for example, by pre-injection have combined to give the diesel engine its present significance.

Diesel engines are particularly suited to aspiration by means of a turbocharger or supercharger. This not only improves the engine's power yield and efficiency, it also reduces pollutant emissions and combustion noise.

In order to reduce NO_x emissions on cars and commercial vehicles, a proportion of the exhaust gas is fed back into the engine's intake

manifold (exhaust-gas recirculation). An even greater reduction of NO_x emissions can be achieved by cooling the recirculated exhaust gas.

Diesel engines may operate either as two-stroke or four-stroke engines. The types used in motor vehicles are generally four-stroke designs.

Method of operation


A diesel engine contains one or more cylinders. Driven by the combustion of the air/fuel mixture, the piston (Fig. 1, 3) in each cylinder (5) performs up-and-down movements. This method of operation is why it was named the "reciprocating-piston engine".

The connecting rod, or conrod (11), converts the linear reciprocating action of the piston into rotational movement on the part of the crankshaft (14). A flywheel (15) connected to the end of the crankshaft helps to maintain continuous crankshaft rotation and reduce unevenness of rotation caused by the periodic nature of fuel combustion in the individual cylinders. The speed of rotation of the crankshaft is also referred to as engine speed.

1 Four-cylinder diesel engine without auxiliary units (schematic)

Fig. 1

- 1 Camshaft
- 2 Valves
- 3 Piston
- 4 Fuel-injection system
- 5 Cylinder
- 6 Exhaust-gas recirculation
- 7 Intake manifold
- 8 Turbocharger
- 9 Exhaust pipe
- 10 Cooling system
- 11 Connecting rod
- 12 Lubrication system
- 13 Cylinder block
- 14 Crankshaft
- 15 Flywheel

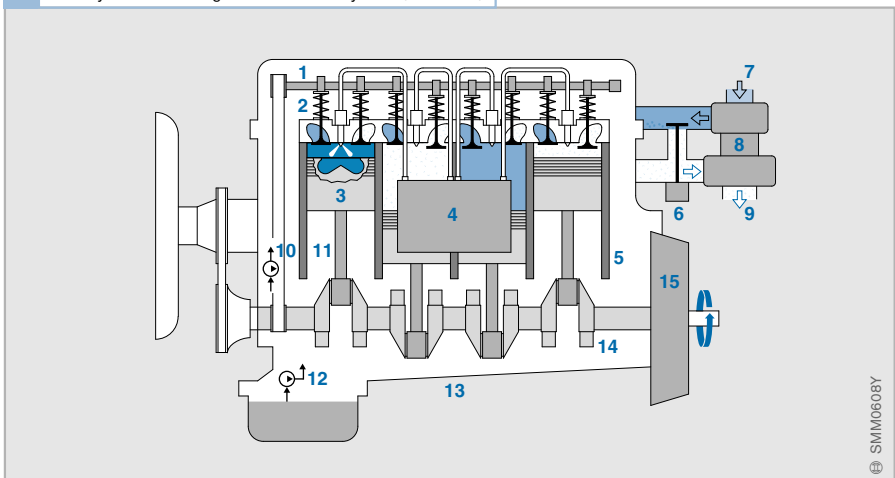

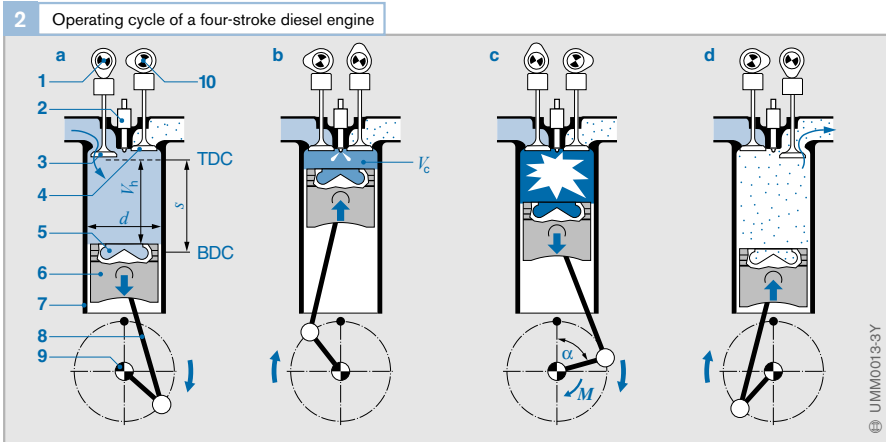


Fig. 2
 a Induction stroke
 b Compression stroke
 c Ignition stroke
 d Exhaust stroke

1 Inlet-valve camshaft
 2 Fuel injector
 3 Inlet valve
 4 Exhaust valve
 5 Combustion chamber
 6 Piston
 7 Cylinder wall
 8 Connecting rod
 9 Crankshaft
 10 Exhaust-valve camshaft

- α Crankshaft angle of rotation
- d Bore
- M Turning force
- s Piston stroke
- V_c Compression volume
- V_h Swept volume
- TDC Top dead center
- BDC Bottom dead center

Four-stroke cycle

On a four-stroke diesel engine (Fig. 2), inlet and exhaust valves control the intake of air and expulsion of burned gases after combustion. They open and close the cylinder’s inlet and exhaust ports. Each inlet and exhaust port may have one or two valves.

1. Induction stroke (a)

Starting from Top Dead Center (TDC), the piston (6) moves downwards increasing the capacity of the cylinder. At the same time the inlet valve (3) is opened and air is drawn into the cylinder without restriction by a throttle valve. When the piston reaches Bottom Dead Center (BDC), the cylinder capacity is at its greatest ($V_h + V_c$).

2. Compression stroke (b)

The inlet and exhaust valves are now closed. The piston moves upwards and compresses the air trapped inside the cylinder to the degree determined by the engine’s compression ratio (this can vary from 6:1 in large-scale engines to 24:1 in car engines). In the process, the air heats up to temperatures as high as 900°C. When the compression stroke is almost complete, the fuel-injection system injects fuel at high pressure (as much as 2,000 bar in modern engines) into the hot, compressed air. When the piston reaches top dead center, the cylinder capacity is at its smallest (compression volume, V_c).

3. Ignition stroke (c)

After the ignition lag (a few degrees of crankshaft rotation) has elapsed, the ignition stroke (working cycle) begins. The finely atomized and easily combustible diesel fuel spontaneously ignites and burns due to the heat of the compressed air in the combustion chamber (5). As a result, the cylinder charge heats up even more and the pressure in the cylinder rises further as well. The amount of energy released by combustion is essentially determined by the mass of fuel injected (quality-based control). The pressure forces the piston downwards. The chemical energy released by combustion is thus converted into kinetic energy. The crankshaft drive translates the piston’s kinetic energy into a turning force (torque) available at the crankshaft.

4. Exhaust stroke (d)

Fractionally before the piston reaches bottom dead center, the exhaust valve (4) opens. The hot, pressurized gases flow out of the cylinder. As the piston moves upwards again, it forces the remaining exhaust gases out.

On completion of the exhaust stroke, the crankshaft has completed two revolutions and the four-stroke operating cycle starts again with the induction stroke.

Valve timing


The cams on the inlet and exhaust camshafts open and close the inlet and exhaust valves respectively. On engines with a single camshaft, a rocker-arm mechanism transmits the action of the cams to the valves.

Valve timing involves synchronizing the opening and closing of the valves with the rotation of the crankshaft (Fig. 4). For that reason, valve timing is specified in degrees of crankshaft rotation.

The crankshaft drives the camshaft by means of a toothed belt or a chain (the timing belt or timing chain) or sometimes by a series of gears. On a four-stroke engine, a complete operating cycle takes two revolutions of the crankshaft. Therefore, the speed of rotation of the camshaft is only half that of the crankshaft. The transmission ratio between the crankshaft and the camshaft is thus 2 : 1.

At the changeover from exhaust to induction stroke, the inlet and exhaust valves are open simultaneously for a certain period of time. This “valve overlap” helps to “flush out” the remaining exhaust and cool the cylinders.

Fig. 3
TDC Top dead center
BDC Bottom dead center

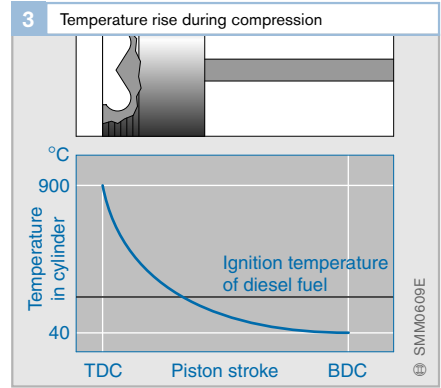

Compression

The compression ratio, ϵ , of a cylinder results from its swept volume, V_h , and its compression volume, V_c , thus:

$$\epsilon = \frac{V_h + V_c}{V_c}$$

The compression ratio of an engine has a decisive effect on the following:


- The engine's cold-starting characteristics
- The torque generated
- Its fuel consumption
- How noisy it is and
- The pollutant emissions

The compression ratio, ϵ , is generally between 16:1 and 24:1 in engines for cars and commercial vehicles, depending on the engine design and the fuel-injection method.

It is therefore higher than in gasoline engines ($\epsilon = 7:1 \dots 13:1$). Due to the susceptibility of gasoline to knocking, higher compression ratios and the resulting higher combustion-chamber temperatures would cause the air/fuel mixture to spontaneously combust in an uncontrolled manner.

The air inside a diesel engine is compressed to a pressure of 30...50 bar (conventionally aspirated engine) or 70...150 bar (turbocharged/supercharged engine). This generates temperatures ranging from 700 to 900°C (Fig. 3). The ignition temperature of the most easily combustible components of diesel fuel is around 250°C.

Fig. 4
EO Exhaust opens
EC Exhaust closes
SOC Start of combustion
IO Inlet opens
IC Inlet closes
IP Injection point
TDC Top dead center
BDC Bottom dead center

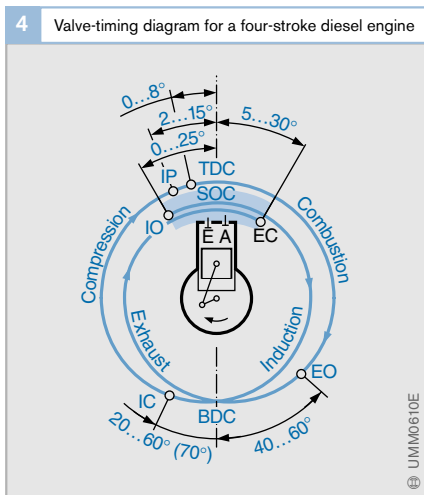

■ Valve overlap

Torque and power output

Torque

The conrod converts the linear motion of the piston into rotational motion of the crankshaft. The force with which the expanding air/fuel mixture forces the piston downwards is thus translated into rotational force or torque by the leverage of the crankshaft.

The output torque M of the engine is, therefore, dependent on mean pressure p_e (mean piston or operating pressure). It is expressed by the equation:

$$M = p_e \cdot V_H / (4 \cdot \pi)$$

where

V_H is the cubic capacity of the engine and $\pi \approx 3.14$.

The mean pressure can reach levels of 8...22 bar in small turbocharged diesel engines for cars. By comparison, gasoline engines achieve levels of 7...11 bar.

The maximum achievable torque, M_{max} , that the engine can deliver is determined by its design (cubic capacity, method of aspiration, etc.). The torque output is adjusted to the requirements of the driving situation essentially by altering the fuel and air mass and the mixing ratio.

Torque increases in relation to engine speed, n , until maximum torque, M_{max} , is reached (Fig. 1). As the engine speed increases beyond that point, the torque begins to fall again (maximum permissible engine load, desired performance, gearbox design).

Engine design efforts are aimed at generating maximum torque at low engine speeds (under 2,000 rpm) because at those speeds fuel consumption is at its most economical and the engine's response characteristics are perceived as positive (good "pulling power").

Power output

The power P (work per unit of time) generated by the engine depends on torque M and engine speed n . Engine power output increases with engine speed until it reaches its maximum level, or rated power P_{rated} at the engine's rated speed, n_{rated} . The following equation applies:

$$P = 2 \cdot \pi \cdot n \cdot M$$

Figure 1a shows a comparison between the power curves of diesel engines made in 1968 and in 1998 in relation to engine speed.

Due to their lower maximum engine speeds, diesel engines have a lower displacement-related power output than gasoline engines. Modern diesel engines for cars have rated speeds of between 3,500 and 5,000 rpm.

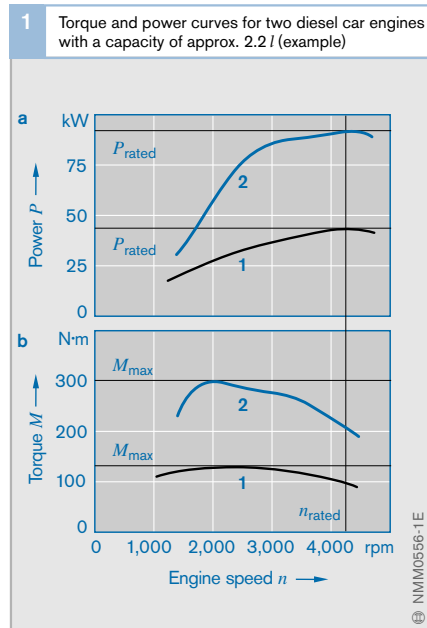


Fig. 1
 a Power curve
 b Torque curve
 1 1968 engine
 2 1998 engine
 M_{max} Maximum torque
 P_{rated} Rated power
 n_{rated} Rated speed

Engine efficiency

The internal-combustion engine does work by changing the pressure and volume of a working gas (cylinder charge).

Effective efficiency of the engine is the ratio between input energy (fuel) and useful work. This results from the thermal efficiency of an ideal work process (Seiliger process) and the percentage losses of a real process.

Seiliger process

Reference can be made to the Seiliger process as a thermodynamic comparison process for the reciprocating-piston engine. It describes the theoretically useful work under ideal conditions. This ideal process assumes the following simplifications:

- Ideal gas as working medium
- Gas with constant specific heat
- No flow losses during gas exchange

The state of the working gas can be described by specifying pressure (p) and volume (V). Changes in state are presented in the p - V chart (Fig. 1), where the enclosed area corresponds to work that is carried out in an operating cycle.

In the Seiliger process, the following process steps take place:

Isentropic compression (1-2)

With isentropic compression (compression at constant entropy, i.e. without transfer of heat), pressure in the cylinder increases while the volume of the gas decreases.

Isochoric heat propagation (2-3)

The air/fuel mixture starts to burn. Heat propagation (q_{BV}) takes place at a constant volume (isochoric). Gas pressure also increases.

Isobaric heat propagation (3-3')

Further heat propagation (q_{Bp}) takes place at constant pressure (isobaric) as the piston moves downwards and gas volume increases.

Isentropic expansion (3'-4)

The piston continues to move downwards to bottom dead center. No further heat transfer takes place. Pressure drops as volume increases.

Isochoric heat dissipation (4-1)


During the gas-exchange phase, the remaining heat is removed (q_A). This takes place at a constant gas volume (completely and at infinite speed). The initial situation is thus restored and a new operating cycle begins.

p - V chart of the real process

To determine the work done in the real process, the pressure curve in the cylinder is measured and presented in the p - V chart (Fig. 2). The area of the upper curve corresponds to the work present at the piston.

Fig. 1

- 1-2 Isentropic compression
 2-3 Isochoric heat propagation
 3-3' Isobaric heat propagation
 3'-4 Isentropic expansion
 4-1 Isochoric heat dissipation
- TDC Top dead center
 BDC Bottom dead center
- q_A Quantity of heat dissipated during gas exchange
 q_{Bp} Combustion heat at constant pressure
 q_{BV} Combustion heat at constant volume
 W Theoretical work

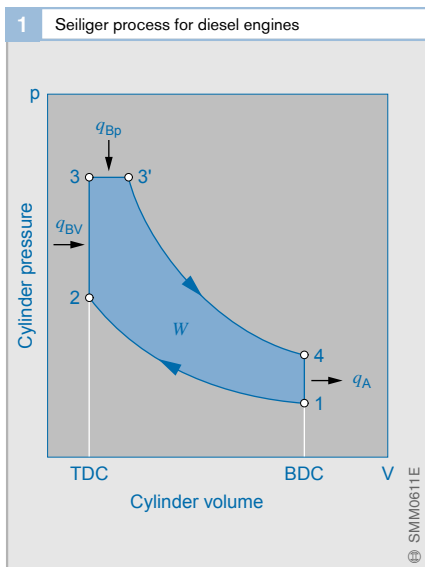

2 Real process in a turbocharged/supercharged diesel engine represented by p - V indicator diagram (recorded using a pressure sensor)

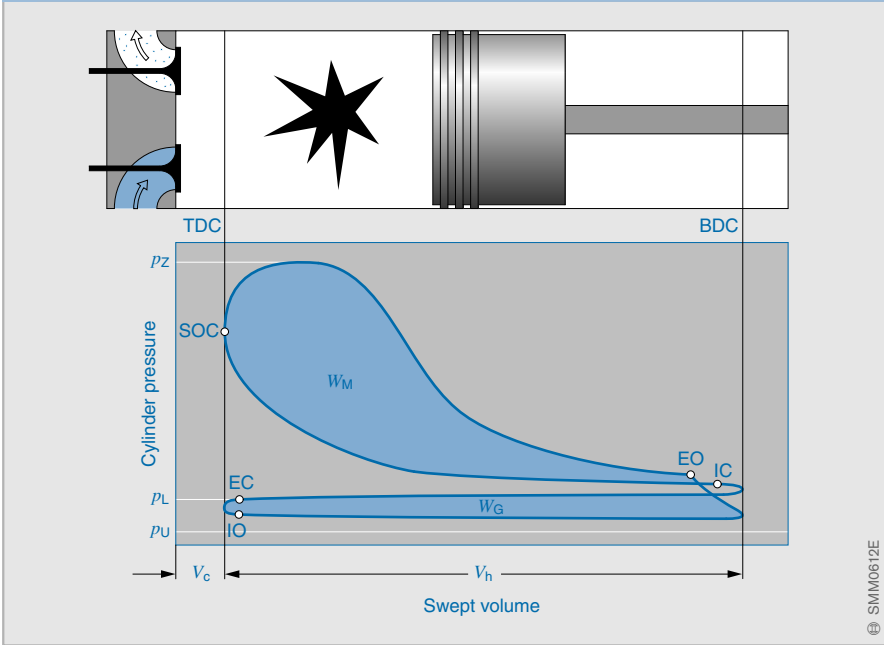


Fig. 2

- EO Exhaust opens
- EC Exhaust closes
- SOC Start of combustion
- IO Inlet opens
- IC Inlet closes
- TDC Top dead center
- BDC Bottom dead center

- p_U Ambient pressure
- p_L Charge-air pressure
- p_z Maximum cylinder pressure
- V_c Compression volume
- V_h Swept volume
- W_M Indexed work
- W_G Work during gas exchange (turbocharger/supercharger)

3 Pressure vs. crankshaft rotation curve (p - α diagram) for a turbocharged/supercharged diesel engine

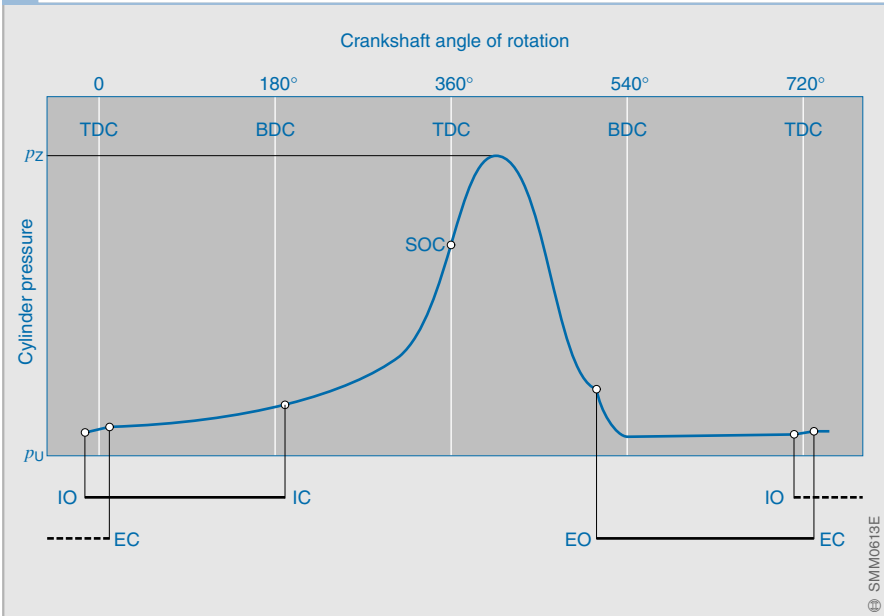


Fig. 3

- EO Exhaust opens
- EC Exhaust closes
- SOC Start of combustion
- IO Inlet opens
- IC Inlet closes
- TDC Top dead center
- BDC Bottom dead center

- p_U Ambient pressure
- p_L Charge-air pressure
- p_z Maximum cylinder pressure

For assisted-aspiration engines, the gas-exchange area (W_G) has to be added to this since the compressed air delivered by the turbocharger/supercharger also helps to press the piston downwards on the induction stroke.

Losses caused by gas exchange are over-compensated at many operating points by the supercharger/turbocharger, resulting in a positive contribution to the work done.

Representation of pressure by means of the crankshaft angle (Fig. 3, previous page) is used in the thermodynamic pressure-curve analysis, for example.

Efficiency

Effective efficiency of the diesel engine is defined as:

$$\eta_e = \frac{W_e}{W_B}$$

W_e is the work effectively available at the crankshaft.

W_B is the calorific value of the fuel supplied.

Effective efficiency η_e is representable as the product of the thermal efficiency of the ideal process and other efficiencies that include the influences of the real process:

$$\eta_e = \eta_{th} \cdot \eta_g \cdot \eta_b \cdot \eta_m = \eta_i \cdot \eta_m$$

η_{th} : thermal efficiency

η_{th} is the thermal efficiency of the Seiliger process. This process considers heat losses occurring in the ideal process and is mainly dependent on compression ratio and excess-air factor.

As the diesel engine runs at a higher compression ratio than a gasoline engine and a high excess-air factor, it achieves higher efficiency.

η_g : efficiency of cycle factor

η_g specifies work done in the real high-pressure work process as a factor of the theoretical work of the Seiliger process.

Deviations between the real and the ideal processes mainly result from use of a real working gas, the finite velocity of heat propagation and dissipation, the position of heat propagation, wall heat loss, and flow losses during the gas-exchange process.

η_b : fuel conversion factor

η_b considers losses occurring due to incomplete fuel combustion in the cylinder.

η_m : mechanical efficiency

η_m includes friction losses and losses arising from driving ancillary assemblies. Frictional and power-transmission losses increase with engine speed. At nominal speed, frictional losses are composed of the following:

- Pistons and piston rings approx. 50%
- Bearings approx. 20%
- Oil pump approx. 10%
- Coolant pump approx. 5%
- Valve-gear approx. 10%
- Fuel-injection pump approx. 5%

If the engine has a supercharger, this must also be included.

η_i : efficiency index

The efficiency index is the ratio between “indexed” work present at the piston W_i and the calorific value of the fuel supplied.

Work effectively available at the crankshaft W_e results from indexed work taking mechanical losses into consideration:

$$W_e = W_i \cdot \eta_m.$$

Operating statuses

Starting

Starting an engine involves the following stages: cranking, ignition and running up to self-sustained operation.

The hot, compressed air produced by the compression stroke has to ignite the injected fuel (combustion start). The minimum ignition temperature required for diesel fuel is approx. 250°C.

This temperature must also be reached in poor conditions. Low engine speeds, low outside temperatures, and a cold engine lead to relatively low final compression temperatures due to the fact that:

- The lower the engine speed, the lower the ultimate pressure at the end of the compression stroke and, accordingly, the ultimate temperature (Fig. 1). The reasons for this phenomenon are leakage losses through the piston ring gaps between the piston and the cylinder wall and the fact that when the engine is first started, there is no thermal expansion and an oil film has not formed. Due to heat loss during com-

pression, maximum compression temperature is reached a few degrees before TDC (thermodynamic loss angle, Fig. 2).

- When the engine is cold, heat loss occurs across the combustion-chamber surface area during the compression stroke. On indirect-injection (IDI) engines, this heat loss is particularly high due to the larger surface area.
- Internal engine friction is higher at low temperatures than at normal operating temperature because of the higher viscosity of the engine oil. For this reason, and also due to low battery voltage, the starter-motor speed is only relatively low.
- The speed of the starter motor is particularly low when it is cold because the battery voltage drops at low temperatures.

The following measures are taken to raise temperature in the cylinder during the starting phase:

Fuel heating

A filter heater or direct fuel heater (Fig. 3 on next page) can prevent the precipitation of paraffin crystals that generally occurs at low

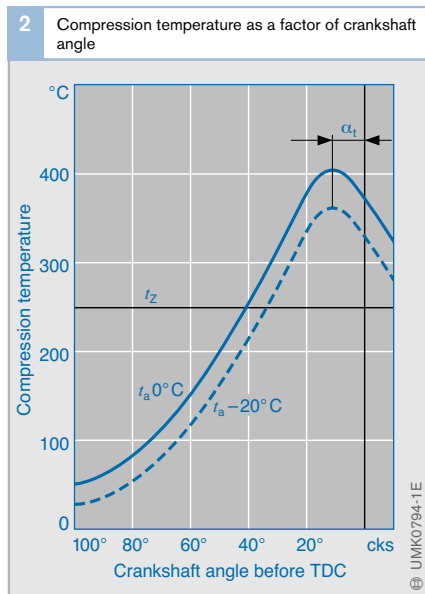
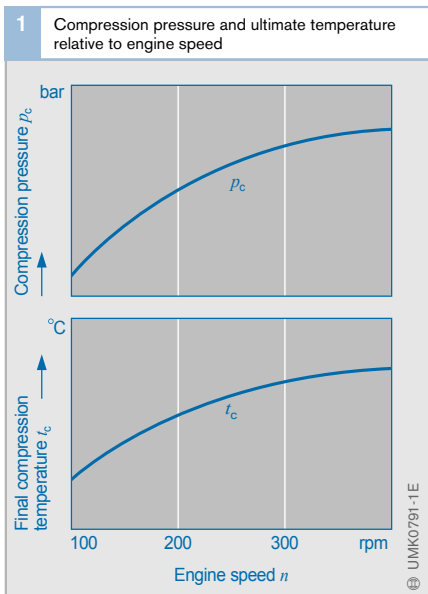


Fig. 2
 t_a Outside temperature
 t_z Ignition temperature of diesel fuel
 α_T Thermodynamic loss angle

$n \approx 200$ rpm

temperatures (during the starting phase and at low outside temperatures).

Start-assist systems

The air/fuel mixture in the combustion chamber (or in the prechamber or whirl chamber) is normally heated by sheathed-element glow plugs in the starting phase on direct-injection (DI) engines for passenger cars, or indirect-injection engines (IDI). On direct-injection (DI) engines for commercial vehicles, the intake air is preheated. Both the above methods assist fuel vaporization and air/fuel mixing and therefore facilitate reliable combustion of the air/fuel mixture.

Glow plugs of the latest generation require a preheating time of only a few seconds (Fig. 4), thus allowing a rapid start. The lower post-glow temperature also permits longer post-glow times. This reduces not only harmful pollutant emissions but also noise levels during the engine's warm-up period.



Injection adaptation

Another means of assisted starting is to inject an excess amount of fuel for starting to compensate for condensation and leakage losses in the cold engine, and to increase engine torque in the running-up phase.

Advancing the start of injection during the warming-up phase helps to offset longer ignition lag at low temperatures and to ensure reliable ignition at top dead center, i.e. at maximum final compression temperature.

The optimum start of injection must be achieved within tight tolerance limits. As the internal cylinder pressure (compression pressure) is still too low, fuel injected too early has a greater penetration depth and precipitates on the cold cylinder walls. There, only a small proportion of it vaporizes since then the temperature of the air charge is too low.

If the fuel is injected too late, ignition occurs during the downward stroke (expansion phase), and the piston is not fully accelerated, or combustion misses occur.

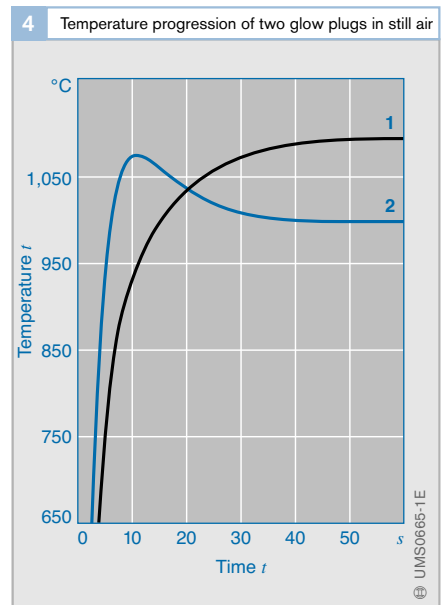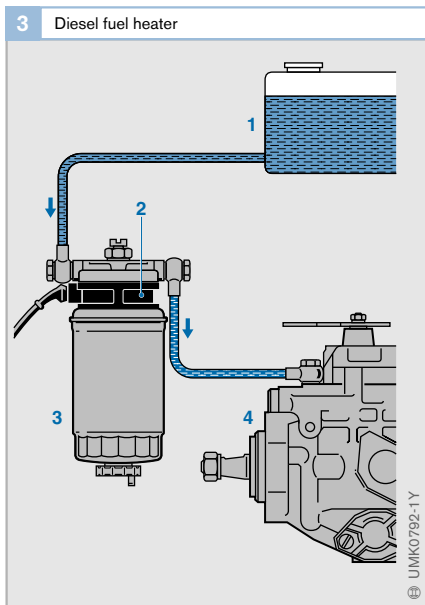

No load

No load refers to all engine operating statuses in which the engine is overcoming only its own internal friction. It is not producing any torque output. The accelerator pedal may be in any position. All speed ranges up to and including breakaway speed are possible.

Idle

The engine is said to be idling when it is running at the lowest no-load speed. The accelerator pedal is not depressed. The engine does not produce any torque. It only overcomes its internal friction. Some sources refer to the entire no-load range as idling. The upper no-load speed (breakaway speed) is then called the upper idle speed.

Full load

At full load (or Wide-Open Throttle (WOT)), the accelerator pedal is fully depressed, or the full-load delivery limit is controlled by the engine management dependent on the operating point. The maximum possible fuel volume is injected and the engine generates its maximum possible torque output under steady-state conditions. Under non steady-state conditions (limited by turbocharger/supercharger pressure) the engine develops the maximum possible (lower) full-load torque with the quantity of air available. All engine speeds from idle speed to nominal speed are possible.

Part load

Part load covers the range between no load and full load. The engine is generating an output between zero and the maximum possible torque.


Lower part-load range

This is the operating range in which the diesel engine's fuel consumption is particularly economical in comparison with the gasoline engine. "Diesel knock" that was a problem on earlier diesel engines – particularly when cold – has virtually been eliminated on diesels with pre-injection.

As explained in the "Starting" section, the final compression temperature is lower at lower engine speeds and at lower loads. In comparison with full load, the combustion chamber is relatively cold (even when the engine is running at operating temperature) because the energy input and, therefore, the temperatures, are lower. After a cold start, the combustion chamber heats up very slowly in the lower part-load range. This is particularly true for engines with prechamber or whirl chambers because the larger surface area means that heat loss is particularly high.

At low loads and with pre-injection, only a few mm³ of fuel are delivered in each injection cycle. In this situation, particularly high demands are placed on the accuracy of the start of injection and injected fuel quantity. As during the starting phase, the required combustion temperature is reached also at idle speed only within a small range of piston travel near TDC. Start of injection is controlled very precisely to coincide with that point.

During the ignition-lag period, only a small amount of fuel may be injected since, at the point of ignition, the quantity of fuel in the combustion chamber determines the sudden increase in pressure in the cylinder.

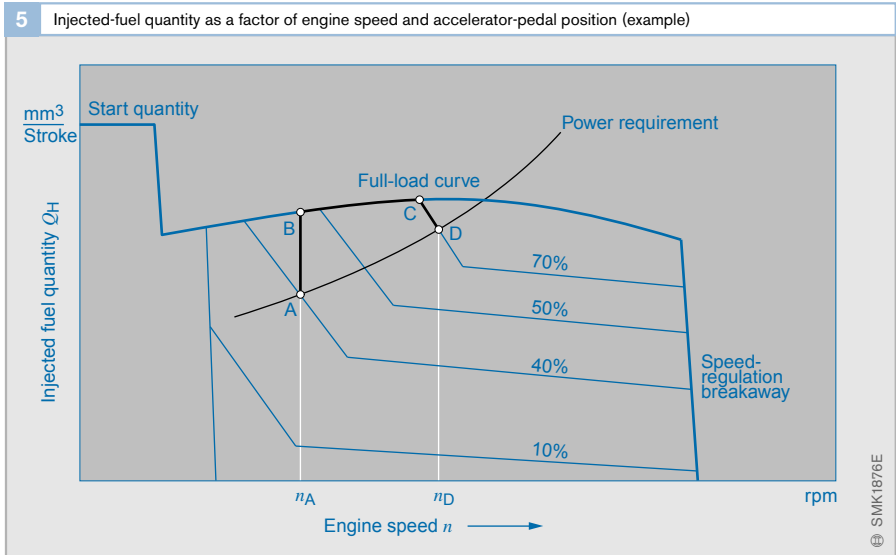

The greater the increase in pressure, the louder the combustion noise. Pre-injection of approx. 1 mm^3 (for cars) of fuel virtually cancels out ignition lag at the main injection point, and thus substantially reduces combustion noise.

Overrun

The engine is said to be overrunning when it is driven by an external force acting through the drivetrain (e.g. when descending an incline). No fuel is injected (overrun fuel cut-off).

Steady-state operation

Torque delivered by the engine corresponds to the torque required by the accelerator-pedal position. Engine speed remains constant.

Non-steady-state operation

The engine's torque output does not equal the required torque. The engine speed is not constant.

Transition between operating statuses

If the load, the engine speed, or the accelerator-pedal position change, the engine's operating state changes (e.g. its speed or torque output).

The response characteristics of an engine can be defined by means of characteristic data diagrams or maps. The map in Figure 5 shows an example of how the engine speed changes when the accelerator-pedal position changes from 40% to 70% depressed. Starting from operating point A, the new part-load operating point D is reached via the full-load curve (B-C). There, power demand and engine power output are equal. The engine speed increases from n_A to n_D .

Operating conditions

In a diesel engine, the fuel is injected directly into the highly compressed hot air which causes it to ignite spontaneously. Therefore, and because of the heterogeneous air/fuel mixture, the diesel engine – in contrast with the gasoline engine – is not restricted by ignition limits (i.e. specific air-fuel ratios λ). For this reason, at a constant air volume in the cylinder, only the fuel quantity is controlled.

The fuel-injection system must assume the functions of metering the fuel and distributing it evenly over the entire charge. It must accomplish this at all engine speeds and loads, dependent on the pressure and temperature of the intake air.

Thus, for any combination of engine operating parameters, the fuel-injection system must deliver:

- The correct amount of fuel
- At the correct time
- At the correct pressure
- With the correct timing pattern and at the correct point in the combustion chamber

In addition to optimum air/fuel mixture considerations, metering the fuel quantity also requires taking account of operating limits such as:


- Emission restrictions (e.g. smoke emission limits)
- Combustion-peak pressure limits
- Exhaust temperature limits
- Engine speed and full-load limits
- Vehicle or engine-specific load limits, and
- Altitude and turbocharger/supercharger pressure limits

Smoke limit

There are statutory limits for particulate emissions and exhaust-gas turbidity. As a large part of the air/fuel mixing process only takes place during combustion, localized over-enrichment occurs, and, in some cases, this leads to an increase in soot-particle emissions, even at moderate levels of excess air. The air-fuel ratio usable at the statutory full-load smoke limit is a measure of the efficiency of air utilization.

Combustion pressure limits

During the ignition process, the partially vaporized fuel mixed with air burns at high compression, at a rapid rate, and at a high

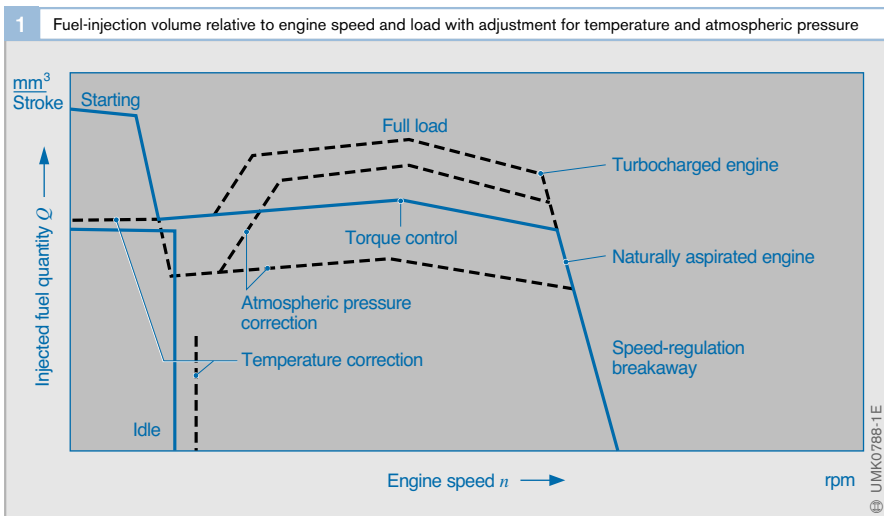

initial thermal-release peak. This is referred to as “hard” combustion. High final compression peak pressures occur during this phenomenon, and the resulting forces exert stresses on engine components and are subject to periodic changes. The dimensioning and durability of the engine and drivetrain components, therefore, limit the permissible combustion pressure and, consequently, the injected fuel quantity. The sudden rise in combustion pressure is mostly counteracted by pre-injection.

Exhaust-gas temperature limits

The high thermal stresses placed on the engine components surrounding the hot combustion chamber, the heat resistance of the exhaust valves and of the exhaust system and cylinder head determine the maximum exhaust temperature of a diesel engine.

Engine speed limits

Due to the existing excess air in the diesel engine, power at constant engine speed mainly depends on injected fuel quantity. If the amount of fuel supplied to a diesel engine is increased without a corresponding increase in the load that it is working against, then the engine speed will rise. If the fuel supply is not reduced before the engine reaches a critical

speed, the engine may exceed its maximum permitted engine speed, i.e. it could self-destruct. Consequently, an engine speed limiter or governor is absolutely essential on a diesel engine.


On diesel engines used to drive road-going vehicles, the engine speed must be infinitely variable by the driver using the accelerator pedal. In addition, when the engine is under load or when the accelerator pedal is released, the engine speed must not be allowed to drop below the idling speed to a standstill. This is why a minimum-maximum-speed governor is fitted. The speed range between these two points is controlled using the accelerator-pedal position. If the diesel engine is used to drive a machine, it is expected to keep to a specific speed constant, or remain within permitted limits, irrespective of load. A variable-speed governor is then fitted to control speed across the entire range.

A program map is definable for the engine operating range. This map (Fig. 1, previous page) shows the fuel quantity in relation to engine speed and load, and the necessary adjustments for temperature and air-pressure variations.

Altitude and turbocharger/supercharger pressure limits

The injected fuel quantity is usually designed for sea level. If the engine is operated at high elevations (height above mean sea level), the fuel quantity must be adjusted in relation to the drop in air pressure in order to comply with smoke limits. A standard value is the barometric elevation formula, i.e. air density decreases by approximately 7% per 1,000 m of elevation.

With turbocharged engines, the cylinder charge in dynamic operation is often lower than in static operation. Since the maximum injected fuel quantity is designed for static operation, it must be reduced in dynamic operation in line with the lower air-flow rate (full-load limited by charge-air pressure).

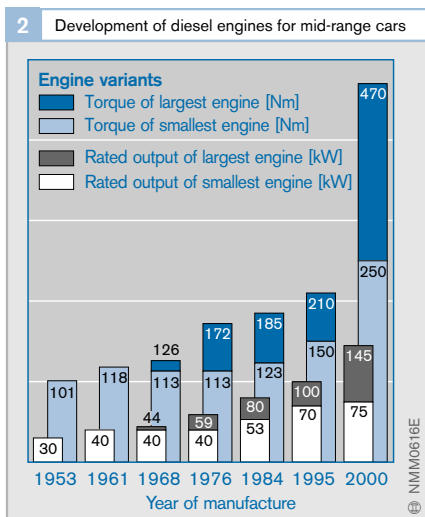

Fuel-injection system

The low-pressure fuel supply conveys fuel from the fuel tank and delivers it to the fuel-injection system at a specific supply pressure. The fuel-injection pump generates the fuel pressure required for injection. In most systems, fuel runs through high-pressure delivery lines to the injection nozzle and is injected into the combustion chamber at a pressure of 200...2,200 bar on the nozzle side.

Engine power output, combustion noise, and exhaust-gas composition are mainly influenced by the injected fuel mass, the injection point, the rate of discharge, and the combustion process.

Up to the 1980s, fuel injection, i.e. the injected fuel quantity and the start of injection on vehicle engines, was mostly controlled mechanically. The injected fuel quantity is then varied by a piston timing edge or via slide valves, depending on load and engine speed. Start of injection is adjusted by mechanical control using flyweight governors, or hydraulically by pressure control (see section entitled “Overview of diesel fuel-injection systems”).

Now electronic control has fully replaced mechanical control – not only in the automotive sector. Electronic Diesel Control (EDC) manages the fuel-injection process by involving various parameters, such as engine speed, load, temperature, geographic elevation, etc. in the calculation. Start of injection and fuel injection quantity are controlled by solenoid valves, a process that is much more precise than mechanical control.

► Size of injection

An engine developing 75 kW (102HP) and a specific fuel consumption of 200 g/kWh (full load) consumes 15 kg fuel per hour. On a 4-stroke 4-cylinder engine, the fuel is distributed by 288,000 injections at 2,400 revs per minute. This results in a fuel volume of approx. 60 mm³ per injection. By comparison, a rain-drop has a volume of approximately 30 mm³.

Even greater precision in metering requires an idle with approx. 5 mm³ fuel per injection and a pre-injection of only 1 mm³. Even the minutest variations have a negative effect on the

smooth running of the engine, noise, and pollutant emissions.

The fuel-injection system not only has to deliver precisely the right amount of fuel for each individual, it also has to distribute the fuel evenly to the individual cylinder of an engine. Electronic Diesel Control (EDC) adapts the injected fuel quantity for each cylinder in order to achieve a particularly smooth-running engine.

Combustion chambers

The shape of the combustion chamber is one of the decisive factors in determining the quality of combustion and therefore the performance and exhaust characteristics of a diesel engine. Appropriate design of combustion-chamber geometry combined with the action of the piston can produce whirl, squish, and turbulence effects that are used to improve distribution of the liquid fuel or air/fuel vapor spray inside of the combustion chamber.

The following technologies are used:

- Undivided combustion chamber (Direct Injection (DI) engines) and
- Divided combustion chamber (Indirect Injection (IDI) engines)

The proportion of direct-injection engines is increasing due to their more economical fuel consumption (up to 20% savings). The harsher combustion noise (particularly under acceleration) can be reduced to the level of indirect-injection engines by pre-injection. Engines with divided combustion chambers now hardly figure at all among new developments.

Undivided combustion chamber (direct-injection engines)

Direct-injection engines (Fig. 1) have a higher level of efficiency and operate more economically than indirect-injection engines. Accordingly, they are used in all types of commercial vehicles and most modern diesel cars.

As the name suggests, the direct-injection process involves injecting the fuel directly into the combustion chamber, part of which is formed by the shape of the piston crown (piston crown recess, 2). Fuel atomization, heating, vaporization and mixing with the air must therefore take place in rapid succession. This places exacting demands on fuel and air delivery. During the induction and compression strokes, the special shape of the intake port in the cylinder head creates an air vortex inside of the cylinder. The shape of the combustion chamber also contributes to the air flow pattern at the end of the compression stroke (i.e. at the moment of fuel injection). Of the combustion chamber designs used over the history of the diesel engine, the most widely used at present is the ω piston crown recess.

In addition to creating effective air turbulence, the technology must also ensure that fuel is delivered in such a way that it is evenly distributed throughout the combustion chamber to achieve rapid mixing. A multi-hole nozzle is used in the direct-injection process and its nozzle-jet position is optimized as a factor of combustion-chamber design. Direct fuel injection requires very high injection pressures (up to 2,200 bar).

In practice, there are two types of direct fuel injection:

- Systems in which mixture formation is assisted by specifically created air-flow effects and
- Systems which control mixture formation virtually exclusively by means of fuel injection and largely dispense with any air-flow effects

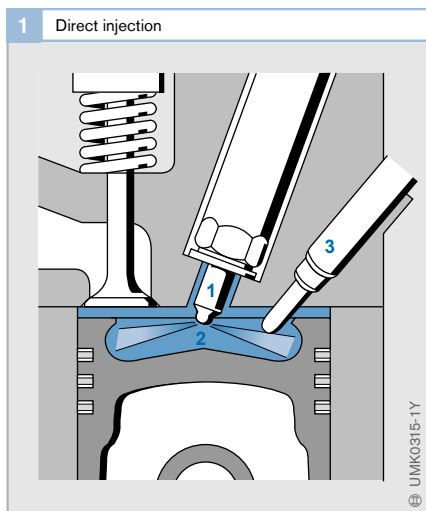


Fig. 1

- 1 Multihole injector
- 2 ω piston recess
- 3 Glow plug

In the latter case, no effort is expended in creating air-turbulence effects and this is evident in smaller gas replacement losses and more effective cylinder charging. At the same time, however, far more demanding requirements are placed on the fuel-injection system with regard to injection-nozzle positioning, the number of nozzle jets, the degree of atomization (dependent on spray-hole diameter), and the intensity of injection pressure in order to obtain the required short injection times and quality of the air/fuel mixture.

Divided combustion chamber (indirect injection)

For a long time diesel engines with divided combustion chambers (indirect-injection engines) held an advantage over direct-injection engines in terms of noise and exhaust-gas emissions. That was the reason why they were used in cars and light commercial vehicles. Now direct-injection engines are more economical than IDI engines, with comparable noise emissions as a result of their high injection pressures, electronic diesel control, and pre-injection. As a result, indirect-injection engines are no longer used in new vehicles.

There are two types of processes with divided combustion chamber:

- The precombustion chamber system and
- The whirl-chamber system

Precombustion chamber system

In the prechamber (or precombustion chamber) system, fuel is injected into a hot prechamber recessed into the cylinder head (Fig. 2, 2). The fuel is injected through a pin-le nozzle (1) at a relatively low pressure (up to 450 bar). A specially shaped baffle (3) in the center of the chamber diffuses the jet of fuel that strikes it and mixes it thoroughly with the air.

Combustion starting in the prechamber drives the partly combusted air/fuel mixture through the connecting channel (4) into the main combustion chamber. Here and further down the combustion process, the injected fuel is mixed intensively with the existing air. The ratio of precombustion chamber volume to main combustion chamber volume is approx. 1:2.

The short ignition lag¹⁾ and the gradual release of energy produce a soft combustion effect with low levels of noise and engine load.

A differently shaped prechamber with an evaporation recess and a different shape and position of the baffle (spherical pin) apply a specific degree of whirl to the air that passes from the cylinder into the prechamber during the compression stroke. The fuel is injected at an angle of 5 degrees in relation to the prechamber axis.

So as not to disrupt the progression of combustion, the glow plug (5) is positioned on the “lee side” of the air flow. A controlled post-glow period of up to 1 minute after a cold start (dependent on coolant temperature) helps to improve exhaust-gas characteristics and reduce engine noise during the warm-up period.

¹⁾ Time from start of injection to start of ignition

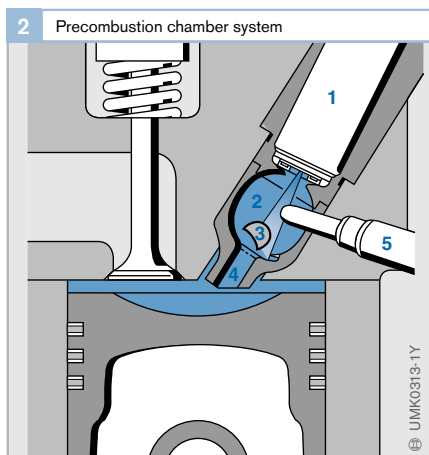


Fig. 2
 1 Nozzle
 2 Precombustion chamber
 3 Baffle surface
 4 Connecting channel
 5 Glow plug

Swirl-chamber system

With this process, combustion is also initiated in a separate chamber (swirl chamber) that has approx. 60% of the compression volume. The spherical and disk-shaped swirl chamber is linked by a connecting channel that discharges at a tangent into the cylinder chamber (Fig. 3, 2).


During the compression cycle, air entering via the connecting channel is set into a swirling motion. The fuel is injected so that the swirl penetrates perpendicular to its axis and meets a hot section of the chamber wall on the opposite side of the chamber.

As soon as combustion starts, the air/fuel mixture is forced under pressure through the connecting channel into the cylinder chamber where it is turbulently mixed with the remaining air. With the swirl-chamber system, the losses due to gas flow between the main combustion chamber and the swirl chamber are less than with the precombustion chamber system because the connecting channel has a larger cross-section. This results in smaller throttle-effect losses and consequent benefits for internal efficiency and fuel consumption. However, combustion noise is louder than with the precombustion chamber system.

It is important that mixture formation takes place as completely as possible inside the swirl chamber. The shape of the swirl chamber, the alignment and shape of the fuel jet and the position of the glow plug must be carefully matched to the engine in order to obtain optimum mixture formation at all engine speeds and under all operating conditions.

Another demand is for rapid heating of the swirl chamber after a cold start. This reduces ignition lag and combustion noise as well as preventing unburned hydrocarbons (blue smoke) during the warm-up period.


Fig. 3
1 Fuel injector
2 Tangential connecting channel
3 Glow plug

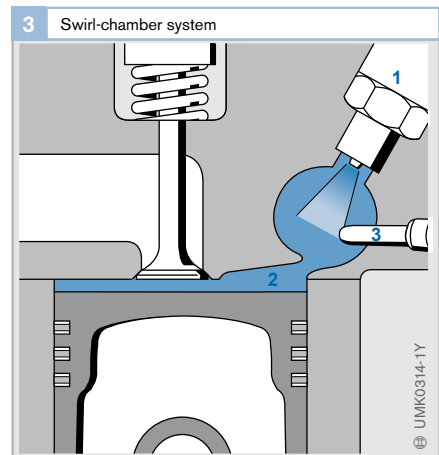

M System

In the direct-injection system with recess-wall deposition (M system) for commercial-vehicle and fixed-installation diesel engines and multi-fuel engines, a single-jet nozzle sprays the fuel at a low injection pressure against the wall of the piston crown recess. There, it vaporizes and is absorbed by the air. This system thus uses the heat of the piston recess wall to vaporize the fuel. If the air flow inside of the combustion chamber is properly adapted, an extremely homogeneous air/fuel mixture with a

long combustion period, low pressure increase and, therefore, quiet combustion can be achieved. Due to its consumption disadvantages compared with the air-distributing direct injection process, the M system is no longer used in modern applications.



Fuel consumption in everyday practice


Automotive manufacturers are obliged by law to specify the fuel consumption of their vehicles. This figure is determined from the exhaust-gas emissions during the exhaust-gas test when the vehicle travels a specific route profile (test cycle). The fuel consumption figures are therefore comparable for all vehicles.

Every driver makes a significant contribution to reducing fuel consumption by his or her driving style. Reducing the fuel consumption that the driver can achieve with a vehicle depends on several factors.

Applying the measures listed below, an "economical" driver can reduce fuel consumption in everyday traffic by 20 to 30% compared to an average driver. The reduction in fuel consumption achievable by applying the individual measures depends on a number of factors, mainly the route profile (city streets, overland roads), and on traffic conditions. For this reason, it is not always practical to specify figures for fuel-consumption savings.

Positive influences on fuel consumption

- Tire pressure: Remember to increase tire pressure when the vehicle is carrying a full payload (saving: approx. 5%).
- When accelerating at high load and low engine speed, shift up at 2,000 rpm.
- Drive in the highest possible gear. You can even drive at full-load at engine speeds below 2,000 rpm.
- Avoid braking and re-accelerating by adopting a forward-looking style of driving.
- Use overrun fuel cutoff to the full.
- Switch off the engine when the vehicle is stopped for an extended period of time, e.g. at traffic lights with a long red phase, or at closed railroad crossings (3 minutes at idle consumes as much fuel as driving 1 km).
- Use high-lubricity engine oils (saving: approx. 2% according to manufacturer specifications).

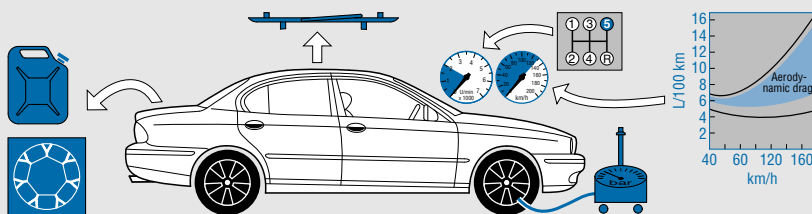

Negative influences on fuel consumption

- Greater vehicle weight due to ballast, e.g. in the trunk (additional approx. 0.3 l/100 km).
- High-speed driving.
- Greater aerodynamic drag from carrying objects on the roof.
- Additional electrical equipment, e.g. rear-window heating, foglamps (approx. 1 l/1 kW).
- Dirty air filter.

Fuels

Diesel fuels are the product of graduated distillation of crude oil. They contain a whole range of individual hydrocarbons with boiling points ranging from roughly 180°C to 370°C. Diesel fuel ignites on average at approximately 350°C (lower limit 220°C), which is very early in comparison with gasoline (on average 500°C).

Diesel fuel

In order to cover the growing demand for diesel fuels, refineries are increasingly adding conversion products, i.e. thermal and catalytic-cracking products. They are obtained by cracking large heavy-oil molecules.

Quality and grading criteria

In Europe, the standard for diesel fuels is EN 590. The key parameters are listed in Table 1. Defining limits is intended to secure

troublefree vehicle operation and restrict pollutants.

In many other countries around the world, fuel standards are less strict. The U.S. standard for diesel fuels, ASTM D975, for example, specifies fewer criteria and applies less stringent limits to these quality criteria. The requirements for marine and fixed-installation engines are also much less demanding.

High-quality diesel fuels are characterized by the following features:

- High cetane number
- Relatively low final boiling point
- Narrow density and viscosity spread
- Low aromatic compounds (particularly polyaromatic compounds) content
- Low sulfur content

| 1 European Standard EN 590: Selected requirements for diesel fuels (figures specified for moderate climate where requirements are climate-dependent) | | |
|--|--|-------------------------|
| Criterion | Parameter | Unit |
| Cetane number | ≥ 51 | – |
| Cetane index | ≥ 46 | – |
| CFPP ¹⁾ in six seasonal categories, max. | +5...–20 ²⁾ | °C |
| Flash point | ≥ 55 | °C |
| Density at 15°C | 820...845 | kg/m ³ |
| Viscosity at 40°C | 2.00...4.50 | mm ² /s |
| Lubricity | ≤ 460 | µm (wear scar diameter) |
| Sulfur content ³⁾ | ≤ 350 (until 12-31-2004); ≤ 50 (low sulfur, starting 2005 – 2008); ≤ 10 (sulfur-free, starting 2009) ⁴⁾ | mg/kg |
| Moisture content | ≤ 200 | mg/kg |
| Total contamination | ≤ 24 | mg/kg |
| FAME content | ≤ 5 | % by volume |
| ¹⁾ Filtration limit ²⁾ Defined by national law, for Germany 0...–20°C ³⁾ In Germany, sulfur-free fuel has been on sale nationwide since 2003, throughout the EU starting 2005. ⁴⁾ EU proposal | | |

Table 1

In addition, the following characteristics are particularly important for the service life and constant function of fuel-injection systems:

- Good lubricity
- Absence of free water
- Limited pollution with particulate

The most important criteria are explained in detail below.

Cetane number, cetane index

The Cetane Number (CN) expresses the ignition quality of the diesel fuel. The higher the cetane number, the greater the fuel's tendency to ignite. As the diesel engine dispenses with an externally supplied ignition spark, the fuel must ignite spontaneously (auto-ignition) and with minimum delay (ignition lag) when injected into the hot, compressed air in the combustion chamber.

Cetane number 100 is assigned to n-hexadecane (cetane), which ignites very easily, while slow-igniting methyl naphthalene is allocated cetane number 0. The cetane number of a diesel fuel is defined in a standard CFR¹⁾ single-cylinder test engine with variable compression pistons. The compression ratio is measured at constant ignition lag. The engine is run on reference fuels comprising cetane and α -methyl naphthalene (Fig. 1) at the measured compression ratio. The proportion of cetane in the mixture is altered until the same ignition lag is obtained. According to the definition, the cetane proportion specifies the cetane number. Example: A mixture comprising 52% cetane and 48% α -methyl naphthalene has the cetane number 52.

A cetane number in excess of 50 is desirable for optimized operation in modern engines (smooth running, low exhaust-gas emissions). High-quality diesel fuels contain a high proportion of paraffins with high CN ratings. Conversely, aromatic compounds reduce ignition quality.

Yet another parameter of ignition quality is provided by the cetane index, which is calculated on the basis of fuel density and various points on the boiling curve. This purely mathematical parameter does not take into account the influence of cetane improvers on ignition quality. In order to limit the adjustment of the cetane number by means of cetane improvers, both the cetane number and the cetane index have been included in the list of requirements in EN 590. Fuels whose cetane number has been enhanced by cetane improvers respond differently during engine combustion than fuels with the same natural cetane number.

Boiling range

The boiling range of a fuel, i.e. the temperature range at which the fuel vaporizes, depends on its composition.

A low initial boiling point makes a fuel suitable for use in cold weather, but also means a lower cetane number and poor lubricant properties. This raises the wear risk for central injection units.

1) Cooperative Fuel Research

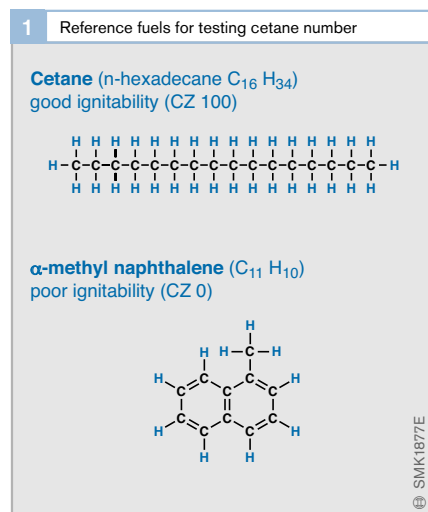


Fig. 1

C Carbon
H Hydrogen
— Chemical bond

On the other hand, if the final boiling point is situated at high temperatures, this can result in increased soot production and nozzle coking (deposit caused by chemical decomposition of not easily volatilized fuel constituents on the nozzle cone, and deposits of combustion residues). For this reason, the final boiling point should not be too high. The requirement of the Association des Constructeurs Européens d'Automobiles (ACEA: Association of European Automobile Manufacturers) is 350°C.

Filtration limit (cold-flow properties)

Precipitation of paraffin crystals at low temperatures can result in fuel-filter blockage, ultimately leading to interruption of fuel flow. In worst-case scenarios, paraffin particles can start to form at temperatures of 0°C or even higher. The cold-flow properties of a fuel are assessed by means of the “filtration limit” (Cold Filter Plugging Point (CFPP)).

European Standard EN 590 defines the CFPP for various classes, and can be defined by individual member states depending on the prevailing geographical and climatic conditions.

Formerly, owners sometimes added regular gasoline to their vehicle fuel tanks to improve the cold response of diesel fuel. This practice is no longer necessary now that fuels conform to standards, and, in any case, this would invalidate any warranty claims if damage occurs.

Flash point

The flash point is the temperature at which the quantities of vapor which a combustible fluid emits to the atmosphere are sufficient to allow a spark to ignite the air/vapor mixture above the fluid. For safety reasons, (e.g. for transportation and storage), diesel fuel is placed in Hazard Class A III, i.e. its flash point is over 55°C. Less than 3% gasoline in the diesel fuel is sufficient to lower the flash point to such an extent that ignition becomes possible at room temperature.

Density

The energy content of diesel fuel per unit of volume increases with density. Assuming constant fuel-injection-pump settings (i.e. constant injected fuel quantity), the use of fuels with widely different densities causes variations in mixture ratios due to fluctuations in calorific value.

When an engine runs on fuel that has a high type-dependent density, engine performance and soot emissions increase; as fuel density decreases, these parameters drop. As a result, the requirements call for a diesel fuel that has a low type-dependent density spread.

Viscosity

Viscosity is a measure of a fuel's resistance to flow due to internal friction. Leakage losses in the fuel-injection pump result if diesel-fuel viscosity is too low, and this in turn results in performance loss.

Much higher viscosity – e.g. Fatty Acid Methyl Ester (biodiesel) – causes a higher peak injection pressure at high temperatures in non-pressure-regulated systems (e.g. unit injector systems). For this reason, mineral-oil diesel may not be applied at the maximum permitted primary pressure. High viscosity also changes the spray pattern due to the formation of larger droplets.

Lubricity

In order to reduce the sulfur content of diesel fuel, it is hydrogenated. In addition to removing sulfur, the hydrogenation process also removes the ionic fuel components that aid lubrication. After the introduction of desulfurized diesel fuels, wear-related problems started to occur on distributor fuel-injection pumps due to the lack of lubricity. As a result, they were replaced by diesel fuels containing lubricity enhancers.

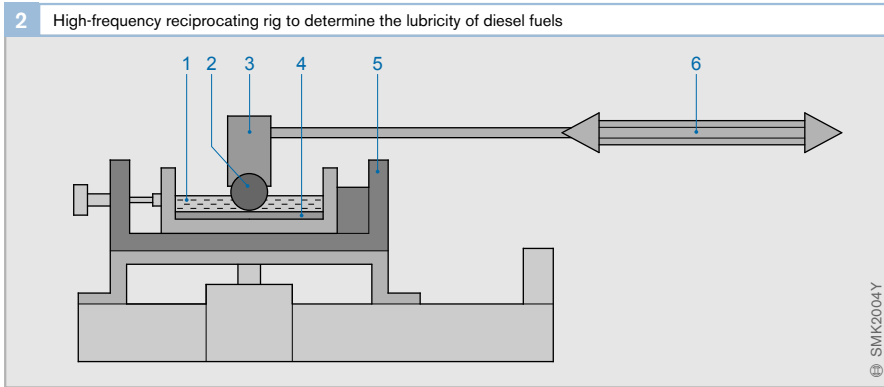


Fig. 2

- 1 Fuel bath
- 2 Test ball
- 3 Stress introduced
- 4 Test disk
- 5 Heating device
- 6 Oscillating movement

Lubricity is measured in a High-Frequency Reciprocating Rig (HFRR method). A fixed, clamped steel ball is ground on a plate by fuel at high frequency. The magnitude of the resulting flattening, i.e. the Wear Scar Diameter (WSD) measured in μm , specifies the amount of wear, and is thus a measure of fuel lubricity.

Diesel fuels complying with EN 590 must have a WSD of $\leq 460 \mu\text{m}$.

Sulfur content

Diesel fuels contain chemically bonded sulfur, and the actual quantities depend on the quality of the crude petroleum and the components added at the refinery. In particular, crack components mostly have high sulfur contents.

To desulfurize fuel, sulfur is removed from the middle distillate by hydrogenation at high pressure and temperature in the presence of a catalyst. The initial byproduct of this process is hydrogen sulfide (H_2S) which is subsequently converted into pure sulfur.

Since the beginning of 2000 the EN 590 maximum limit for the sulfur content of diesel fuel has been 350 mg/kg. Starting 2005 all regular gasolines and diesel fuels will be subject to a minimum low-sulfur requirement (sulfur content $< 50 \text{ mg/kg}$) throughout Europe. Starting 2009 only sulfur-free fuels (sulfur content $< 10 \text{ mg/kg}$) will be allowed.

In Germany, a penalty tax has been levied on fuels containing sulfur since 2003. As a result, the German market only offers sulfur-free diesel fuel. This has dropped direct SO_2 emissions (sulfur dioxide), as well as emitted particle mass (sulfur adhering to soot).

Exhaust-gas treatment systems for NO_x and particulate filters use catalysts. They must run on sulfur-free fuel since sulfur poisons the active catalyst surface.

Carbon-deposit index

The carbon-deposit index describes a fuel's tendency to form carbon residue on injection nozzles. The processes of carbon depositing are highly complex. Above all, components which the diesel fuel contains at the final boiling point (particularly cracking constituents) influence carbon-deposit formation (coking).

Overall contamination

Overall contamination refers to the sum total of undissolved foreign particles in the fuel, such as sand, rust, and undissolved organic components, including aging polymers.

EN 590 permits a maximum of 24 mg/kg. Very hard silicates as occur in mineral dust are specially damaging to high-pressure fuel-injection systems with narrow gap widths. Even a fraction of the permissible overall contamination level of hard particles would cause erosive and abrasive wear (e.g. at the seats of solenoid valves). Wear of this nature results in valve leakage, which lowers fuel-injection pressure and engine performance, and increases particulate emissions from the engine.

Typical European diesel fuels contain about 100,000 particles per 100 ml. Particle sizes of 6 to 7 μm are particularly critical. High-performance fuel filters with high filtration efficiency help to prevent damage caused by particles.

Water in diesel fuel

Diesel fuel can absorb approx. 100 mg/kg water. The solubility limit is defined by the composition of the diesel fuel and the ambient temperature.

EN 590 permits a maximum water content of 200 mg/kg. Although much higher water contents occur in diesel fuel in many countries, market surveys show that water content rarely exceeds 200 mg/kg. Samples often do not detect any water, or detection is incomplete, since water is deposited on walls in the form of undissolved, “free” water, or it settles at the bottom in a separate phase. Whereas dissolved water does not damage the fuel-injection system, even very small quantities of free water can cause major damage to fuel-injection pumps within a short period of time.

It is not possible to prevent the entrainment of water into the fuel tank as a result of condensation from the air. For this reason, water separators are specified as obligatory equipment in certain regions of the world. In addition, the vehicle manufacturer must design the tank ventilation system and the fuel-filler neck so as to prevent additional water from entering.

Fuel parameters

Net and gross calorific values

Specific calorific value H_U (formerly: *lower calorific value*) is usually specified to express the energy content of fuels. The specific gross calorific value H_O (formerly: *upper calorific value* or combustion heat) for fuels that have water vapor in their combustion products is higher than the calorific value since the gross calorific value also includes the heat trapped in the water vapor (latent heat). This component is not used in the vehicle. The specific calorific value of diesel fuel is 42.5 MJ/kg.

Oxygenates, i.e. fuel constituents containing oxygen, such as alcohol fuels, ether, or fatty-acid methyl ester, have a lower calorific value than pure hydrocarbons because the oxygen bonded in them does not contribute to the combustion process. Performance comparable to that achievable with oxygenate-free fuels can only be attained at the cost of higher fuel-consumption rates.

Calorific value of air/fuel mixture

The calorific value of the combustible air/fuel mixture determines engine output. Assuming a constant stoichiometric ratio, this figure remains roughly the same for all liquid fuels and liquefied gases (approx. 3.5...3.7 MJ/m³).

Additives

Additives, a long-standard feature in gasolines, have become commonplace as quality improvers in diesel fuels. The various agents are generally combined in additive packages to achieve a variety of objectives. The total concentration of additives is normally about < 0.1%. This does not change the physical parameters of fuels, such as density, viscosity, or the boiling curve.

Lubricity enhancers

It is possible to improve the lubricity of diesel fuels which have poor lubrication properties by adding fatty acids, fatty-acid esters, or glycerins. Biodiesel is also a fatty-acid ester. In this case, if diesel fuel already contains a proportion of biodiesel, no further lubricity enhancers are added.

Cetane improvers

Cetane improvers are nitric acid esters of alcohols added to shorten ignition lag. They reduce emissions and noise (combustion noise).

Flow improvers

Flow improvers consist of polymer substances that lower the filtration limit. They are added in winter to ensure troublefree operation at low temperatures.

Although flow improvers cannot prevent the precipitation of paraffin crystals from diesel fuel, it can severely limit their growth. The size of the crystals produced is so small that they can still pass through the filter pores.

Detergent additives

Detergent additives are used to keep the intake system clean. They can also inhibit the formation of deposits and reduce the buildup of carbon deposits on the injection nozzles.

Corrosion inhibitors


Corrosion inhibitors are deposited on the surfaces of metal parts and protect them against corrosion if water is entrained.

Antifoaming agents (defoamants)

Adding defoamants helps to avoid excessive foaming when the vehicle is refueled quickly.

| 2 Effects of the most important diesel-fuel additives | |
|---|---|
| Additives | Effect |
| Ignition accelerators (cetane improvers) | Increase cetane number |
| | Improve <ul style="list-style-type: none"> ● Engine starting characteristics ● Exhaust white-smoke emission ● Engine noise levels ● Exhaust emission levels ● Fuel consumption |
| Detergents | Keep nozzles cleaner |
| Flow improvers | Improve reliability at low temperatures |
| Wax anti-setting additives | Improve storage properties at low temperatures |
| Lubricity enhancers | Reduce fuel-injection component wear especially with hydrogenated low-sulfur fuels |
| Antifoaming additives | Make refuelling easier (reduce tendency to slosh over) |
| Anticorrosive additives (corrosion inhibitors) | Protect the fuel system |

Table 2

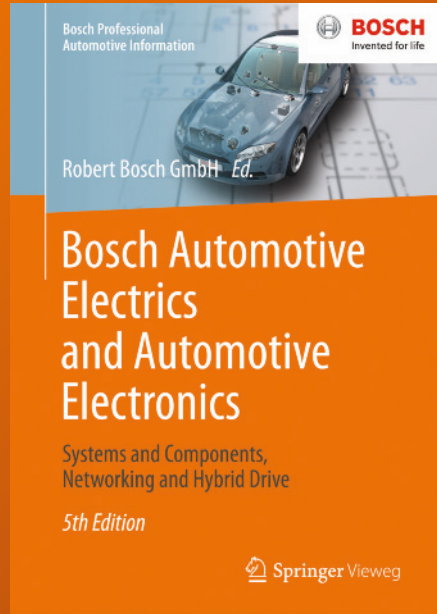

Robert Bosch GmbH (Ed.)
Bosch Automotive Electrics and Automotive Electronics

5th ed. (Reprint) 2014. IX, 521 p.
 595 illus. in color.
 Softcover *€ 49,99 | € (A) 51,39 | sFr 62,50
 ISBN 978-3-658-01783-5

Bosch Professional Automotive Information is a definitive reference for automotive engineers. The series is compiled by one of the world's largest automotive equipment suppliers. All topics are covered in a concise but descriptive way backed up by diagrams, graphs, photographs and tables enabling the reader to better comprehend the subject. There is now greater detail on electronics and their application in the motor vehicle, including electrical energy management (EEM) and discusses the topic of inter-system networking within vehicle. The series will benefit automotive engineers and design engineers, automotive technicians in training and mechanics and technicians in garages.

Konrad Reif (Ed.)
Automotive Mechatronics
 2014. 532 p. 657 illus. in color.
 Softcover € 49,99 | € (A) 51,39 | *sFr 62,50
 ISBN 978-3-658-03974-5

Konrad Reif (Ed.)
Gasoline Engine Management
 2014. 334 p. 336 illus. in color.
 Softcover € 49,99 | € (A) 51,39 | *sFr 62,50
 ISBN 978-3-658-03963-9

Konrad Reif (Ed.)
Brakes, Brake Control and Driver Assistance Systems
 2014. 267 p. 306 illus. in color.
 Softcover € 49,99 | € (A) 51,39 | *sFr 62,50
 ISBN 978-3-658-03977-6

Konrad Reif (Ed.)
Diesel Engine Management
 2014. 357 p. 351 illus. in color.
 Softcover € 49,99 | € (A) 51,39 | *sFr 62,50
 ISBN 978-3-658-03980-6

Konrad Reif (Ed.)
Fundamentals of Automotive and Engine Technology
 2014. 267 p. 306 illus. in color.
 Softcover € 49,99 | € (A) 51,39 | *sFr 62,50
 ISBN 978-3-658-03971-4

Prices indicated with * are recommended retail prices including VAT for books; the € (D) includes 7% for Germany, the € (A) includes 10% for Austria. Prices are subject to change without notice. Errors and omissions excepted.

Order your copy now:
SpringerDE-service@springer.com
 Telephone +49 (0)6221 / 3 45 - 4301

Order now: springer-vieweg.de

Alternative fuels for diesel engines

Biodiesel

The term biodiesel covers fatty acid esters which are created through cracking of oils or greases and then converting with methanol or ethanol. This creates fatty acid methyl ester (FAME) or fatty acid ethyl ester (FAEE). The molecules of biodiesel are in terms of size and properties much more similar to diesel fuel than to vegetable oil. Therefore biodiesel cannot under any circumstances be equated with vegetable oil.

Production

Vegetable oils or animal fats can be used to produce biodiesel. The choice of starting materials is essentially determined by their respective availability. In Europe primarily rape oil is used (Fig. 3), in North and South America soybean oil, in the ASEAN countries¹ palm oil, and on the Indian subcontinent the oil from the purgier nut (jatropha).

Because esterification can be technically carried out much more easily with methanol than it can with ethanol, the methyl esters of these oils are produced by way of preference. Used frying oil methyl ester (UFOME) is produced worldwide. Because methanol is generally produced from coal,

fatty acid methyl ester cannot strictly speaking be seen as fully biogenous. Fatty acid ethyl ester on the other hand is made up of 100% biomass when bioethanol is used for production.

The properties of biodiesel are determined by various factors. Oils of different vegetable oil differ in the composition of the fatty-acid blocks and demonstrate typical fatty-acid patterns. The type and quantity of unsaturated fatty acids have, for example, a decisive influence on the stability of the biodiesel.


The properties are also affected by the pretreatment of the vegetable oil and the production process of the biodiesel.

Quality requirements

The quality of biodiesel is regulated in fuel standards. Basically the quality requirements for biodiesel are described by way of the material properties. It is important to bear in mind here that limitations with regard to the starting materials are avoided wherever possible.

The European standard EN 14214 (Table 1) is the most comprehensive description of biodiesel worldwide. Good-quality biodiesel is defined in this standard. The quality of biodiesel deviates markedly from that of petroleum diesel,

¹ Association of Southeast Asian Nations

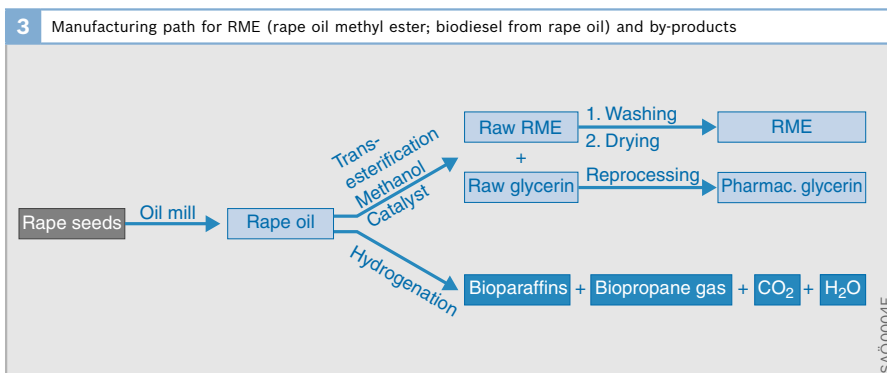

since biodiesel consists of a narrow spectrum of fatty acid esters which are polar and chemically reactive. Conventional diesel fuel on the other hand is an inert and nonpolar mixture of paraffins and aromatic compounds.

The American biodiesel standard ASTM D6751 is less quality-oriented. For example, its definition of the minimum requirement for oxidation stability is only half as high as in EN 14214. This increases the risk of problems arising as a result of fuel aging, particular under limit-value application and field conditions.

Other countries such as Brazil, India and Korea have geared themselves to a large extent to the European B 100 standard EN 14214.

Use in motor vehicles

Pure biodiesel (B 100) is used especially in Germany predominantly in commercial vehicles. The high annual mileage ensures fast consumption, which enables problems with insufficient oxidation stability to be avoided.

From an engine viewpoint it is more favorable to use biodiesel in a blend (i.e., as a mixture) with petroleum diesel. The diesel content increases, for example, stability as a rule, but at the same time the sound lubricating effect of biodiesel is maintained.

For practical purposes it is important to specify not only the pure component B 100, but also the diesel/biodiesel blends offered on the market. Here the trend is towards small admixtures up to max. 7% biodiesel (B 7 in Europe).

In closed fleets higher proportions of biodiesel are also used (B 30 in France, B 20 in the USA). In the case of higher contents, however, the high boiling point of biodiesel can cause it to be heavily introduced into the engine oil after its has been injected into the combustion chamber via condensation on the cylinder walls. This affects above all vehicles which are fitted with diesel particulate filters, and in which regeneration occurs by way of a retarded secondary injection. Depending on the application it is possible particularly in slow part-load operation to encounter an unacceptably high introduction of biodiesel, which necessitates shorter oil replacement intervals.

| 1 Properties of diesel fuel and FAME (biodiesel) | | | | |
|--|--------------------|----------------------|---|----------------------|
| Parameter | Unit | Diesel EN 590 (2005) | Diesel (typically German quality 2005/2006) | FAME EN 14214 (2003) |
| Cetane number | – | ≥ 51 | 49.6...53.3 | ≥ 51 |
| Density at 15 °C | kg/m ³ | 820...845 | 821.3...838.2 | 860...900 |
| Total aromatics* | % (m/m) | – | 18.1...26.5 | (< 0.1) |
| Polyaromatics | % (m/m) | ≤ 11 | 1.1...4.1 | (< 0.1) |
| Sulfur content | mg/kg | ≤ 50 2009: ≤ 10 | 4...17 | ≤ 10 |
| Water content | mg/kg | ≤ 200 | 7...114 | ≤ 500 |
| Lubricity | μm | ≤ 460 | 205...434 | (≤ 460) |
| Viscosity at 40 °C | mm ² /s | 2.0...4.5 | 2.3...3.4 | 3.5...5.0 |
| FAME content | % (v/v) | ≤ 5.0 | < 0.1...5.0 | ≥ 96.5 |
| H/C ratio (molar)* | – | – | 1.78 | 1.69 |
| Lower heating value* | MJ/kg | – | 42.7 | 37.1 |
| * not part of EN 590 and EN 14214 | | | | |

Table 1

Rape oil

Possibilities of use

Rape oil can be used with great success in older engines which are equipped, for example, with in-line pumps. With weak emission requirements and under the premise that an increased number of vehicle breakdowns is accepted, rape oil is an inexpensive fuel (provided this is permitted by the boundary tax conditions).

The 100-tractor program of the German Federal Ministry of Food, Agriculture and Consumer Protection (BMELV), which was carried out between the years 2000–2005, has shown that it greatly depends on the manufacturer or engine type and retrofit whether the use of rape oil is acceptable. Of the 107 tractors 63 reached the end of the project period without any or with minimal failures (repair costs under 1,000 Euro), while serious and thus cost-intensive failures occurred in 44 tractors.

Limits of use

Rape oil is, on account of its high density and viscosity together with its high volatility, as a rule not suitable for use in diesel engines. The direct use of pure rape oil and other vegetable oils in engines is limited by an insufficient fuel deliverability at low temperatures, by the formation of residues by thermal coking on the injector nozzle on account of a lack of vaporability due to insufficient spray preparation in the combustion chamber, and by the associated noncompliance with the Euro 4 or Euro 5 emission limits.

Sustainability

A significant increase in the worldwide production of vegetable oils is to be reckoned with. The demand for vegetable oils as the starting product for producing biodiesel and for creating bioparaffins will

increase significantly in the future. A certificate of sustainability is currently being developed for vegetable oils. The introduction of this certificate is intended to eliminate negative effects on the environment. Thus, for example, the cultivation of plantations to obtain palm oil is not permitted to result in the clearing of rainforests.

Bioparaffins

Bioparaffins are obtained from fats and oils of different origin and quality by means of hydrogenation (see Fig. 3). Hydrogenation with hydrogen results in a cracking of fats and oils, during which all the oxygen atoms and unsaturated bonds are also removed. Long-chain alkanes are created from the fatty acids, while the glycerin content is converted into propane gas. This chemical process places only minimum quality demands on the starting materials and results in hydrocarbons with excellent engine properties. Vegetable-oil hydrogenation is thus an alternative to manufacturing biodiesel, during which production the vegetable oils must be of high quality. Furthermore the product properties of bioparaffins are far superior to those of biodiesel. Because the production of bioparaffins can both take place in stand-alone plants and be integrated in the existing processes of a petroleum refinery, a sharp increase in vegetable-oil hydrogenation is anticipated. Vegetable-oil hydrogenation is also more cost-effective than biodiesel production.

At present there are particularly in Germany impediments to vegetable-oil hydrogenation to the effect that counting bioparaffins against the bio-quota is limited. This limitation is intended to support the existing structure of the domestic biodiesel industry.

Synthetic fuels (synfuels)

Production

Synthetic fuels are built up from individual chemical blocks. Coal, natural gas or biomass can be thermally converted into synthesis gas made up of carbon monoxide and hydrogen. Linear, straight-chain hydrocarbons, the n-paraffins, are then built up from these two components on Fischer-Tropsch catalysts. An additional isomerization step can be incorporated downstream to improve the properties of synthetic diesel fuel, particularly its low-temperature resistance.

This approach to building up fuels anew differs fundamentally from the common methods, which are based on transforming components such as fats or oils by chemical alteration (esterification, hydrogenation) into fuels. That is why synthetic fuels are also known as 2nd-generation fuels.

Fischer-Tropsch synthesis is really non-specific such that a wealth of different components is obtained, starting with gases through short-chain gasoline components, kerosine and diesel paraffins, right down to oils and waxes of high molecular weight. For reasons of economy splitting the production mixture is optimized to a maximum diesel yield. These fuels were initially referred to as *designer fuels*, because the notion existed that the composition of synthetic diesel fuel could be geared exactly to the demands of diesel-engine technology. In principle there is naturally the possibility of changing the fuel composition through the choice of catalysts. But, in view of the wide range of products obtained from Fischer-Tropsch synthesis, and also for cost reasons the notion of producing fuels of customized composition no longer appears justified.

CtL, GtL, BtL

The manufacture of synthetic diesel (synfuel) from coal and natural gas is economically important. These fuels are known as Coal-to-Liquid (CtL) or Gas-to-Liquid (GtL).

The production of natural gas is only worthwhile with large natural-gas deposits where the natural gas cannot be attributed to any direct use. CtL and GtL are however fossil energy sources such that no reduction in CO₂ emissions is achieved. If, on the other hand, the fuel is produced from biomass (BtL, Biomass-to-Liquid), there is a CO₂ advantage, and this fuel is called *Sunfuel*[®].

The conversion process developed by the company Choren is however only tried and tested on a small scale. Currently a plant is being set up with an annual capacity of 15,000 tons. It will depend on the lessons learned from this production plant as to whether the use of biomass to manufacture synthetic fuels also on a large industrial scale represents a practicable solution. For purposes of comparison: In 2006 roughly 5 million tons of GtL were produced.

Properties and use in motor vehicles

Fischer-Tropsch products are valuable fuel components. They are purely paraffinic, i.e., aromatic- and sulfur-free, and also have a high cetane number. Fischer-Tropsch diesel with its low density of approximately 800 kg/m³ is below the density range of the European diesel-fuel standard EN 590. Careful validation must be performed before pure Fischer-Tropsch diesel can be used in vehicles, particularly in the on-the-road vehicle population.

Due to the lower emissions, particularly in the case of nitrogen oxides as well as HC and CO, the use of pure synthetic fuels

suggests itself above all in closed fleets in centers of population with heavy air pollution. However, it could be possible with the same amount of synthetic diesel fuel to achieve identical or sometimes even greater emission reductions if this amount were to be admixed as a blend component in petroleum diesel. Engine tests with different blends of GtL and petroleum diesel have shown that at certain operating points greater emission savings can be achieved by means of non-linear effects than corresponds to the purely rated content of GtL.

GtL can be very well marketed as a blend component in premium diesel fuels. Furthermore diesel fuels which fail to reach the established limit values can be improved by the addition of GtL to such an extent that they conform to the standard.

At present there is still no commercial basis for the pure use of GtL. The emission advantages of using pure GtL can be used to reduce the technical expenditure in exhaust-gas treatment. This is of particular interest when the emissions attain a lower stage of the emissions legislation. Changes must be made to the engine for this purpose.

What is important is that the emission advantages are evident in the entire driving cycle and have long-time stability, and that vehicle driveability is assured in all load states.

There may perhaps in future be opportunities for the pure application of GtL in more homogeneously configured combustion processes. However, blends of GtL with specifically optimized petroleum fractions also offer interesting potential here.

Dimethyl ether

Dimethyl ether (DME) is a combustible and explosive gas with a boiling point of -25°C at 1 bar. DME can be created from synthesis gas or from methanol. With a cetane number of roughly 55 DME can be burned in the engine with low sooting and with reduced nitrogen-oxide formation. But, because of its low density and the high content of oxygen, the calorific value is low. Using gases such as DME requires an adapted fuel-injection system with a complicated low-pressure system and a pressure-proof fuel tank.

The buildup of an infrastructure for DME is less likely, especially since a close filling-station network already exists for natural gas.

Cylinder-charge control systems

1) The cylinder charge is a mixture of gases trapped in the cylinder when the intake valves are closed. It consists of the intake air and the residual burned gases from the preceding combustion cycle.

In diesel engines, both the fuel mass injected and the air mass with which it is mixed are decisive factors in determining torque output and, therefore, engine performance, and exhaust-gas composition. For this reason, the systems that control the cylinder-air charge¹⁾ have an important role to play as well as the fuel-injection system. Cylinder-charge control systems clean the intake air and affect the flow, density, and composition (e.g. oxygen content) of the cylinder charge.

Overview

In order to burn the fuel, the engine requires oxygen which it extracts from the intake air. In principle, the more oxygen there is available for combustion in the combustion chamber, the greater the amount of fuel that can be injected for full-load delivery. There is, therefore, a direct relationship between the amount of air with which the cylinder is charged and the maximum possible engine power output.

Air-intake systems have the function of conditioning the intake air and ensuring that the cylinders are properly charged. Cylinder-charge control systems are made up of the following components (Fig. 1):


- Air filter (1)
- Turbocharger/supercharger (2)
- Exhaust-gas recirculation system (4)
- Swirl flaps (5)

Supercharging/turbocharging systems (i.e. to precompress air before injection in the cylinder) are fitted to most diesel engines to raise performance.

Exhaust-gas recirculation systems are fitted on all modern diesel cars and some commercial vehicles for the purpose of minimizing pollutants in the exhaust gas. They reduce the amount of oxygen in the cylinder. Less nitrogen oxides (NO_x) caused by the resulting drop in combustion temperature are then formed on combustion.

Fig. 1

- 1 Air filter
- 2 Turbocharger/supercharger with intercooler
- 3 Engine control unit
- 4 Exhaust-gas recirculation and cooler
- 5 Swirl flap
- 6 Engine cylinder
- 7 Intake valve
- 8 Exhaust valve

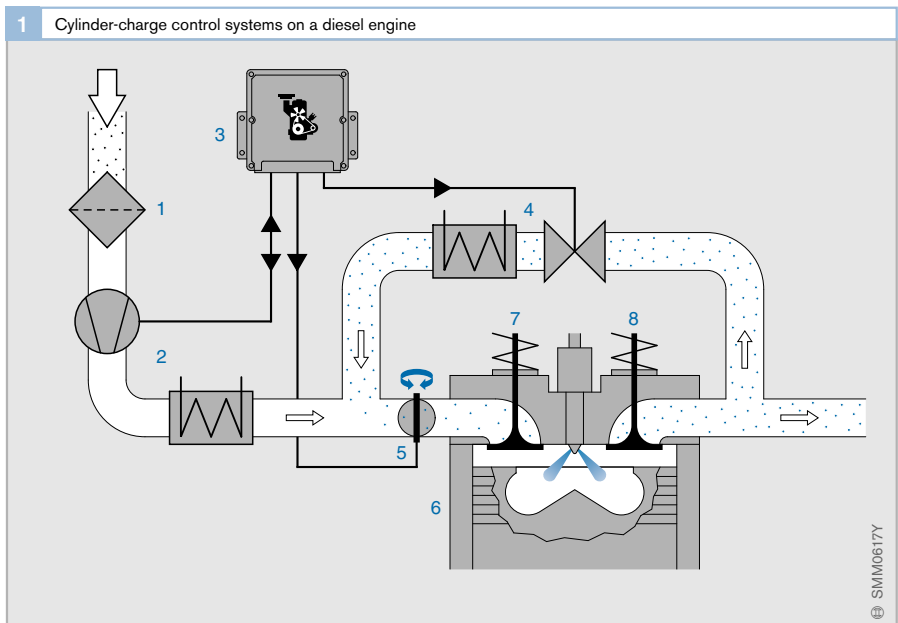

Turbochargers and superchargers

Assisted aspiration by means of turbochargers or superchargers has been in existence for many years¹⁾ on large diesel engines for fixed installations, marine propulsion systems, and commercial vehicles. It has now been adopted for fast-running diesel engines in cars²⁾. In contrast to a conventionally aspirated engine, air in a turbocharged or supercharged engine is forced under pressure into the cylinders. This increases the air mass in the cylinder charge and, in combination with a greater fuel mass, this results in a greater power yield from the same engine capacity, or the same power yield from a smaller engine capacity. Lower fuel consumption is achievable by reducing engine swept volume (downsizing).

At the same time it improves exhaust-gas emission rates.

The diesel engine is particularly suited to assisted aspiration as its compressed cylinder charge consists only of air rather than a mixture of fuel and air, and it can be economically combined with a supercharger/turbocharger because of its quality-based method of control. On larger commercial-vehicle engines, a further increase in mean pressure (and, therefore, torque) is achieved by higher turbocharger pressures and lower compression, but is offset by poorer cold-starting characteristics.

A distinction is made between two types of supercharger/turbocharger:

- On the *exhaust-gas turbocharger*, compression power is won from the exhaust gas (flow of exhaust gas between engine and turbocharger).
- On the *supercharger*, compression power is tapped from the engine crankshaft (mechanical coupling between engine and supercharger).

Volumetric efficiency

Volumetric efficiency refers to the relationship between the actual air charge trapped inside the cylinder and the theoretical air charge

governed by the cylinder capacity under standard conditions (air pressure $p_0 = 1,013 \text{ hPa}$, temperature $T_0 = 273 \text{ K}$) without supercharging/turbocharging. On supercharged/turbocharged diesel engines, volumetric efficiency is within the range of 0.85...3.0.

Intercooling

In the process of being compressed by the turbocharger, air also heats up (to as much as 180°C). Since hot air is less dense than cold air, a higher air temperature has a negative effect on cylinder charge. A charge-air cooler (intercooler) downstream of the supercharger/turbocharger (cooled by ambient air or with a separate coolant circuit) cools the compressed air, thus increasing the cylinder charge further. It means that more oxygen is available for combustion, with the result that a higher maximum torque and, therefore, greater power output is available at a given engine speed.

The lower temperature of the air entering the cylinder also reduces the temperatures generated during the compression stroke. This has a number of advantages:

- Greater thermal efficiency and, therefore, lower fuel consumption and soot emission from diesel engines
- Reduced knock tendency in gasoline engines
- Lower thermal stresses on the cylinder block/head
- Slight reduction in NO_x emissions as a result of the lower combustion temperature

Turbocharging

Of the methods of assisted aspiration, the exhaust-gas-driven turbocharger is by far the most widely used. Turbochargers are used on engines for cars and commercial vehicles as well as on large, heavy-duty marine and locomotive engines.

The exhaust-gas turbocharger is used as a means of improving the power-to-weight ratio, and improving maximum torque at low to medium engine speeds, when it is normally fitted with electronic boost-pressure control. In addition, the aspects of minimizing pollutants also play a growing role.

¹⁾ Even the pioneers of automotive engineering, Gottlieb Daimler (1885) and Rudolf Diesel (1896), considered the possibility of precompressing intake air in order to improve performance. But it was the Swiss Alfred Büchi who first successfully produced a turbocharger in 1925 – it boosted power output by 40% (application for the patent was made in 1905). The first turbocharged commercial-vehicle engines were built in 1938. They became widespread by the early 1950s.

²⁾ They became more widespread from the 1970s onwards.

Design and operating concept

The hot exhaust gas expelled under pressure from an internal-combustion engine represents a substantial loss of energy. It makes sense, therefore, to utilize some of that energy to generate pressure in the intake manifold.

The turbocharger (Fig. 1) is a combination of two turbo elements:

- An exhaust-gas turbine (7) that is driven by the flow of exhaust gas.
- A centrifugal turbo-compressor (2) that is directly coupled to the turbine by means of a shaft (11) and which compresses the intake air.


The hot exhaust gas flows into the turbine and, by so doing, forces it to rotate at high speeds (in diesel engines, up to around 200,000 rpm). The inward-facing blades of the turbine divert the flow of gas into the center from where it passes out to the side (8, radial-flow turbine). The connecting shaft drives the radial compressor. This is the exact reverse of the turbine: The intake air (3) is drawn in at the center of the compressor and is driven outwards by the blades of the impeller so that it is compressed (4).

As a result of exhaust-gas pressure that builds upstream of the turbine, the engine has to work harder to expel the exhaust gas on the exhaust stroke. Besides converting the

flow energy of exhaust gas into compression power, the turbine also converts the thermal energy in the exhaust gas into compression power. As a result, the increase in charge-air pressure is greater than the rise in exhaust-gas pressure upstream of the turbine (positive scavenging drop). This improves the overall efficiency of the engine across large sections of the engine map.

For fixed-installation engines running at constant speed, the turbine and turbocharger characteristics can be tuned to a high level of efficiency and turbocharger pressure. Turbocharger design becomes more complicated when it is applied to road-vehicle engines that do not run under steady-state conditions – because they are expected to produce high torque levels, particularly when accelerating from slow speeds. Low exhaust-gas temperatures, low exhaust-gas flow rates, and the mass moment of inertia of the turbocharger itself all contribute to a slow buildup of pressure in the compressor at the start of acceleration. On turbocharged car engines, this is referred to as “turbo lag”. Special turbochargers have been developed for supercharging/turbocharging in passenger cars and commercial vehicles. They respond at small exhaust-gas flow rates due to their low intrinsic mass, and thus improve performance in the lower rev band to a considerable extent.

Fig. 1
 1 Compressor housing
 2 Centrifugal compressor
 3 Intake air
 4 Compressed intake air
 5 Lubricant inlet
 6 Turbine housing
 7 Turbine
 8 Exhaust-gas outflow
 9 Bearing housing
 10 Exhaust-gas inflow
 11 Shaft
 12 Lubricant return outlet

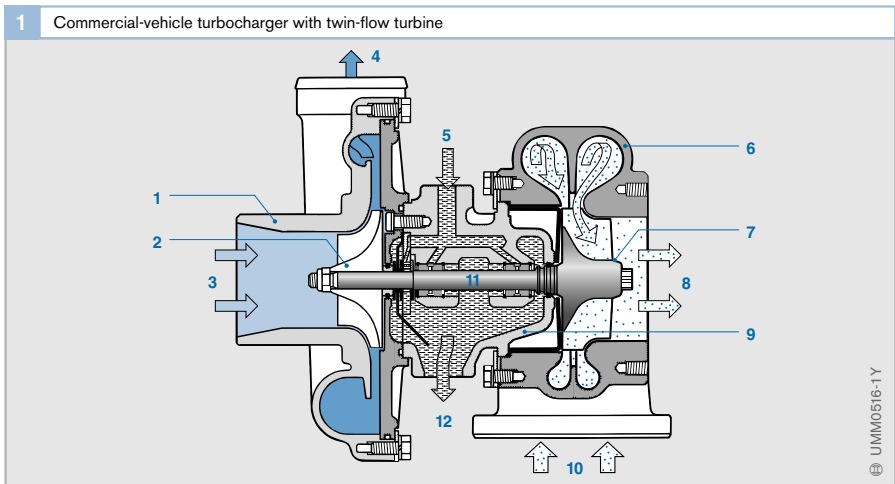

A distinction is made between two methods of turbocharging.

Constant-pressure turbocharging involves the use of an exhaust-gas accumulator upstream of the turbine to smooth out the pressure pulsations in the exhaust system. As a result, the turbine can accommodate a higher exhaust-gas flow rate at a lower pressure at high engine speeds. As the exhaust-gas back pressure that the engine is working against is lower under those operating conditions, fuel consumption is also lower. Constant-pressure turbocharging is used for large-scale marine, generator and fixed-installation engines.

Pulse turbocharging utilizes the kinetic energy of the pressure pulsations caused by the expulsion of the exhaust gas from the cylinders. Pulse turbocharging achieves higher torques at lower engine speeds. It is the principle used by turbochargers for cars and commercial vehicles. Separate exhaust manifolds are used for different banks of cylinders to prevent individual cylinders from interfering with each other during gas exchange, e.g. two groups of three cylinders on a six-cylinder engine. If twin-flow turbines – which have two outer channels – are used (Fig. 1), the exhaust flows are kept separate in the turbocharger as well.

In order to obtain good response characteristics, the turbocharger is positioned as close as possible to the exhaust valves in the flow of hot exhaust gas. It therefore has to be made of highly durable materials. On ships – where hot surfaces in the engine room have to be prevented because of the fire risk – turbochargers are water-cooled or enclosed in heat-insulating material. Turbochargers for gasoline engines, where the exhaust-gas temperatures can be 200...300°C higher than on diesel engines, may also be water-cooled.

Designs

Engines need to be able to generate high torque even at low speeds. For that reason, turbochargers are designed for low exhaust-gas mass flow rates (e.g. full load at an engine speed of $n \leq 1,800$ rpm). To prevent the turbocharger from overloading the engine at higher exhaust-gas mass flow rates, or being damaged itself, the turbocharger pressure has to be controlled. There are three turbocharger designs which can achieve this:

- The wastegate turbocharger
- The variable-turbine-geometry turbocharger and
- The variable-sleeve-turbine turbocharger

Wastegate turbocharger (Fig. 2)

At higher engine speeds or loads, part of the exhaust flow is diverted past the turbine by a bypass valve – the “wastegate” (5). This reduces the exhaust-gas flow passing through the turbine and lowers the exhaust-gas back pressure, thereby preventing excessive turbocharger speed.

At low engine speeds or loads, the wastegate closes and the entire exhaust flow passes through and drives the turbine.

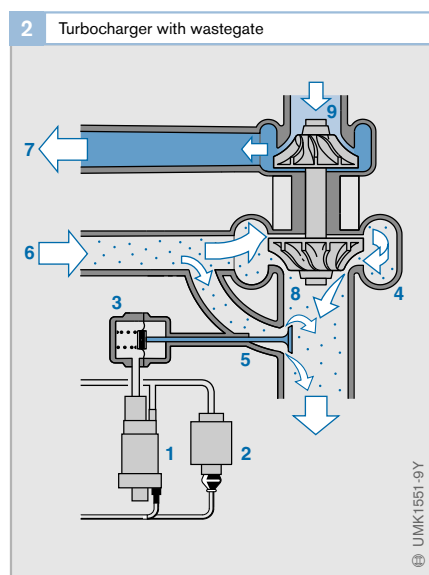


Fig. 2

- 1 Charge-pressure actuator
- 2 Vacuum pump
- 3 Pressure actuator
- 4 Turbocharger
- 5 Wastegate (bypass valve)
- 6 Exhaust flow
- 7 Intake air flow
- 8 Turbine
- 9 Centrifugal compressor

The wastegate usually takes the form of a flap integrated in the turbine housing. In the early days of turbocharger design, a poppet valve was used in a separate housing parallel to the turbine.

The wastegate is operated by an electropneumatic charge-pressure actuator (1). That actuator is an electrically operated 3/2-way valve that is connected to a vacuum pump (2). In its neutral position (de-energized) it allows atmospheric pressure to act on the pressure actuator (3). The spring in the pressure actuator opens the wastegate.

If a current is applied to the charge-pressure actuator by the engine control unit, it opens the connection between the pressure actuator and the vacuum pump so that the diaphragm is drawn back against the action of the spring. The wastegate closes and the turbocharger speed increases.

The turbocharger is designed in such a way that the wastegate will always open if the control system fails. This insures that, at high engine speeds, excessive turbocharger pressure which might damage the engine or the turbocharger itself cannot be produced.

On gasoline engines, sufficient vacuum is created by the intake manifold. Therefore, unlike diesel engines, they do not require a vacuum pump. Both types of engine may also use a purely electrical wastegate actuator.


Variable-turbine-geometry (VTG) turbocharger (Fig. 3)

Varying the rate of gas flow through the turbine by means of Variable Turbine Geometry (VTG) is another method by which the exhaust-gas flow rate can be limited at high engine speeds. The adjustable deflector blades (3) alter the size of the gap through which the exhaust gas flows in order to reach the turbine (variation of geometry). By so doing, they adjust the exhaust-gas pressure acting on the turbine in response to the required turbocharger pressure.

At low engine speeds or loads, they allow only a small gap for the exhaust gas to pass through so that the exhaust-gas back pressure increases. The exhaust-gas flow velocity through the turbine is then higher so that the turbine turns at a higher speed (a). In addition, the exhaust-gas flow is directed at the outer ends of the turbine blades. This generates more leverage which in turn produces greater torque.

At high engine speeds or loads, the deflector blades open up a larger gap for the exhaust gas to flow through with the result that the flow velocity is lower (b). Consequently, the turbocharger turns more slowly if the flow volume remains the same, or else its speed does not increase as much if the flow volume increases. In that way, the turbocharger pressure is limited.

Fig. 3
 a Deflector blade setting for high turbocharger pressure
 b Deflector blade setting for low turbocharger pressure
 1 Turbine
 2 Adjusting ring
 3 Deflector blade
 4 Adjusting lever
 5 Pneumatic actuator
 6 Exhaust flow
 ← High flow rate
 ⇐ Low flow rate

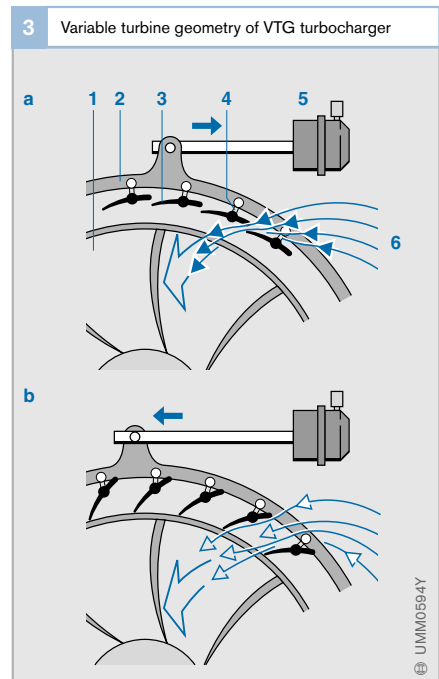

The deflector blade angle is adjusted very simply by turning an adjuster ring (2). This sets the deflector blades to the desired angle by operating them either directly using adjusting levers (4) attached to the blades or indirectly by means of adjuster cams. The adjusting ring is operated by a pneumatic actuator (5) to which positive or negative pressure is applied, or alternatively by an electric motor with position feedback (position sensor). The engine control unit controls the actuator. Thus the turbocharger pressure can be adjusted to the optimum setting in response to a range of input variables.

The VTG turbocharger is fully open in its neutral position and therefore inherently safe, i.e. if the control system fails, neither the turbocharger nor the engine suffers damage as a result. There is merely a loss of power at low engine speeds.

This is the type of turbocharger most widely used on diesel engines today. It has not been able to establish itself as the preferred choice for gasoline engines because of the high thermal stresses and the higher exhaust temperatures encountered.

Variable-sleeve-turbine (VST) turbocharger (Fig. 4)

The variable-sleeve-turbine turbocharger is used on small car engines. On this type of turbocharger, an intake slide valve (4) alters the cross-section of the inlet flow to the turbine by opening one or both of the intake ports (2, 3).

At low engine speeds or loads, only one of the intake ports is open (2). The small inlet aperture produces high exhaust-gas back pressure combined with a high exhaust-gas flow velocity, and consequently results in a high speed of rotation on the part of the turbine (1).

When the required turbocharger pressure is reached, the intake valve gradually opens the second intake port (3). The flow velocity of the exhaust gas – and therefore the turbine speed and the turbocharger pressure – then gradually reduce.

The engine control unit module controls the valve setting by means of a pneumatic actuator.

There is also a bypass channel (5) integrated in the turbine housing so that virtually the entire exhaust gas flow can be diverted past the turbine in order to obtain a very low turbocharger pressure.

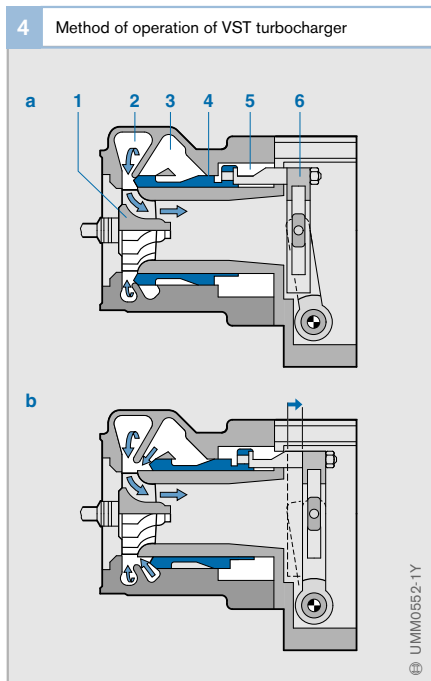


Fig. 4
 a Only one intake port open
 b Both intake ports open
 1 Turbine
 2 1st intake port
 3 2nd intake port
 4 Inlet slide valve
 5 Bypass channel
 6 Valve actuator

Advantages and disadvantages of turbocharging

Downsizing

When compared with a conventionally aspirated engine of equal power, the prime advantage of a turbocharged engine is its lighter weight and smaller dimensions. It also has better torque characteristics within the useful speed range (Fig. 5). Consequently, the power output at a given speed is higher (A – B) at the same specific fuel consumption.

The same amount of power is available at a lower engine speed because of the superior torque characteristics (B – C). Thus, with a turbocharged engine, the point at which a required amount of power is produced is shifted to a position where frictional losses are lower. The result of this is lower fuel consumption (E – D).

Torque curve

At very low engine speeds, the basic torque of a turbocharged engine is similar to that of a conventionally aspirated engine. At that point, the usable energy from the exhaust-gas flow is insufficient to drive the turbine. No turbocharger pressure is generated in this way.

Under dynamic operating conditions, the torque output remains similar to that of a conventionally aspirated engine even at medium engine speeds (c). This is because of the delay in the build-up of the exhaust-gas flow. On acceleration from slow speeds, therefore, the “turbo lag” effect occurs.

On gasoline engines in particular, the turbo lag can be minimized by utilizing the dynamic supercharging effect. This improves the turbocharger’s response characteristics.

On diesel engines, the use of turbochargers with variable turbine geometry provides a means of significantly reducing turbo lag.

Another design variation is the electrically assisted turbocharger which is aided by an electric motor. The motor accelerates the impeller on the compressor side of the turbocharger independently of the exhaust-gas flow through the turbine, thereby reducing turbo lag. This type of turbocharger is currently in the course of development.

A rapid development of turbocharger pressure at low speeds can also be achieved using two-stage turbocharging. Two-stage turbocharging stands at the beginning of series-production launch.

The response of turbocharged engines as altitude increases is very good because the pressure differential is greater at lower atmospheric pressure. This partially offsets the lower density of air. However, the design of the turbocharger must ensure that the turbine does not over-rev in such conditions.

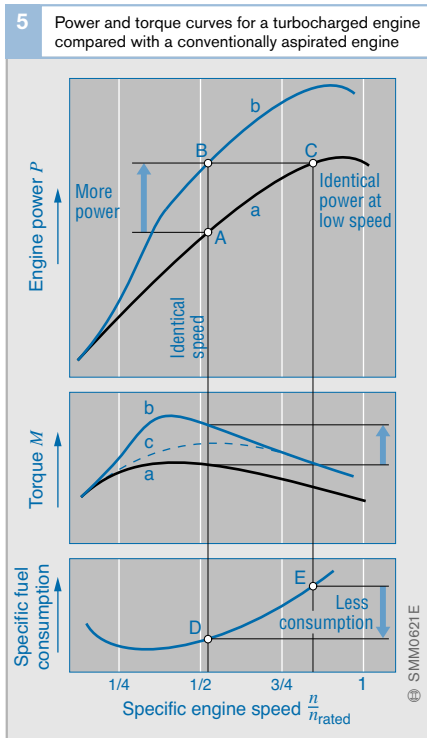


Fig. 5
 a Conventionally aspirated engine under steady-state conditions
 b Turbocharged engine under steady-state conditions
 c Turbocharged engine under dynamic conditions

Multistage turbocharging

Multistage turbocharging is an improvement on single-stage turbocharging in that power limits can be significantly extended. The objective here is to improve air supply under both steady-state and dynamic operating conditions and at the same time improve the specific fuel consumption of the engine. Two methods of turbocharging have proved successful in this respect.

Sequential supercharging

Sequential supercharging involves the use of multiple turbochargers connected in parallel which successively cut in as engine load increases. Thus, in comparison with a single larger turbocharger which is geared to the engine's rated power output, two or more optimum levels of operation can be obtained. Because of the added expense of the supercharger sequencing control system, however, sequential supercharging is predominantly used on marine propulsion systems or generator engines.

Controlled two-stage turbocharging

Controlled two-stage turbocharging involves two differently dimensioned turbochargers connected in series with a controlled bypass and, ideally, two intercoolers (Fig. 6, 1 and 2). The first turbocharger is a low-pressure turbocharger (1) and the second, a high-pressure turbocharger (2). The intake air first under-

goes precompression by the low-pressure turbocharger. Consequently, the relatively small high-pressure compressor in the second turbocharger is operating at a higher input pressure with a low volumetric flow rate, so that it can deliver the required air-mass flow rate. A particularly high level of compressor efficiency can be achieved with two-stage turbocharging.

At lower engine speeds, the bypass valve (5) is closed, so that both turbochargers are working. This provides for very rapid development of a high turbocharger pressure. As engine speed increases, the bypass valve gradually opens until eventually only the low-pressure turbocharger is operating. In this way, the turbocharging system adjusts evenly to the engine's requirements.

This method of turbocharging is used in automotive applications because of its straightforward control characteristics.

Electric booster

This is an additional compressor mounted upstream of the turbocharger. It is similar in design to the turbocharger's compressor but is driven by an electric motor. Under acceleration, the electric booster supplies the engine with extra air, thereby improving its response characteristics at low speeds in particular.

Supercharging

A supercharger consists of a compressor driven directly by the engine. The engine and the compressor are generally rigidly linked, e.g. by a belt drive system. Compared with turbochargers, superchargers are rarely used on diesel engines.

Positive-displacement supercharger

The most common type of supercharger is the positive-displacement supercharger. It is used mainly on small and medium-sized car engines. The following types of supercharger are used on diesel engines:

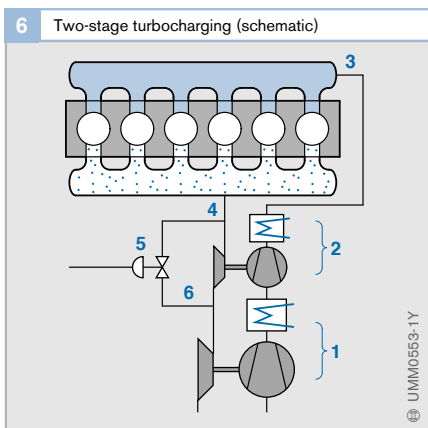


Fig. 6

- 1 Low-pressure stage (turbocharger with intercooler)
- 2 High-pressure stage (turbocharger with intercooler)
- 3 Intake manifold
- 4 Exhaust manifold
- 5 Bypass valve
- 6 Bypass pipe

Positive-displacement supercharger with internal compression

With this type of supercharger, the air is compressed inside the compressor. The types used on diesel engines are the reciprocating-piston supercharger and the helical-vane supercharger.

Reciprocating-piston supercharger: This type has either a rigid piston (Fig. 7) or a diaphragm (Fig. 8). A piston (similar to an engine piston) compresses the air which then passes through an outlet valve to the engine cylinder.

Helical-vane supercharger (Fig. 9): Two intermeshing helical vanes (4) compress the air.

Positive-displacement supercharger without internal compression

With this type of supercharger, the air is compressed outside of the supercharger by the action of the fluid flow generated. The only example of this type to be used on diesel engines was the Roots supercharger (Fig. 10) which was fitted to some two-stroke diesels.

Roots supercharger: Two contra-rotating rotary vanes (2) linked by gears rotate in contact with one another in similar fashion to a gear pump and in that way compress the intake air.

Fig. 7

- 1 Inlet valve
- 2 Outlet valve
- 3 Piston
- 4 Drive shaft
- 5 Casing


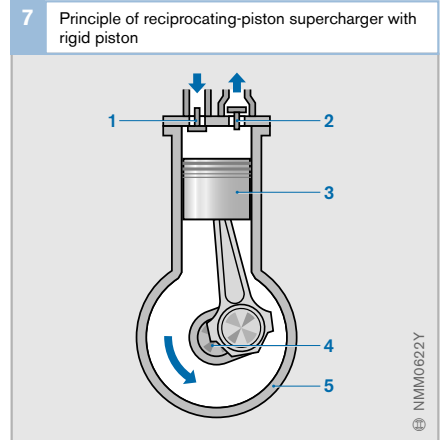


Fig. 8

- 1 Inlet valve
- 2 Outlet valve
- 3 Diaphragm
- 4 Drive shaft

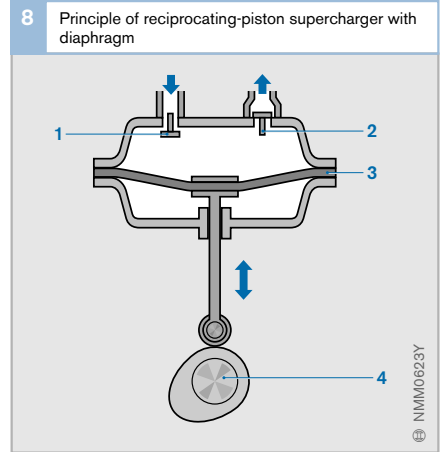

9 Helical-vane supercharger

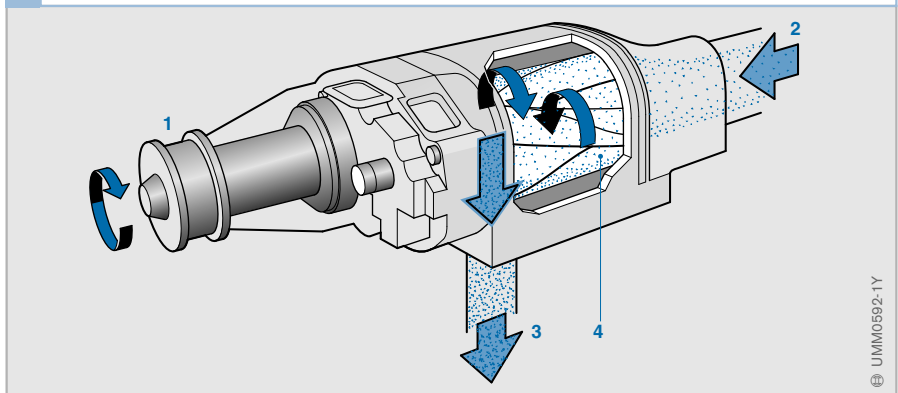


Fig. 9

- 1 Drive pulley
- 2 Intake air
- 3 Compressed air
- 4 Helical vane

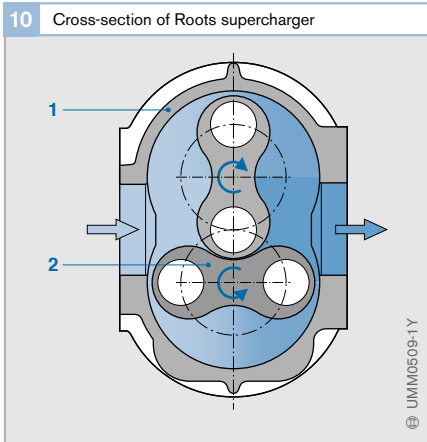


Fig. 10

- 1 Housing
- 2 Rotary vane

Centrifugal supercharger

In addition to the positive-displacement superchargers, there are also centrifugal superchargers (centrifugal-flow compressors) in which the compressor is similar to that in a turbocharger. In order to obtain the high peripheral velocity required, they are driven via a system of gears. This type of supercharger offers good volumetric efficiency over a wide range of speeds and can be seen as an alternative to the turbocharger for small engines. Mechanical centrifugal superchargers are also known as mechanical centrifugal turbo-compressors. Centrifugal turbochargers are rarely used on medium-sized or larger car engines.

Controlling supercharger pressure

The pressure generated by a supercharger can be controlled by means of a bypass. A proportion of the compressed air flow enters the cylinder and determines the cylinder charge. The remainder flows through the bypass and is returned to the intake side. The bypass valve is controlled by the engine control unit.

Advantages and disadvantages of supercharging

Because the supercharger is driven directly by the crankshaft, any increase in engine speed is instantaneously mirrored by an increase in compressor speed. This means that under

dynamic operating conditions, higher engine torque and better response characteristics are obtained than with a turbocharger. If variable-speed gearing is used, the engine response to load changes can also be improved.

Since, however, the necessary power output for driving the compressor (approx. 10...15 kW for cars) is not available as effective engine output, those advantages are offset by a somewhat higher rate of fuel consumption than with a turbocharger. That disadvantage is mitigated if the compressor can be disconnected at low engine speeds and loads by means of a clutch operated by the engine control unit. This, on the other hand, makes the supercharger more expensive to produce. Another disadvantage of the supercharger is the greater amount of space it requires.

Dynamic supercharging

A degree of supercharging can be achieved simply by the utilization of dynamic effects in the intake manifold. Dynamic supercharging effects of this type are less important in diesel engines than they are for gasoline engines. In diesel engines, the main emphasis of intake-manifold design is on even distribution of the air charge between all cylinders and distribution of the recirculated exhaust gas. In addition, the creation of whirl effects inside the cylinders is also of importance. At the relatively low speeds at which diesel engines run, designing the intake manifold specifically to obtain dynamic supercharging effects would require it to be extremely long. Since virtually all modern diesel engines are equipped with turbochargers, the only benefit that could be achieved would be under non steady-state operating conditions where the turbocharger has not reached full delivery pressure.

In general, the intake manifold on a diesel engine is kept as short as possible. The advantages of this are

- Improved dynamic response characteristics and
- Better control characteristics on the part of the exhaust-gas recirculation system

Swirl flaps

The pattern of air flow inside of the cylinders of a diesel engine has a fundamental effect on mixture formation. It is mainly influenced by:

- The air flow generated by the injection jets.
- The movement of air flowing into the cylinder.
- The movement of the piston.

The whirl-assisted combustion process swirls the air during the induction and compression cycles to obtain rapid, complete mixture formation. Using special flaps and channels, the whirl can be regulated depending on engine speed and load.

The intake ducts are designed as fill channels (Fig. 1, 5) and swirl passages (2). The fill channels can be closed by a flap (swirl flap; 6). The flap is controlled by the engine control unit, depending on the program map. Besides a simple system with two positions, “Open” and “Closed”, there are also position-controlled systems that allow intermediate positions.

The swirl flap is closed at low engine speeds. Air is sucked in via the swirl passage. The whirl is stronger when the cylinder charge is fuller.

At high engine speeds, the flap opens and releases the fill channels (5) to allow a greater cylinder charge and improve engine performance. Whirl is then reduced.

By controlling whirl as a function of the program map, it is possible to make significant cuts in NO_x and particulate emissions in the lower rev band. Flow losses caused by closing off the passages lead to increased charge-cycle work. However, improving mixture formation and combustion compensate more or less for any additional fuel consumption. A compromise between optimizing emission, fuel consumption, and performance is achieved dependent on engine load and speed.

Intake-duct switchoff is presently fitted to some car engines and is playing an increasingly important role in the emission-minimization concept.

However, modern truck diesel engines operate generally at very low whirl rates. Due to their smaller speed range and larger combustion chambers, the energy of the injection jets are sufficient to allow mixture formation.

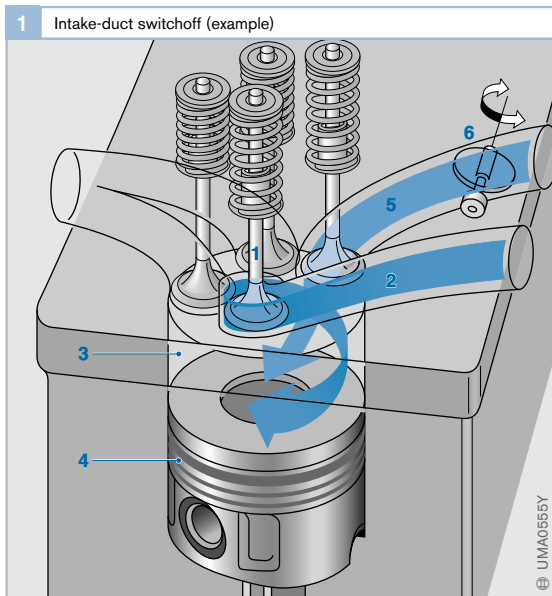


Fig. 1

- 1 Intake valve
- 2 Swirl passage
- 3 Engine cylinder
- 4 Piston
- 5 Fill channel
- 6 Flap

Intake air filters

The air filter filters the engine intake air and prevents any mineral dust or particles from entering the engine and becoming entrained in the engine oil. This reduces wear in the bearings, piston rings, cylinder walls, etc. It also protects the sensitive air-mass meter by preventing dust from depositing there. If this should happen, it could result in incorrect signals, higher fuel consumption, and higher pollutant emissions.

Typical air impurities include oil mist, aerosols, diesel soot, industrial waste gases, pollen, and dust. Dust particles drawn in together with the intake air have diameters that range from approx. 0.01 μm (soot particles) to approx. 2 mm (sand grains).

Filter medium and design

The air filters are normally deep-bed filters that retain particles in the filter-medium structure – as opposed to surface filters. Deep-bed filters with high dust retention capacities are always preferred when large volumetric flows with low particle concentrations need to be filtered efficiently.

Pressures achieve mass-related, overall separation efficiencies of up to 99.8 bar (passenger cars) and 99.95 bar (commercial vehicles). Such figures must be capable of being maintained under all prevailing conditions, including the dynamic conditions that exist in the air-intake system of an engine (pulsation). Filters of inadequate quality have greater dust passage rates under such circumstances.

The filter elements are individually designed for each engine. In this way, pressure losses can be kept to a minimum, and the high filtration rates are not dependent on the air-flow rate. The filter elements, which may be rectangular or cylindrical, consist of a filter medium that is folded so that the maximum possible filter surface area can be accommodated within the smallest possible space.

Generally cellulose-fiber based, the filter medium is compressed and impregnated to

give it the required structural strength, wet rigidity, and chemical resistance.

The elements are changed at intervals specified by the vehicle manufacturer.

The demands for small and highly efficient filter elements (smaller space requirements) that also offer longer servicing intervals is the driving force behind the development of innovative, new air-filter media. New air-filter media made of synthetic fibers (Fig. 1), which have substantially improved performance figures in some cases, are already in production.

Better results than with purely cellulose-based media can be achieved using composite materials (e.g. paper with melt-blown layer) and special nano-fiber filter media, which consist of a relatively coarse base layer made of cellulose on which ultra-thin fibers with diameters of only 30 to 40 nm are applied. New folded structures with alternately sealed channels, similar to diesel soot filters, are soon to be launched on the market.

Conical, oval, and stepped or trapezoidal geometries add to the range of shapes available in order to optimize use of the space under the hood, which is becoming ever more confined.

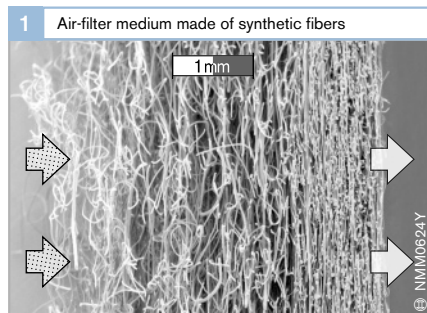


Fig. 1 Synthetic high-performance nonwoven filters, with gradually increasing density, and decreasing fiber diameter in the cross-section from the intake side to the clean-air side. Source: Freudenberg Vliesstoffe KG

Mufflers


Previously, air-filter housings were almost exclusively designed as “muffler filters”. Their large volume was designed for the supplementary function of reducing air intake noise. In the meantime, the two functions of filtration and engine-noise reduction have become increasingly separated and the different components independently optimized. This means that the filter housing can be reduced in size. And that results in very slim filters which can be integrated in the engine trim covers while the mufflers are placed in less accessible positions inside the engine compartment.

Air filters for cars

In addition to the housing (1 and 3) with the cylindrical air-filter element, the passenger-car air-intake module (Fig. 2) incorporates all the intake ducts (5 and 6) and the air-intake module (4). Arranged in-between are

Helmholtz resonators and lambda quarter pipes for acoustics. With the aid of this type of overall system optimization, the individual components can be better matched to one another. This helps to comply with the ever stricter noise-output restrictions.

Increasingly in demand are water-separating components, which are integrated in the air-intake system. They are used primarily to protect the air-mass sensor, which measures the air-mass flow. Water droplets which are drawn in through poorly situated intake fittings in the event of heavy rain, heavy splash water (e.g., on off-road vehicles) or snowfall and which reach the sensor can cause incorrect cylinder-charge readings to be taken.

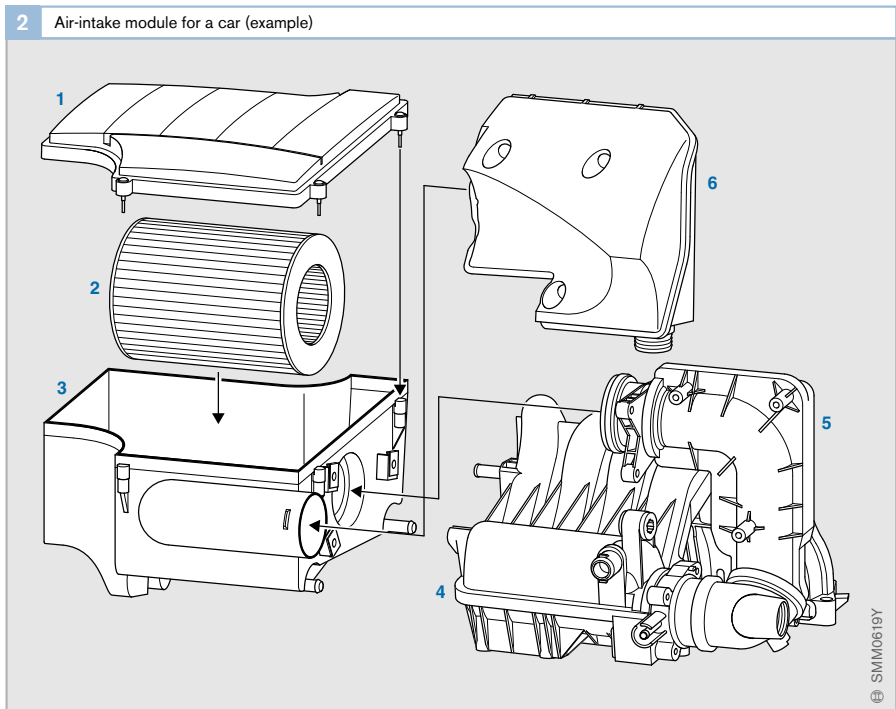

Splash plates or cyclone-like designs installed in the intake duct are used to separate out the water droplets. The shorter the distance from the air intake to the filter element, the more difficult it is to obtain a solution because only very low flow-pressure losses are permitted. However, it is also possible to use appropriately fitted filter elements which collect (coalesce) the water droplets and deflect the water film outwards ahead of the actual particulate-filter element. A housing specially designed for this purposes aids this process. This arrangement can also be successfully used for water separation even in the case of very short raw-air ducts.

Air filters for commercial vehicles

Figure 3 shows an easy-to-maintain and weight-optimized plastic air filter for commercial vehicles. In addition to having a very high filtration rate, the elements for this filter are dimensioned for servicing intervals of over 100,000 km. The servicing intervals are thus significantly longer than those for passenger cars.

In countries with high levels of atmospheric dust, and on construction and agricultural machines, a pre-filter is fitted upstream of the filter element. The pre-filter filters out coarse-grained, heavy dust particles, thereby substantially increasing the service life of the fine filter element.

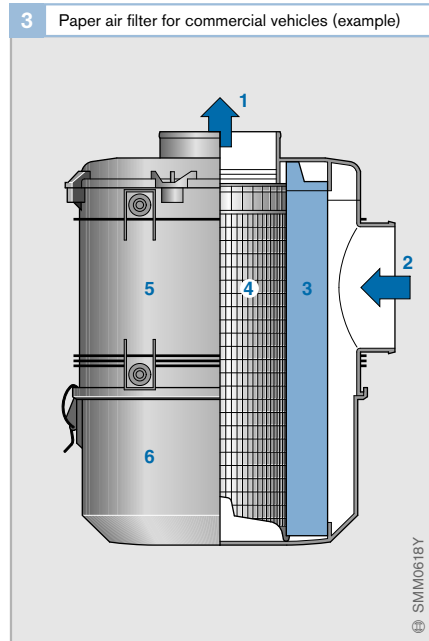


Fig. 3

- 1 Air outlet
- 2 Air inlet
- 3 Filter element
- 4 Supporting tube
- 5 Housing
- 6 Dust collector

In its most simple form, it is a ring of deflector vanes which set the air flow into a rotating motion. The resulting centrifugal force separates out the coarse dust particles. However, only mini-cyclone pre-filter batteries optimized for use in conjunction with the main filter element can properly utilize the potential of centrifugal separators in commercial-vehicle air filters.

Basic principles of diesel fuel injection

The combustion processes in the diesel engine, also linked to engine performance, fuel consumption, exhaust-gas composition, and combustion noise, depend to a great extent on how the air/fuel mixture is prepared.

The fuel-injection parameters that are decisive on the quality of the mixture formation are primarily:

- start of injection
- rate-of-discharge curve and injection duration
- injection pressure
- number of injection events

On the diesel engine, exhaust-gas and noise emissions are largely reduced by measures inside of the engine, i.e. combustion-process control.

Until the 1980s injected fuel quantity and start of injection were controlled on vehicle engines by mechanical means only. However, compliance with prevailing emission limits requires the high-precision adjustment of injection parameters, e.g. pre-injection, main injection, injected fuel quantity, injection pressure, and start of injection, adapted to the engine operating state. This is only achievable using an electronic control unit that calculates injection parameters as a factor of temperature, engine speed, load, altitude (elevation), etc. Electronic Diesel Control (EDC) has generally become widespread on diesel engines.

As exhaust-gas emission standards become more severe in future, further measures for minimizing pollutants will have to be introduced. Emissions, as well as combustion noise, can continue to be reduced by means of very high injection pressures, as achieved by the Unit Injector System, and by a rate-of-discharge curve that is adjustable independent of pressure buildup, as implemented by the common-rail system.

Fig. 1
Special engines with glass inserts and mirrors allow observation of the fuel injection and combustion processes.

The times are measured from the start of spontaneous combustion.

- a 200 μs
- b 400 μs
- c 522 μs
- d 1,200 μs

Mixture distribution

Excess-air factor λ

The excess-air factor λ (lambda) was introduced to indicate the degree by which the actual air/fuel mixture actually deviates from the stoichiometric¹⁾ mass ratio. It indicates the ratio of intake air mass to required air mass for stoichiometric combustion, thus:


$$\lambda = \frac{\text{Air mass}}{\text{Fuel mass} \cdot \text{Stoichiometric ratio}}$$

$\lambda = 1$: The intake air mass is equal to the air mass theoretically required to burn all of the fuel injected.

$\lambda < 1$: The intake air mass is less than the amount required and therefore the mixture is rich.

$\lambda > 1$: The intake air mass is greater than the amount required and therefore the mixture is lean.

¹⁾ The stoichiometric ratio indicates the air mass in kg required to completely burn 1 kg of fuel (m_A/m_K). For diesel fuel, this is approx. 14.5.

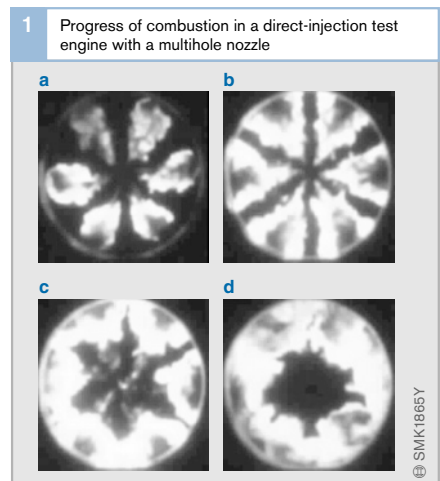

Lambda levels in diesel engines

Rich areas of mixture are responsible for sooty combustion. In order to prevent the formation of too many rich areas of mixture, diesel engines – in contrast to gasoline engines – have to be run with an overall excess of air.

The lambda levels for turbocharged diesel engines at full load are between $\lambda = 1.15$ and $\lambda = 2.0$. When idling and under no-load conditions, those figures rise to $\lambda > 10$.

These excess-air factors represent the ratio of total masses of fuel and air in the cylinder. However, the lambda factor, which is subject to strong spatial fluctuation, is primarily responsible for auto-ignition and the production of pollutants.

Diesel engines operate with heterogeneous mixture formation and auto-ignition. It is not possible to achieve completely homogeneous mixing of the injected fuel with the air charge prior to or during combustion. Within the heterogeneous mixture encountered in a diesel engine, the localized excess-air factors can cover the entire range from $\lambda = 0$ (pure fuel) in the eye of the jet close to the injector to $\lambda = \infty$ (pure air) at the outer extremities of the spray jet. Around the outer zone of a single liquid droplet (vapor envelope), there are localized lambda levels of 0.3 to 1.5 (Figs. 2 and 3). From this, it can be deduced that optimized atomization (large numbers of very

small droplets), high levels of excess air, and “metered” motion of the air charge produce large numbers of localized zones with lean, combustible lambda levels. This results in less soot occurring during combustion. EGR compatibility then rises, and NO_x emissions are reduced.

Optimized fuel atomization is achieved by high injection pressures that range up to max. 2,200 bar for UIS. Common-rail systems (CRS) operate at an injection pressure of max. 1,800 bar. This results in a high relative velocity between the jet of fuel and the air in the cylinder which has the effect of scattering the fuel jet.

With a view to reducing engine weight and cost, the aim is to obtain as much power as possible from a given engine capacity. To achieve this, the engine must run on the lowest possible excess air at high loads. On the other hand, a deficiency in excess air increases the amount of soot emissions. Therefore, soot has to be limited by precisely metering the injected fuel quantity to match the available air mass as a factor of engine speed.

Low atmospheric pressures (e.g. at high altitudes) also require the fuel volume to be adjusted to the smaller amount of available air.

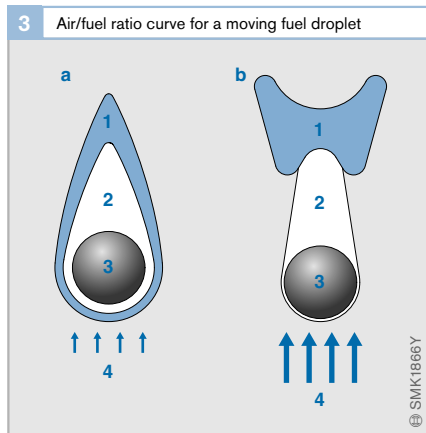
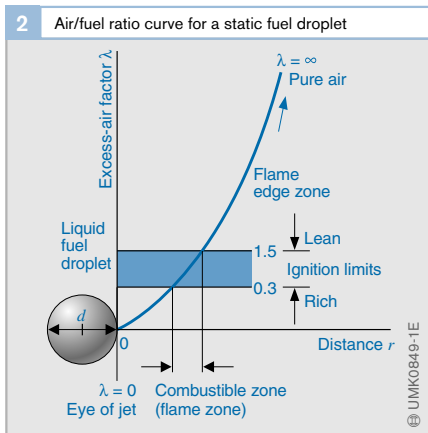


Fig. 2
d Droplet diameter (approx. 2...20 μm)

Fig. 3
a Low relative velocity
b High relative velocity
1 Flame zone
2 Vapor envelope
3 Fuel droplet
4 Air flow

Fuel-injection parameters

Start of injection and delivery

Start of injection

The point at which injection of fuel into the combustion chamber starts has a decisive effect on the point at which combustion of the air/fuel mixture starts, and therefore on emission levels, fuel consumption and combustion noise. For this reason, start of injection plays a major role in optimizing engine performance characteristics.

Start of injection specifies the position stated in degrees of crankshaft rotation relative to crankshaft Top Dead Center (TDC) at which the injection nozzle opens, and fuel is injected into the engine combustion chamber.

The position of the piston relative to top dead center at that moment influences the flow of air inside of the combustion chamber, as well as air density and temperature. Accordingly, the degree of mixing of air and fuel is also dependent on start of injection. Thus,

start of injection affects emissions such as soot, nitrogen oxides (NO_x), unburned hydrocarbons (HC), and carbon monoxide (CO).

The start-of-injection setpoints vary according to engine load, speed, and temperature. Optimized values are determined for each engine, taking into consideration the impacts on fuel consumption, pollutant emission, and noise. These values are then stored in a start-of-injection program map (Fig. 4). Load-dependent start-of-injection variability is controlled across the program map.

Compared with cam-controlled systems, common-rail systems offer more freedom in selecting the quantity and timing of injection events and injection pressure. As a consequence, fuel pressure is built up by a separate high-pressure pump, optimized to every operating point by the engine management system, and fuel injection is controlled by a solenoid valve or piezoelectric element.

Fig. 4



- 1 Cold start ($< 0^\circ\text{C}$)
- 2 Full load
- 3 Medium load

Fig. 5

Example of an application:

α_N Optimum start of injection at no-load: low HC emissions while NO_x emissions at no load are low anyway.

α_V Optimum start of injection at full load: low NO_x emissions while HC emissions are low at full load anyway.

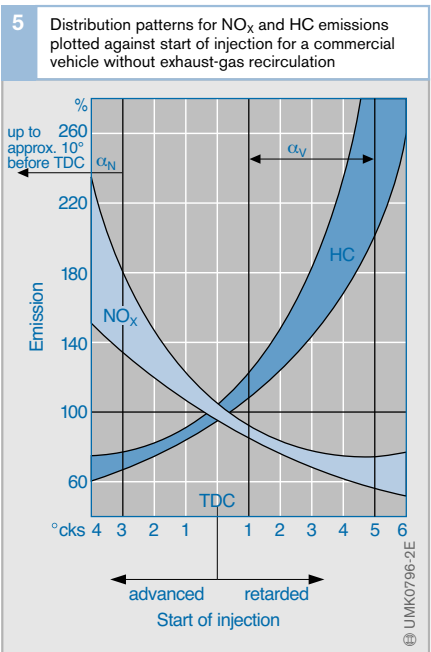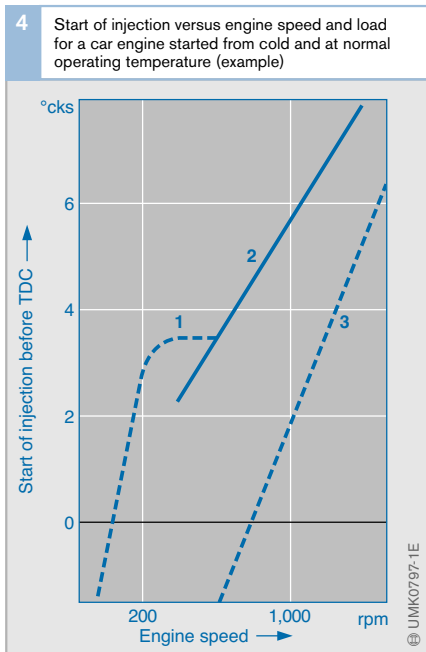

Standard values for start of injection

On a diesel-engine data map, the optimum points of combustion start for low fuel consumption are in the range of 0...8° crankshaft angle before TDC. As a result, and based on statutory exhaust-gas emission limits, the start of injection points are as follows:

Direct-injection car engines:

- No load: 2° crankshaft angle before TDC to 4° crankshaft angle after TDC
- Part load: 6° crankshaft angle before TDC to 4° crankshaft angle after TDC
- Full load: 6 to 15° crankshaft angle before TDC

Direct-injection commercial-vehicle engines (without exhaust-gas recirculation):

- No load: 4 to 12° crankshaft angle before TDC
- Full load: 3 to 6° crankshaft angle before TDC to 2° crankshaft angle after TDC

When the engine is cold, the start of injection for car and commercial-vehicle engines is 3 to 10° earlier. Combustion time at full load is 40 to 60° crankshaft angle.

Advanced start of injection

The highest compression temperature (final compression temperature) occurs shortly before piston Top Dead Center (TDC). If combustion starts a long way before TDC, combustion pressure rises steeply, and acts as a retarding force against the piston stroke. Heat lost in the process diminishes engine efficiency and, therefore, increases fuel consumption. The steep rise in compression pressure also makes combustion much noisier.

An advanced start of injection increases temperature in the combustion chamber. As a result, NO_x emission levels rise, but HC emissions are lower (Fig. 5).

Minimizing blue and white smoke levels requires advanced start of injection and/or pre-injection when the engine is cold.

Retarded start of injection

A retarded start of injection at low-load conditions can result in incomplete combustion and, therefore, in the emission of unburned hydrocarbons (HC) and carbon monoxide (CO) since the temperature in the combustion chamber is already dropping (Fig. 5).

The partially conflicting tradeoffs of specific fuel consumption and hydrocarbon emissions on the one hand, and soot (black smoke) and NO_x emissions on the other, demand compromises and very tight tolerances when modifying the start of injection to suit a particular engine.

Start of delivery

In addition to start of injection, start of delivery is another aspect that is often considered. It relates to the point at which the fuel-injection pump starts to deliver fuel to the injector.

On older fuel-injection systems, start of delivery plays an important role since the in-line or distributor injection pump must be allocated to the engine. The relative timing between pump and engine is fixed at start of delivery, since this is easier to define than the actual start of injection. This is made possible because there is a definite relationship between start of delivery and start of injection (injection lag¹⁾).

Injection lag results from the time it takes the pressure wave to travel from the high-pressure pump through to the injection nozzle. Therefore, it depends on the length of the line. At different engine speeds, there is a different injection lag measured as a crankshaft angle (degrees of crankshaft rotation). At higher engine speeds, the engine has a greater ignition lag²⁾ related to the crankshaft position (in degrees of crankshaft angle). Both of these effects must be compensated for – which is why a fuel-injection system must be able to adjust the start of delivery/start of injection in response to engine speed, load, and temperature.

1) Time or crankshaft angle swept from start of delivery through start of injection

2) Time or crankshaft angle swept from start of injection through start of ignition

Injected-fuel quantity

The required fuel mass, m_e , for an engine cylinder per power stroke is calculated using the following equation:

$$m_e = \frac{P \cdot b_e \cdot 33.33}{n \cdot z} [\text{mg/stroke}]$$

where:

P engine power in kilowatts

b_e engine specific fuel consumption in g/kWh

n engine speed in rpm

z number of engine cylinders

The corresponding fuel volume (injected fuel quantity), Q_H , in $\text{mm}^3/\text{stroke}$ or $\text{mm}^3/\text{injection cycle}$ is then:

$$Q_H = \frac{P \cdot b_e \cdot 1,000}{30 \cdot n \cdot z \cdot \rho} [\text{mm}^3/\text{stroke}]$$

Fuel density, ρ , in g/cm^3 is temperature-dependent.

Engine power output at an assumed constant level of efficiency ($\eta \sim 1/b_e$) is directly proportional to the injected fuel quantity.

The fuel mass injected by the fuel-injection system depends on the following variables:

- The fuel-metering cross-section of the injection nozzle
- The injection duration
- The variation over time of the difference between the injection pressure and the pressure in the combustion chamber
- The density of the fuel

Diesel fuel is compressible, i.e. it is compressed at high pressures. This increases the injected fuel quantity. The deviation between the setpoint quantity in the program map and the actual quantity impacts on performance and pollutant emissions. In high-precision fuel-injection systems controlled by electronic diesel control, the required injected fuel quantity can be metered with a high degree of accuracy.

Injection duration





One of the main parameters of the rate-of-discharge curve is injection duration. During this period, the injection nozzle is open, and fuel flows into the combustion chamber. This parameter is specified in degrees of crankshaft or camshaft angle, or in milliseconds. Different diesel combustion processes require different injection durations, as illustrated by the following examples (approximate figures at rated output):

- Passenger-car direct-injection (DI) engine approx. 32...38° crankshaft angle
- Indirect-injection car engines: 35...40° crankshaft angle
- Direct-injection commercial-vehicle engines: 25...36° crankshaft angle

A crankshaft angle of 30° during injection duration is equivalent to a camshaft angle of 15°. This results in an injection pump speed¹⁾ of 2,000 rpm, equivalent to an injection duration of 1.25 ms.

In order to minimize fuel consumption and emissions, the injection duration must be defined as a factor of the operating point and start of injection (Figs. 6 through 9).

¹⁾ Equivalent to half the engine speed on four-stroke engines

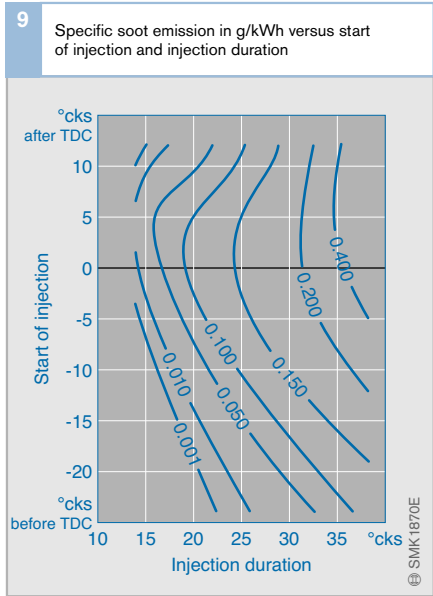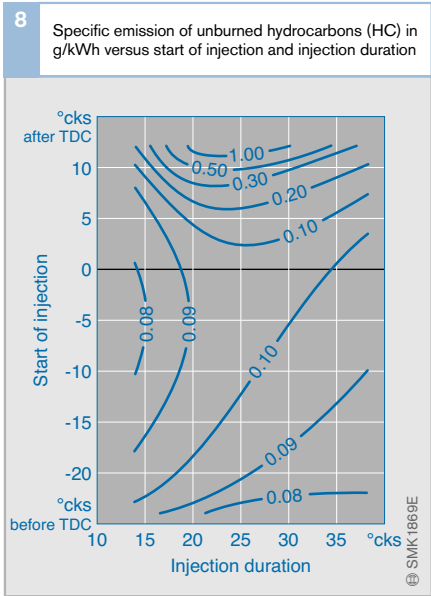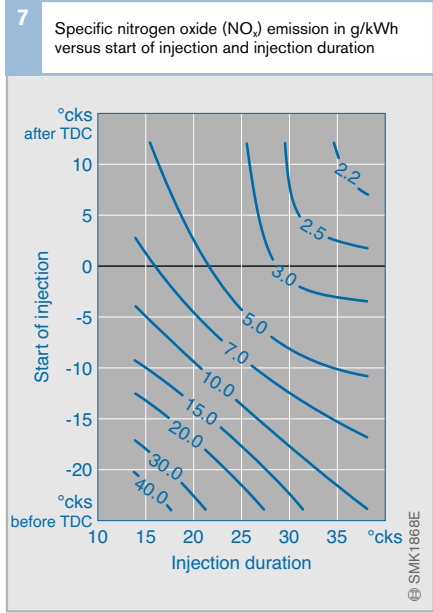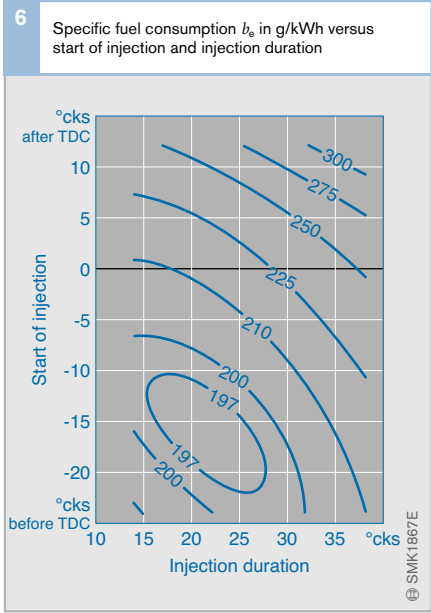

Figs. 6 to 9
 Engine:
 Six-cylinder commercial-vehicle diesel engine with common-rail fuel injection
 Operating conditions:
 $n = 1,400$ rpm,
 50% full load.

The injection duration is varied in this example by changing the injection pressure to such an extent that a constant injected fuel quantity results for each injection event.

Rate-of-discharge curve

The rate-of-discharge curve describes the fuel-mass flow plotted against time when injected into the combustion chamber during the injection duration.

Rate-of-discharge curve on cam-controlled fuel-injection systems

On cam-controlled fuel-injection systems, pressure is built up continuously throughout the injection process by the fuel-injection pump. Thus, the speed of the pump has a direct impact on fuel delivery rate and, consequently, on injection pressure.

Port-controlled distributor and in-line fuel-injection pumps do not permit any pre-injection. With two-spring nozzle-and-holder assemblies, however, the injection rate can be reduced at the start of injection to improve combustion noise.

Pre-injection is also possible with solenoid-valve controlled distributor injection pumps. Unit Injector Systems (UIS) for passenger cars are equipped with hydro-mechanical pre-injection, but its control is only limited in time.

Pressure generation and delivery of the injected fuel quantity are interlinked by the cam and the injection pump in cam-controlled systems. This has the following impacts on injection characteristics:

- Injection pressure rises as engine speed and injected fuel quantity increase, and until maximum pressure is reached (Fig. 10).
- Injection pressure rises at the start of injection, but drops back to nozzle-closing pressure before the end of injection (starting at end of delivery).

The consequences of this are as follows:

- Small injected fuel quantities are injected at lower pressure.
- The rate-of-discharge curve is approximately triangular in shape.

This triangular curve promotes combustion in part-load and at low engine speeds since it achieves a shallower rise, and thus quieter combustion; however, this curve is less beneficial at full-load as a square curve achieves better air efficiency.

On indirect-injection engines (engines with prechamber or whirl chambers), throttling-pintle nozzles are used to produce a single jet of fuel and define the rate-of-discharge curve. This type of injection nozzle controls the outlet cross-section as a function of needle lift. It produces a gradual increase in pressure and, consequently, “quiet combustion”.

Fig. 10

- 1 High engine speeds
- 2 Medium engine speeds
- 3 Low engine speeds


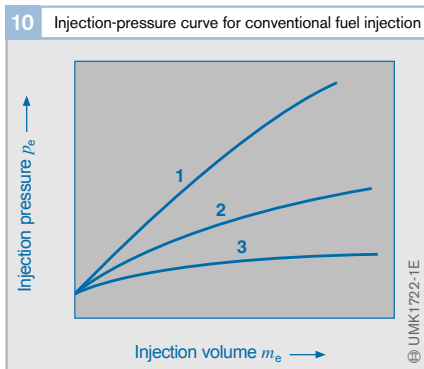


Fig. 11

- p_r Fuel-rail pressure
 p_o Nozzle-opening pressure

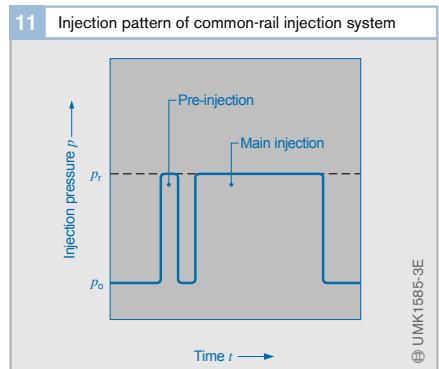

Rate-of-discharge curve in the common-rail system

A high-pressure pump generates the fuel-rail pressure independently of the injection cycle. Injection pressure during the injection process is virtually constant (Fig. 11). At a given system pressure, the injected fuel quantity is proportional to the length of time the injector is open, and it is independent of engine or pump speed (time-based injection).

This results in an almost square rate-of-discharge curve which intensifies with short injection durations and the almost constant, high spray velocities at full-load, thus permitting higher specific power outputs.


However, this is not beneficial to combustion noise since a large quantity of fuel is injected during ignition lag because of the high injection rate at the start of injection. This leads to a high pressure rise during premixed combustion. As it is possible to exclude up to two pre-injection events, the combustion chamber can be preconditioned. This shortens ignition lag and achieves the lowest possible noise emissions.

Since the electronic control unit triggers the injectors, start of injection, injection duration, and injection pressure are freely definable for the various engine operating points in an engine application. They are controlled by Electronic Diesel Control (EDC). EDC balances out injected-fuel-quantity spread in individual injectors by means of injector delivery compensation (IMA).

Modern piezoelectric common-rail fuel-injection systems permit several pre-injection and secondary injection events. In fact, up to five injection events are possible during a power cycle.

Fig. 12 Adjustments aimed at low NO_x levels require starts of injection close to TDC. The fuel delivery point is significantly in advance of the start: injection lag is dependent on the fuel-injection system

- 1 Pre-injection
 - 2 Main injection
 - 3 Steep pressure gradient (common-rail system)
 - 4 "Boot-shaped" pressure rise (UPS with 2-stage opening solenoid-valve needle (CCRS). Dual-spring nozzle holders can achieve a boot-shaped curve of the needle lift (not pressure curve!).
 - 5 Gradual pressure gradient (conventional fuel injection)
 - 6 Flat pressure drop (in-line and distributor injection pumps)
 - 7 Steep pressure drop (UIS, UPS, slightly less steep with common rail)
 - 8 Advanced secondary injection
 - 9 Retarded post-injection
- p_s Peak pressure
 p_o Nozzle-opening pressure
 b Duration of combustion for main injection phase
 v Duration of combustion for pre-injection phase
 IL Ignition lag of main injection

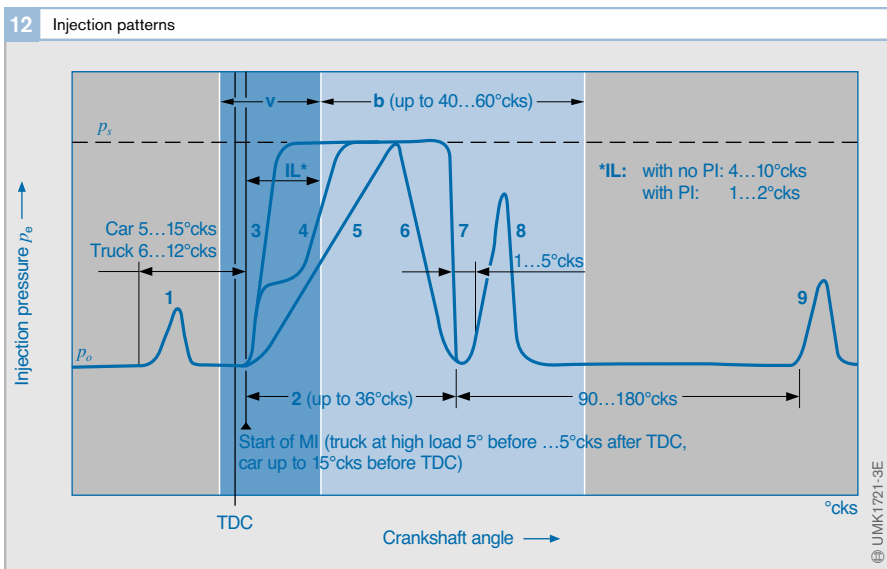

Injection functions

Depending on the application for which the engine is intended, the following injection functions are required (Fig. 12):

- *Pre-injection* (1) reduces combustion noise and NO_x emissions, in particular on DI engines.
- *Positive-pressure gradient* during the main injection event (3) reduces NO_x emissions on engines without exhaust-gas recirculation.
- *Two-stage pressure gradient* (4) during the main injection event reduces NO_x and soot emissions on engines without exhaust-gas recirculation.
- *Constant high pressure* during the main injection event (3, 7) reduces soot emissions when operating the engine with exhaust-gas recirculation.
- *Advanced secondary injection* (8) reduces soot emissions.
- *Retarded secondary injection* (9).

Pre-injection

The pressure and temperature levels in the cylinder at the point of main injection rise if a small fuel quantity (approx. 1 mg) is burned during the compression phase. This shortens the ignition lag of the main injection event and has a positive impact on combustion noise, since the proportion of fuel in the

premixed combustion process decreases. At the same time the quantity of diffuse fuel combusted increases. This increases soot and NO_x emissions, also due to the higher temperature prevailing in the cylinder.

On the other hand, the higher combustion-chamber temperatures are favorable mainly at cold start and in the low load range in order to stabilize combustion and reduce HC and CO emissions.

A good compromise between combustion noise and NO_x emissions is obtainable by adapting the time interval between pre-injection and main injection dependent on the operating point, and metering the pre-injected fuel quantity.

Retarded secondary injection

With retarded secondary injection, fuel is not combusted, but is evaporated by residual heat in the exhaust gas. The secondary-injection phase follows the main-injection phase during the expansion or exhaust stroke at a point up to 200° crankshaft angle after TDC. It injects a precisely metered quantity of fuel into the exhaust gas. The resulting mixture of fuel and exhaust gas is expelled through the exhaust ports into the exhaust-gas system during the exhaust stroke.

Retarded secondary injection is mainly used to supply hydrocarbons which also cause an increase in exhaust-gas temperature by oxidation in an oxidation-type catalytic converter. This measure is used to regenerate downstream exhaust-gas treatment systems, such as particulate filters or NO_x accumulator-type catalytic converters.

Since retarded secondary injection may cause thinning of the engine oil by the diesel fuel, it needs clarification with the engine manufacturer.

Advanced secondary injection

On the common-rail system, secondary injection can occur directly after main injection while combustion is still taking place. In this way, soot particles are returned, and soot emissions can be reduced by 20 to 70%.

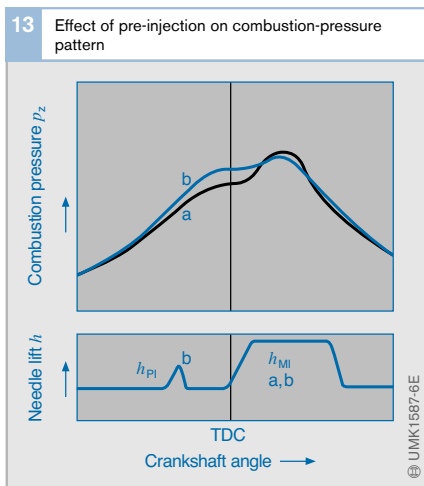


Fig. 13

- a Without pre-injection
b With pre-injection

h_{PI} Needle lift during pre-injection

h_{MI} Needle lift during main injection

Timing characteristics of fuel-injection systems

Figure 14 presents an example of a radial-piston distributor pump (VP44). The cam on the cam ring starts delivery, and fuel then exits from the nozzle. It shows that pressure and injection patterns vary greatly between the pump and the nozzle, and are determined by the characteristics of the components that control injection (cam, pump, high-pressure valve, fuel line, and nozzle). For this reason, the fuel-injection system must be precisely matched to the engine.

The characteristics are similar for all fuel-injection systems in which pressure is generated by a pump plunger (in-line injection pumps, unit injectors, and unit pumps).

Detrimental volume in conventional injection systems

The term “detrimental volume” refers to the volume of fuel on the high-pressure side of the fuel-injection system. This is made up of the high-pressure side of the fuel-injection pump, the high-pressure fuel lines, and the volume of the nozzle-and-holder assembly. Every time fuel is injected, the detrimental volume is pressurized and depressurized. As a result, compression losses occur, thus retarding injection lag. The fuel volume inside of the pipes is compressed by the dynamic processes generated by the pressure wave.

The greater the detrimental volume, the poorer the hydraulic efficiency of the fuel-injection system. A major consideration when developing a fuel-injection system is, therefore, to minimize detrimental volume as much as possible. The unit injector system has the smallest detrimental volume.

In order to guarantee uniform control of the engine, the detrimental volume must be equal for all cylinders.

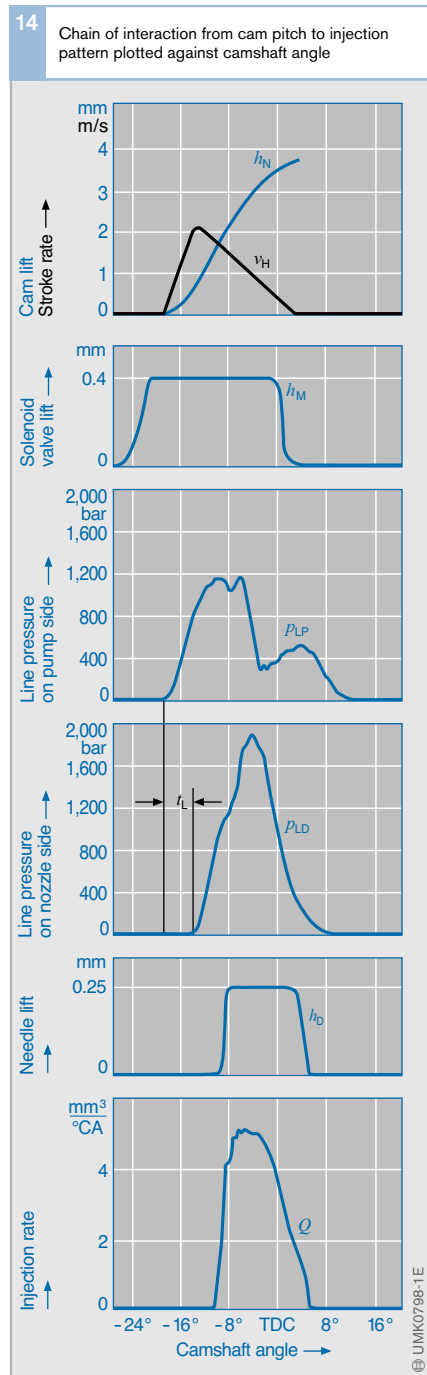


Fig. 14 Example of radial-piston distributor injection pump (VP44) at full load without pre-injection

t_L Time for fuel to pass through line

Injection pressure

The process of fuel injection uses pressure in the fuel system to induce the flow of fuel through the injector jets. A high fuel-system pressure results in a high rate of fuel outflow at the injection nozzle. Fuel atomization is caused by the collision of the turbulent jet of fuel with the air inside of the combustion chamber. Therefore, the higher the relative velocity between fuel and air, and the higher the density of the air, the more finely the fuel is atomized. The injection pressure at the nozzle may be higher than in the fuel-injection pump because of the length of the high-pressure fuel line, whose length is matched to the reflected pressure wave.

Direct-injection (DI) engines

On diesel engines with direct injection, the velocity of the air inside of the combustion chamber is relatively slow since it only moves as a result of its mass moment of inertia (i.e. the air “attempts” to maintain the velocity at which it enters the cylinder; this causes whirl). The piston stroke intensifies whirl in the cylinder since the restricted flow forces the air into the piston recess, and thus into a smaller diameter. In general, however, air motion is less and in indirect-injection engines.

The fuel must be injected at high pressure due to low air flow. Modern direct-injection systems now generate full-load peak pressures of 1,000...2,050 bar for car engines, and 1,000...2,200 bar for commercial vehicles. However, peak pressure is available only at higher engine speeds – except on the common-rail system.

A decisive factor to obtain an ideal torque curve with low-smoke operation (i.e. with low particulate emission) is a relatively high injection pressure adapted to the combustion process at low full-load engine speeds. Since the air density in the cylinder is relatively low at low engine speeds, injection pressure must be limited to avoid depositing fuel on the cylinder wall. Above about 2,000 rpm, the maximum charge-air pressure becomes available, and injection pressure can rise to maximum.

To obtain ideal engine efficiency, fuel must be injected within a specific, engine-speed-dependent angle window on either side of TDC. At high engine speeds (rated output), therefore, high injection pressures are required to shorten the injection duration.

Engines with indirect injection (IDI)

On diesel engines with divided combustion chambers, rising combustion pressure expels the charge out of the prechamber or whirl chamber into the main combustion chamber. This process runs at high air velocities in the whirl chamber, in the connecting passage between the whirl chamber, and the main combustion chamber.

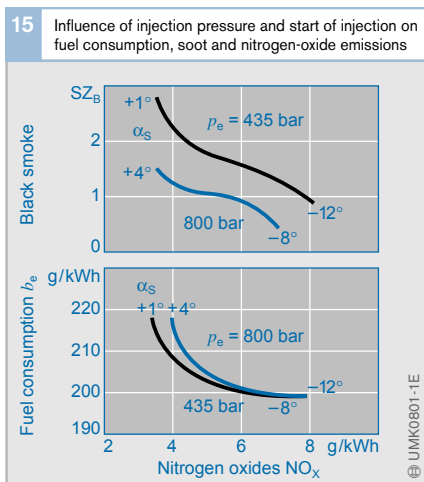


Fig. 15
Direct-injection engine,
engine speed 1,200 rpm,
mean pressure 16.2 bar

p_e Injection pressure
 α_S Start of injection
after TDC
 SZ_B Black smoke
number

Nozzle and nozzle holder designs

Secondary injection

Unintended secondary injection has a particularly undesirable effect on exhaust-gas quality. Secondary injection occurs when the injection nozzle shortly re-opens after closing and allows poorly conditioned fuel to be injected into the cylinder at a late stage in the combustion process. This fuel is not completely burned, or may not be burned at all, with the result that it is released into the exhaust gas as unburned hydrocarbons. This undesirable effect can be prevented by rapidly closing nozzle-and-holder assemblies, at sufficiently high closing pressure and low static pressure in the supply line.

Dead volume

Dead volume in the injection nozzle on the cylinder side of the needle-seat seats has a similar effect to secondary injection. The fuel accumulated in such a volume runs into the combustion chamber on completion of combustion, and partly escapes into the exhaust pipe. This fuel component similarly increases the level of unburned hydrocarbons in the exhaust gas (Fig. 1). Sac-less

(vco) nozzles, in which the injection orifices are drilled into the needle-seat seats, have the smallest dead volume.

Injection direction

Direct-injection (DI) engines

Diesel engines with direct injection generally have hole-type nozzles with between 4 and 10 injection orifices (most commonly 6 to 8 injection orifices) arranged as centrally as possible. The injection direction is very precisely matched to the combustion chamber. Divergences of the order of only 2 degrees from the optimum injection direction lead to a detectable increase in soot emission and fuel consumption.

Engines with indirect injection (IDI)

Indirect-injection engines use pintle nozzles with only a single injection jet. The nozzle injects the fuel into the precombustion or whirl chamber in such a way that the glow plug is just within the injection jet. The injection direction is matched precisely to the combustion chamber. Any deviations in injection direction result in poorer utilization of combustion air and, therefore, to an increase in soot and hydrocarbon emissions.

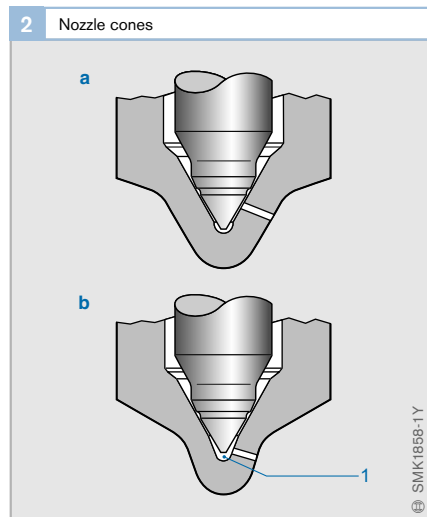
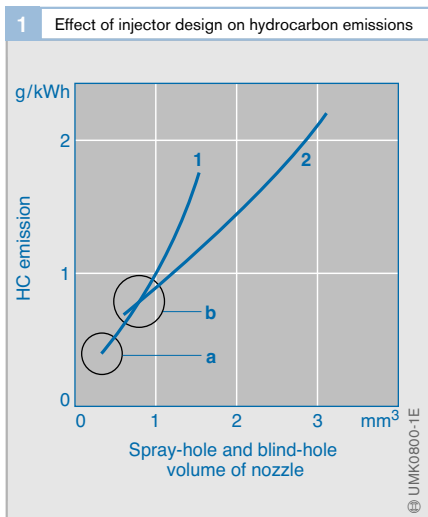


Fig. 1

- a Sac-less (vco) nozzle
- b Injector with micro-blind hole

- 1 Engine with 1 //cylinder
- 2 Engine with 2 //cylinder

Fig. 2

- a Sac-less (vco) nozzle
- b Injector with micro-blind hole

- 1 Dead volume

Overview of diesel fuel-injection systems

The fuel-injection system injects fuel into the combustion chamber at high pressure, at the right time, and in the right quantity. The main components of the fuel-injection system are the injection pump that generates high pressure, and the injection nozzles that are linked to the injection pump via high-pressure delivery lines – except with the Unit Injector System. The injection nozzles project into the combustion chamber of each cylinder.

In most systems, the nozzle opens when the fuel pressure reaches a specific opening pressure, and closes when it drops below this pressure. The nozzle is only controlled externally by an electronic controller in the common-rail system.

Designs

The main differences between fuel-injection systems are in the high-pressure generation system, and in the control of start of injection and injection duration. Whereas older systems still have mechanical control only, electronic control is now widespread.

In-line fuel-injection pumps

Standard in-line fuel-injection pumps

In-line fuel-injection pumps (Fig. 1) have a separate pump element consisting of a barrel (1) and plunger (4) for each engine cylinder. The pump plunger is moved in the delivery direction (in this case upwards) by the camshaft (7) integrated in the fuel-injection pump, is driven by the engine, and is returned to its starting position by the plunger spring (5). The individual pump units are generally arranged in-line (hence the name in-line fuel-injection pump).

The stroke of the plunger is invariable. The point at which the top edge of the plunger closes off the inlet port (2) on its upward stroke marks the beginning of the pressure generation phase. This point is referred to as the start of delivery. The plunger continues to move upwards. The fuel pressure therefore increases, the nozzle opens and fuel is injected into the combustion chamber.


When the helix (3) of the plunger clears the inlet port, fuel can escape and pressure is lost. The nozzle closes and fuel injection ceases.


The piston travel between opening and closing the inlet opening is the effective stroke.

Fig. 1

- a Standard in-line fuel-injection pump
- b In-line control-sleeve fuel-injection pump

- 1 Pump barrel
- 2 Inlet port
- 3 Helix
- 4 Pump plunger
- 5 Plunger spring
- 6 Adjustment range using control rack (injected-fuel quantity)
- 7 Camshaft
- 8 Control sleeve
- 9 Adjustment range using actuator shaft (start of delivery)
- 10 Fuel outflow to injection nozzle
- X Effective stroke

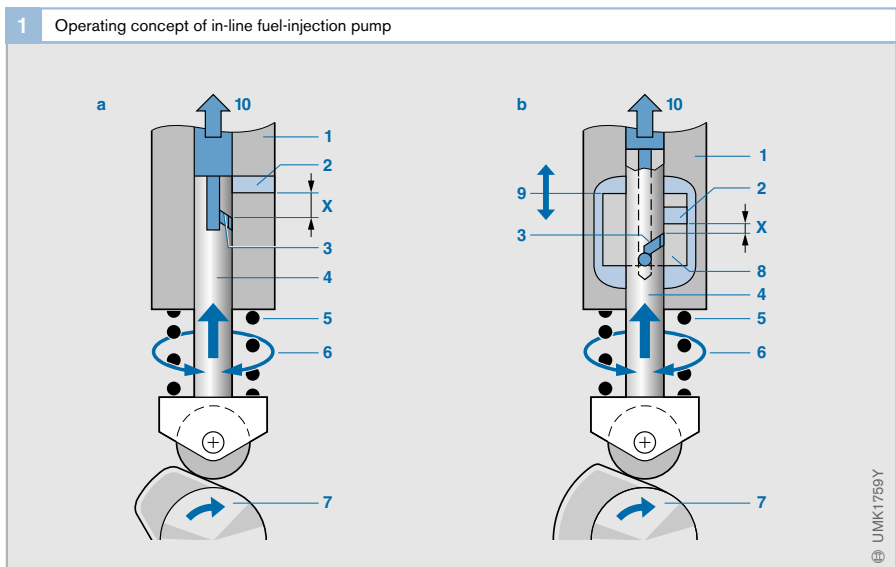

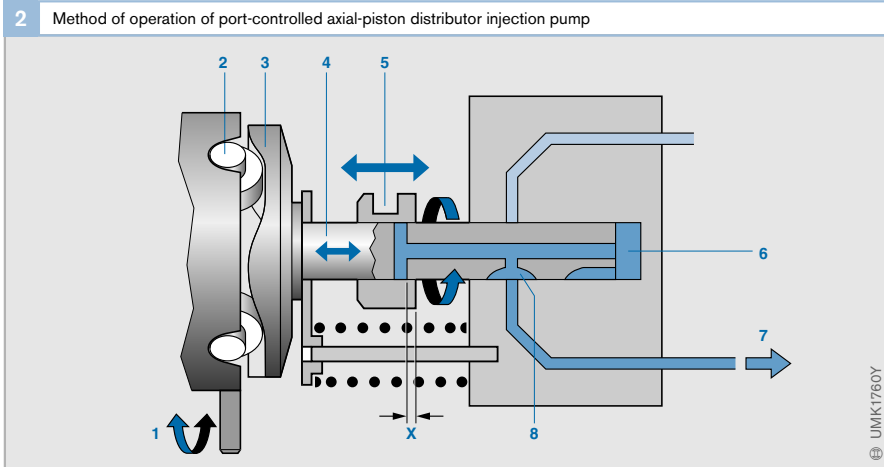

The greater the effective stroke, the greater the delivery quantity and injected fuel quantity.

The pump plunger is turned by a control rack to control the injected fuel quantity as a factor of engine speed and load. This changes the position of the helix relative to the inlet opening, and thus the effective stroke. The control rack is controlled by a mechanical governor, or an electrical actuator.

Injection pumps that work according to this principle are called “port-controlled”.

Control-sleeve in-line fuel-injection pumps

The control-sleeve in-line fuel-injection pump has a control sleeve on the pump plunger (Fig. 1, 8) to change the LPC – i.e. the plunger lift to port closing – via an actuator shaft that shifts the start of delivery.

Control-sleeve in-line fuel-injection pumps are always electronically controlled. The injected fuel quantity and start of injection are adjusted according to calculated setpoint values.

With the standard in-line fuel-injection pump, however, the start of injection is dependent on engine speed.

Distributor injection pumps


Distributor injection pumps have only one pump unit that serves all cylinders (Figs. 2 and 3). A vane pump forces the fuel into the high-pressure chamber (6). High pressure is generated by an axial piston (Fig. 2, 4), or several radial pistons (Fig. 3, 4). A rotating central distributor plunger opens and closes metering slots (8) and spill ports, thereby distributing fuel to the individual engine cylinders. The injection duration is controlled by a control collar (Fig. 2, 5) or a high-pressure solenoid valve (Fig. 3, 5).

Axial-piston distributor pumps

A rotating cam plate (Fig. 2, 3) is driven by the engine. The number of cam lobes on the bottom of the cam plate is equal to the number of engine cylinders. They travel over rollers (2) on the roller ring and thus cause the distributor piston to describe a rotating as well as a lifting motion. In the course of each rotation of the drive shaft, the piston completes a number of strokes equal to the number of engine cylinders to be supplied.

Fig. 3

- 1 Injection timing adjustment range on cam ring
- 2 Roller
- 3 Cam ring
- 4 Radial piston
- 5 High-pressure solenoid valve
- 6 High-pressure chamber
- 7 Fuel outflow to injection nozzle
- 8 Spill port

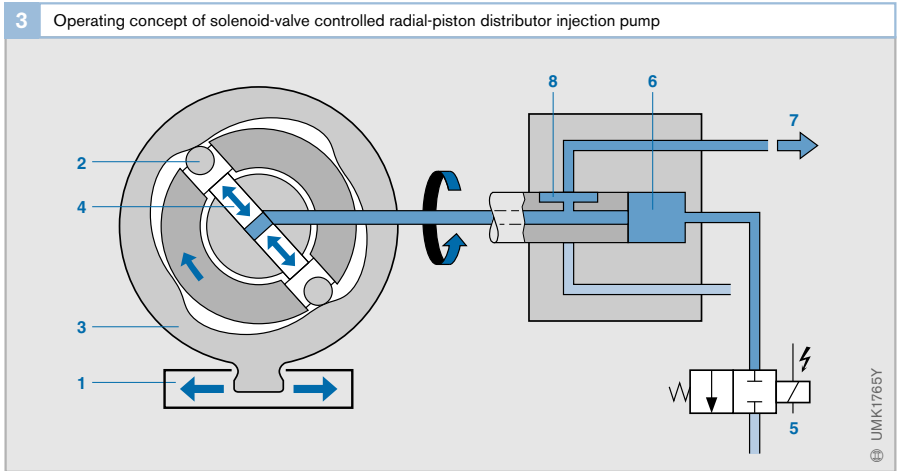

In a port-controlled axial-piston distributor pump with mechanical governor or electronically controlled actuator mechanism, a control collar (5) determines the effective stroke, thereby controlling the injected-fuel quantity.

The timing device can vary the pump's start of delivery by turning the roller ring.

Radial-piston distributor pumps

High pressure is generated by a radial-piston pump with cam ring (Fig. 3, 3), and from two to four radial pistons (4). Radial-piston pumps can generate higher injection pressures than axial-piston pumps. However, they have to be capable of withstanding greater mechanical stresses.

The cam ring can be rotated by the timing device (1), and this shifts the start of delivery. With radial-piston distributor pumps, the start of injection and injection duration are always controlled by solenoid valve.

Solenoid-valve-controlled distributor injection pumps

With this type of distributor injection pump, an electronically controlled high-pressure solenoid valve (5) meters the injected-fuel quantity and varies the start of injection. When the solenoid valve is closed, pressure can build up in the high-pressure chamber (6). When it is open, the fuel escapes so that no pressure buildup occurs and therefore fuel injection is not possible. One or two electronic control units (pump control unit and engine control unit) generate the control and regulation signals.

Individual injection pumps type PF

Individual injection pumps of type PF (pump with external drive) are directly driven by the engine camshaft. They are mainly fitted to marine engines, diesel locomotives, construction machinery, and low-power engines. Besides the cam for engine valve timing, the engine camshaft has drive cams for the individual injection pumps.

Otherwise, the single-plunger fuel-injection pump of type PF basically operates in the same way as in-line fuel-injection pumps.

Unit Injector System (UIS)

In a Unit Injector System, UIS, the fuel-injection pump and the injection nozzle form a single unit (Fig. 4). There is a unit injector fitted in the cylinder head for each cylinder. It is actuated either directly by a tappet, or indirectly by a rocker arm driven by the engine camshaft.

The integrated construction of the unit injector dispenses with the high-pressure line between the fuel-injection pump and the injection nozzle otherwise required on other fuel-injection systems. The unit-injector system can therefore be designed to operate at higher injection pressures. The maximum injection pressure is presently about 2,200 bar (on commercial vehicles).

The unit injector system is controlled electronically. An electronic control unit calculates start of injection and injection duration, which are controlled by a high-pressure solenoid valve.

Unit Pump System (UPS)

The modular Unit Pump System (UPS) operates on the same principle as the unit injector system (Fig. 5). In contrast to the unit injector system, however, the nozzle-and-holder assembly (2) and the fuel-injection pump are linked by a short high-pressure line (3) specifically designed for the system components. This separation of high-pressure generation and nozzle-and-holder assembly allows for a simpler attachment to the engine. There is one unit pump assembly (fuel-injection pump, fuel line, and nozzle-and-holder assembly) for each engine cylinder. The unit pump assemblies are driven by the engine camshaft (6).

As with the unit injector system, the unit pump system uses an electronically controlled fast-switching high-pressure solenoid valve (4) to regulate injection duration and start of injection.

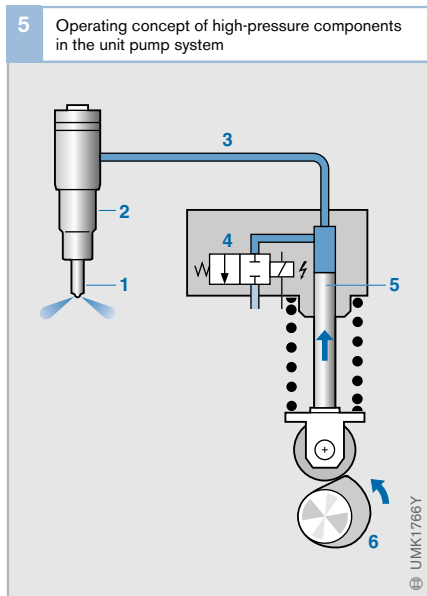
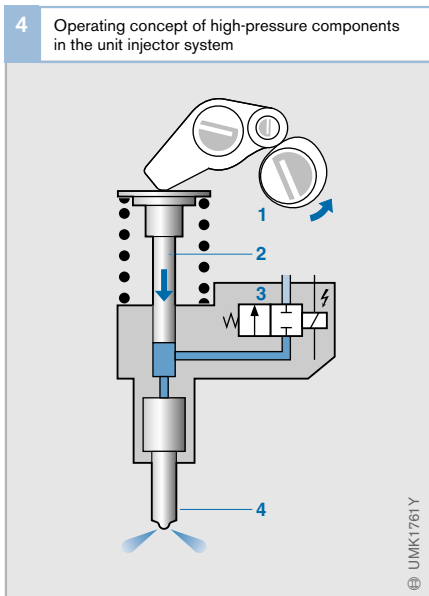


Fig. 4
 1 Drive cam
 2 Pump plunger
 3 High-pressure solenoid valve
 4 Injection nozzle

Fig. 5
 1 Injection nozzle
 2 Nozzle-and-holder assembly
 3 High-pressure fuel line
 4 High-pressure solenoid valve
 5 Pump plunger
 6 Drive cam

Common-Rail system (CR)

In the common-rail pressure-accumulator fuel-injection system, the functions of pressure generation and fuel injection are separate. This takes place by means of an accumulator volume composed of the common rail and the injectors (Fig. 6). Injection pressure is largely independent of engine speed or injected-fuel quantity, and is generated by a high-pressure pump. This system thus offers a high degree of flexibility in designing the fuel-injection process.

Presently, pressures range up to 1,600 bar (passenger cars) and 1,800 bar (commercial vehicles).


Functional description

A presupply pump feeds fuel via a filter and water separator to a high-pressure pump. The high-pressure pump ensures that the required fuel pressure in the rail is constantly high.

The Electronic Diesel Control (EDC) calculates the injection point and injected fuel quantity dependent on engine operating state, ambient conditions, and rail pressure.

Fuel is metered by controlling injection time and injection pressure. Pressure is controlled by the pressure-control valve which returns excess fuel to the fuel tank. In a more recent CR generation, metering is performed by a metering unit in the low-pressure stage to control the pump delivery rate.

The injector is connected to the fuel rail by short supply lines. Solenoid-valve injectors were used on previous CR generations. The latest system uses piezo-inline injectors. Their moves masses and inner friction has been reduced. This allows very short intervals between injection events and has a positive impact on fuel consumption.

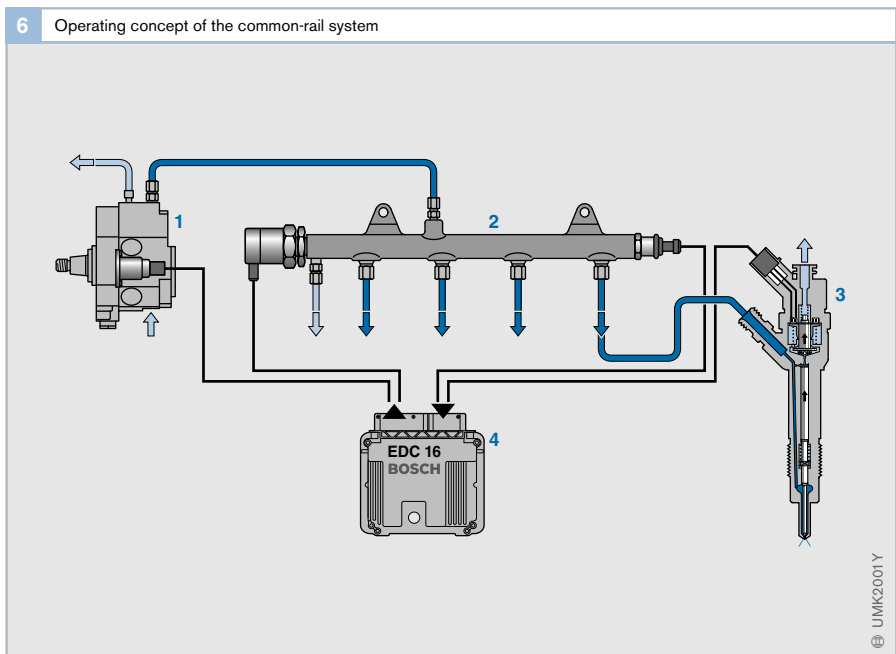

History of diesel fuel injection

Bosch started development on a fuel-injection system for diesel engines in 1922. The technological omens were good: Bosch had experience with internal-combustion engines, its production systems were highly advanced and, above all, expertise developed in the production of lubrication pumps could be utilized. Nevertheless, this step was still a substantial risk for Bosch as there were many difficulties to be overcome.

The first volume-production fuel-injection pumps appeared in 1927. At the time, the level of precision of the product was unmatched. They were small, light, and enabled diesel engines to run at higher speeds. These in-line fuel-injection pumps were used on commercial vehicles from 1932 and in cars from 1936. Since that time, the technological advancement of the diesel engine and its fuel-injection systems has continued unabated.

In 1962, the distributor injection pump with automatic timing device developed by Bosch gave the diesel engine an additional boost. More than two decades later, many years of intensive development work at Bosch culminated in the arrival of the electronically controlled diesel fuel-injection system.


The pursuit of ever more precise metering of minute volumes of fuel delivered at exactly the right moment coupled with the aim of increasing the injection pressure is a constant challenge for developers. This has led to many more innovations in the design of fuel-injection systems (see figure).

In terms of fuel consumption and energy efficiency, the compression-ignition engine remains the benchmark.

New fuel-injection systems have helped to further exploit its potential. In addition, engine performance has been continually improved while noise and exhaust-gas emissions have been consistently lowered.

Milestones in diesel fuel injection


1927
First series-production in-line pump




1962
First axial-piston distributor pump, the EP-VM



1986
The first electronically controlled axial-piston distributor pump




1994
First Unit Injector System (UIS) for commercial vehicles




1995
First Unit Pump System (UPS)



1996
First radial-piston distributor pump



1997
First Common Rail accumulator injection system (CRS)



1998
First Unit Injector System (UIS) for passenger cars



Fuel supply system to the low-pressure stage

The function of the fuel supply system is to store and filter the required fuel, and to provide the fuel-injection system with fuel at a specific supply pressure in all operating conditions. For some applications, the fuel return flow is also cooled.

Essentially, the fuel-supply system differs greatly, depending on the fuel-injection system used, as the following figures for radial-piston pump, common-rail system and passenger-car UIS show.

Overview

The fuel-supply system comprises the following main components (Figs. 1, 2, 3):

- Fuel tank
- Pre-filter
- Control unit cooler (optional)
- Presupply pump (optional, also in-tank pump on cars)
- Fuel filter
- Fuel pump (low-pressure)
- Pressure-control valve (overflow valve)
- Fuel cooler (optional)
- Low-pressure fuel lines

Fig. 1

- 1 Fuel tank
- 2 Pre-filter
- 3 Presupply pump
- 4 Fuel filter
- 5 Low-pressure fuel line
- 6 Radial-piston pump with integrated supply pump
- 7 High-pressure delivery line
- 8 Nozzle-and-holder assembly
- 9 Glow-plug
- 10 ECU
- 11 Fuel return line


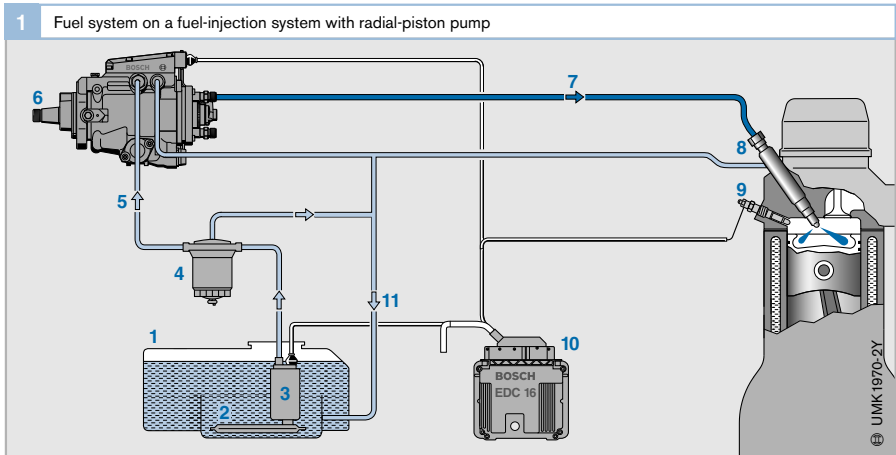


Fig. 2

- 1 Fuel tank
- 2 Pre-filter
- 3 Presupply pump
- 4 Fuel filter
- 5 Low-pressure fuel lines
- 6 High-pressure pump
- 7 High-pressure fuel lines
- 8 Fuel rail
- 9 Nozzle
- 10 Fuel return line
- 11 Fuel-temperature sensor
- 12 ECU
- 13 Sheathed-element glow plug

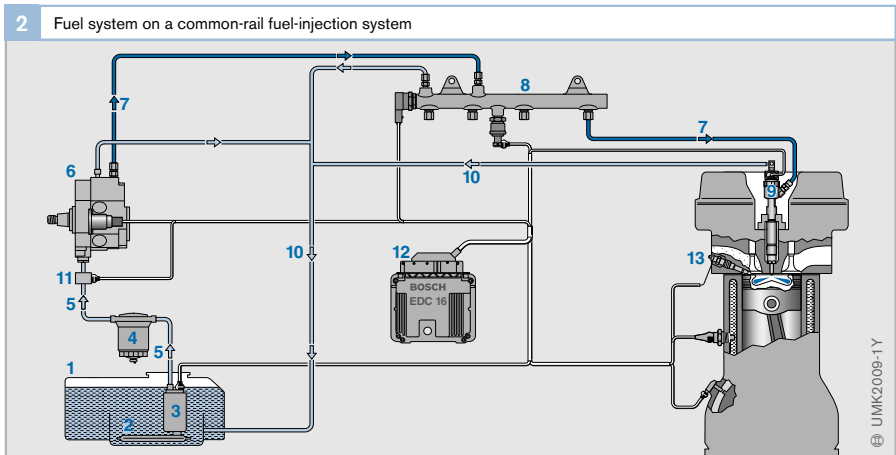

Fuel tank

The fuel tank stores the fuel. It must be corrosion-resistant and leakproof at double the operating pressure, but at least at 0.3 bar. Any gauge pressure must be relieved automatically by suitable vents or safety valves. When the vehicle is negotiating corners, inclines or bumps, fuel must not escape past the filler cap or leak out of the pressure-relief vents or valves.

The fuel tank must be separated from the engine to prevent the fuel from igniting in case of an accident.

Fuel lines

Besides metallic tubes, flexible, flame-retardant tubes reinforced with braided-steel armoring can be used in the low-pressure stage. They must be routed so as to avoid contact with moving components that might damage them and in such a way that any leak fuel or evaporation cannot collect or ignite. The function of the fuel lines must not be impaired by twisting of the chassis, movement of the engine or any other similar effects.

All fuel-conveying parts must be protected against heat that may affect their proper operation. On buses, fuel lines may not be routed through the passenger cabin or the driver’s cab. Fuel may not be gravity-fed.

Diesel fuel filter

Fuel-injection equipment for diesel engines are manufactured with great precision and are sensitive to the slightest contamination in the fuel. The fuel filter has the following functions:

- Reduce particulate impurities to avoid particulate erosion
- Separate emulgated water from free water to avoid corrosion damage

The fuel filter must be adapted to the fuel-injection system.

Fuel-supply pump

The fuel-supply pump draws fuel from the fuel tank and conveys it continuously to the high-pressure pump. The fuel pump is integrated in the high-pressure pump on axial-piston and radial-piston distributor pumps, and in a few instances in common-rail systems.

Alternatively, an additional fuel pump can be provided as a presupply pump.

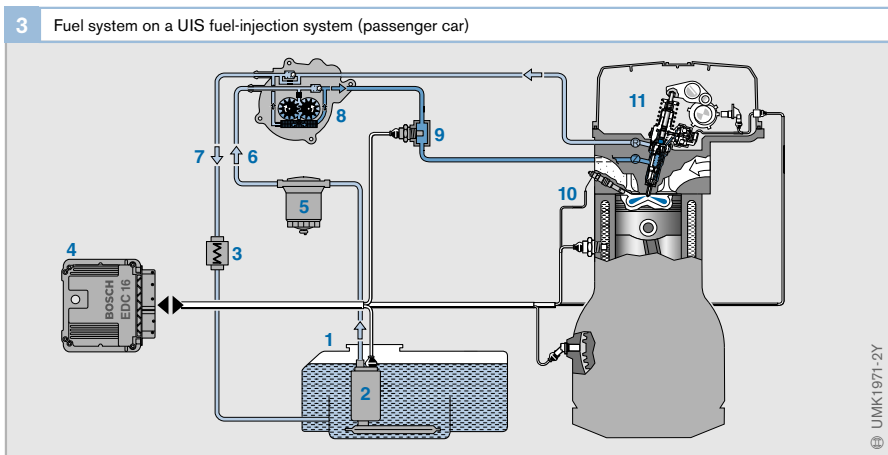


Fig. 3
 1 Fuel tank
 2 Presupply pump
 3 Fuel cooler
 4 ECU
 5 Fuel filter
 6 Fuel supply line
 7 Fuel return line
 8 Tandem pump
 9 Fuel-temperature sensor
 10 Glow-plug
 11 Nozzle

© UMK1971-2Y

Fuel filter

Design and requirements

Modern direct-injection (DI) systems for gasoline and diesel engines are highly sensitive to the smallest impurities in the fuel. Damage mainly occurs as a result of particulate erosion and water corrosion. The service-life design of the fuel-injection system depends on a specific minimum purity of the fuel.

Particulate filtration

Reducing particulate impurities is one of the functions of the fuel filter. In this way, it protects the wear-prone components of the fuel-injection system. In other words, the fuel-injection system prescribes the necessary filter fineness. Besides wear protection, fuel filters must also have a sufficient particulate storage capacity, otherwise they could become blocked before the end of the change interval. If they do become blocked, they would reduce fuel delivery quantity as well as engine performance. It is therefore essential to fit a fuel filter tailored to the requirements of the fuel-injection system. Fitting the incorrect filters would have unpleasant results at best; at worst, it would have very expensive consequences (from replacing components through to renewing the complete fuel-injection system).

Compared to gasoline fuel, diesel fuel contains many more impurities. For this reason, and also due to the much higher injection pressures, diesel fuel-injection systems require greater wear protection, larger filtration capacities, and longer service lives. As a result, diesel filters are designed as exchange filters.

Requirements regarding filter fineness have increased dramatically in the last few years with the introduction of second-generation common-rail systems and further advances in Unit Injector Systems for passenger cars and commercial vehicles. Depending on the application (operating conditions, fuel contamination, engine life), new systems require filtration efficiencies ranging from 65% to 98.6% (particle size 3 to 5 μm , ISO/TR 13353:1994).

Longer servicing intervals in more recent vehicles require greater particulate storage capacities as well as intensive fine particulate filtration.

Water separation


The second main function of diesel fuel filters is to separate emulgated and undissolved water from the fuel in order to avoid corrosion damage. Efficient water separation greater than 93% at maximum flow (ISO 4020:2001) is a specially important factor for distributor injection pumps and common-rail systems.

Designs

The filter must be carefully selected depending on the fuel-injection system and the operating conditions.

Main filter

The diesel fuel filter is normally fitted in the low-pressure circuit between the electric fuel pump and the high-pressure pump in the engine compartment.

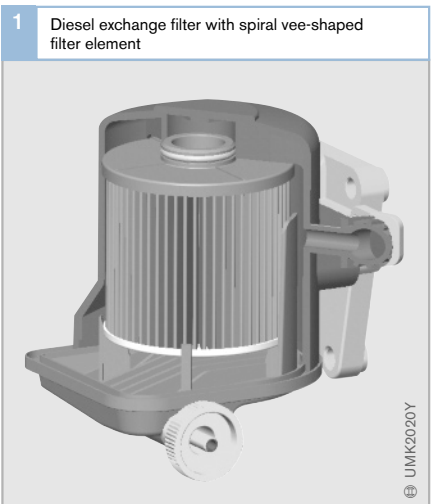

The use of screw-on exchange filters, in-line filters, and metal-free filter elements is widespread. The replacement parts are inserted in filter housings made of aluminum, solid plastic, or sheet steel (to meet higher crash requirements). Only the filter element is replaced in these filters. The filter elements are mainly spiral vee-shaped (Fig. 1).

Two filters can also be fitted in parallel, resulting in greater particulate storage capacity. Connecting the filter in series produces a higher filtration efficiency. Stepped filters, or a fine filter with a matched pre-filter, are used in series connections.

Pre-filter for presupply pump

If requirements are particularly high, an additional pre-filter is fitted on the suction or pressure side with a filter fineness matched to the main filter (fine filter). Pre-filters are mainly used for commercial vehicles in countries that have poor diesel fuel quality. These filters are mainly designed as strainers with a mesh width of 300 μm .

Water separator


Water is separated by the filter medium using the *repellent effect* (droplets forming due to the different surface tensions of water and fuel). Separated water collects in the chamber at the bottom of the filter housings (Fig. 2). Conductivity sensors are used in some cases to monitor the water level. The water is drained manually by opening a water drain plug or pressing a pushbutton switch. Fully automatic water-disposal systems are currently under development.

Filter media

Increased demands with respect to fuel filters in engines of the new generation require the use of special filter media composed of several synthetic layers and cellulose. The filter media employ a preliminary fine filtering effect and guarantee maximum particulate retention capacity by separating particles within each filtering layer.

The new filter generation is also deployable with biodiesel (Fatty Acid Methyl Ester (FAME)). However, the higher concentration of organic particles in FAME means taking account of a shorter filter service life in the servicing concept.

2 Diesel fuel filter with water drain and water sensor

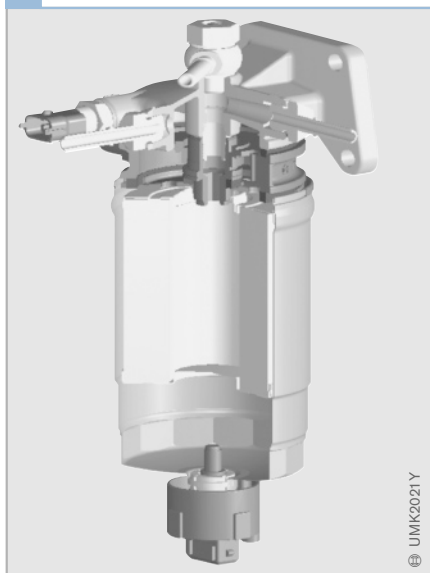

Additional functions

Modern filter modules integrate additional modular functions such as:

- Fuel preheating: Electrically, by cooling water, or by return fuel flow. Preheating prevents paraffin crystals from blocking the filter pores in winter.
- Displaying the servicing interval by measuring differential pressure.
- Filling and venting facilities: After a filter change, the fuel system is filled and vented by hand pump. The pump is usually integrated in the filter cover.

Fuel-supply pump

The fuel-supply pump in the low-pressure stage (the so-called presupply pump) is responsible for maintaining an adequate supply of fuel to the high-pressure components.

This applies:

- irrespective of operating state,
- with a minimum of noise,
- at the necessary pressure, and
- throughout the vehicle's complete service life.

The fuel-supply pump draws fuel out of the fuel tank and conveys it continuously in the required quantity (injected fuel quantity and scavenging flow) to the high-pressure fuel-injection installation (60...500 l/h, 300...700 kPa or 3...7 bar). Many pumps bleed themselves

automatically so that starting is possible even when the fuel tank has run dry.

There are three designs:

- Electric fuel pump (as used in passenger cars)
- Mechanically driven gear-type supply pumps, and
- Tandem fuel pumps (passenger cars, UIS)

In axial-piston and radial-piston distributor pumps, a vane-type supply pump is used as presupply pump and is integrated directly in the fuel-injection pump.

Electric fuel pump

The Electric Fuel Pump (EFP, Figs. 1 and 2) is only fitted to passenger cars and light-duty trucks. As part of the system-monitoring strategy, it is responsible, besides fuel delivery, for cutting off the fuel supply, if this is necessary in an emergency.

Electric fuel pumps are available as in-line or in-tank versions. In-line pumps are fitted to the vehicle's body platform outside of the fuel tank in the fuel line between tank and fuel filter. On the other hand, in-tank pumps are located inside of the fuel tank in a special retainer that normally includes a suction-side fuel strainer, a fuel-level sensor, a swirl plate acting as fuel reservoir, and the electrical and hydraulic connections to the exterior.

Starting with the engine cranking process, the electric fuel pump runs continuously, irrespective of engine speed. This means that it permanently delivers fuel from the fuel tank through a fuel filter to the fuel-injection system. Excess fuel flows back to the tank through an overflow valve.

A safety circuit is provided to prevent the delivery of fuel if ignition is on and the engine is stopped.

An electric fuel pump comprises three function elements inside of a common housing:

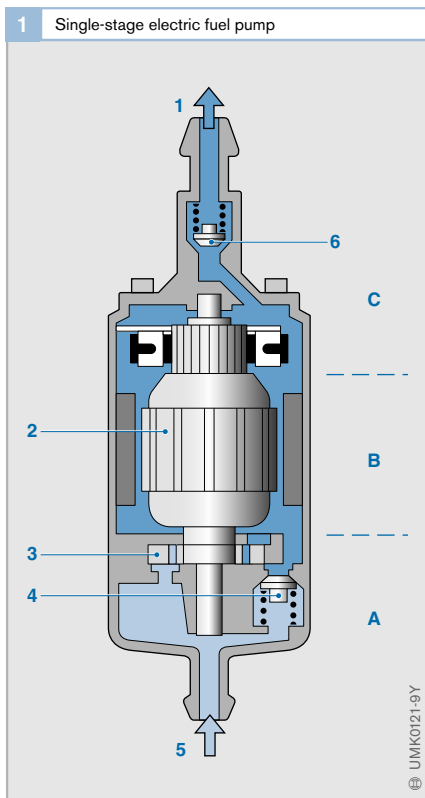


Fig. 1
A Pumping element
B Electric motor
C End cover

- 1 Pressure side
- 2 Motor armature
- 3 Pumping element
- 4 Pressure limiter
- 5 Suction side
- 6 Non-return valve

Pump element (Fig. 1, A)

There are a variety of different pump-element designs available, depending on the electric fuel pump’s specific operating concept. Diesel applications mainly use Roller-Cell Pumps (RCP).



The roller-cell pump (Fig. 2) is a positive-displacement pump consisting of an eccentrically located base plate (4) in which a slotted rotor (2) is free to rotate. There is a movable roller in each slot (3) which, when the rotor rotates, is forced outwards against the outside roller path and against the driving flanks of the slots by centrifugal force and the pressure of the fuel. The result is that the rollers now act as rotating seals, whereby a chamber is formed between the rollers of adjacent slots and the roller path. The pumping effect is due to the fact that, once the kidney-shaped inlet opening (1) has closed, the chamber volume reduces continuously.

Electric motor (Fig. 1, B)

The electric motor comprises a permanent-magnet system and an armature (2). Design is determined by the required delivery quantity at a given system pressure. The electric motor is permanently flushed by fuel so that it remains cool. This design permits high motor performance without the necessity for complicated sealing elements between pumping element and electric motor.

End cover (Fig. 1, C)

The end cover contains the electrical connections as well as the pressure-side hydraulic connection. A non-return valve (6) is incorporated to prevent the fuel lines from emptying once the fuel pump has been switched off. Interference suppressors can also be fitted in the end cover.

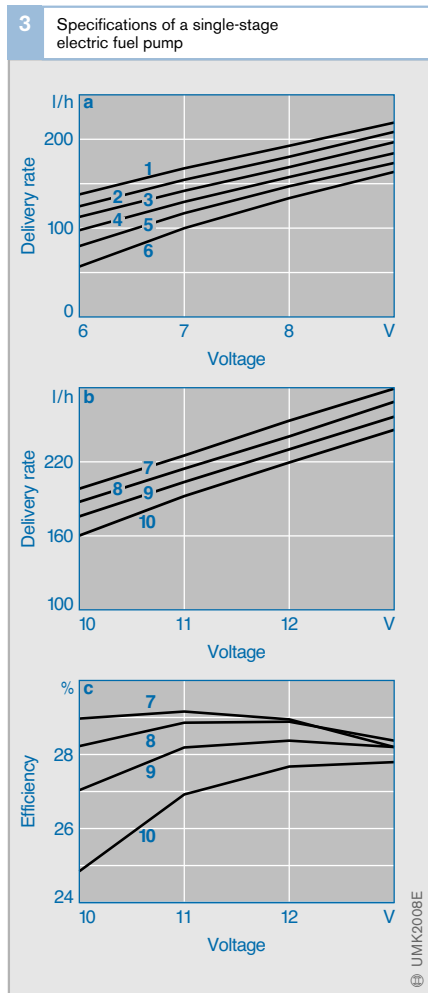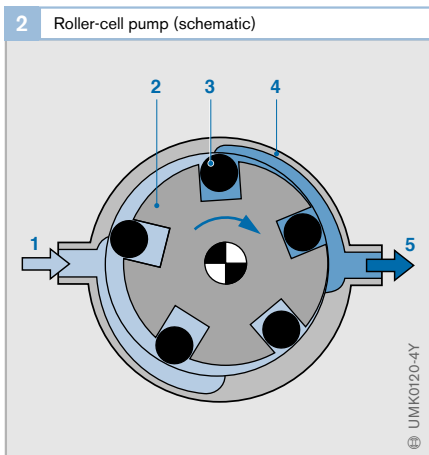

Gear-type fuel pump

The gear-type supply pump (Figs. 4 and 6) is used to supply the fuel-injection modules of single-cylinder pump systems (commercial vehicles) and common-rail systems (passenger cars, commercial vehicles, and off-road vehicles). It is directly attached to the engine or is integrated in the common-rail high-pressure pump. Common forms of drive are via coupling, gearwheel, or toothed belt.

The main components are two rotating, engaged gearwheels that convey the fuel in the tooth gaps from the suction side (Fig. 6, 1) to the pressure side (5). The line of contact between the rotating gearwheels provides the seal between the suction and pressure sides of the pump, and prevents fuel from flowing back again.

The delivery quantity is approximately proportional to engine speed. For this reason, fuel-delivery control takes place either by throttle control on the suction side, or by means of an overflow valve on the pressure side (Fig. 5).

The gear-type fuel pump is maintenance-free. In order to bleed the fuel system before the first start, or when the tank has run dry, a

hand pump can be installed directly on the gear pump, or in the low-pressure lines.

Fig. 5
Pressure at pump outlet:
8 bar


Parameter: suction-side
pressure at pump inlet

- 1 500 mbar
- 2 600 mbar
- 3 700 mbar


Fig. 6

- 1 Suction side
(fuel inlet)
- 2 Suction throttle
- 3 Primary gearwheel
(drive wheel)
- 4 Secondary gearwheel
- 5 Pressure side

5 Delivery characteristics of the gear-type supply pump

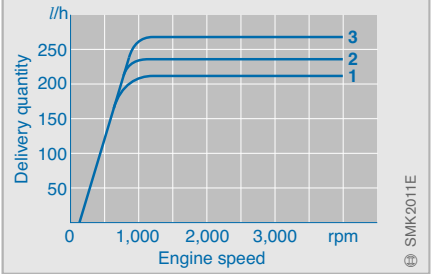

6 Fuel flow in the gear pump

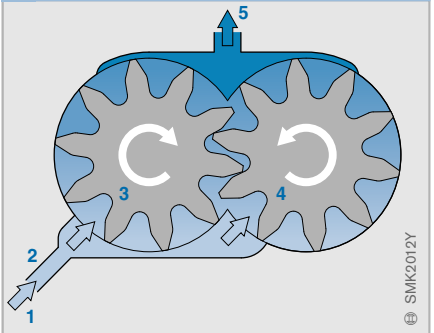

4 Exploded diagram of a gear pump

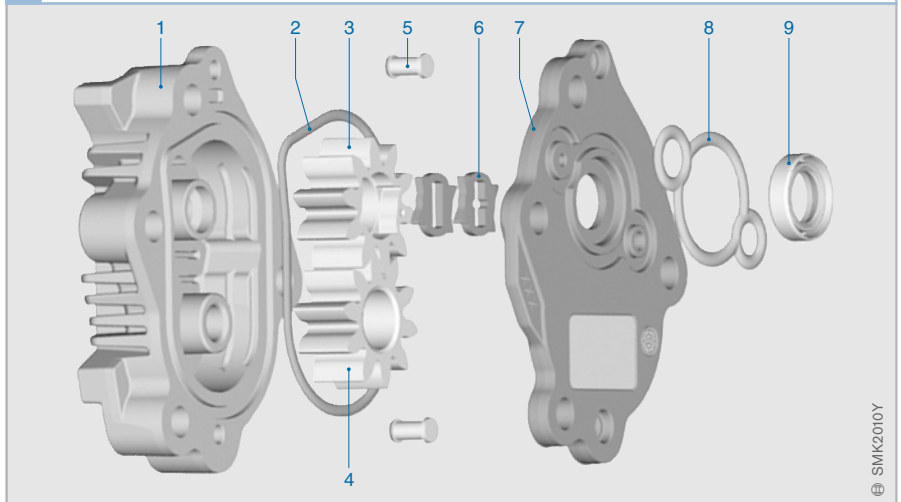


Fig. 4

- 1 Pump housing
- 2 O-ring seal
- 3 Primary gearwheel
- 4 Secondary gearwheel
- 5 Rivet
- 6 Coupling
- 7 Cover plate
- 8 Molded seal
- 9 Shaft seal

Vane-type pump with separating vanes

In the version of this pump used with the passenger-car UIS (Fig. 7), two separating vanes (4) are pressed by springs (3) against a rotor (1). When the rotor rotates, volume increases at the inlet (suction) end (2) and fuel is drawn into two chambers. With continued rotation, chamber volumes decrease, and fuel is forced out of the chambers at the outlet (pressure) end (5). This pump delivers fuel even at very low rotational speeds.

Tandem pump

The tandem pump used on the passenger-car UIS is a unit comprising the fuel pump (Fig. 8) and the vacuum pump for the brake booster. It is attached to the engine's cylinder head and driven by the engine's camshaft. The fuel pump itself is either a vane-type pump with separating vanes or a gear pump (3), and even at low speeds (cranking speeds) delivers enough fuel to ensure that the engine starts reliably. The pump contains a variety of valves and throttling orifices:

Suction throttling orifice (6): Essentially, the quantity of fuel delivered by the pump is proportional to the pump's speed. The pump's maximum delivery quantity is limited by the suction throttling orifice so that not too much fuel is delivered.

Overpressure valve (7): This is used to limit the maximum pressure in the high-pressure stage.

Throttling bore (4): Vapor bubbles in the fuel-pump outlet are eliminated in the fuel-return throttling bore (1).

Bypass (12): If there is air in the fuel system (for instance, if the vehicle has been driven until the fuel tank is empty), the low-pressure pressure-control valve remains closed. The air is forced out of the fuel system through the bypass by the pressure of the pumped fuel.

Thanks to the ingenious routing of the pump passages, the pump's gearwheels never run dry even when the fuel tank is empty. When restarting after filling the tank, therefore, this means that the pump draws in fuel immediately.

The fuel pump is provided with a connection (8) for measuring the fuel pressure in the pump outlet.

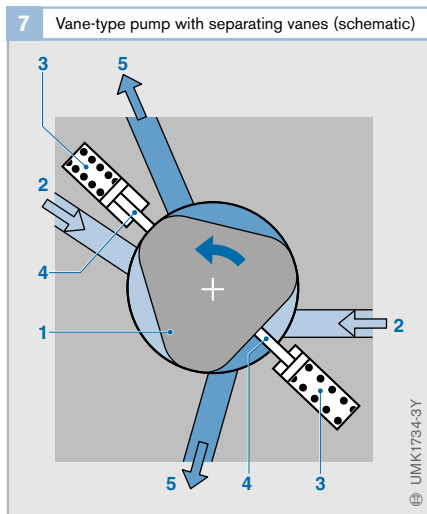


Fig. 7
 1 Rotor
 2 Inlet (suction) side
 3 Spring
 4 Separating vane
 5 Outlet (pressure) end

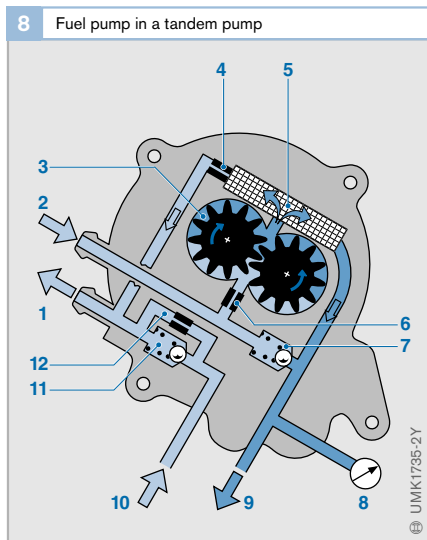


Fig. 8
 1 Return to tank
 2 Entry from the fuel tank
 3 Pumping element (gearwheel)
 4 Throttling bore
 5 Filter
 6 Suction throttling orifice
 7 Overpressure valve
 8 Connection for pressure measurement
 9 Outlet to the injector
 10 Return from the injector
 11 Non-return valve
 12 Bypass

Miscellaneous components

Distributor tube

The passenger-car UIS is provided with a distributor tube which, as its name implies, distributes the fuel to the unit injectors. This form of distribution ensures that the individual injectors all receive the same quantities of fuel at the same temperature, and smooth engine running is the result. In the distributor tube, fuel flowing to the unit injectors mixes with fuel flowing back from them in order to even out the temperature.

Low-pressure pressure-control valve

The pressure-control valve (Fig. 1) is an overflow valve installed in the fuel return of the UIS and UPS systems. Independent of operating status, it provides for adequate operating pressure in the respective low-pressure stages so that the pumps are always well filled with a

consistently even charge of fuel. The accumulator plunger (5) opens at a “snap-open pressure” of 3...3.5 bar, so that the conical seat (7) releases the accumulator volume (6). Only very little leakage fuel can escape through the gap seal (4). The spring (3) is compressed as a function of the fuel pressure, so that the accumulator volume changes and compensates for minor pressure fluctuations.

When pressure has increased to 4...4.5 bar, the gap seal also opens and the flow quantity increases abruptly. The valve closes again when the pressure drops. Two threaded elements (2), each with a different spring seat, are available for preliminary adjustment of opening pressure.

ECU cooler

On commercial vehicles, ECU cooling must be provided if the ECU for the UIS or UPS systems is mounted directly on the engine. In such cases, fuel is used as the cooling medium. It flows past the ECU in special cooling channels and in the process absorbs heat from the electronics.

Fuel cooler

Due to the high pressures in the injectors for the passenger-car UIS, and some Common Rail Systems (CRS), the fuel heats up to such an extent that in order to prevent damage to fuel tank and level sensor it must be cooled down before returning. The fuel returning from the injector flows through the fuel cooler (heat exchanger, Fig. 2, 3) and gives off heat energy to the coolant in the fuel-cooling circuit. This is separated from the engine-cooling circuit (6) since at normal engine temperatures the engine coolant is too hot to absorb heat from the fuel. In order that the fuel-cooling circuit can be filled and temperature fluctuations compensated for, the fuel-cooling circuit is connected to the engine-cooling circuit near the equalizing reservoir (5). Connection is such that the fuel-cooling circuit is not adversely affected by the engine-cooling circuit which is at a higher temperature.

Fig. 1

- 1 Valve body
- 2 Threaded element
- 3 Spring
- 4 Gap seal
- 5 Accumulator plunger
- 6 Accumulator volume
- 7 Conical seat


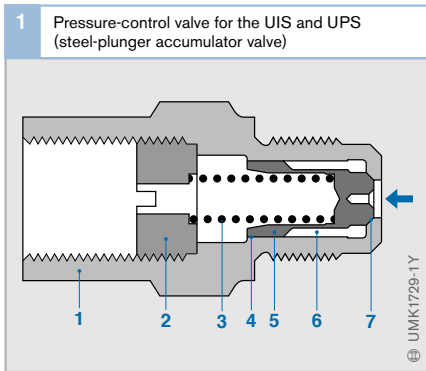


Fig. 2

- 1 Fuel pump
- 2 Fuel-temperature sensor
- 3 Fuel cooler
- 4 Fuel tank
- 5 Equalizing reservoir
- 6 Engine-cooling circuit
- 7 Coolant pump
- 8 Auxiliary cooler

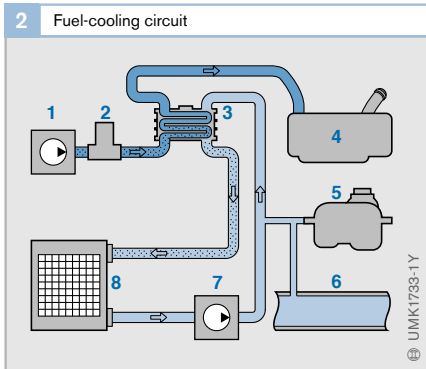

► Diesel aircraft engines of the 1920s and 30s

In the 1920s and 1930s numerous two and four-stroke diesel engines were developed for use as aircraft engines. Apart from their economical consumption and the lower price of diesel fuel, diesels had a number of other features in their favor such as a lower fire risk and simpler maintenance due to the absence of carburetor, spark plugs and magneto. Engineers also hoped that the compression-ignition engine would provide good performance at high altitudes. In those days, spark-ignition engines were liable to misfire because the ignition system was subject to atmospheric pressure. The main problems associated with the development of a diesel aircraft engine involved controlling the fuel/air mixture effectively and handling the higher mechanical and thermal stresses.

The most successful production aircraft diesel engine was the Jumo 205 6-cylinder two-stroke opposed-piston heavy-oil engine (see illustration). Following its introduction in 1933 it was fitted in numerous planes. It had a take-off power output of up to 645 kW (880 hp). Its strengths primarily lay in its suitability for long-distance flights at constant speeds, e.g. for transatlantic postal services. Around 900 units of this reliable engine were built.


The fuel injection system for the Jumo 205 consisted of two pumps and two injectors for each cylinder. The injection pressure was in excess of 500 bar. It was that fuel-injection system which was a major factor in the breakthrough of the Jumo 205. Based on the experience gained from that engine, development work was also started on direct fuel-injection for spark-ignition aircraft engines in the 1930s.

The Jumo 205 was followed in 1939 by the Jumo 207 high-altitude engine which also had a take-off power output of 645 kW (880 hp). Thanks to its turbocharger aspiration, aircraft with the new engine could reach altitudes of up to 14,000 metres.

The technical high point in the development of diesel aircraft engines was the experimental 24-cylinder opposed-piston Jumo 224 produced in the early 1940s which developed as much as 3,330 kW (4,400 hp) take-off power. This "square configuration" engine had its cylinders arranged in a cross formation driving four separate crankshafts.

A whole series of diesel aircraft engines were developed by other manufacturers as well. However, none of them progressed beyond the experimental stage. In later years interest in diesel aircraft engines waned because of progress made with high-performance spark-ignition engines with fuel injection.

▼ Junkers Jumo 205 two-stroke opposed-piston diesel aircraft engine

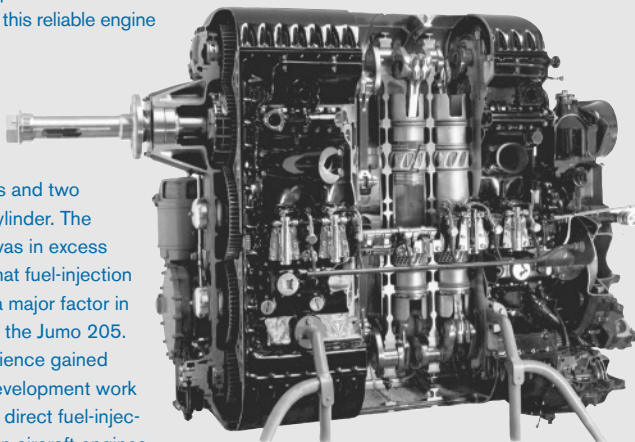

(Source: Deutsches Museum, Munich)

Supplementary valves for in-line fuel-injection pumps

In addition to the overflow valve, electronically controlled in-line fuel-injection pumps also have an electric shutoff valve (Type ELAB) or an electrohydraulic shutoff device (Type EHAB).

Overflow valve

The overflow valve is fitted to the pump's fuel-return outlet. It opens at a pressure (2...3 bar) that is set to suit the fuel-injection pump concerned and thereby maintains the pressure in the fuel gallery at a constant level. A valve spring (Fig. 1, 4) acts on a spring seat (2) which presses the valve cone (5) against the valve seat (6). As the pressure, p_1 in the fuel-injection pump rises, it pushes the valve seat back, thus opening the valve. When the pressure drops, the valve closes again. The valve seat has to travel a certain distance before the valve is fully open. The buffer volume thus created evens out rapid pressure variations, which has a positive effect on valve service life.


Fig. 1

- 1 Sealing ball
- 2 Spring seat
- 3 Sealing washer
- 4 Valve spring
- 5 Valve cone
- 6 Valve seat
- 7 Hollow screw housing
- 8 Fuel return

p_1 Pump fuel gallery pressure

Fig. 2


- 1 Electrical connection to engine control unit
- 2 Solenoid valve housing
- 3 Solenoid coil
- 4 Solenoid armature
- 5 Compression spring
- 6 Fuel inlet
- 7 Plastic sealing cone
- 8 Constriction plug for venting
- 9 Inlet passage to pump
- 10 Connection for overflow valve
- 11 Housing (ground)
- 12 Mounting-bolt eyes

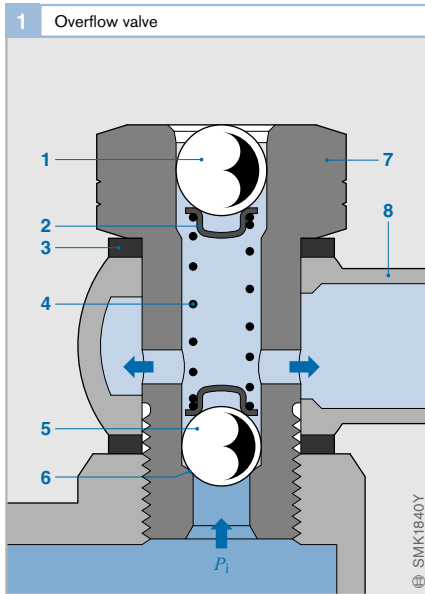

Type ELAB electric shutoff valve

The Type ELAB electric shutoff valve acts as a redundant (i.e. duplicate) back-up safety device. It is a 2/2-way solenoid valve which is screwed into the fuel inlet of the in-line fuel-injection pump (Fig. 2). When not energized, it cuts off the fuel supply to the pump's fuel gallery. As a result, the fuel-injection pump is prevented from delivering fuel to the nozzles even if the actuator mechanism is defective, and the engine cannot overrev. The engine control unit closes the electric shutoff valve if it detects a permanent governor deviation or if a fault in the control unit's fuel-quantity controller is detected.

When it is energized (i.e. when the status of Terminal 15 is "Ignition on"), the electromagnet (Fig. 2, 3) draws in the solenoid armature (4) (12 or 24 V, stroke approx. 1.1 mm). The sealing cone seal (7) attached to the armature then opens the channel to the inlet passage (9). When the engine is switched off using the starter switch ("ignition switch"), the supply of electricity to the solenoid coil is also disconnected. This causes the magnetic field to collapse so that the compression spring (5) pushes the armature and the attached sealing cone back against the valve seat.

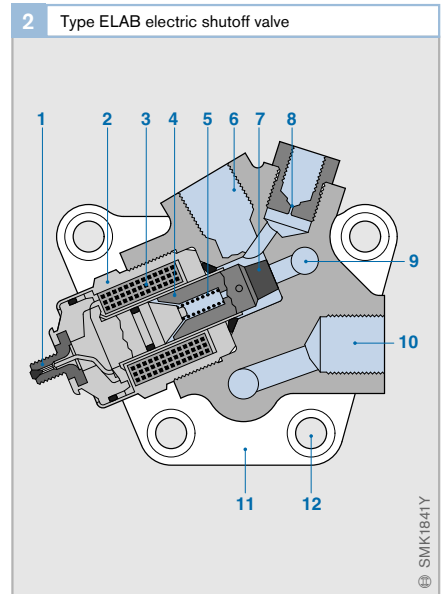

Type EHAB electrohydraulic shutoff device

The Type EHAB electrohydraulic shutoff device is used as a safety shutoff for fuel-injection pumps with relatively high fuel gallery pressures. In such cases, the capabilities of the Type ELAB electric shutoff valve are insufficient. With high fuel-gallery pressures and in the absence of any special compensating devices, it can take up to 10 s for the pressure to drop sufficiently for fuel injection to stop. The electrohydraulic shutoff device thus ensures that fuel is drawn back out of the fuel-injection pump by the presupply pump. Thus, when the valve is de-energized, the fuel gallery pressure in the fuel-injection pump is dissipated much more quickly and the engine can be stopped within a period of no more than 2 s. The electrohydraulic shutoff device is mounted directly on the fuel-injection pump. The EHAB housing also incorporates an integrated fuel-temperature sensor for the electronic governing system (Fig. 3, 8).

Normal operation setting (Fig. 3a)

As soon as the engine control unit activates the electrohydraulic shutoff device (“Ignition on”), the electromagnet (6) draws in the solenoid armature (5, operating voltage 12 V). Fuel can then flow from the fuel tank (10) via the heat exchanger (11) for cold starting and the preliminary filter (3) to port A. From there, the fuel passes through the right-hand valve past the solenoid armature to port B. This is connected to the presupply pump (1) which pumps the fuel via the main fuel filter (2) to port C of the electrohydraulic shutoff device. The fuel then passes through the open left-hand valve to port D and finally from there to the fuel-injection pump (12).

Reversed-flow setting (Fig. 3b)

When the ignition is switched off, the valve spring (7) presses the solenoid armature back to its resting position. The intake side of the presupply pump is then connected directly to the fuel-injection pump’s inlet passage so that fuel flows back from the fuel gallery to the fuel tank. The right hand valve opens the connection between the preliminary filter and

main fuel filter, allowing fuel to return to the fuel tank.

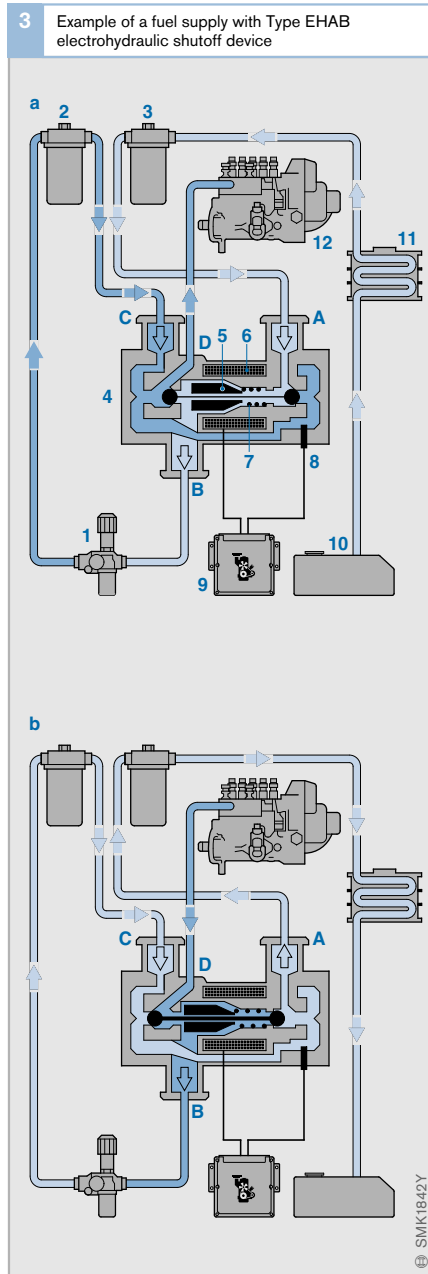


Fig. 3
 a Normal operation setting
 b Reversed-flow/emergency shutoff setting

- 1 Presupply pump
- 2 Main fuel filter
- 3 Preliminary filter
- 4 Type EHAB electrohydraulic shutoff device
- 5 Solenoid armature
- 6 Electromagnet
- 7 Valve spring
- 8 Fuel-temperature sensor
- 9 Engine control unit
- 10 Fuel tank
- 11 Heat exchanger
- 12 Fuel-injection pump

A...D valve ports

Overview of discrete cylinder systems

Diesel engines with discrete cylinder systems have a separate fuel-injection pump for each cylinder of the engine. Such individual fuel-injection pumps are easily adaptable to particular engines. The short high-pressure fuel lines enable the achievement of particularly good injection characteristics and extremely high injection pressures.

Continually increasing demands have led to the development of a variety of diesel fuel-injection systems, each of which is suited to different requirements.

Modern diesel engines must offer low emissions, good fuel economy, high torque and power output while also being quiet-running.

There are basically three types of discrete cylinder systems: type PF helix-controlled discrete injection pumps, solenoid-valve-controlled unit injector and unit pump systems. These systems differ not only in their design but also in their performance data and areas of application (Fig. 1).

Type PF discrete injection pumps

Applications


Type PF discrete injection pumps are particularly easy to maintain. They are used in the “off-highway” sector as

- fuel-injection pumps for diesel engines with outputs of 4...75 kW/cylinder in small construction machines, pumps, tractors and power generators, and
- fuel-injection pumps for large-scale engines with outputs of between 75 kW and 1,000 kW per cylinder. These versions are capable of working with high-viscosity diesel fuel and heavy oil.

Design and method of operation

Type PF discrete injection pumps operate in the same way as type PE in-line fuel-injection pumps. They have a single pump unit on which the injected fuel quantity can be varied by means of a helix.

Each discrete injection pump is separately flange-mounted to the engine and driven by the camshaft that controls the engine valve timing. They can therefore

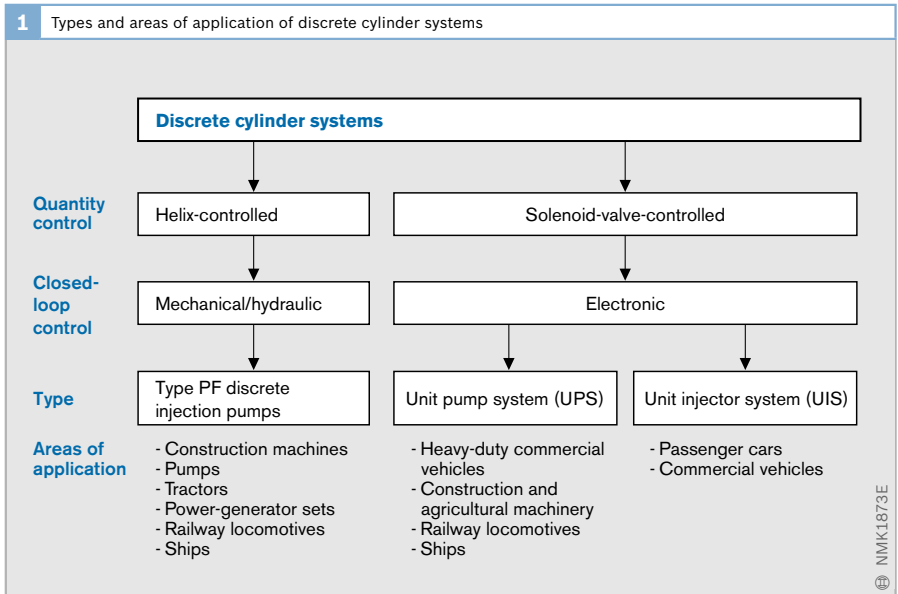

be described as externally driven pumps (PF: German designation for an externally driven pump). They may also be referred to as plug-in pumps.

Some of the smaller type PF pumps come in 2-, 3- and 4-cylinder versions. However, the majority of designs supply only a single cylinder and are therefore known as discrete or single-cylinder injection pumps.

Closed-loop control

As with in-line fuel-injection pumps, a control rack incorporated in the engine engages with the pump plunger-and-barrel assembly. A governor or control system moves the control rack, thereby varying the fuel delivery and injected fuel quantity.

On large-scale engines, the governor is mounted directly on the engine block. Hydro-mechanical governors or electronic control systems may be used, or more rarely, purely mechanical governors.

Between the control rack for the discrete injection pumps and the actuating linkage from the governor, type PF pumps have a sprung compensating link so that, in the

event that the adjusting mechanism on one of the pumps jams, control of the other pumps is not compromised.

Fuel supply


The fuel is fed to the discrete injection pumps by a gear-type presupply pump. It delivers around 3...5 times as much fuel as the maximum full-load delivery of all the fuel-injection pumps. The fuel pressure in this part of the system is around 3...10 bar.

The fuel is filtered by fine filters with a pore size of 5...30 μm in order to keep suspended particles out of the fuel-injection system. Such particles would otherwise cause premature wear on the part of the high-precision fuel-injection components.

Use in common-rail system

Discrete injection pumps are used and further developed as high-pressure pumps in 2nd and 3rd generation common-rail systems for truck and off-highway applications. Fig. 2 shows the use of the PF 45 in a common-rail system for a six-cylinder engine.

2 PF 45 in common-rail system

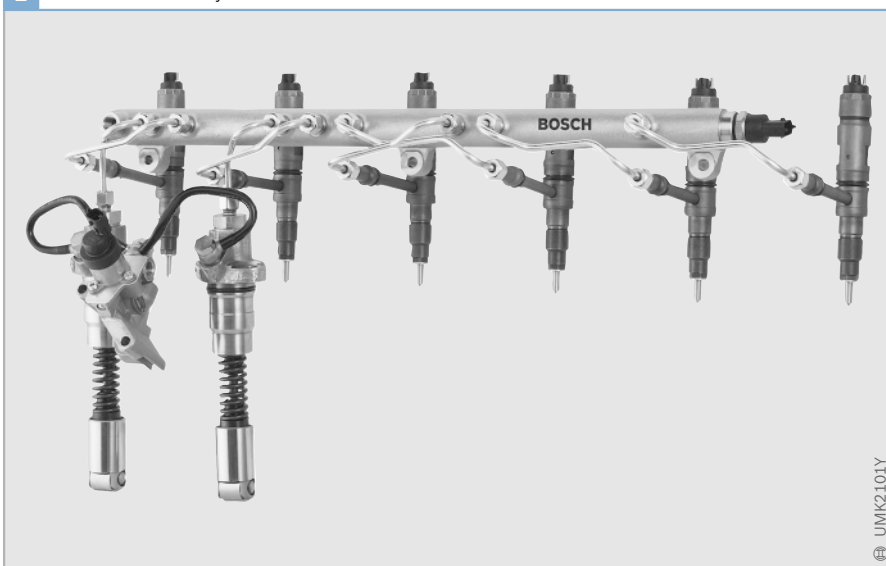

Unit injector system (UIS) and unit pump system (UPS)

The unit injector and unit pump fuel-injection systems achieve the highest injection pressures of all diesel fuel-injection systems currently available. They are capable of high-precision fuel injection that is infinitely variable in response to the engine operating state. Diesel engines equipped with these systems produce low emission levels, are economical and quiet to run, and offer high performance and torque characteristics.

Areas of application

Unit injector system (UIS)

The unit injector system (UIS) went into volume production for commercial vehicles in 1994 and for cars in 1998. It is a fuel-injection system with timer-controlled discrete injection pumps for diesel engines with direct injection (DI). This system offers a significantly greater degree of adaptability to individual engine designs than conventional helix-controlled systems. It can be used on a wide range of modern diesel engines for cars and commercial vehicles extending to

- *cars and light-duty commercial vehicles* with power plants ranging from three-cylinder engines with a displacement of 1.2 l developing 45 kW (61 bhp) of power and 195 Nm of torque to ten-cylinder engines with a displacement of 5 l developing 230 kW (312 bhp) of power and 750 Nm of torque.
- *heavy-duty commercial vehicles* developing up to 80 kW/cylinder.

As it requires no high-pressure fuel lines, the unit injector system has excellent hydraulic characteristics. That is the reason why this system is capable of producing the highest injection pressures (up to 2,200 bar). Hydro-mechanical pre-injection is effected in the unit injector system for passenger cars. The unit injector system for commercial vehicles offers the possibility of pre-injection in the lower engine-speed and load range.

Unit pump system (UPS)

The unit pump system (UPS) is also referred to by the type designation PF..MV for large-scale engines.

Like the unit injector system, the unit pump system is a fuel-injection system with timer-controlled discrete injection pumps for direct-injection (DI) diesel engines. The following versions may be used:

- UPS 12 for commercial-vehicle engines with up to 6 cylinders and 37 kW/cylinder
- UPS 20 for heavy-duty commercial-vehicle engines with up to 8 cylinders and 65 kW/cylinder
- SP (plug-in pump, German: Steckpumpe) for heavy-duty commercial-vehicle engines with up to 18 cylinders and 92 kW/cylinder
- SPS (plug-in pump – small) for commercial-vehicle engines with up to 6 cylinders and 40 kW/cylinder
- UPS for engines in construction and agricultural machinery, railway locomotives and ships with power outputs of up to 500 kW/cylinder and up to 20 cylinders

Design

System areas

The unit injector and unit pump systems are made up of four system areas (Fig. 3):

- *Electronic Diesel Control (EDC)*, consisting of the system blocks of sensors, ECU and actuators, performs all diesel-engine management and control functions as well as providing all electrical and electronic interfaces.
- The *fuel-supply system* (low-pressure stage) provides suitably filtered fuel at the correct pressure.
- The *high-pressure stage* generates the necessary injection pressure and injects the fuel into the combustion chamber.
- The *air-intake and exhaust-gas systems* handle the supply of air for combustion, exhaust-gas recirculation and exhaust-gas treatment.

Differences

The essential difference between the unit injector system and the unit pump system lies in the engine layout (Fig. 4).

In the *unit injector system*, the high-pressure pump and the nozzle form a single unit - the “unit injector”. There is a unit injector fitted in each cylinder of the engine. As there are no high-pressure fuel lines, extremely high injection pressures can be

generated and precisely controlled injection patterns can be produced.

With the *unit pump system*, the high-pressure pump - the “unit pump” - and the nozzle-holder assembly are separate units that are connected by a short length of high-pressure line. This arrangement has advantages in terms of use of space, pump-drive system, and servicing and maintenance.

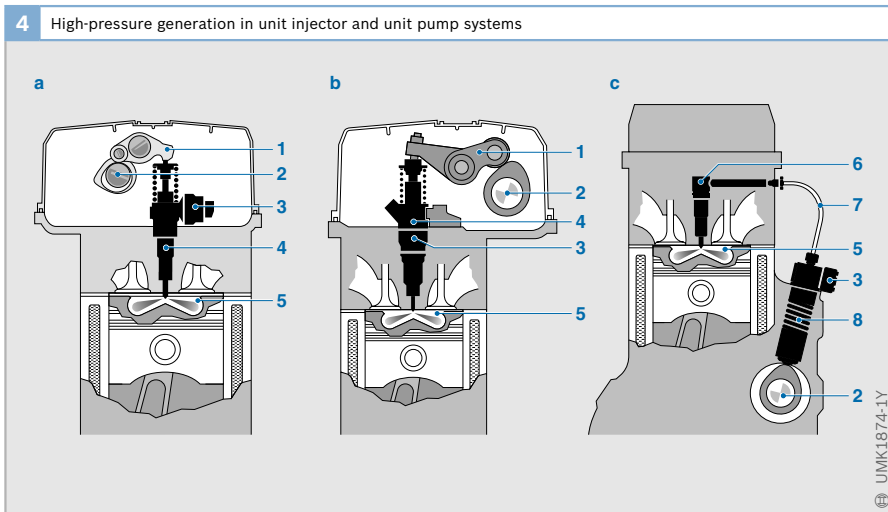
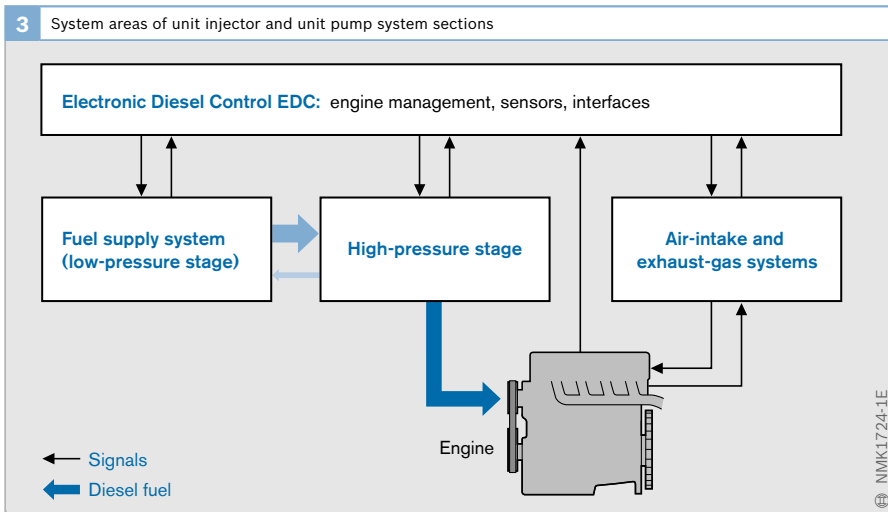


Fig. 4

- a Unit injector system for passenger cars
- b Unit injector system for commercial vehicles
- c Unit pump system for commercial vehicles

- 1 Rocker arm
- 2 Camshaft
- 3 High-pressure solenoid valve
- 4 Unit injector
- 5 Engine combustion chamber
- 6 Nozzle-holder assembly
- 7 Short high-pressure line
- 8 Unit pump

System diagram of UIS for passenger cars

Fig. 5 shows all the components of a fully equipped unit injector system for a ten-cylinder diesel car engine. Depending on the type of vehicle and application, some of the components may not be used.

For the sake of clarity of the diagram, the sensors and setpoint generators (A) are not shown in their fitted positions. Exceptions to this are the components of the exhaust-gas treatment systems (F) as their proper fitted positions are necessary in order to understand the system.

Data exchange between the various sections takes place via the CAN bus in the “Interfaces” (B) section:

- Starter,
- Alternator,
- Electronic immobilizer,
- Transmission control,
- Traction Control System (TCS), and
- Electronic Stability Program (ESP).

The instrument cluster (12) and the air conditioner (13) can also be connected via the CAN bus.

For exhaust-gas treatment, three alternative combination systems are shown (a, b or c).

Fig. 5
Engine, engine management and high-pressure fuel-injection components

- 24 Fuel rail
- 25 Camshaft
- 26 Unit injector
- 27 Glow plug
- 28 Diesel engine (DI)
- 29 Engine ECU (master)
- 30 Engine ECU (slave)
- M* Torque

A Sensors and setpoint generators

- 1 Pedal-travel sensor
- 2 Clutch switch
- 3 Brake contacts (2)
- 4 Operator unit for vehicle-speed controller (cruise control)
- 5 Glow-plug and starter switch (“ignition lock”)
- 6 Vehicle-speed sensor
- 7 Crankshaft-speed sensor (inductive)
- 8 Engine-temperature sensor (in coolant system)
- 9 Intake-air temperature sensor
- 10 Boost-pressure sensor
- 11 Hot-film air-mass meter (intake air)

B Interfaces

- 12 Instrument cluster with signal output for fuel consumption, rotational speed, etc.
- 13 A/C compressor and operator unit
- 14 Diagnosis interface
- 15 Glow control unit
- CAN Controller Area Network (serial data bus in motor vehicle)

C Fuel-supply system (low-pressure stage)

- 16 Fuel filter with overflow valve
- 17 Fuel tank with prefilter and electric fuel pump (presupply pump)
- 18 Level sensor
- 19 Fuel cooler
- 20 Pressure-limiting valve

D Additive system


- 21 Additive metering unit
- 22 Additive tank

E Air supply

- 31 Exhaust-gas recirculation cooler
- 32 Boost-pressure actuator
- 33 Exhaust-gas turbocharger (here with VTG – variable turbine geometry)
- 34 Intake-manifold flap
- 35 Exhaust-gas recirculation positioner
- 36 Vacuum pump

F Exhaust-gas treatment

- 38 Broadband lambda sensor, type LSU
- 39 Exhaust-gas temperature sensor
- 40 Oxidation-type catalytic converter
- 41 Particulate filter
- 42 Differential-pressure sensor
- 43 NO_x accumulator-type catalytic converter
- 44 Broadband lambda sensor, optional NO_x sensor

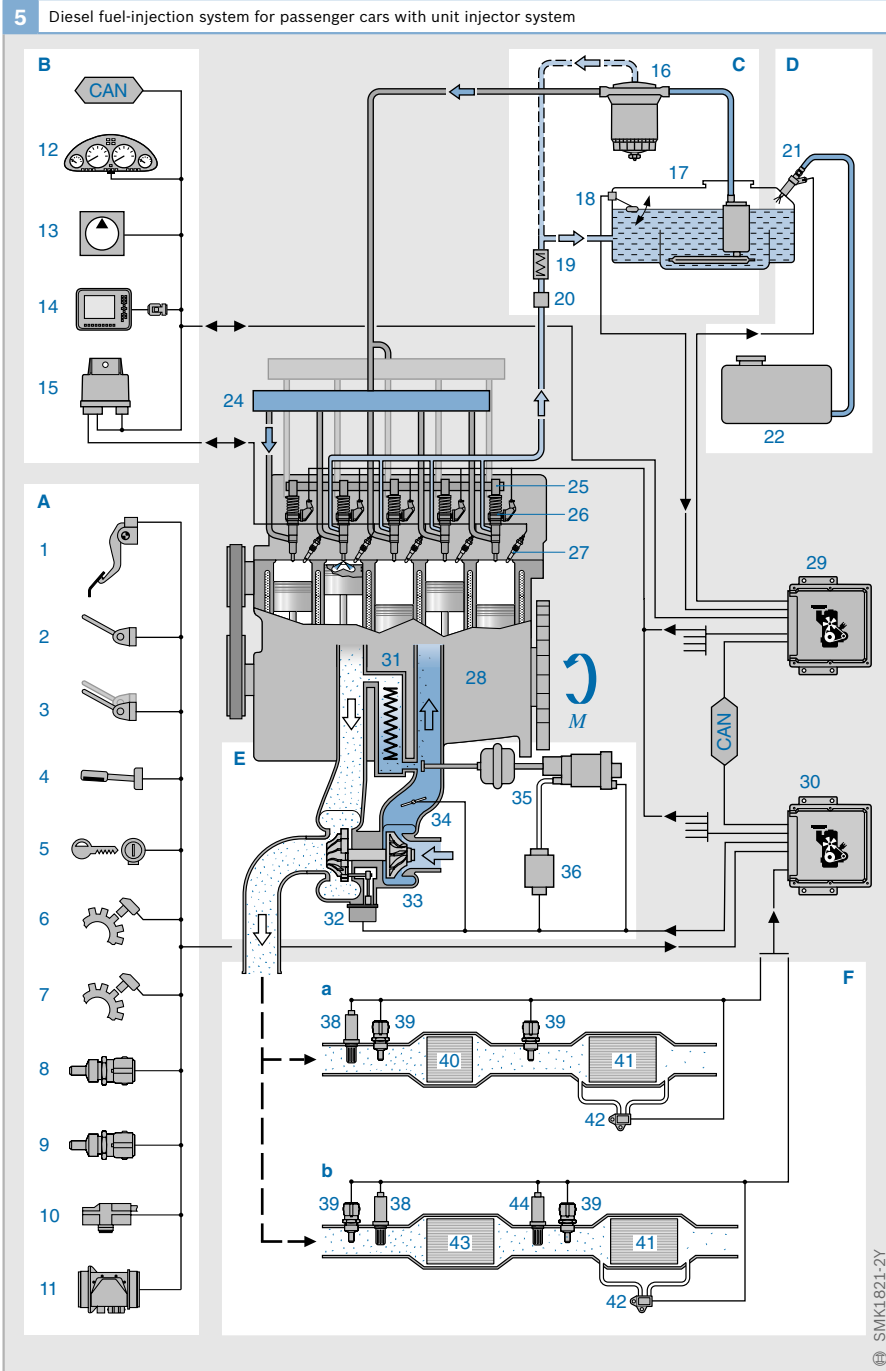

System diagram of UIS/UPS for commercial vehicles

Fig. 6 shows all the components of a unit injector system for a six-cylinder diesel commercial-vehicle engine. Depending on the type of vehicle and application, some of the components may not be used.

The components of Electronic Diesel Control (EDC) (sensors, interfaces and engine management), the fuel-supply system, air-intake system and exhaust-gas treatment are very similar in the unit injector and unit pump systems. They differ only in the high-pressure stage of the overall system.

For the sake of clarity of the diagram, only those sensors and setpoint generators

whose true position is necessary in order to understand the system are shown in their fitted locations.

Data exchange with a wide range of other systems (e.g. transmission control, Traction Control System (TCS), Electronic Stability Program (ESP), oil-quality sensor, tachograph, radar ranging sensor, vehicle management, brake coordinator, fleet management - involving up to 30 ECUs) is possible via the CAN bus in the "Interfaces" section. Even the alternator (18) and the air conditioner (17) can be connected via the CAN bus.

For exhaust-gas treatment, three alternative combination systems are shown (a, b or c).

Fig. 6

Engine, engine management and high-pressure fuel-injection components

- 22 Unit pump and nozzle-holder assembly
- 23 Unit injector
- 24 Camshaft
- 25 Rocker arm
- 26 Engine ECU
- 27 Relay
- 28 Auxiliary equipment (e.g. retarder, exhaust flap for engine brake, starter, fan)
- 29 Diesel engine (DI)
- 30 Flame glow plug (alternatively grid heater)
- M Torque

A Sensors and setpoint generators

- 1 Pedal-travel sensor
- 2 Clutch switch
- 3 Brake contacts (2)
- 4 Engine-brake contact
- 5 Parking-brake contact
- 6 Control switch (e.g. cruise control, intermediate-speed control, engine-speed and torque reduction)
- 7 Starter switch ("ignition lock")
- 8 Turbocharger-speed sensor
- 9 Crankshaft-speed sensor (inductive)
- 10 Camshaft-speed sensor
- 11 Fuel-temperature sensor
- 12 Engine-temperature sensor (in coolant system)
- 13 Charge-air temperature sensor
- 14 Boost-pressure sensor
- 15 Fan-speed sensor
- 16 Air-filter differential-pressure sensor

B Interfaces

- 17 A/C compressor with operator unit
- 18 Alternator
- 19 Diagnosis interface

- 20 SCR ECU

- 21 Air compressor

CAN Controller Area Network (serial data bus in motor vehicle) (up to 3 buses)

C Fuel-supply system (low-pressure stage)


- 31 Fuel pump
- 32 Fuel filter with water-level and pressure sensors
- 33 ECU cooler
- 34 Fuel tank with prefilter
- 35 Level sensor
- 36 Pressure-limiting valve

D Air supply

- 37 Exhaust-gas recirculation cooler
- 38 Control flap
- 39 Exhaust-gas recirculation positioner with exhaust-gas recirculation valve and position sensor
- 40 Intercooler with bypass for cold starting
- 41 Turbocharger (here VTG) with position sensor
- 42 Boost-pressure actuator

E Exhaust-gas treatment

- 43 Exhaust-gas temperature sensor
- 44 Oxidation-type catalytic converter
- 45 Differential-pressure sensor
- 46 Catalyst-coated particulate filter (CSF)
- 47 Soot sensor
- 48 Level sensor
- 49 Reducing-agent tank
- 50 Reducing-agent delivery pump
- 51 Reducing-agent nozzle
- 52 NO_x sensor
- 53 SCR catalytic converter
- 54 NH₃ sensor

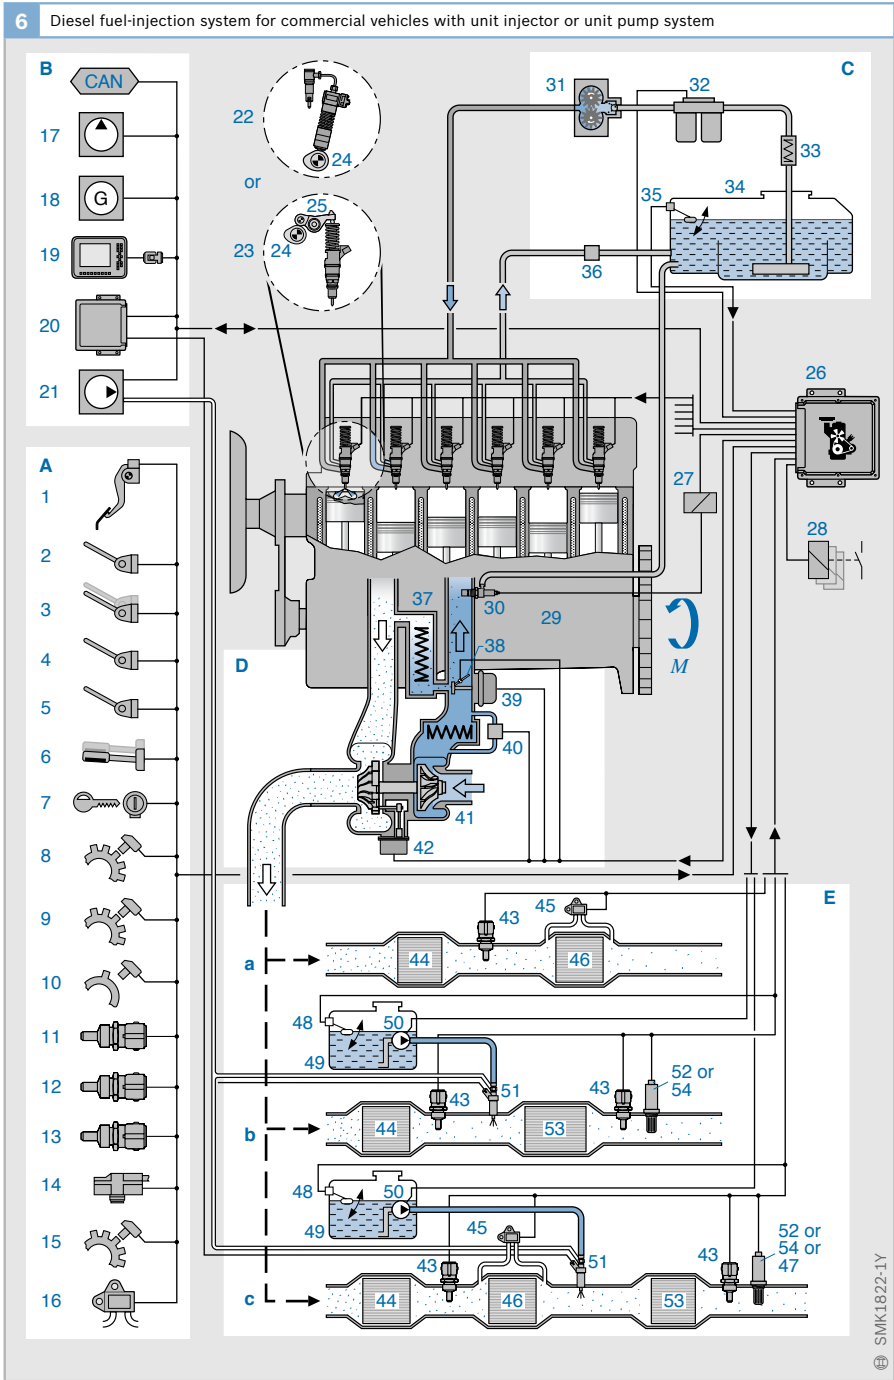

Unit injector system (UIS)

In the unit injector system (UIS), the fuel-injection pump, high-pressure solenoid valve and injection nozzle form a single unit. The compact construction - with very short high-pressure lines integrated in the component between pump and nozzle - makes it easier to deliver higher injection pressures compared with other fuel-injection systems because the compression volume ¹⁾ and thus the compression losses are lower. The peak pressure in the UIS currently varies, depending on the type of pump, between 1,800 and 2,200 bar.

¹⁾ The compression volume is the fuel volume which is compressed

Installation and drive

Each cylinder has its own unit injector (UI), which is installed directly in the cylinder head (Fig. 1). For passenger cars, there are two types of unit injector (UI-1, UI-2), which - while having an identical function - differ in size. In a 2-valve engine, the UI-1 is secured

using a clamping block at an angle of approx. 20° in the engine's cylinder head. In a 4-valve engine, the smaller injector (UI-2) is used on account of the smaller amount of space available; this injector is secured vertically in the cylinder head with anti-fatigue bolts.

The engine camshaft (2) has an actuating cam for each unit injector, the particular cam lift being transferred to the pump plunger (6) by a rocker arm (1). The injection curve is influenced by the shape of the actuating cams. These are shaped so that the pump plunger moves more slowly when fuel is taken in (upward movement) than during injection (downward movement) in order, on the one hand, to prevent air from being accidentally drawn in and, on the other hand, to achieve a high delivery rate. Torsional vibration is induced in the camshaft by the forces applied to it during operation, and adversely affects injection

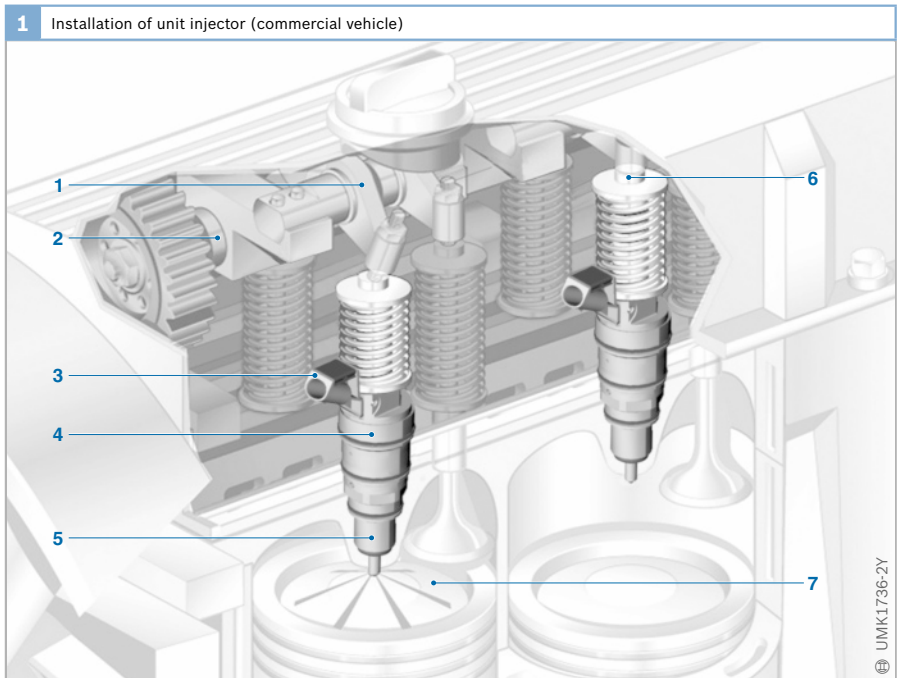


Fig. 1

- 1 Rocker arm
- 2 Engine camshaft
- 3 Plug
- 4 Unit injector
- 5 Injection nozzle
- 6 Pump plunger
- 7 Engine combustion chamber

characteristics and injected-fuel-quantity metering. It is therefore imperative that in order to reduce these vibrations the individual-pump drives are designed to be as rigid as possible (this applies to the camshaft drive, the camshaft itself, the rocker arm, and the rocker-arm bearings).

The unit injector is installed in the engine's cylinder head and is therefore subject to very high temperatures. It is cooled by relatively cool fuel flowing back to the low-pressure stage.

Design

Fuel is supplied to the UI for passenger cars through roughly 500 laser-drilled inlet passages in the steel sleeve of the injector. The fuel is filtered by the passages, which have a diameter of less than 0.1 mm.


The unit-injector body assembly serves as the pump barrel. The nozzle (Fig. 2,

item 7) is integrated in the stem of the unit injector. The stem and body assembly are connected to each other by means of a retaining nut (13).

The return spring (1) forces the pump plunger against the rocker arm (8) and the rocker arm against the actuating cam (9). This ensures that pump plunger, rocker arm and cam are always in contact during actual operation.

In the unit injector for commercial vehicles, the solenoid valve is integrated in the injector. In the UI for passenger cars, however, it is mounted externally on the pump body on account of the injector's smaller dimensions.


The design of the injector for passenger cars and commercial vehicles is shown on the following pages.

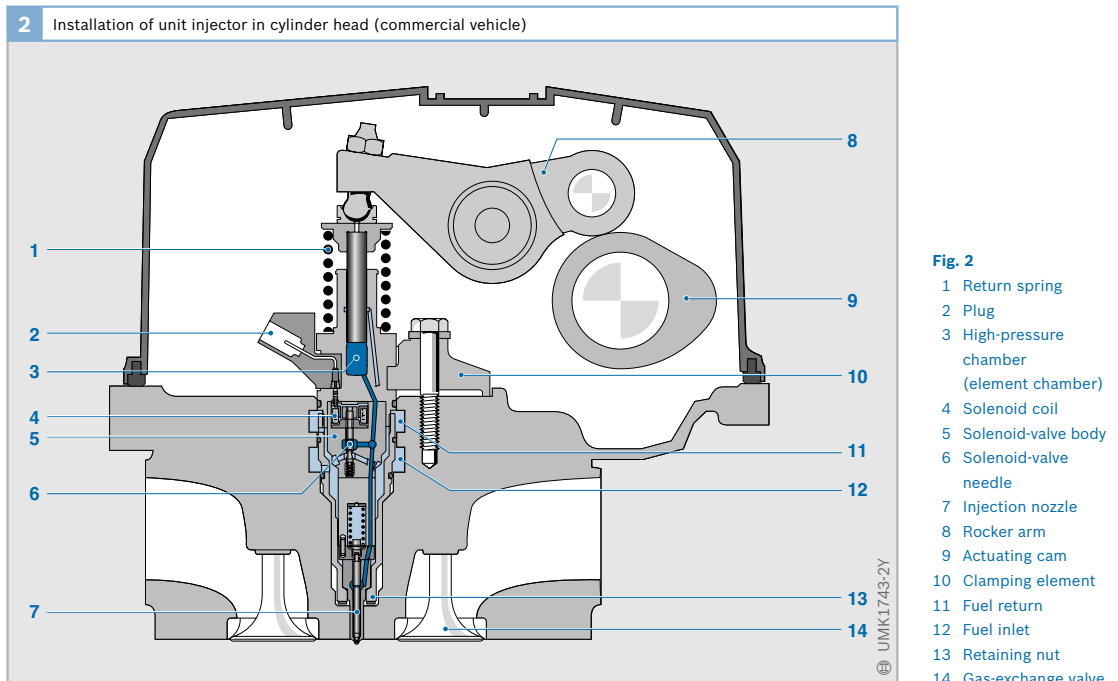

3 Design of unit injector for passenger cars (for use in a 2-valve engine)

Fig. 3

- 1 Ball pin
- 2 Return spring
- 3 Pump plunger
- 4 Pump housing
- 5 Plug
- 6 Magnet core
- 7 Compensating spring
- 8 Solenoid-valve needle
- 9 Armature
- 10 Solenoid-valve coil
- 11 Fuel return
- 12 Seal
- 13 Inlet passages (laser-drilled holes acting as a filter)
- 14 Hydraulic stop (damping unit)
- 15 Needle seat
- 16 Sealing disk
- 17 Engine combustion chamber
- 18 Nozzle needle
- 19 Retaining nut
- 20 Integral nozzle assembly
- 21 Engine cylinder head
- 22 Needle-valve spring
- 23 Accumulator plunger
- 24 Accumulator chamber
- 25 High-pressure chamber (element chamber)
- 26 Solenoid-valve spring

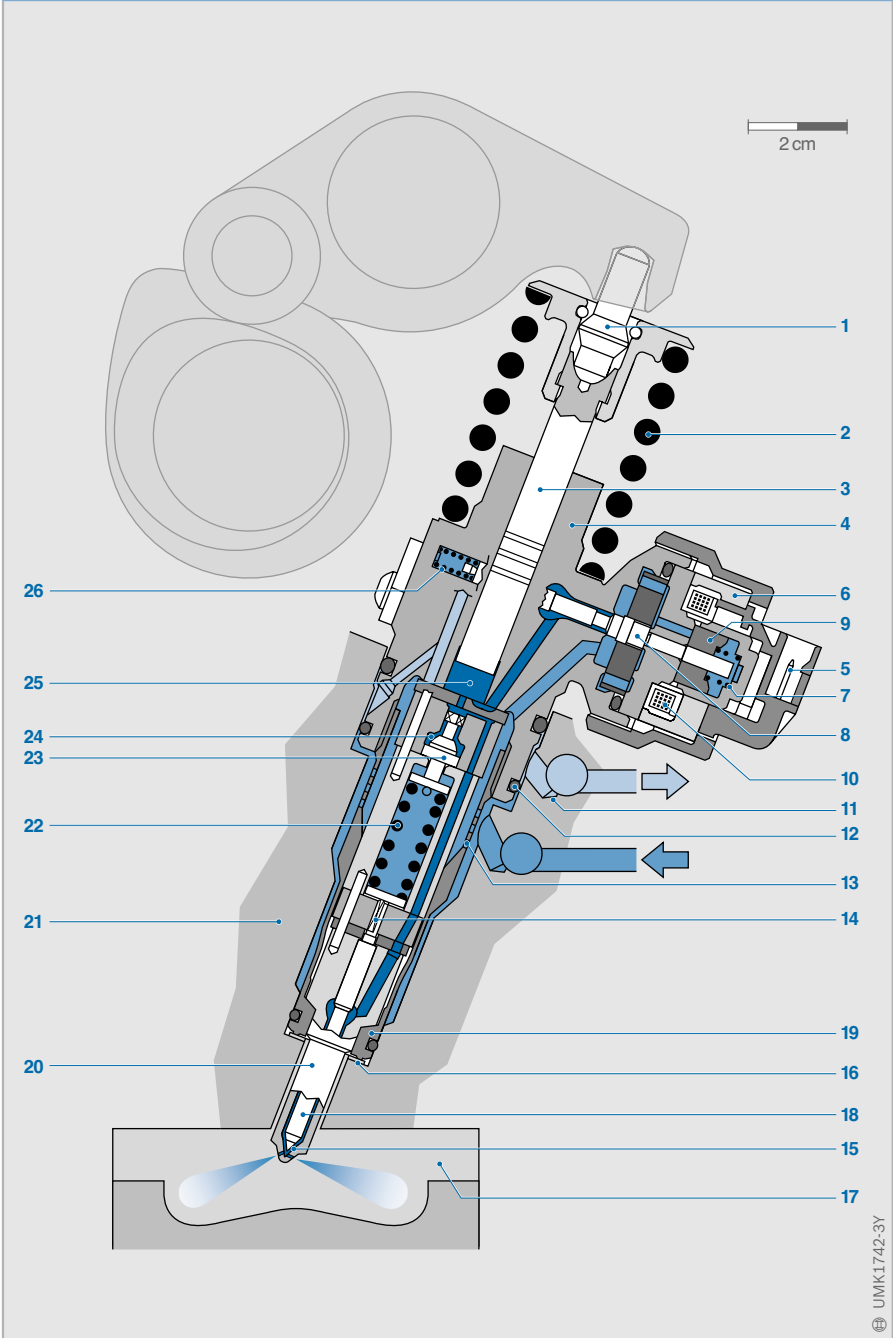

In a 4-valve engine, the unit injector is situated vertically in the cylinder head.

4 Design of unit injector for commercial vehicles

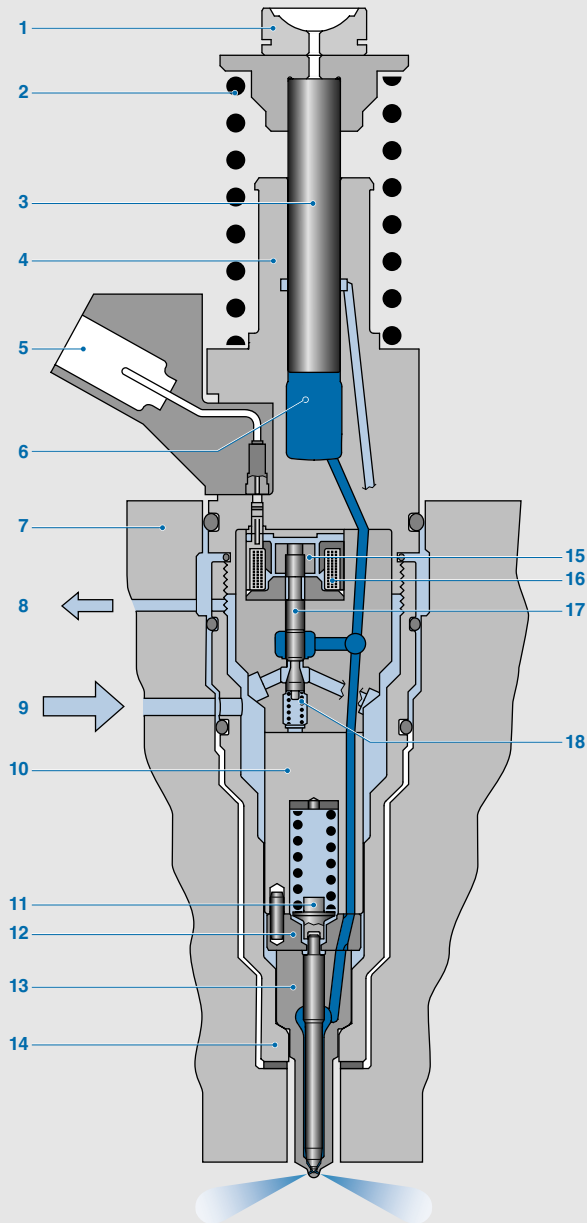


Fig. 4

- 1 Slide disk
- 2 Return spring
- 3 Pump plunger
- 4 Pump housing
- 5 Plug
- 6 High-pressure chamber (element chamber)
- 7 Engine cylinder head
- 8 Fuel return
- 9 Fuel inlet
- 10 Spring retainer
- 11 Pressure pin
- 12 Intermediate disk
- 13 Integral nozzle assembly
- 14 Retaining nut
- 15 Armature
- 16 Solenoid coil
- 17 Solenoid-valve needle
- 18 Solenoid-valve spring

Method of operation of UI for passenger cars

Pre-injection

Hydro-mechanically controlled pre-injection is effected in the unit injector for passenger cars by an accumulator plunger and a damping unit.

Induction stroke (Fig. 5a)

The pump plunger (4) is forced upwards by the return spring when the actuating cam (3) rotates. The fuel, which is permanently under pressure, flows from the fuel-supply system's low-pressure stage through the inlet passage (1) into the injector. The solenoid valve is open. The fuel passes through the opened solenoid-valve seat (11) into the high-pressure chamber (5).

Prestroke (Fig. 5b)

The actuating cam continues to rotate and forces the pump plunger downwards. The solenoid valve is open, and the fuel is forced back by the pump plunger into the fuel-supply system's low-pressure stage (2). Heat is also dissipated from the injector with the fuel as it flows back, i.e. the injector is cooled.

Delivery stroke and injection

At a given instant in time, the ECU energizes the solenoid coil so that the solenoid-valve needle is pressed into the solenoid-valve seat (11), and the connection between the high-pressure chamber and the low-pressure stage is closed. This instant is called the *Beginning of Injection Period* (BIP); however, it corresponds not to the actual start of injection but to the start of delivery.

Start of pre-injection (Fig. 5c)

Further volume displacement of the pump plunger causes the fuel pressure in the high-pressure chamber to increase. The nozzle-opening pressure is approx. 180 bar for pre-injection. When this pressure is reached, the nozzle needle (9) lifts from its seat and pre-injection commences. During

this phase, the nozzle-needle lift is hydraulically limited by a damping unit (see section entitled "Nozzle-needle damping").

The accumulator plunger (6) initially remains on its seat because the nozzle needle opens first on account of its greater, hydraulically effective surface on which the pressure acts.

End of pre-injection (Fig. 5d)

Further pressure increase causes the accumulator plunger to be forced downwards and then lifted off its seat so that a connection is set up between the high-pressure chamber (5) and the accumulator chamber (7). The resulting pressure drop in the high-pressure chamber, the pressure increase in the accumulator chamber, and the simultaneous increase in the initial tension of the compression spring (8) cause the nozzle needle to close. This marks the end of pre-injection. In contrast to the nozzle needle, the accumulator plunger does not return to its starting position, because when open it presents to the fuel pressure a greater working surface than the nozzle needle.

For the most part, the pre-injection quantity of approx. 1.5 mm^3 is determined by the opening pressure and lift of the accumulator plunger.

Main injection

Main injection requires a higher opening pressure at the nozzle than pre-injection. This has two causes: On the one hand, the excursion of the accumulator plunger increases the initial tension of the nozzle spring during pre-injection. On the other hand, the excursion of the accumulator must force fuel out of the spring-retainer chamber through a throttling orifice into the low-pressure stage of the fuel-supply system such that the fuel in the spring-retainer chamber is subject to greater compression (pressure backing). The pressure-backing level is derived from the size of the throttling orifice in the spring retainer and

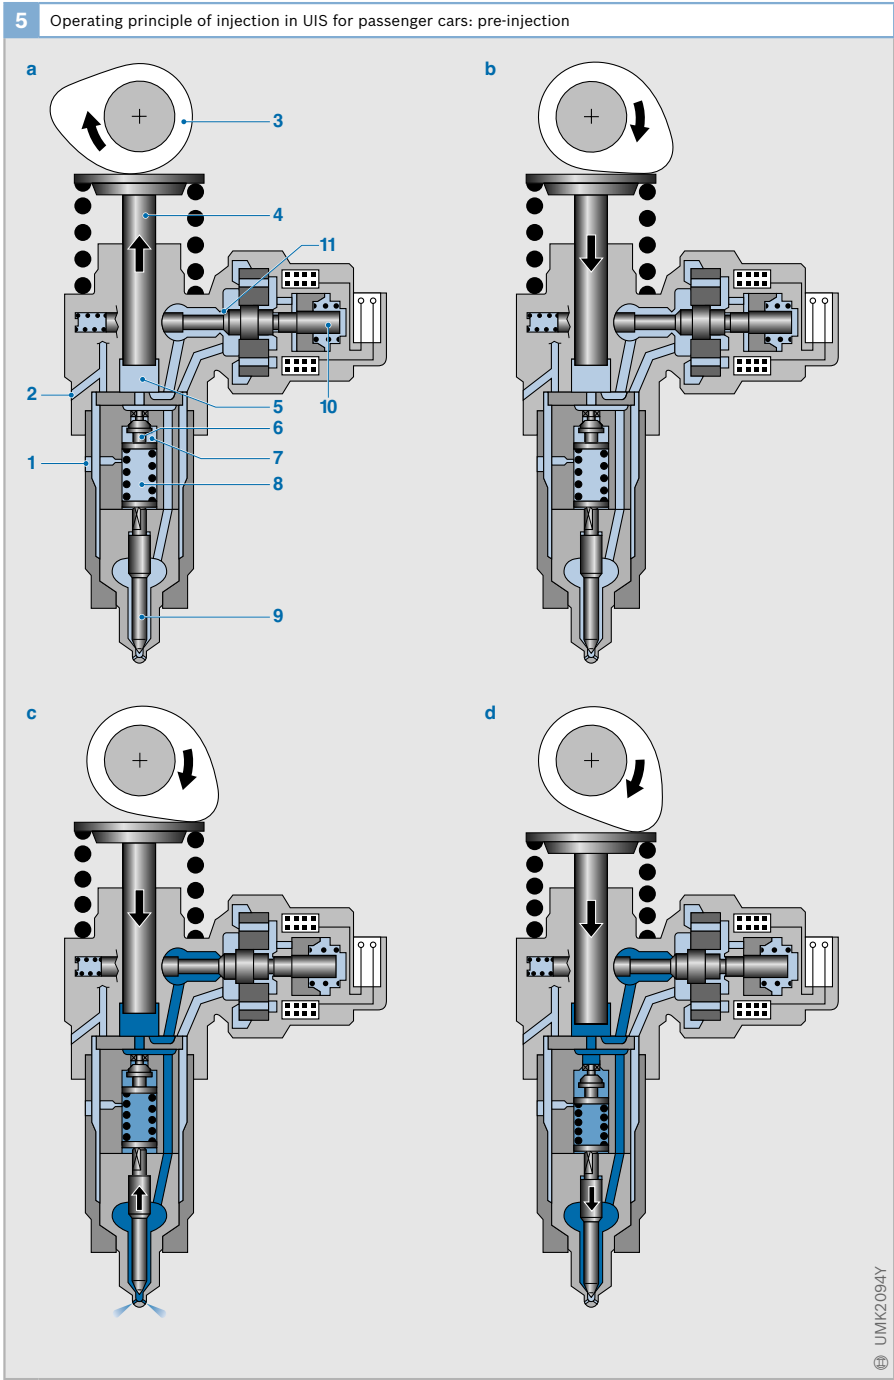


Fig. 5
 a Induction stroke
 b Prestroke
 c Delivery stroke: start of pre-injection
 d Delivery stroke: end of pre-injection

1 Fuel inlet
 2 Fuel return
 3 Actuating cam
 4 Pump plunger
 5 High-pressure chamber (element chamber)
 6 Accumulator plunger
 7 Accumulator chamber
 8 Spring-retainer chamber
 9 Nozzle needle
 10 Solenoid-valve needle
 11 Solenoid-valve seat

can thus be varied (small throttling orifice - large pressure increase - large difference in nozzle-opening pressure for pre- and main injection). In this way, it is possible to achieve a sensible compromise between a low opening pressure for pre-injection (for noise reasons) and as high an opening pressure as possible for main injection especially at part load (emission-reducing).

The time interval between pre- and main injection is chiefly determined by the accumulator-plunger lift (which for its part is determined by the initial tension of the compression spring) and the engine speed. It is approx. 0.2 - 0.6 ms.

Continuation of delivery stroke (Fig. 6a)

Start of main injection

The continuing movement of the pump plunger leads to the pressure in the high-pressure chamber continuing to increase. Upon reaching the nozzle-opening pressure of now approx. 300 bar, the nozzle needle is lifted from its seat and fuel is sprayed into the engine's combustion chamber

(actual start of injection). Due to the pump plunger's high delivery rate, the pressure continues to increase throughout the whole of the injection process. The maximum pressure is reached during the transitional phase between delivery stroke and residual stroke (see below).

End of main injection

To terminate main injection, the solenoid coil deactivates the current flow; the solenoid valve opens after a short delay and opens the connection between the high-pressure chamber and the low-pressure stage. The pressure collapses, and when it drops below the nozzle-closing pressure, the nozzle closes and terminates the injection process. The accumulator plunger then returns to its starting position.

Residual stroke (Fig. 6b)


The residual fuel is returned to the low-pressure stage during the downward movement of the pump plunger. Heat is again dissipated from the injector in this process.

6 Operating principle of injection in UIS for passenger cars: main injection

Fig. 6

- a Delivery stroke:
main injection
b Residual stroke



- 1 Fuel inlet
- 2 Fuel return
- 3 Actuating cam
- 4 Pump plunger
- 5 High-pressure chamber (element chamber)
- 6 Accumulator plunger
- 7 Accumulator chamber
- 8 Spring-retainer chamber
- 9 Nozzle needle
- 10 Solenoid-valve needle
- 11 Solenoid-valve seat

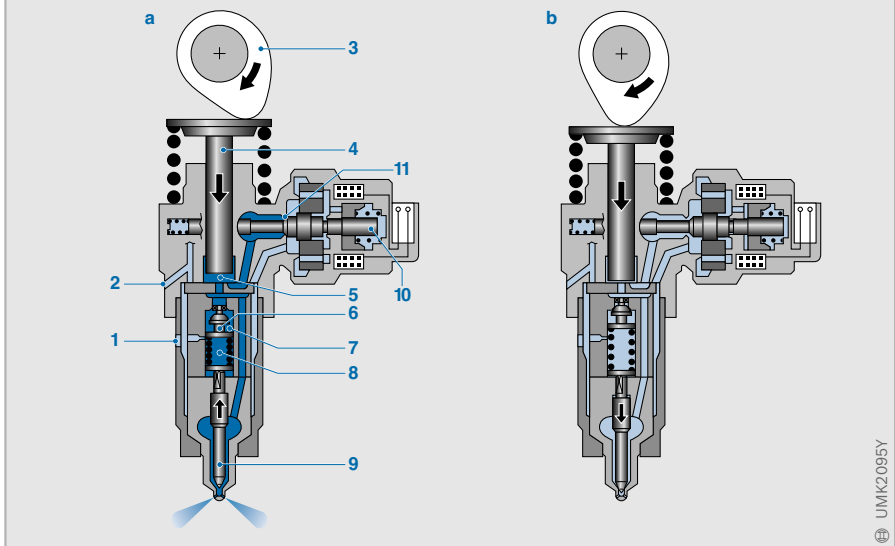

Nozzle-needle damping

During pre-injection, the nozzle-needle lift is hydraulically limited by a damping unit so that the small injected fuel quantity required can be metered precisely (see section entitled “Pre-injection”). For this purpose, the needle lift is limited to roughly one third of the overall stroke for main injection.

The damping unit is formed by a damping plunger which is situated above the nozzle needle (Fig. 7, item 4). The nozzle needle opens initially undamped until the damping plunger (4) reaches the bore of the damping plate (3). The fuel above the nozzle needle

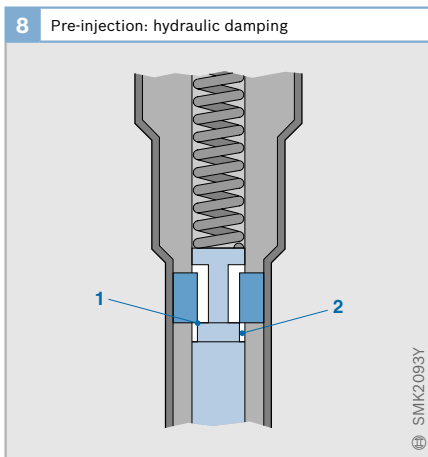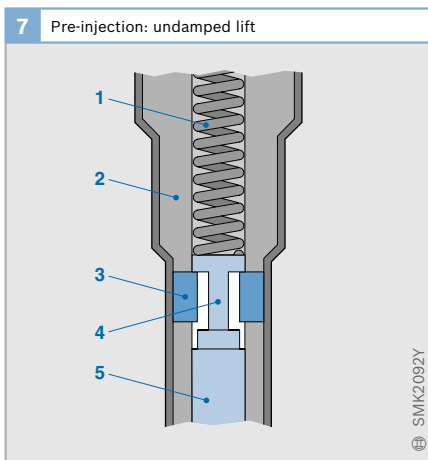

now forms a hydraulic cushion (Fig. 8, item 2) because it can only be forced into the nozzle-spring chamber through a narrow leakage gap (1). Further upward movement of the nozzle needle is thus limited.

The effect of nozzle-needle damping is negligible during main injection because much greater opening forces act on the nozzle needle on account of the higher pressure level.

Intrinsic safety

Individual-pump systems are intrinsically safe since, in the event of a fault, one uncontrolled injection is the maximum that can occur:

- If the solenoid valve remains open, no injection can take place since the fuel flows back into the low-pressure stage and it is impossible for pressure to be built up.
- When the solenoid valve is permanently closed, no fuel can enter the high-pressure chamber since the chamber can only be filled via the opened solenoid-valve seat. In this case, at the most only a single injection can take place.

Method of operation of UI for commercial vehicles


In terms of main injection, the unit injector system for commercial vehicles (Fig. 9) essentially functions in the same way as the system for passenger cars. There are differences with regard to pre-injection: the unit injector system for commercial vehicles offers the possibility in the lower engine-speed and load range of electronically controlled pre-injection, which is effected by actuating the solenoid valve twice.

Fig. 7

- 1 Nozzle-spring chamber
- 2 Spring retainer
- 3 Damping plate
- 4 Damping plunger
- 5 Nozzle needle

Fig. 8

- 1 Leakage gap
- 2 Hydraulic cushion

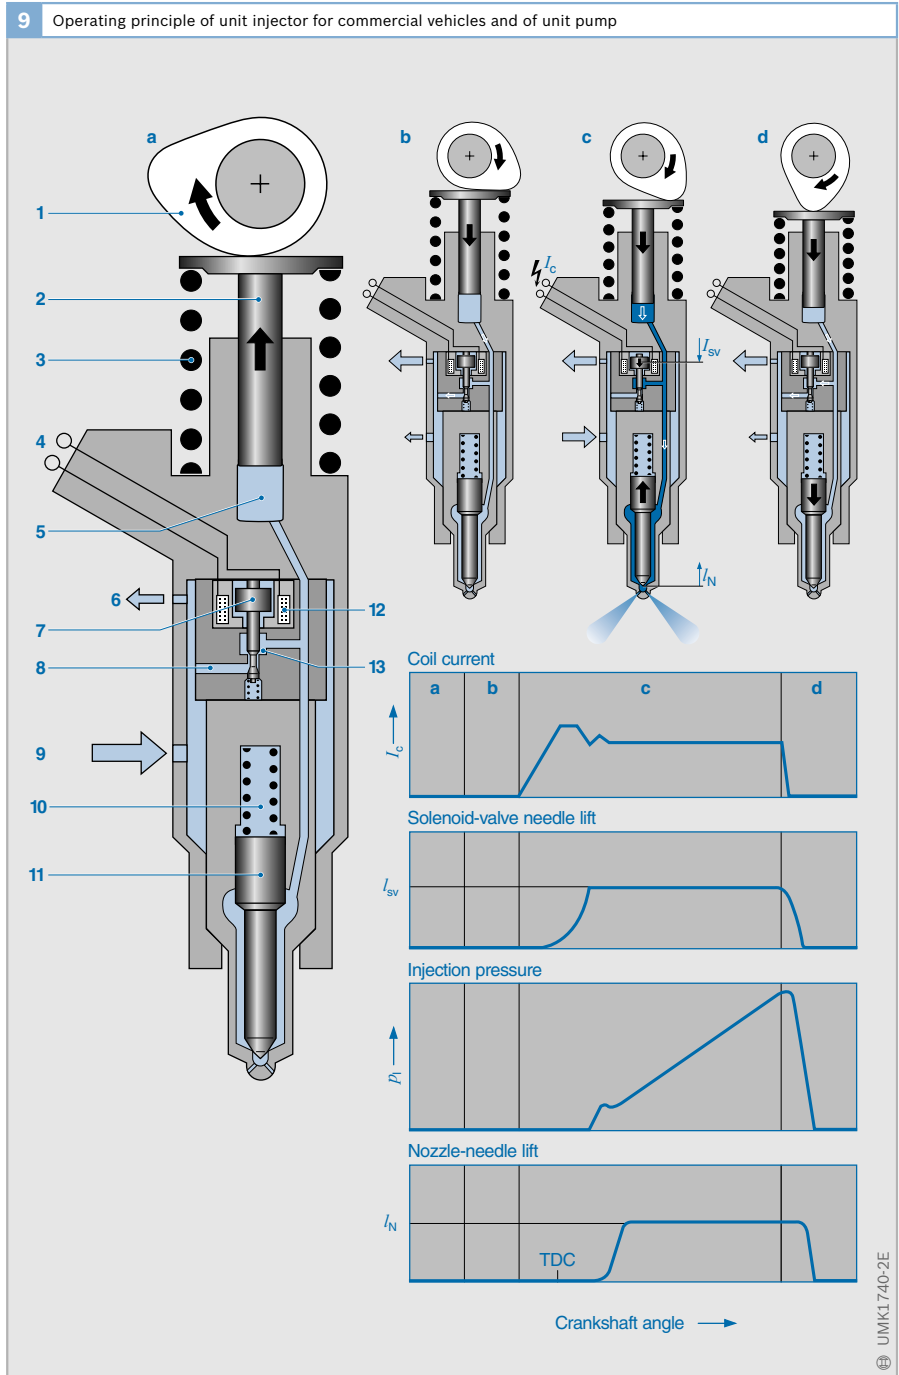

High-pressure solenoid valve

The high-pressure solenoid valve controls pressure buildup, start of injection and injection duration.

Design

Valve

The valve itself comprises the valve needle (Fig. 10, item 2), valve body (12) and valve spring (1).

The valve body's sealing surface is conically ground (10), and the valve needle is also provided with a conical sealing surface (11). The angle of the needle's ground surface is slightly larger than that of the valve body. With the valve closed, when the needle is forced up against the valve body, valve body and needle are only in contact along a line (and not a surface) which represents the valve seat. As a result of this dual-conical sealing arrangement, sealing is very efficient. High-precision machining must be applied to match the valve needle and valve body perfectly to each other.

Magnet

The magnet consists of the magnet yoke and the movable armature (16). The magnet

yoke itself comprises the magnet core (15), a coil (6), and the electrical contacting with plug (8).

The armature is secured or non-positively connected to the valve needle. In the non-energized position, there is an initial or residual air gap between the magnet yoke and the armature.

Method of operation

Valve open

The solenoid valve is open as long as it is not actuated, i.e. when no current is applied across its coil. The force exerted by the valve spring pushes the valve needle up against the stop so that the valve through-flow cross-section (9) between the valve needle and the valve body is opened in the vicinity of the valve seat. The pump's high-pressure (3) and low-pressure (4) areas are now connected with each other. In this initial position, it is possible for fuel to flow into and out of the high-pressure chamber.

Valve closed

The ECU actuates the coil when an injection of fuel is to take place. The pickup current causes a magnetic flux in the magnetic-circuit components (magnet core, magnet disk

10 High-pressure solenoid valve for passenger-car unit injector

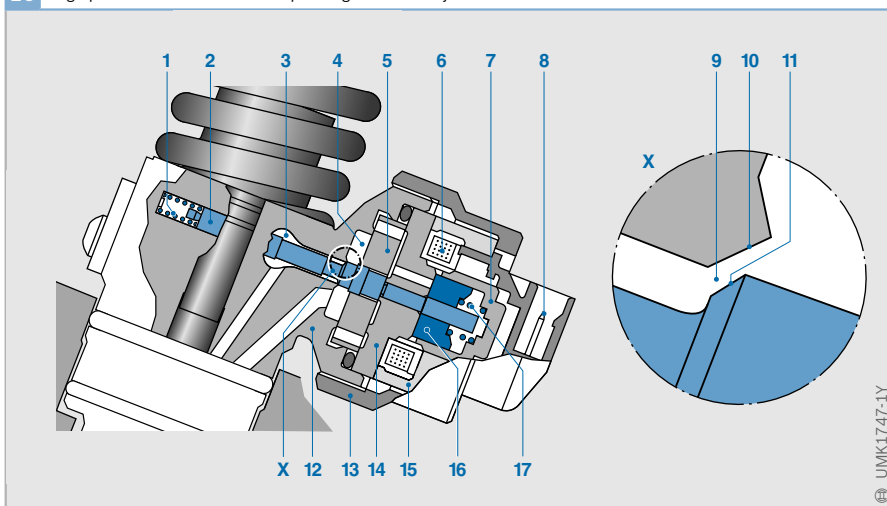


Fig. 10

- 1 Valve spring
- 2 Valve needle
- 3 High-pressure area
- 4 Low-pressure area
- 5 Shim
- 6 Solenoid coil
- 7 Retainer
- 8 Plug
- 9 Valve throughflow cross-section
- 10 Valve-body sealing surface
- 11 Valve-needle sealing surface
- 12 Integral valve body
- 13 Union nut
- 14 Magnetic disk
- 15 Magnet core
- 16 Armature
- 17 Compensating spring

and armature). This magnetic flux generates a magnetic force which pulls in the armature towards the magnet disk (14) and with it moves the valve needle towards the valve body. The armature is pulled in until the valve needle and valve body come into contact at the seal seat and the valve closes. A residual air gap remains between the armature and the magnet disk.

The magnetic force is not only used to pull in the armature, but must at the same time overcome the force exerted by the valve spring and hold the armature against the spring force. In addition, the magnetic force must keep the sealing surfaces in contact with each other with a certain force in order also to withstand the pressure from the element chamber.

When the solenoid valve is closed, pressure is built up in the high-pressure chamber during the downward movement of the pump plunger to facilitate fuel injection. To stop the fuel-injection process, the current through the solenoid coil is switched off. As a result, the magnetic flux and the magnetic force collapse, and the spring forces the valve needle to its normal position against the stop. The valve seat is opened and the pressure in the high-pressure chamber is reduced.

Activation


In order for the high-pressure solenoid valve to close, it is activated with a relatively high pickup current (Fig. 11, a) with a steeply rising edge. This ensures short switching times for the solenoid valve and exact metering of the injected fuel quantity.

When the valve is closed, the pickup current can be reduced to a holding current (c) in order to keep the valve closed. This reduces the heat loss due to current flow. The holding current required is smaller, the nearer the armature is to the magnet disk because a small gap causes a greater magnetic force.

For a brief period between the pickup-current and holding-current phases, constant triggering current is applied to permit the detection of the solenoid-valve closing point ("BIP detection", phase b).

In order to ensure high-speed, defined opening of the solenoid valve at the end of the injection event, a high voltage is applied across the terminals for rapid quenching of the energy stored in the solenoid valve (phase d).

11 Activation sequence of high-pressure solenoid valve

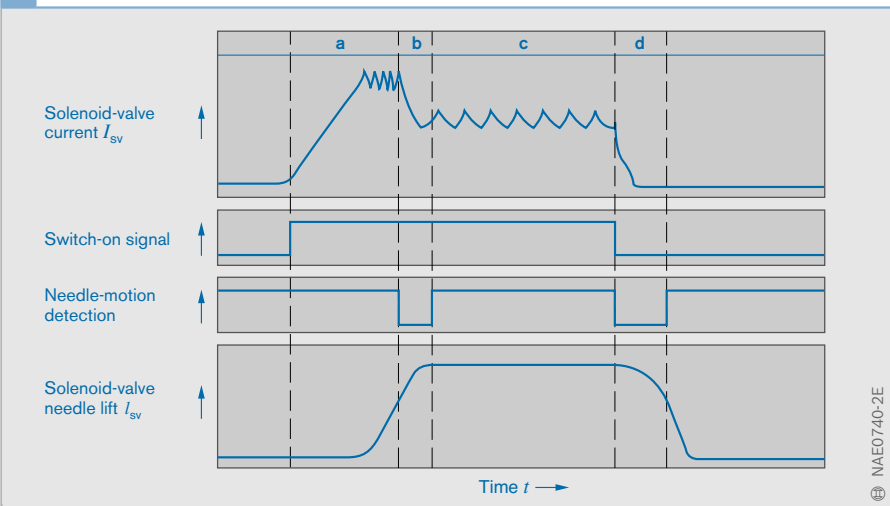

▶ History of diesel fuel injection

Development by Bosch of a fuel-injection system for diesel engines started in 1922. The technological omens were good: Bosch had experience with internal-combustion engines, its production systems were highly advanced and, above all, expertise developed in the production of lubrication pumps could be utilized. Nevertheless, this step was still a substantial risk for Bosch as there were still many difficulties to be overcome.

The first volume-production fuel-injection pumps appeared in 1927. At the time, the level of precision of the product was unmatched. They were small, light, and enabled diesel engines to run at higher speeds. These in-line fuel-injection pumps were used on commercial vehicles from 1932 and in cars from 1936. Since that time, the technological advancement of the diesel engine and its fuel-injection systems has continued unabated.

In 1962 the distributor-type injection pump with automatic timing device developed by Bosch gave the diesel engine an additional boost. More than two decades later, many years of intensive development work at Bosch culminated in the arrival of the electronically controlled diesel fuel-injection system.


The pursuit of ever more precise metering of minute volumes of fuel delivered at exactly the right moment coupled with the aim of increasing the injection pressure is a constant challenge for developers. This has led to many more innovations in the design of fuel-injection systems (see graphic).

In terms of fuel consumption and energy efficiency, the compression-ignition engine remains the benchmark.

New fuel-injection systems have helped to further exploit its potential. In addition, engine performance has been continually improved while noise and exhaust-gas emissions have been consistently lowered.

▶ Milestones in diesel fuel injection


1927
First series in-line
fuel-injection pump




1962
First axial-piston
distributor pump
EP-VM



1986
First electronically
controlled axial-piston
distributor pump




1994
First unit injector system
for commercial vehicles



1995
First unit pump system



1996
First radial-piston
distributor pump



1997
First common-rail
accumulator injection
system



1998
First unit injector system
for passenger cars



Unit pump system (UPS)

The unit pump system (UPS) is used in commercial vehicles and large engines. The unit pump (UP) works in the same way as the unit injector (UI) for commercial vehicles. In contrast to the UI, however, the nozzle and the injector are kept separate in the UP and connected to each other by a short line.

- New cylinder-head design is unnecessary
- Rigid drive, since no rocker arms are needed
- Simple handling for workshop staff since the pumps are easy to remove

Installation and drive

The nozzle in the unit pump system is installed with a nozzle-holder assembly in the cylinder head whereas in the unit injector system it is integrated directly in the injector.

The pump is secured to the side of the engine block (Fig. 1) and driven directly by an injection cam (Fig. 2, item 13) on the engine camshaft via a roller tappet (26). This offers the following advantages over the UI:

Design

In contrast to the unit injector, high-pressure lines are installed in the unit pump between the high-pressure pump and the nozzle. These lines must be able to permanently withstand the maximum pump pressure and the to some extent high-frequency pressure fluctuations which occur during the injection pauses. High-tensile, seamless steel tubes are therefore used. The lines are kept as short as possible and must be of identical length for the individual pumps of an engine.

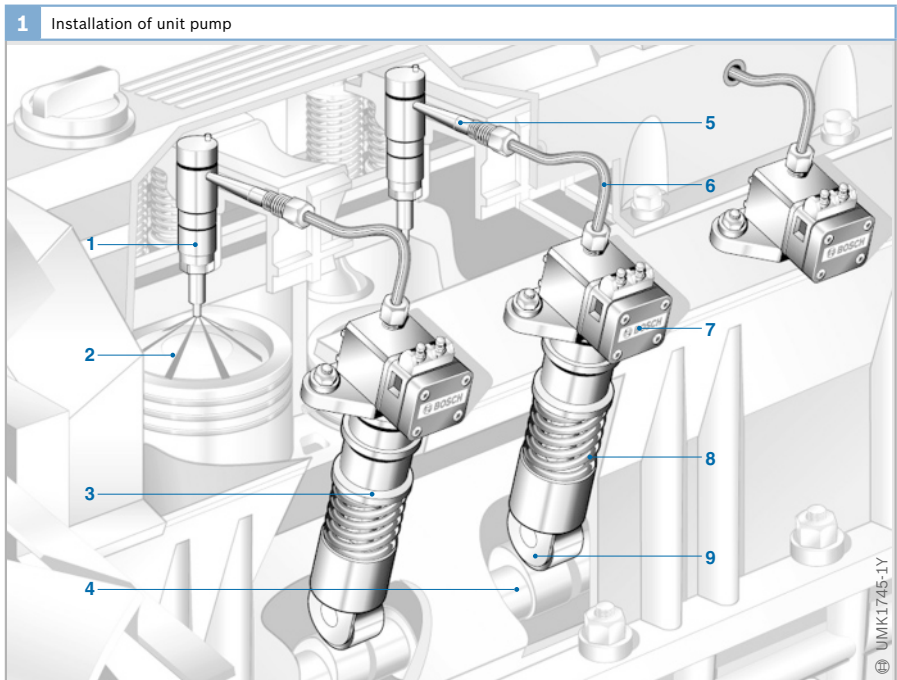


Fig. 1

- 1 Stepped nozzle holder
- 2 Engine combustion chamber
- 3 Unit pump
- 4 Engine camshaft
- 5 Pressure fitting
- 6 High-pressure line
- 7 Solenoid valve
- 8 Return spring
- 9 Roller tappet

2 Design of unit pump for commercial vehicles

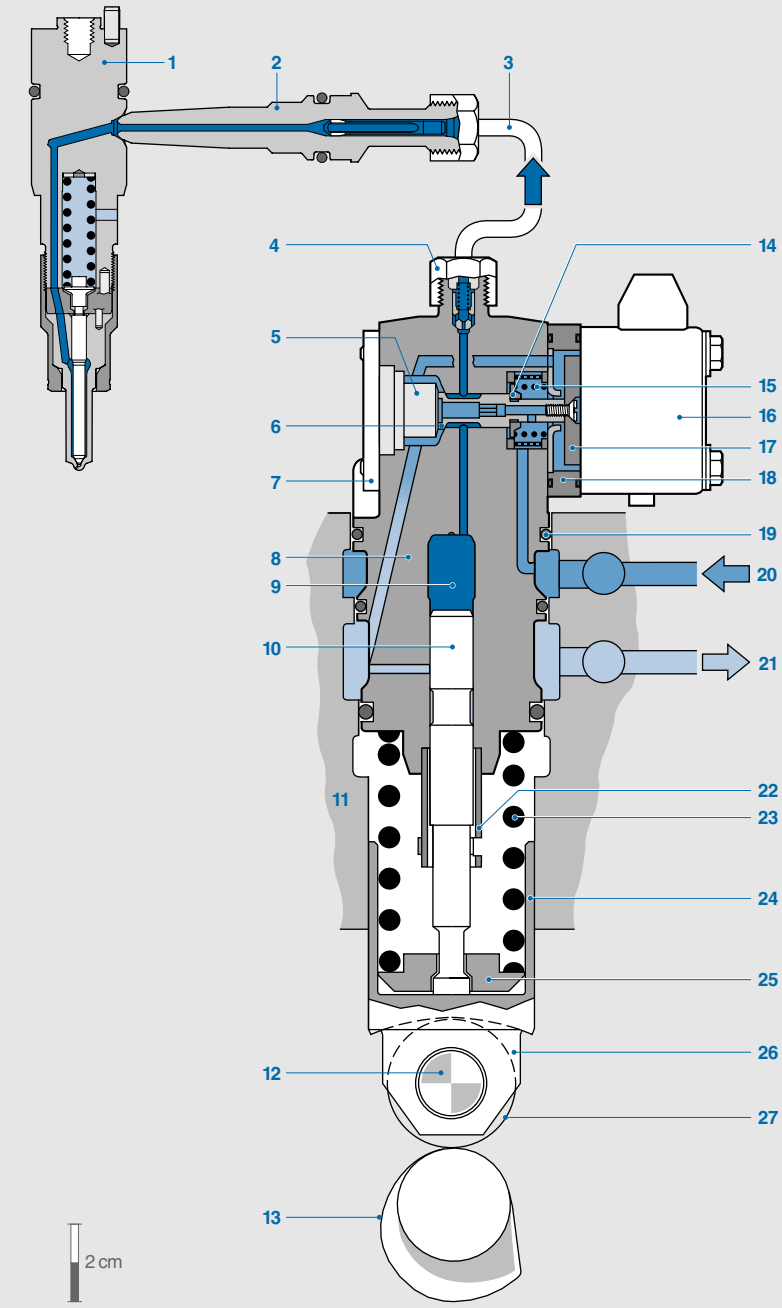


Fig. 2

- 1 Stepped nozzle holder
- 2 Pressure fitting
- 3 High-pressure line
- 4 Connection
- 5 Lift-stop
- 6 Solenoid-valve needle
- 7 Plate
- 8 Pump housing
- 9 High-pressure chamber (element chamber)
- 10 Pump plunger
- 11 Engine block
- 12 Roller-tappet pin
- 13 Cam
- 14 Spring seat
- 15 Solenoid-valve spring
- 16 Valve housing with coil and magnet core
- 17 Armature plate
- 18 Intermediate plate
- 19 Seal
- 20 Fuel supply
- 21 Fuel return
- 22 Pump-plunger retention device
- 23 Tappet spring
- 24 Tappet body
- 25 Spring seat
- 26 Roller tappet
- 27 Tappet roller

2 cm

UMK1746-1Y

Current-controlled rate shaping (CCRS)



The way in which the solenoid valve works described in relation to the unit injector results in a triangular injection curve. In some unit pump systems, a design modification of the solenoid valve is used to produce a boot-shaped injection curve. For this purpose, the solenoid valve is equipped with a moving lift-stop (Fig. 4, item 1), which is used to limit intermediate lift and thereby facilitates a throttled switching state (“boot”).

After the solenoid valve closes, the solenoid-valve current is returned to an intermediate level (Fig. 3, phase c_1) below the holding current (c_2) so that the valve needle rests on the lift-stop. This enables a throttling gap, which limits further pressure buildup. By raising the current, the valve is fully closed again and the “boot” phase is terminated.

This procedure is known as Current-Controlled Rate Shaping (CCRS).

Fig. 3

- a Pickup current (commercial-vehicle UIS/UPS: 12...20 A)
- b BIP detection
- c_1 Holding current for boot-shaped injection
- c_2 Holding current (commercial-vehicle UIS/UPS: 8...14 A)
- d High-speed quenching

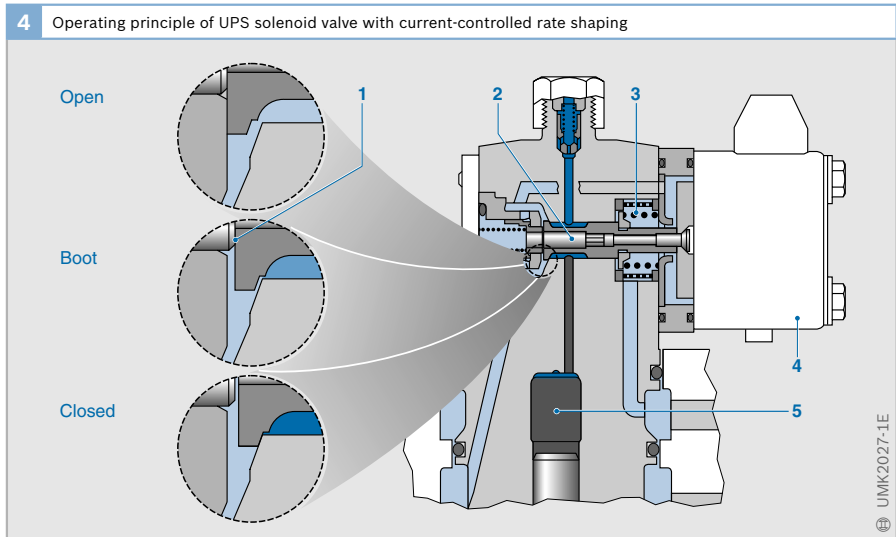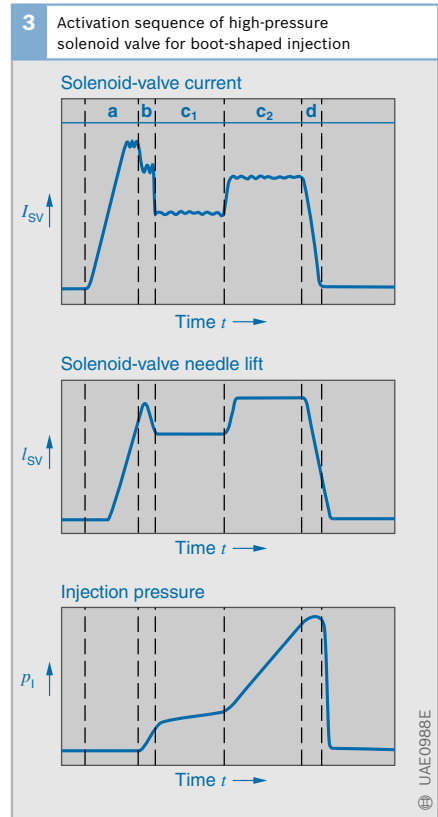

▶ Dimensions of diesel fuel-injection technology

The world of diesel fuel injection is a world of superlatives.

The valve needle of a commercial-vehicle nozzle will open and close the nozzle more than a billion times in the course of its service life. It provides a reliable seal at pressures as high as 2,200 bar and has to withstand many other stresses such as


- the shocks caused by rapid opening and closing (on cars this can take place as frequently as 10,000 times a minute if there are pre- and post-injection phases)
- the high flow-related stresses during fuel injection, and
- the pressure and temperature of the combustion chamber.

The facts and figures below illustrate what modern nozzles are capable of.

- The pressure in the injection chamber can be as high as 2,200 bar. This is equivalent to the pressure produced by the weight of a large executive car acting on an area the size of a fingernail.

- The injection duration is 1...2 milliseconds (ms). In one millisecond, the sound wave from a loudspeaker would travel only about 33 cm.
- The injected fuel quantities on a car engine vary between 1 mm³ (pre-injection) and 50 mm³ (full-load injected fuel quantity); on a commercial vehicle between 3 mm³ (pre-injection) and 350 mm³ (full load). 1 mm³ is equivalent to half the size of a pinhead. 350 mm³ is about the same as 12 large raindrops (30 mm³ per raindrop). That amount of fuel is forced at a velocity of 2,000 km/h through an opening of less than 0.25 mm² in the space of only 2 ms.
- The nozzle-needle guide clearance is 0.002 mm (2 μm). A human hair is 30 times as thick (0.06 mm).

Such high-precision technology demands an enormous amount of expertise in development, materials, production, and measuring equipment.

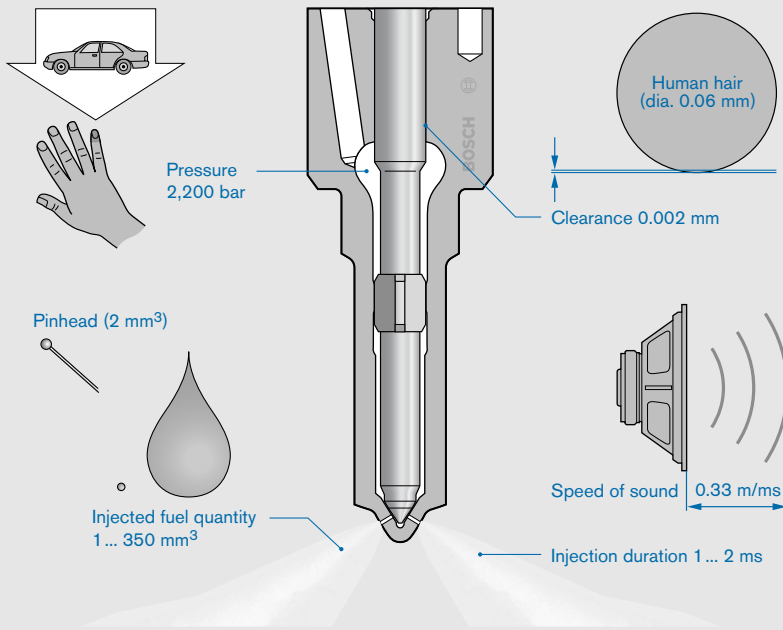

Overview of common-rail systems

The demands placed on diesel-engine fuel-injection systems are continuously increasing. Higher pressures, faster switching times, and a variable rate-of-discharge curve modified to the engine operating state have made the diesel engine economical, clean, and powerful. As a result, diesel engines have even entered the realm of luxury-performance sedans.

One of the advanced fuel-injection systems is the *common-rail (CR)* fuel-injection system. The main advantage of the common-rail system is its ability to vary injection pressure and timing over a broad scale. This was achieved by separating pressure generation (in the high-pressure pump) from the fuel-injection system (injectors). The rail here acts as a pressure accumulator.

Areas of application

The common-rail fuel-injection system for engines with diesel direct injection (Direct Injection, DI) is used in the following vehicles:

- *Passenger cars* ranging from high-economy 3-cylinder engines with displacements of 800 cc, power outputs of 30 kW (41 HP), torques of 100 Nm, and a fuel consumption of 3.5 l/100 km through to 8-cylinder engines in luxury-performance sedans with displacements of approx. 4 l, power outputs of 180 kW (245 HP), and torques of 560 Nm.
- *Light-duty trucks* with engines producing up to 30 kW/cylinder, and
- *Heavy-duty trucks, railway locomotives, and ships* with engines producing up to approx. 200 kW/cylinder

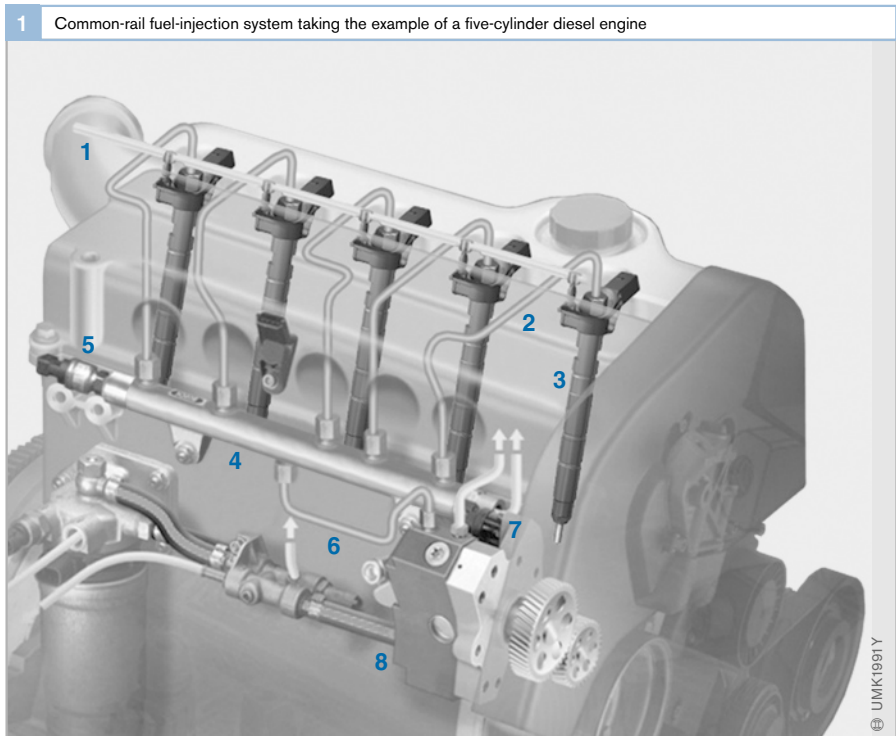


Fig. 1

- 1 Fuel return line
- 2 High-pressure fuel line to injector
- 3 Injector
- 4 Fuel rail
- 5 Rail-pressure sensor
- 6 High-pressure fuel line to rail
- 7 Fuel return line
- 8 High-pressure pump

The common-rail system is a highly flexible system for adapting fuel injection to the engine. This is achieved by:

- High injection pressure up to approx. 1,600 bar, in future up to 1,800 bar.
- Injection pressure adapted to the operating status (200...1,800 bar).
- Variable start of injection.
- Possibility of several pre-injection events and secondary injection events (even highly retarded secondary injection events).

In this way, the common-rail system helps to raise specific power output, lower fuel consumption, reduce noise emission, and decrease pollutant emission in diesel engines.

Today common rail has become the most commonly used fuel-injection system for modern, high-rev passenger-car direct-injection engines.

Design

The common-rail system consists of the following main component groups (Figs. 1 and 2):

- *The low-pressure stage*, comprising the fuel-supply system components.
- *The high-pressure system*, comprising components such as the high-pressure pump, fuel rail, injectors, and high-pressure fuel lines.
- *The electronic diesel control (EDC)*, consisting of system modules, such as sensors, the electronic control unit, and actuators.

The key components of the common-rail system are the injectors. They are fitted with a rapid-action valve (solenoid valve or piezo-triggered actuator) which opens and closes the nozzle. This permits control of the injection process for each cylinder.

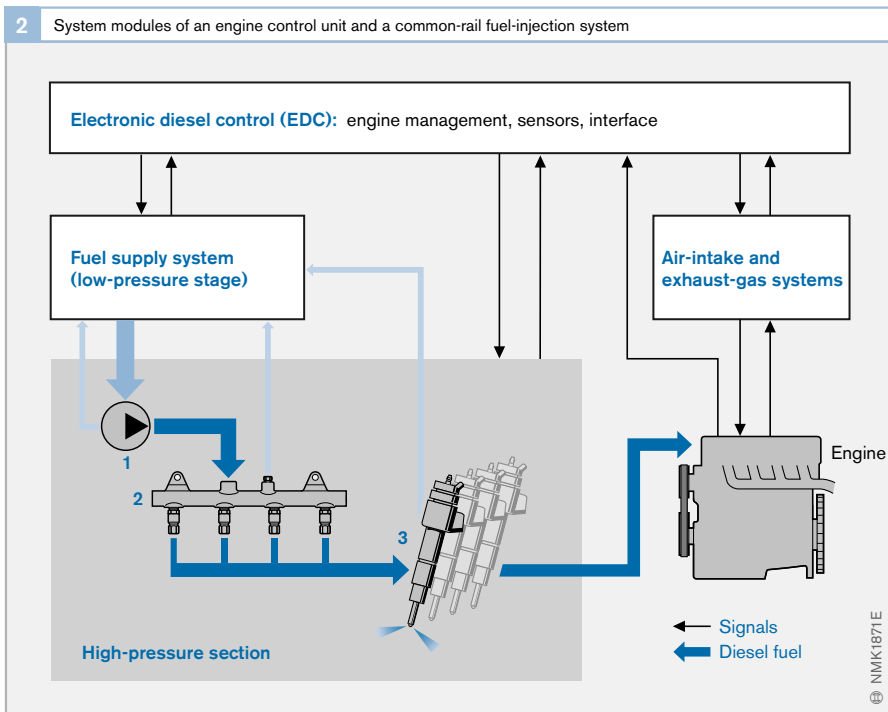


Fig. 2

- 1 High-pressure pump
- 2 Fuel rail
- 3 Injectors

All the injectors are fed by a common fuel rail, this being the origin of the term “common rail”.

One of the main features of the common-rail system is that system pressure is variable dependent on the engine operating point. Pressure is adjusted by the pressure-control valve or the metering unit (Fig. 3).

The modular design of the common-rail system simplifies modification of the system to different engines.

Operating concept

In the common-rail fuel-injection system, the functions of pressure generation and fuel injection are separate. The injection pressure is generated independent of the engine speed and the injected fuel quantity. The electronic diesel control (EDC) controls each of the components.

Pressure generation

Pressure generation and fuel injection are separated by means of an accumulator volume. Fuel under pressure is supplied to the accumulator volume of the common rail ready for injection.

A continuously operating high-pressure pump driven by the engine produces the desired injection pressure. Pressure in the fuel rail is maintained irrespective of engine speed or injected fuel quantity. Owing to the almost uniform injection pattern, the high-pressure pump design can be much smaller and its drive-system torque can be lower than conventional fuel-injection systems. This results in a much lower load on the pump drive.

The high-pressure pump is a radial-piston pump. On commercial vehicles, an in-line fuel-injection pump is sometimes fitted.

Pressure control

The pressure control method applied is largely dependent on the system.


Control on the high-pressure side

On passenger-car systems, the required rail pressure is controlled on the high-pressure side by a pressure-control valve (Fig. 3a, 4). Fuel not required for injection flows back to the low-pressure circuit via the pressure-control valve. This type of control loop allows rail pressure to react rapidly to changes in operating point (e.g. in the event of load changes).

Fig. 3

- a Pressure control on the high-pressure side by means of pressure-control valve for passenger-car applications
- b Pressure control on the suction side with a metering unit flanged to the high-pressure pump (for passenger cars and commercial vehicles)
- c Pressure control on the suction side with a metering unit and additional control with a pressure-control valve (for passenger cars)

- 1 High-pressure pump
- 2 Fuel inlet
- 3 Fuel return
- 4 Pressure-control valve
- 5 Fuel rail
- 6 Rail-pressure sensor
- 7 Injector connection
- 8 Return fuel connection
- 9 Pressure-relief valve
- 10 Metering unit
- 11 Pressure-control valve

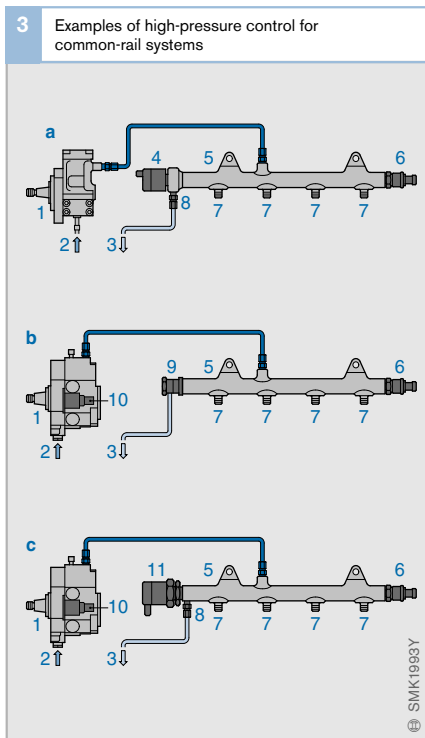

Control on the high-pressure side was adopted on the first common-rail systems. The pressure-control valve is mounted preferably on the fuel rail. In some applications, however, it is mounted directly on the high-pressure pump.

Fuel-delivery control on the suction side

Another way of controlling rail pressure is to control fuel delivery on the suction side (Fig. 3b). The metering unit (10) flanged on the high-pressure pump makes sure that the pump delivers exactly the right quantity of fuel to the fuel rail in order to maintain the injection pressure required by the system. In a fault situation, the pressure-relief valve (9) prevents rail pressure from exceeding a maximum.

Fuel-delivery control on the suction side reduces the quantity of fuel under high pressure and lowers the power input of the pump. This has a positive impact on fuel consumption. At the same time, the temperature of the fuel flowing back to the fuel tank is reduced in contrast to the control method on the high-pressure side.

Two-actuator system

The two-actuator system (Fig. 3c) combines pressure control on the suction side via the metering unit and control on the high-pressure side via the pressure-control valve, thus marrying the advantages of high-pressure-side control and suction-side fuel-delivery control (see the section on “Common-rail system for passenger cars”).

Fuel injection

The injectors spray fuel directly into the engine’s combustion chambers. They are supplied by short high-pressure fuel lines connected to the fuel rail. The engine control unit controls the switching valve integrated in the injector to open and close the injector nozzle.

The injector opening times and system pressure determine the quantity of fuel delivered. At a constant pressure, the fuel quantity delivered is proportional to the switching time of the solenoid valve. This is, therefore, independent of engine or pump speed (time-based fuel injection).

Potential hydraulic power

Separating the functions of *pressure generation* and *fuel injection* opens up further degrees of freedom in the combustion process compared with conventional fuel-injection systems; the injection pressure is more or less freely selectable within the program map. The maximum injection pressure at present is 1,600 bar; in future this will rise to 1,800 bar.

The common-rail system allows a further reduction in exhaust-gas emissions by introducing pre-injection events or multiple injection events and also attenuating combustion noise significantly. Multiple injection events of up to five per injection cycle can be generated by triggering the highly rapid-action switching valve several times. The nozzle-needle closing action is hydraulically assisted to ensure that the end of injection is rapid.

Control and regulation

Operating concept

The engine control unit detects the accelerator-pedal position and the current operating states of the engine and vehicle by means of sensors (see the section on “Electronic diesel control”). The data collected includes:

- Crankshaft speed and angle
- Fuel-rail pressure
- Charge-air pressure
- Intake air, coolant temperature, and fuel temperature
- Air-mass intake
- Road speed, etc.

The electronic control unit evaluates the input signals. In sync with combustion, it calculates the triggering signals for the pressure-control valve or the metering unit, the injectors, and the other actuators (e.g. the EGR valve, exhaust-gas turbocharger actuators, etc.).

The injector switching times, which need to be short, are achievable using the optimized high-pressure switching valves and a special control system.

The angle/time system compares injection timing, based on data from the crankshaft and camshaft sensors, with the engine state (time control). The electronic diesel control (EDC) permits a precise metering of the injected fuel quantity. In addition, EDC offers the potential for additional functions that can improve engine response and convenience.

Basic functions

The basic functions involve the precise control of diesel-fuel injection timing and fuel quantity at the reference pressure. In this way, they ensure that the diesel engine has low consumption and smooth running characteristics.

Correction functions for calculating fuel injection

A number of correction functions are available to compensate for tolerances between the fuel-injection system and the engine (see the section on “Electronic diesel control”):

- Injector delivery compensation
- Zero delivery calibration
- Fuel-balancing control
- Average delivery adaption

Additional functions

Additional open- and closed-loop control functions perform the tasks of reducing exhaust-gas emissions and fuel consumption, or providing added safety and convenience.

Some examples are:

- Control of exhaust-gas recirculation
- Boost-pressure control
- Cruise control
- Electronic immobilizer, etc.

Integrating EDC in an overall vehicle system opens up a number of new opportunities, e.g. data exchange with transmission control or air-conditioning system.

A diagnosis interface permits analysis of stored system data when the vehicle is serviced.

Control unit configuration

As the engine control unit normally has a maximum of only eight output stages for the injectors, engines with more than eight cylinders are fitted with two engine control units. They are coupled within the “master/slave” network via an internal, high-speed CAN interface. As a result, there is also a higher microcontroller processing capacity available. Some functions are permanently allocated to a specific control unit (e.g. fuel-balancing control). Others can be dynamically allocated to one or other of the control units as situations demand (e.g. to detect sensor signals).

Diesel boom in Europe

Diesel engine applications

At the start of automobile history, the spark-ignition engine (Otto cycle) was the drive unit for road vehicles. The first time a diesel engine was mounted on a truck was 1927. Passenger cars had to wait until 1936.

The diesel engine made strong headway in the truck sector due to its fuel economy and long service life. By contrast, the diesel engine in the car sector was long relegated to a fringe existence. It was only with the introduction of supercharged direct-injection diesel engines – the principle of direct injection was already used in the first truck diesel engines – that the diesel engine changed its image. Meanwhile, the percentage of diesel-engined passenger cars among new registrations is fast approaching 50% in Europe.

Features of the diesel engine

What is the reason for the boom in diesel engines in Europe?

Fuel economy

Firstly, fuel consumption compared to gasoline engines is still lower – this is due to the greater efficiency of the diesel engine. Secondly, diesel fuel is subject to lower taxes in most European countries. For people who travel a lot, therefore, diesel is the more economical alternative despite the higher purchase price.

Driving pleasure

Almost all diesel engines on the market are supercharged. This produces a high cylinder charge at low revs. The metered fuel quantity can also be high, and this produces high engine torque. The result is a torque curve that permits driving at high torque and low revs.


It is torque, and not engine performance, that is the decisive factor for engine power. Compared to a gasoline engine without supercharging, a driver can experience more “driving pleasure” with a diesel engine of lower performance. The image of the “stinking slowcoach” is simply no longer true for diesel-engined cars of the latest generation.

Environmental compatibility

The clouds of smoke that diesel-engined cars produced when driven at high loads are a thing of the past. This was brought about by improved fuel-injection systems and electronic diesel control (EDC). These systems can meter fuel quantity with high precision, adjusting it to the engine operating point and environmental conditions. This technology also meets prevailing exhaust-gas emission standards.

Oxidation-type catalytic converters, that remove carbon monoxide (CO) and hydrocarbons (HC) from exhaust gas, are standard equipment on diesel engines. Future, more stringent exhaust-gas emission standards, and even U.S. legislation, will be met by other exhaust-gas treatment systems, such as particulate filters and NO_x accumulator-type catalytic converters.

▶ Typical torque and power curves of a passenger-car diesel engine

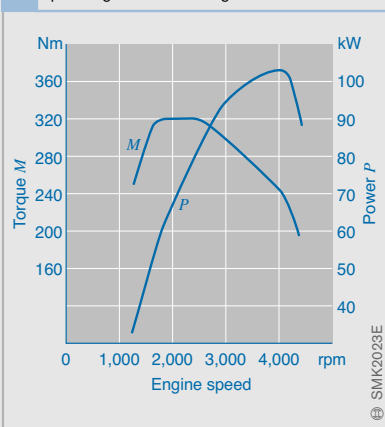

Common-rail system for passenger cars

Fuel supply

In common-rail systems for passenger cars, electric fuel pumps or gear pumps are used to deliver fuel to the high-pressure pump.

Systems with electric fuel pump

The electric fuel pump is either part of the in-tank unit (in the fuel tank) or is fitted in the fuel line (in-line). It intakes fuel via a pre-filter and delivers it to the high-pressure pump at a pressure of 6 bar (Fig. 3). The maximum delivery rate is 190 l/h. To ensure fast engine starting, the pump switches on as soon as the driver turns the ignition key. This builds up the necessary pressure in the low-pressure circuit when the engine starts.

The fuel filter (fine filter) is fitted in the supply line to the high-pressure pump.

Systems with gear pump

The gear pump is flanged to the high-pressure pump and is driven by its input shaft (Figs. 1 and 2). In this way, the gear pump starts delivery only after the engine has started. Delivery rate is dependent on the engine speed and reaches rates up to 400 l/h at pressures up to 7 bar.

A fuel pre-filter is fitted in the fuel tank. The fine filter is located in the supply line to the gear pump.

Combination systems

There are also applications where the two pump types are used. The electric fuel pump improves starting response, in particular for hot starts, since the delivery rate of the gear pump is lower when the fuel is hot, and therefore, thinner, and at low pump speeds.

High-pressure control

On first-generation common-rail systems, rail pressure is controlled by the pressure-control valve. The high-pressure pump (type CP1) generates the maximum delivery quantity, irrespective of fuel demand. The pressure-control valve returns excess fuel to the fuel tank.

Second-generation common-rail systems control rail pressure on the low-pressure side by means of the metering unit (Figs. 1 and 2). The high-pressure pump (types CP3 and CP1H) need only deliver the fuel quantity that the engine actually requires. This lowers the energy demand of the high-pressure pump and reduces fuel consumption.

Third-generation common-rail systems feature piezo-inline injectors (Fig. 3).

If pressure is only adjustable on the low-pressure side, it takes too long to lower the pressure in the fuel rail when rapid negative load changes occur. Adapting pressure to dynamic changes in load conditions is then too slow. This is particularly the case with piezo-inline injectors due to their very low internal leakage. For this reason, some common-rail systems are equipped with an additional pressure-control valve (Fig. 3) besides the high-pressure pump and metering unit. This two-actuator system combines the advantages of control on the low-pressure side with the dynamic response of control on the high-pressure side.

Another advantage compared with control on the low-pressure side only is that the high-pressure side is also controllable when the engine is cold. The high-pressure pump then delivers more fuel than is injected and pressure is controlled by the pressure-control valve. Compression heats the fuel, thus eliminating the need for an additional fuel heater.

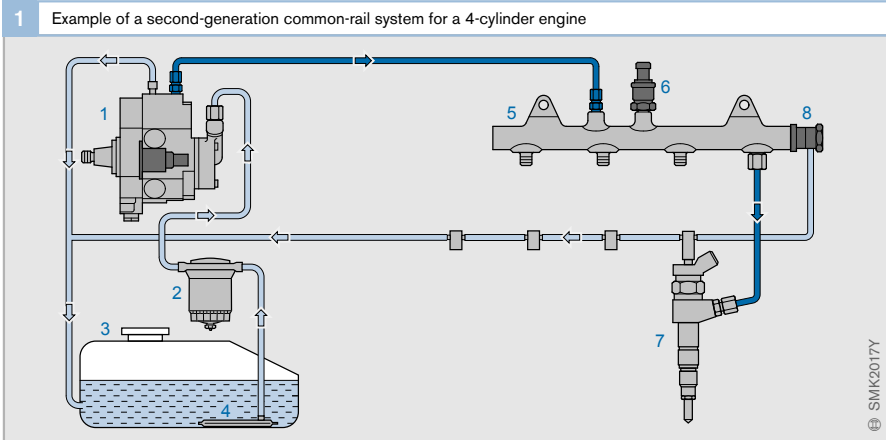


Fig. 1

- 1 High-pressure pump (CP3) with fitted geared presupply pump and metering unit
- 2 Fuel filter with water separator and heater (optional)
- 3 Fuel tank
- 4 Pre-filter
- 5 Fuel rail
- 6 Rail-pressure sensor
- 7 Solenoid-valve injector
- 8 Pressure-relief valve

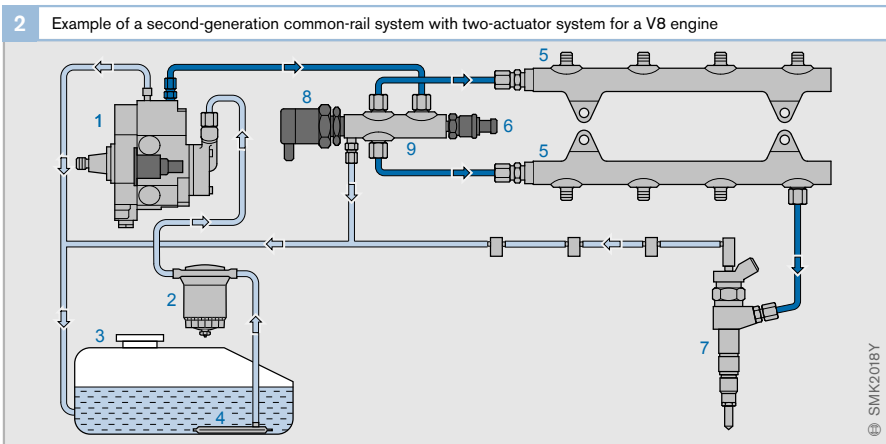


Fig. 2

- 1 High-pressure pump (CP3) with fitted geared presupply pump and metering unit
- 2 Fuel filter with water separator and heater (optional)
- 3 Fuel tank
- 4 Pre-filter
- 5 Fuel rail
- 6 Rail-pressure sensor
- 7 Solenoid-valve injector
- 8 Pressure-control valve
- 9 Function module (distributor)

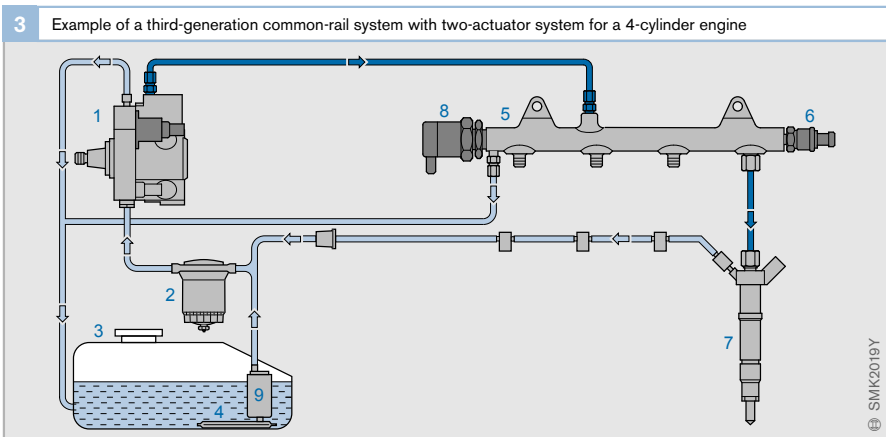


Fig. 3

- 1 High-pressure pump (CP1H) with metering unit
- 2 Fuel filter with water separator and heater (optional)
- 3 Fuel tank
- 4 Pre-filter
- 5 Fuel rail
- 6 Rail-pressure sensor
- 7 Piezo-inline injector
- 8 Pressure-control valve
- 9 Electric fuel pump

System diagram for passenger cars

Fig. 4 shows all the components in a common-rail system for a fully equipped, 4-cylinder, passenger-car diesel engine. Depending on the type of vehicle and its application, some of the components may not be fitted.

The sensors and setpoint generators (A) are not depicted in their real installation position to simplify presentation. Exceptions are the exhaust-gas treatment sensors (F) and the rail-pressure sensor as their installation positions are required to understand the system.

Data exchange between the various sections takes place via the CAN bus in the “Interfaces” (B) section:

- Starter motor
- Alternator
- Electronic immobilizer
- Transmission control
- Traction Control System (TSC)
- Electronic Stability Program (ESP)

The instrument cluster (13) and the air-conditioning system (14) are also connectable to the CAN bus.

Two possible combined systems are described (a or b) for exhaust-gas treatment.

Fig. 4

Engine, engine management, and high-pressure fuel-injection components

- 17 High-pressure pump
- 18 Metering unit
- 25 Engine ECU
- 26 Fuel rail
- 27 Rail-pressure sensor
- 28 Pressure-control valve (DRV 2)
- 29 Injector
- 30 Glow plug
- 31 Diesel engine (DI)
- M Torque

A Sensors and setpoint generators

- 1 Pedal-travel sensor
- 2 Clutch switch
- 3 Brake contacts (2)
- 4 Operator unit for vehicle-speed controller (cruise control)
- 5 Glow-plug and starter switch (“ignition switch”)
- 6 Road-speed sensor
- 7 Crankshaft-speed sensor (inductive)
- 8 Camshaft-speed sensor (inductive or Hall sensor)
- 9 Engine-temperature sensor (in coolant circuit)
- 10 Intake-air temperature sensor
- 11 Boost-pressure sensor
- 12 Hot-film air-mass meter (intake air)

B Interfaces

- 13 Instrument cluster with displays for fuel consumption, engine speed, etc.
- 14 Air-conditioner compressor with operator unit
- 15 Diagnosis interface
- 16 Glow control unit
- CAN Controller Area Network
(on-board serial data bus)

C Fuel-supply system (low-pressure stage)

- 19 Fuel filter with overflow valve
- 20 Fuel tank with pre-filter and Electric Fuel Pump, EFP (presupply pump)
- 21 Fuel-level sensor

D Additive system

- 22 Additive metering unit
- 23 Additive control unit
- 24 Additive tank


E Air supply

- 32 Exhaust-gas recirculation cooler
- 33 Boost-pressure actuator
- 34 Turbocharger (in this case with Variable Turbine Geometry (VTG))
- 35 Control flap
- 36 Exhaust-gas recirculation actuator
- 37 Vacuum pump

F Exhaust-gas treatment

- 38 Broadband lambda oxygen sensor, type LSU
- 39 Exhaust-gas temperature sensor
- 40 Oxidation-type catalytic converter
- 41 Particulate filter
- 42 Differential-pressure sensor
- 43 NO_x accumulator-type catalytic converter
- 44 Broadband lambda oxygen sensor, optional NO_x sensor

4 Common-rail diesel fuel-injection system for cars

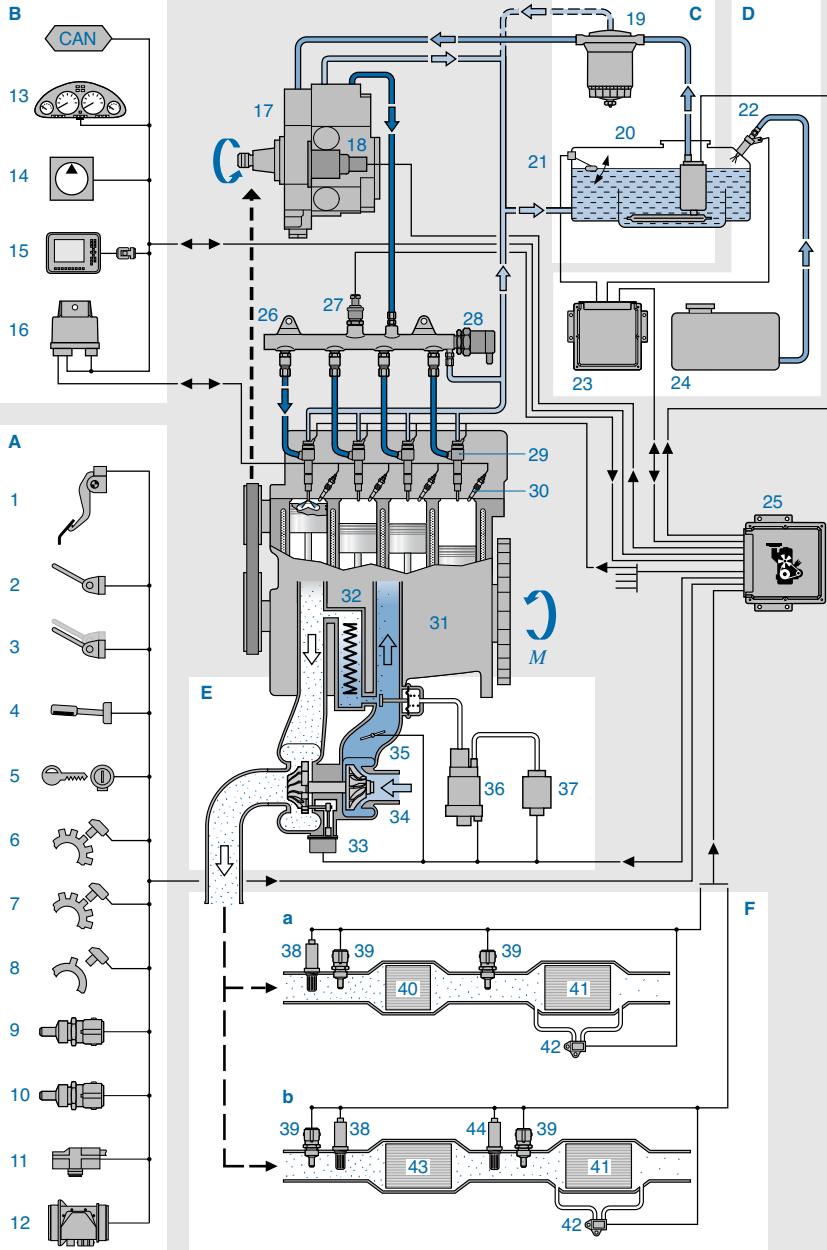

▶ Overview of diesel fuel-injection systems

Areas of application

Diesel engines are characterized by high fuel economy. Since the first volume-production fuel-injection pump was introduced by Bosch in 1927, fuel-injection systems have experienced a process of continuous development.

Diesel engines are used in a wide variety of design for many different purposes (Fig. 1 and Table 1), for example

- To drive mobile power generators (up to approx. 10 kW/cylinder)
- As fast-running engines for cars and light-duty trucks (up to approx. 50 kW/cylinder)
- As engines for construction-industry and agricultural machinery (up to approx. 50 kW/cylinder)
- As engines for heavy trucks, omnibuses and tractor vehicles (up to approx. 80 kW/cylinder)
- To drive fixed installations such as emergency power generators (up to approx. 160 kW/cylinder)
- As engines for railway locomotives and ships (up to 1,000 kW/cylinder)

Requirements

Ever stricter statutory regulations on noise and exhaust-gas emissions and the desire for more economical fuel consumption continually place greater demands on the fuel-injection system of a diesel engine.

Basically, the fuel-injection system is required to inject a precisely metered amount of fuel at high pressure into the combustion chamber in such a way that it mixes effectively with the air in the cylinder as demanded by the type of engine (direct or indirect-injection) and its present operating status. The power output and speed of a diesel engine is controlled by means of the injected fuel quantity as it has no air intake throttle.

Mechanical control of diesel fuel-injection systems is being increasingly replaced by **Electronic Diesel Control (EDC)** systems. All new diesel-injection systems for cars and commercial vehicles are electronically controlled.

1 Applications for Bosch diesel fuel-injection systems

| M | | M | M | A/P | P/H | ZWM | ZWM |
|----|----|-----|-----|-----|-----|-------|-------|
| MW | MW | MW | MW | MW | MW | CW | CW |
| PF | | | PF | PF | PF | PF | PF |
| VE | | VE | VE | VE | VE | | VE |
| VR | | VR | VR | VR | VR | | |
| | | UIS | UIS | UIS | UIS | UIS | |
| | | | | UPS | UPS | UPS | UPS |
| | | | | | | PF(R) | PF(R) |
| | | CR | CR | CR | CR | CR | CR |

Fig. 1
 M, MW,
 A, P, H,
 ZWM,
 CW In-line fuel-injection
 pumps of increas-
 ing size
 PF Discrete fuel-
 injection pumps
 VE Axial-piston pumps
 VR Radial-piston
 pumps
 UIS Unit injector system
 UPS Unit pump system
 CR Common-rail
 system

Common-rail system for commercial vehicles

Fuel supply



Presupply

Common-rail systems for light-duty trucks differ very little from passenger-car systems. Electric fuel pumps or gear pumps are used for fuel presupply. On common-rail systems for heavy-duty trucks, only gear pumps are used to deliver fuel to the high-pressure pump (see the subsection “Gear-type supply pump” in the section “Fuel supply in the low-pressure stage”). The presupply pump is normally flanged to the high-pressure pump

(Figs. 1 and 2). In many applications, it is mounted on the engine.

Fuel filtering

As opposed to passenger-car systems, the fuel filter (fine filter) is fitted to the pressure side. For this reason, an exterior fuel inlet is required, in particular when the gear pump is flanged to the high-pressure pump.

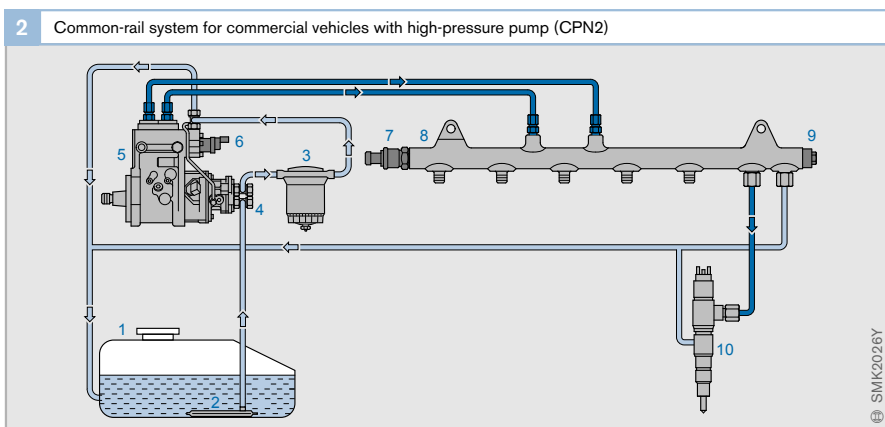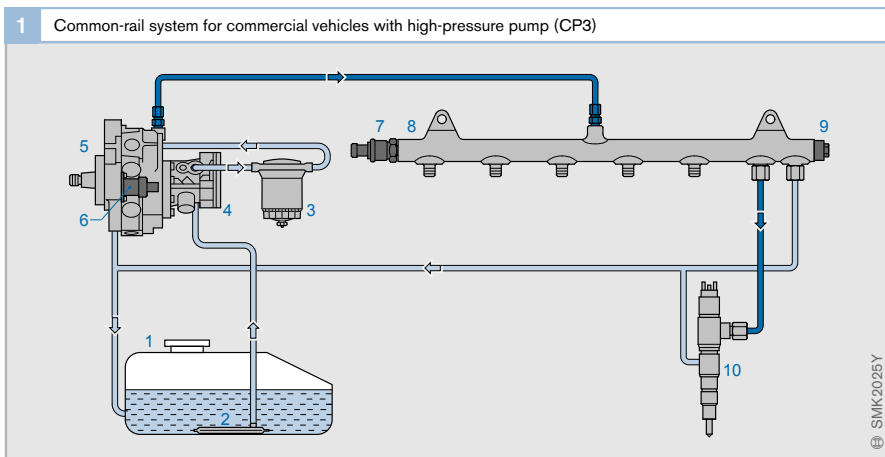

System diagram for commercial vehicles

Fig. 3 shows all the components in a common-rail system for a 6-cylinder commercial-vehicle diesel engine. Depending on the type of vehicle and its application, some of the components may not be fitted.

Only the sensors and setpoint generators are depicted at their real position to simplify presentation, as their installation positions are required to understand the system.

Data exchange to the various sections takes place via the CAN bus in the “Interfaces” (B) section (e.g. transmission control, Traction Control System (TCS), Electronic Stability

Program (ESP), oil-grade sensor, trip recorder, Active Cruise Control (ACC), brake coordinator – up to 30 ECUs). The alternator (18) and the air-conditioning system (17) are also connectable to the CAN bus.

Three systems are described for exhaust-gas treatment: a purely DPF system (a) mainly for the U.S. market, a purely SCR system (b) mainly for the EU market, and a combined system (c).

Fig. 3

Engine, engine management, and high-pressure fuel-injection components

- 22 High-pressure pump
- 29 Engine ECU
- 30 Fuel rail
- 31 Rail-pressure sensor
- 32 Injector
- 33 Relay
- 34 Auxiliary equipment (e.g. retarder, exhaust flap for engine brake, starter motor, fan)
- 35 Diesel engine (DI)
- 36 Flame glow plug (alternatively grid heater)
- M* Torque

A Sensors and setpoint generators

- 1 Pedal-travel sensor
- 2 Clutch switch
- 3 Brake contacts (2)
- 4 Engine brake contact
- 5 Parking brake contact
- 6 Operating switch (e.g. vehicle-speed controller, intermediate-speed regulation, rpm- and torque reduction)
- 7 Starter switch (“ignition lock”)
- 8 Turbocharger-speed sensor
- 9 Crankshaft-speed sensor (inductive)
- 10 Camshaft-speed sensor
- 11 Fuel-temperature sensor
- 12 Engine-temperature sensor (in coolant circuit)
- 13 Boost-air temperature sensor
- 14 Boost-pressure sensor
- 15 Fan-speed sensor
- 16 Air-filter differential-pressure sensor

B Interfaces

- 17 Air-conditioner compressor with operator unit
- 18 Alternator
- 19 Diagnosis interface

- 20 SCR control unit

- 21 Air compressor

CAN Controller Area Network (on-board serial data bus) (up to three data buses)

C Fuel-supply system (low-pressure stage)

- 23 Fuel presupply pump
- 24 Fuel filter with water-level and pressure sensors
- 25 Control unit cooler
- 26 Fuel tank with pre-filter
- 27 Pressure-relief valve
- 28 Fuel-level sensor


D Air intake

- 37 Exhaust-gas recirculation cooler
- 38 Control flap
- 39 Exhaust-gas recirculation positioner with exhaust-gas recirculation valve and position sensor
- 40 Intercooler with bypass for cold starting
- 41 Exhaust-gas turbocharger (in this case with variable turbine geometry) with position sensor
- 42 Boost-pressure actuator

E Exhaust-gas treatment

- 43 Exhaust-gas temperature sensor
- 44 Oxidation-type catalytic converter
- 45 Differential-pressure sensor
- 46 Catalyst-coated particulate filter (CSF)
- 47 Soot sensor
- 48 Level sensor
- 49 Reducing-agent tank
- 50 Reducing-agent pump
- 51 Reducing-agent injector
- 52 NO_x sensor
- 53 SCR catalytic converter
- 54 NH₃ sensor

3 Common-rail diesel fuel-injection system for commercial vehicles

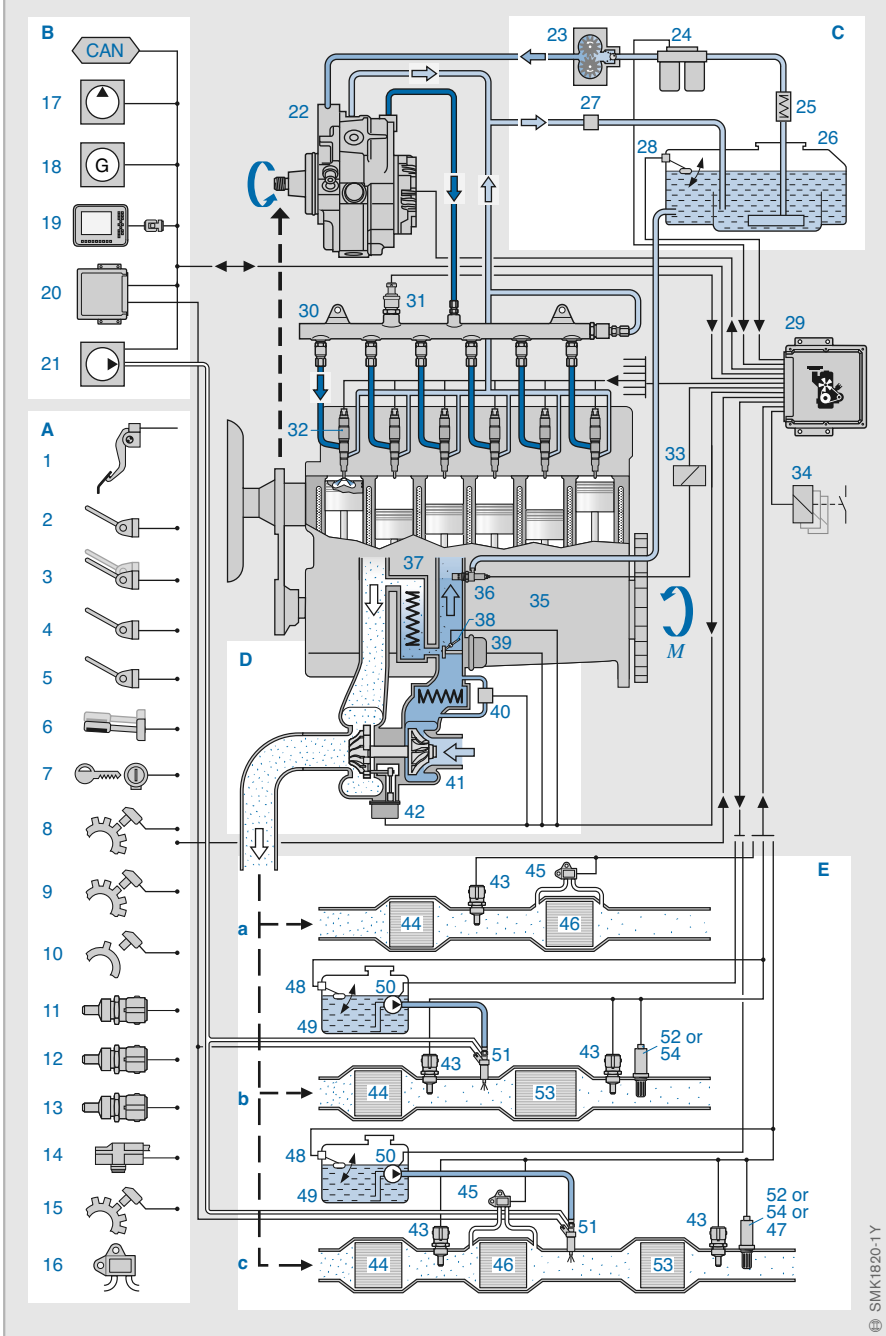

High-pressure components of common-rail system

The high-pressure stage of the common-rail system is divided into three sections: pressure generation, pressure storage, and fuel metering. The high-pressure pump assumes the function of pressure generation. Pressure storage takes place in the fuel rail to which the rail-pressure sensor and the pressure-control and pressure-relief valves are fitted. The function of the injectors is correct timing and metering the quantity of


fuel injected. High-pressure fuel lines interconnect the three sections.

Overview

The main difference in the various generations of common-rail systems lie in the design of the high-pressure pump and the injectors, and in the system functions required (Table 1).

| 1 Overview of common-rail systems | | | |
|--|------------------------------------|-------------------------|---|
| CR generation | Maximum pressure | Injector | High-pressure pump |
| 1st generation Pass. cars | 1,350...1,450 bar | Solenoid-valve injector | CP1 Pressure control on high-pressure side by pressure-control valve |
| 1st generation Comm. veh. | 1,400 bar | Solenoid-valve injector | CP2 Suction-side fuel-delivery control by two solenoid valves |
| 2nd generation Pass. cars and comm. veh. | 1,600 bar | Solenoid-valve injector | CP3, CP1H Suction-side fuel-delivery control by metering unit |
| 3rd generation Pass. cars | 1,600 bar (in future 1,800 bar) | Piezo-inline injector | CP3, CP1H Suction-side fuel-delivery control by metering unit |
| 3rd generation Comm. veh. | 1,800 bar | Solenoid-valve injector | CP3.3NH Metering unit |

Table 1

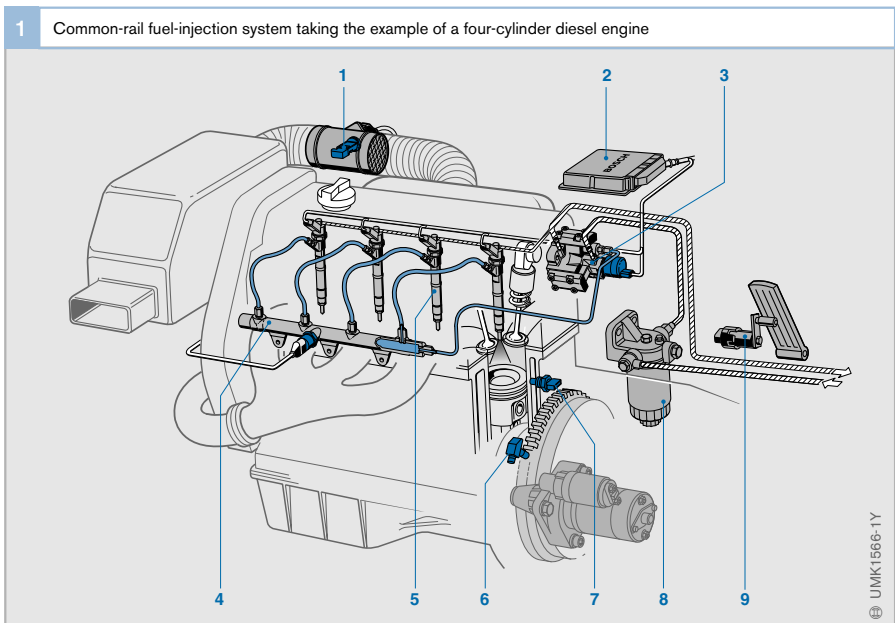

Cleanliness requirements

Cleanliness quality



The sharp rise in the performance of new assemblies, e.g. the common-rail system for high-pressure diesel fuel injection, requires extreme precision in machining, and ever tighter tolerances and fits. Particle residue from the production process may lead to increased wear, or even the total failure of the assembly. This results in high requirements and tight tolerances for cleanliness quality, with a continuous reduction in the permitted particle size.

The cleanliness quality of components is currently determined in the production process by light-microscope image-analysis systems. They supply information on particle-size distribution. Additional information, such as the nature of the particles and their chemical composition, is required to develop innovative cleaning processes. This information is obtained by electron microscopes.

Particle-analysis system (SEM)

Bosch uses a particle-analysis system based on a **Scanning Electron Microscope (SEM)**. This system performs an automated analysis of particles adhering to a product. The results of the analysis show particle-size distribution, the chemical composition of the particles, and images of the individual particles. Using this information, the source of the particles are identifiable. Action can then be taken to avoid, reduce, or wash off certain particle types. In this way, solutions are not based on the increased use of cleaning techniques, but on avoiding and reducing residual soiling during the production process.

The automated particle-analysis system (SEM) provides the cleanliness process with an analysis system that produces important information on the type of residual soiling. The precise identification of particles and their sources is vital to developing new cleaning techniques.

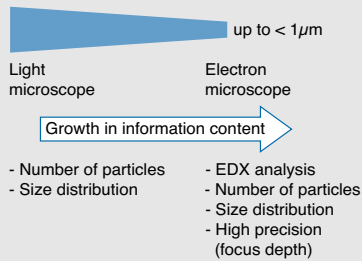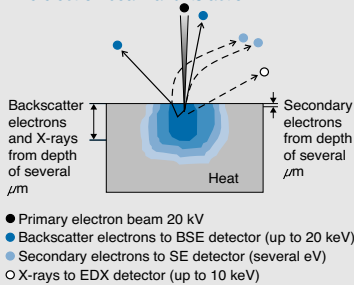Principle of the particle-analysis system (SEM)**Evolution of particulate-analysis process****The electron beam and its action****Detection of interaction between electron beam and sample****SE detector**

Secondary electrons of sample surface are converted into image signals.

- Plastic image of surface (REM images).

BSE detector

Backscatter electrons are converted into image signals.

- Phase composition
- TOPO mode plastic image

EDX detector

Characteristic X-ray is converted into "energy-dispersive" spectrum.

- Identification of chemical elements

Injector

On a common-rail diesel injection system, the injectors are connected to the fuel rail by short high-pressure fuel lines. The injectors are sealed to the combustion chamber by a copper gasket. The injectors are fitted into the cylinder head by means of taper locks. Depending on the injection-nozzle design, common-rail injectors are intended for straight or inclined mounting in direct-injection diesel engines.

One of the system's features is that it generates an injection pressure irrespective of engine speed or injected fuel quantity. The start of injection and injected fuel quantity are controlled by the electrically triggered injector. The injection time is controlled by the angle/time system of the Electronic Diesel Control (EDC). This requires the use

of sensors to detect the crankshaft position and the camshaft position (phase detection).


An optimum mixture formation is required to reduce exhaust-gas emissions and comply with continuous demands to reduce the noise of diesel engines. This calls for injectors with very small pre-injection quantities and multiple injection events.

There are presently three different injector types in serial production:

- Solenoid-valve injectors with one-part armature
- Solenoid-valve injectors with two-part armature
- Injector with piezo actuator

Fig. 1

- a Resting position
 b Injector opens
 c Injector closes
- 1 Fuel-return
 2 Solenoid coil
 3 Overstroke spring
 4 Solenoid armature
 5 Valve ball
 6 Valve-control chamber
 7 Nozzle spring
 8 Pressure shoulder of nozzle needle
 9 Chamber volume
 10 Injection orifice
 11 Solenoid-valve spring
 12 Outlet restrictor
 13 High-pressure connection
 14 Inlet restrictor
 15 Valve plunger (control plunger)
 16 Nozzle needle

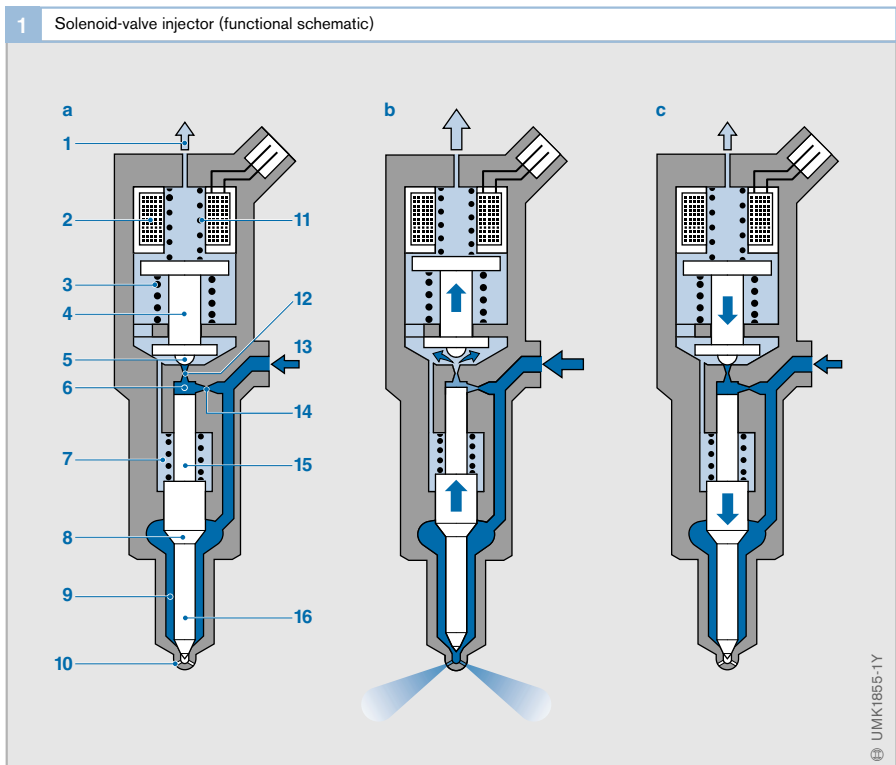

Solenoid-valve injector

Design

The injector can be subdivided into a number of function modules:

- The hole-type nozzle (see the section on “Injection nozzle”)
- The hydraulic servo system
- The solenoid valve

Fuel is conveyed by the high-pressure connection (Fig. 1a, 13) via a supply passage to the injection nozzle and via an inlet restrictor (14) to the valve-control chamber (6). The valve-control chamber is connected to the fuel return (1) via the outlet restrictor (12) which can be opened by a solenoid valve.

Operating concept

The function of the injector can be subdivided into four operating states when the engine and the high-pressure pump are operating:

- Injector closed (with high pressure applied)
- Injector opens (start of injection)
- Injector fully open
- Injector closes (end of injection)

The operating states are caused by the balance of forces acting on the injector components. When the engine is not running and the fuel rail is not pressurized, the nozzle spring closes the injector.

Injector closed (resting position)

In its resting position, the injector is not triggered (Fig. 1a). The solenoid-valve spring (11) presses the valve ball (5) onto the seat of the outlet restrictor (12). Inside of the valve-control chamber, the pressure rises to the pressure in the fuel rail. The same pressure is also applied to the chamber volume (9) of the nozzle. The forces applied by the rail pressure to the end faces of the control plunger (15), and the force of the nozzle spring (7) retain the nozzle needle closed against the opening force applied to its pressure shoulders (8).

Injector opens (start of injection)

To begin with, the injector is in its resting position. The solenoid valve is triggered by the “pickup current”. This makes the solenoid valve open very rapidly (Fig. 1b). The required rapid switching times are achieved by controlling solenoid-valve triggering in the ECU at high voltages and currents.

The magnetic force of the now triggered electromagnet exceeds the force of the valve spring. The armature raises the valve ball from the valve seat and opens the outlet restrictor. After a short time the increased pickup current is reduced to a lower holding current in the electromagnet. When the outlet restrictor opens, fuel flows from the valve-control chamber to the cavity above and then via the fuel-return line to the fuel tank. The inlet restrictor (14) prevents a complete pressure compensation. As a result, pressure in the valve-control chamber drops. Pressure in the valve-control chamber falls below the pressure in the nozzle chamber, which is still the same as the pressure in the fuel rail. The reduction in pressure in the valve-control chamber reduces the force acting on the control plunger and opens the nozzle needle. Fuel injection commences.

Injector fully open

The rate of movement of the nozzle needle is determined by the difference in the flow rates through the inlet and outlet restrictors. The control plunger reaches its upper stop and dwells there on a cushion of fuel (hydraulic stop). The cushion is created by the flow of fuel between the inlet and outlet restrictors. The injector nozzle is then fully open. Fuel is injected into the combustion chamber at a pressure approaching that in the fuel rail.

The balance of forces in the injector is similar to that during the opening phase. At a given system pressure, the fuel quantity injected is proportional to the length of time that the solenoid valve is open. This is entirely independent of the engine or pump speed (time-based injection system).

Injector closes (end of injection)

When the solenoid valve is no longer triggered, the valve spring presses the armature down and the valve ball closes the outlet restrictor (Fig. 1c). When the outlet restrictor closes, pressure in the control chamber rises again to that in the fuel rail via the inlet restrictor. The higher pressure exerts a greater force on the control plunger. The force on the valve-control chamber and the nozzle-spring force then exceed the force acting on the nozzle needle, and the nozzle needle closes. The flow rate of the inlet restrictor determines the closing speed of the nozzle needle. The fuel-injection cycle comes to an end when the nozzle needle is resting against its seat, thus closing off the injection orifices.

This indirect method is used to trigger the nozzle needle by means of a hydraulic servo system because the forces required to open the nozzle needle rapidly cannot be generated directly by the solenoid valve. The “control volume” required in addition to the injected fuel quantity reaches the fuel-return line via the restrictors in the control chamber.

In addition to the control volume, there are also leakage volumes through the nozzle-needle and valve-plunger guides. The control and leakage volumes are returned to the fuel tank via the fuel-return line and a collective line that comprises an overflow valve, high-pressure pump, and pressure-control valve.

Program-map variants*Program maps with fuel-quantity flat curve*

With injectors, a distinction is made in the program map between ballistic and non-ballistic modes. The valve plunger/nozzle needle unit reaches the hydraulic stop if the triggering period in vehicle operation is of sufficient length (Fig. 2a). The section until the nozzle needle reaches its maximum stroke is termed ballistic mode. The ballistic and nonballistic sections in the fuel-quantity map, where the injected fuel quantity is applied for the triggering period (Fig. 2b), is separated by a kink in the program map. Another feature of the fuel-quantity map is

the flat curve that occurs with small triggering periods. The flat curve is caused by the solenoid armature rebounding on opening. In this section, the injected fuel quantity is independent on the triggering period. This allows small injected fuel quantities to be represented as stable. Only after the armature has stopped rebounding does the injected fuel quantity curve continue to rise linearly as the triggering period becomes longer.

Injection events with small injected fuel quantities (short triggering periods) are used as pre-injection in order to suppress noise. Secondary injection events help to enhance soot oxidation in selected sections of the operating curve.

Program maps without fuel-quantity flat curve

The increasing stringency of emission-control legislation has led to the use of the two system functions: *injector delivery compensation* (IMA) and *zero delivery calibration* (NMK), as well as to short intervals in injection between pre-injection, main injection, and secondary injection events. With injectors that have no flat-curve section, IMA allows a precise adjustment of the pre-injection fuel quantity when new. NMK corrects fuel-quantity drifts over time in the low-pressure section. The key condition for deploying these two system functions is a constant, linear rise in quantity, i.e. there is no flat curve in the fuel-quantity map (Fig. 2c). If the valve plunger/nozzle needle unit is operated in nominal mode without lift-stop at the same time, this represents a fully ballistic operating mode of the valve plunger and there is no kink in the fuel-quantity map.


Injector variants

A distinction is made between two different solenoid-valve concepts with solenoid-valve injectors:

- Injectors with one-part armature (1-spring system)
- Injectors with two-part armature (2-spring system)

The short intervals between injection events are ensured when the armature can return to its resting position very rapidly on closing. This is best achieved by a two-part armature with an overstroke stop. During the closing process, the armature plate moves down by positive locking. The bottoming-out of the armature plate is limited by an overstroke stop. As a result, the armature reaches its resting position faster. Armature rebound

on closing can end faster by decoupling the armature masses and adapting the setting parameters. This helps to achieve shorter intervals between two injection events with the two-part armature concept.

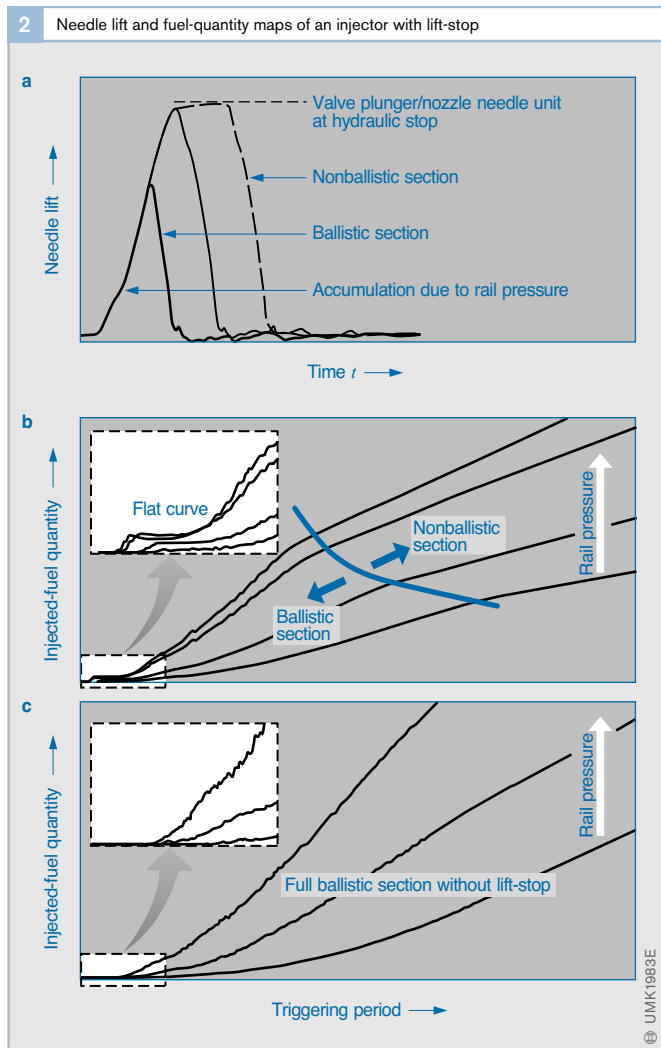

Triggering the solenoid-valve injector

In its resting position, the injector's high-pressure solenoid valve is not triggered and is therefore closed. The injector injects when the solenoid valve opens.

Triggering the solenoid valve is divided into five phases (Figs. 3 and 4).

Opening phase

Initially, in order to ensure tight tolerances and high levels of reproducibility for the injected fuel quantity, the current for opening the solenoid valve features a steep, precisely defined flank and increases rapidly up to approx. 20 A. This is achieved by means of a *booster voltage* of up to 50 V. It is generated in the control unit and stored in a capacitor (booster-voltage capacitor). When this voltage is applied across the solenoid valve, the current increases several times faster than it does when only battery voltage is used.

Pickup-current phase

During the pickup-current phase, battery voltage is applied to the solenoid valve and assists in opening it quickly. Current control limits pickup current to approx. 20 A.

Holding-current phase

In order to reduce power loss in the ECU and injector, the current is dropped to approx. 13 A in the holding-current phase.

The energy which becomes available when pickup current and holding current are reduced is routed to the booster-voltage capacitor.

Switchoff

When the current is switched off in order to close the solenoid valve, the surplus energy is also routed to the booster-voltage capacitor.

Recharging the step-up chopper

Recharging takes place by means of a step-up chopper integrated in the ECU. The energy tapped during the opening phase is recharged at the start of the pickup phase until the original voltage required to open the solenoid valve is reached.

3 Triggering sequence of a high-pressure solenoid valve for a single injection event


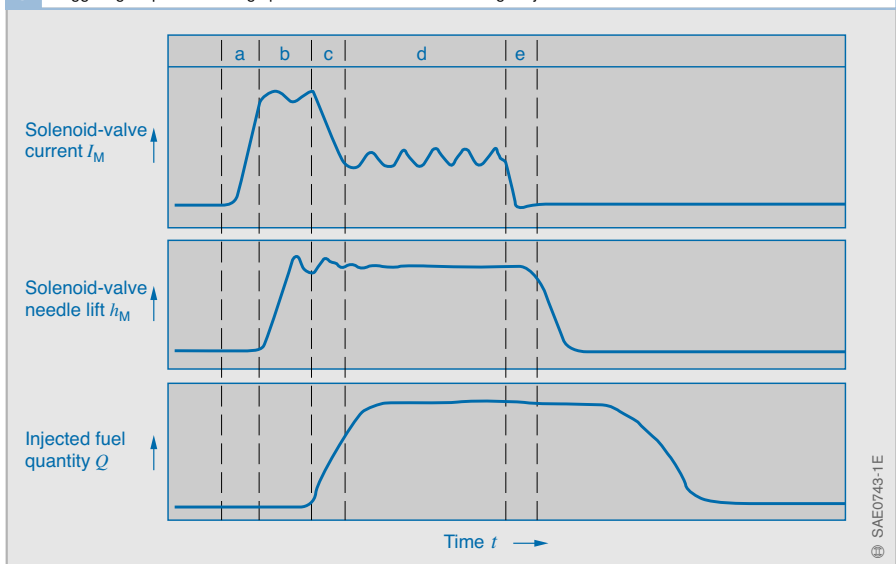


Fig. 3


- a Opening phase
- b Pickup-current phase
- c Transition to holding-current phase
- d Holding-current phase
- e Switchoff

4 Common-rail system: Block diagram of the triggering phases for a cylinder group


a Opening phase

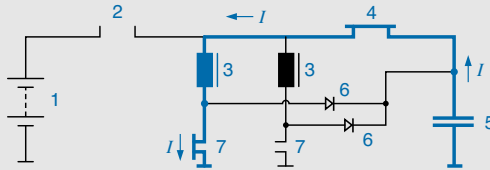


b Pickup-current phase

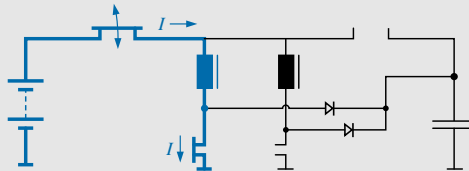


c Transition to holding-current phase

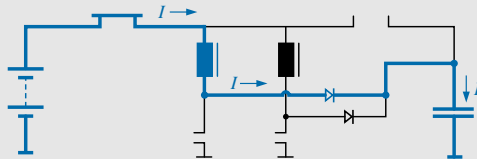

d Holding-current phase

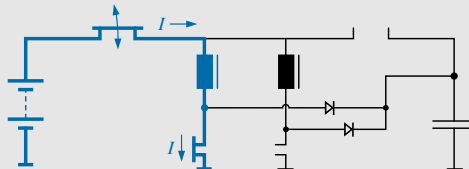

e Switchoff

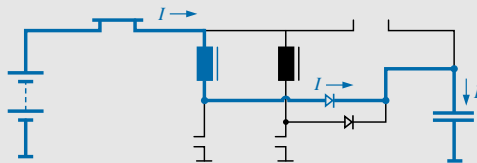

f Recharging the step-up chopper

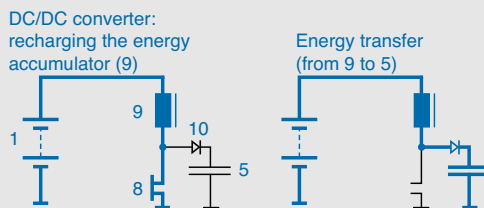


Fig. 4

- 1 Battery
- 2 Current control
- 3 Solenoid windings of the high-pressure solenoid valves
- 4 Booster switch
- 5 Booster-voltage capacitor
- 6 Free-wheeling diodes for energy recovery and high-speed quenching
- 7 Cylinder selector switch
- 8 DC/DC switch
- 9 DC/DC coil
- 10 DC/DC diode
- I* Current flow

Piezo-inline injector

Design and requirements

The design of the piezo-inline injector is divided into its main modules in the schematic (see Fig. 5):

- Actuator module (3)
- Hydraulic coupler or translator (4)
- Control or servo valve (5)
- Nozzle module (6)

The design of the injector took account of the high overall rigidity required within the actuator chain composed of actuator, hydraulic coupler, and control valve. Another design feature is the avoidance of mechanical forces

acting on the nozzle needle. Such forces occurred as a result of the push rod used on previous solenoid-valve injectors. On aggregate, this design effectively reduces the moving masses and friction, thus enhancing injector stability and drift compared to conventional systems.

In addition, the fuel-injection system allows the implementation of very short intervals (“hydraulic zero”) between injection events. The number and configuration of fuel-metering operations can represent up to five injection events per injection cycle in order to adapt the requirements to the engine operating points.

A direct response of the needle to actuator operation is achieved by coupling the servo valve (5) to the nozzle needle. The delay between the electric start of triggering and hydraulic response of the nozzle needle is about 150 microseconds. This meets the contradictory requirements of high needle speeds and extremely small reproducible injected fuel quantities.

As a result of this principle, the injector also includes small direct leakage points from the high-pressure section to the low-pressure circuit. The result is an increase in the hydraulic efficiency of the overall system.

Operating concept

Function of the 3/2-way servo valve in the CR injector

The nozzle needle on piezo-inline injector is controlled indirectly by a servo valve. The required injected fuel quantity is then controlled by the valve triggering period. In its non-triggered state, the actuator is in the starting position and the servo valve is closed (Fig. 6a), i.e. the high-pressure section is separated from the low-pressure section.

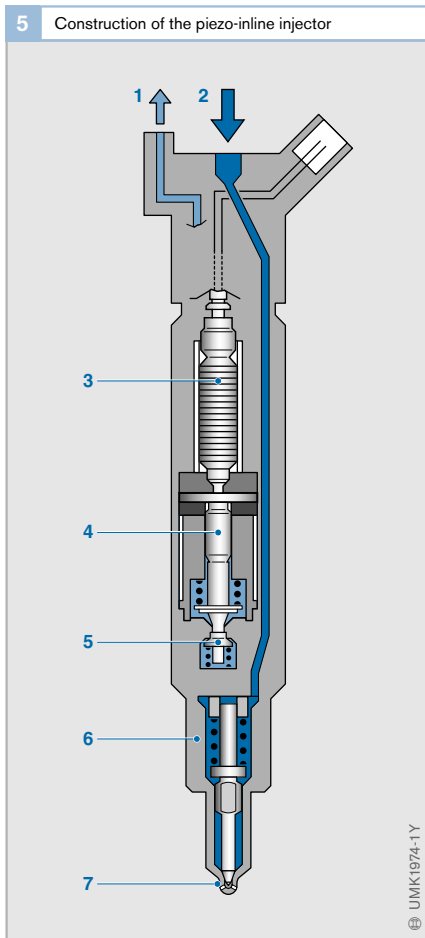


Fig. 5

- 1 Fuel return
- 2 High-pressure connection
- 3 Piezo actuator module
- 4 Hydraulic coupler (translator)
- 5 Servo valve (control valve)
- 6 Nozzle module with nozzle needle
- 7 Injection orifice

The nozzle is kept closed by the rail pressure exerted in the control chamber (3). When the piezo actuator is triggered, the servo valve opens and closes the bypass passage (Fig. 6b). The flow-rate ratio between the outlet restrictor (2) and the inlet restrictor (4) lowers pressure in the control chamber and the nozzle (5) opens. The control volume flows via the servo valve to the low-pressure circuit of the overall system.

To start the closing process, the actuator is discharged and the servo valve releases the bypass passage. The control chamber is then refilled by reversing the inlet and outlet restrictors, and pressure in the control chamber is raised. As soon as the required pressure is attained, the nozzle needle starts to move and the injection process ends.

The valve design described above and the greater dynamic design of the actuator system result in much shorter injection times compared to injectors of conventional design, i.e. push rod and 2/2-way valve. Ultimately, this has a positive impact on exhaust-gas emissions and engine performance. Due to requirements regarding the engine in EU 4, the injector program maps were optimized to apply corrective functions (injector delivery compensation (IMA) and zero delivery cali-

bration (NMK). The pre-injection quantity can then be selected at will, and IMA can minimize the quantity spread in the program map using full ballistic mode (see Fig. 7).

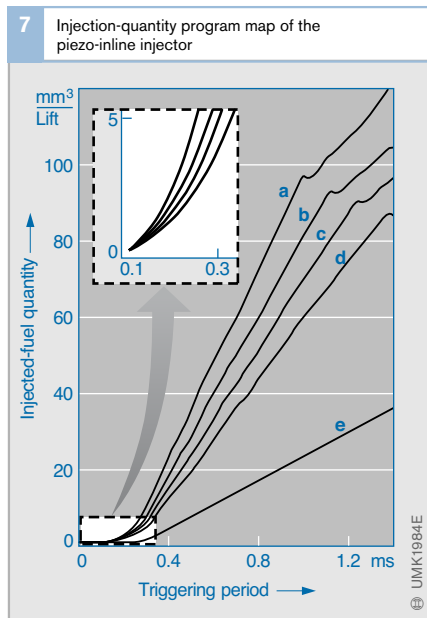


Fig. 7
 Injected fuel quantities at different injection pressures
 a 1,600 bar
 b 1,200 bar
 c 1,000 bar
 d 800 bar
 e 250 bar

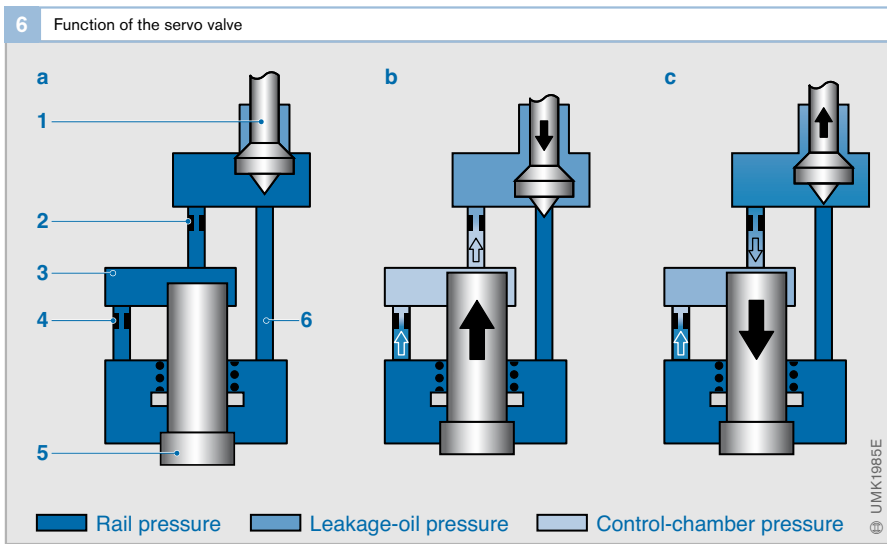


Fig. 6
 a Start position
 b Nozzle needle opens (bypass closed, normal function with outlet and inlet restrictors)
 c Nozzle needle closes (bypass open, function with two inlet restrictors)
 1 Servo valve (control valve)
 2 Outlet restrictor
 3 Control chamber
 4 Inlet restrictor
 5 Nozzle needle
 6 Bypass

Function of the hydraulic coupler

Another key component in the piezo-inline injector is the hydraulic coupler (Fig. 8, 3) that implements the following functions:

- Translates and amplifies the actuator stroke.
- Compensates for any play between the actuator and the servo valve (e.g. caused by thermal expansion).
- Performs a failsafe function (automatic safety cutoff of fuel injection if electrical decontacting fails).

The actuator module and the hydraulic coupler are immersed in the diesel fuel flow at a pressure of about 10 bar. When the actuator is not triggered, pressure in the hydraulic coupler is in equilibrium with its surroundings. Changes in length caused by temperature are compensated by small leakage-fuel quantities via the guide clearances of the two plungers. This maintains the coupling of forces between actuator and switching valve at all times.

To generate an injection event, a voltage (110...150 V) is applied to the actuator until the equilibrium of forces between the switching valve and the actuator is exceeded. This increases the pressure in the coupler, and a small leakage volume flows out of the coupler via the piston guide clearances into the low-pressure circuit of the injector. The pressure drop caused in the coupler has no impact on injector function for a triggering period lasting several milliseconds.

At the end of the injection process, the quantity missing in the hydraulic coupler needs refilling. This takes place in the reverse direction via the guide clearances of the plungers as a result of the pressure difference between the hydraulic coupler and the low-pressure circuit of the injector. The guide clearances and the low-pressure level are matched to fill up the hydraulic coupler fully before the next injection cycle starts.

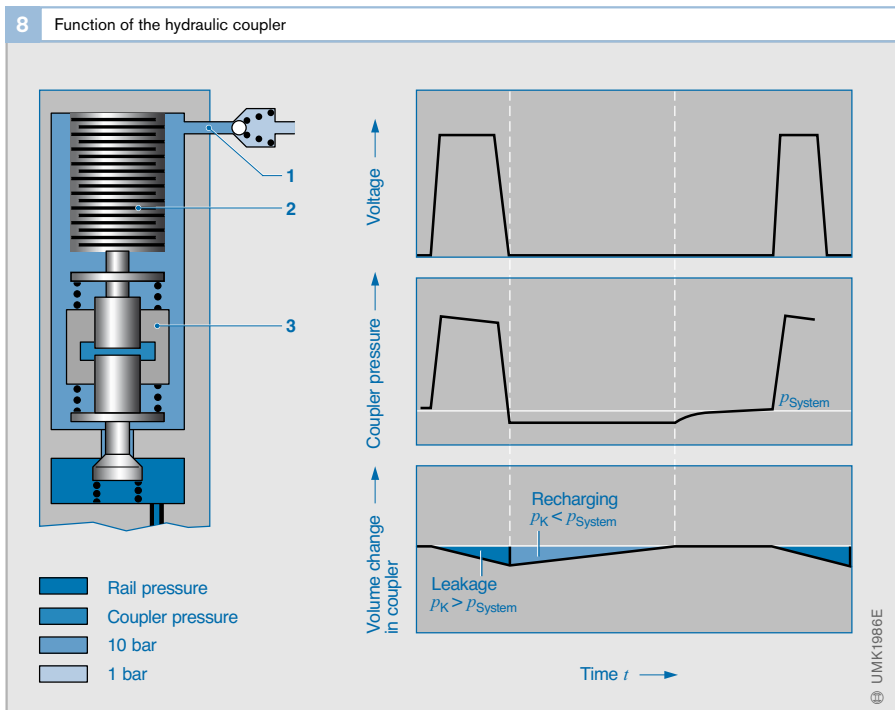


Fig. 8

Triggering the common-rail piezo in-line injector

The injector is triggered by an engine control unit whose output stage was specially designed for these injectors. A reference triggering voltage is predetermined as a function of the rail pressure of the set operating point. The voltage signal is pulsed (Fig. 9) until there is a minimum deviation between the reference and the control voltage. The voltage rise is converted proportionally into a piezoelectric actuator stroke. The actuator stroke produces a pressure rise in the coupler by means of hydraulic translation until the equilibrium of forces is exceeded at the switching valve, and the valve opens. As soon as the switching valve reaches its end position, pressure in the control chamber starts to drop via the needle, and injection ends.

Benefits of the piezo-inline injector

- Multiple injection with flexible start of injection and intervals between individual injection events.
- Production of very small injected fuel quantities for pre-injection.
- Small size and low weight of injector (270 g compared to 490 g).
- Low noise (-3 dB [A]).
- Lower fuel consumption (-3%).
- Lower exhaust-gas emission (-20%).
- Increased engine performance ($+7\%$).

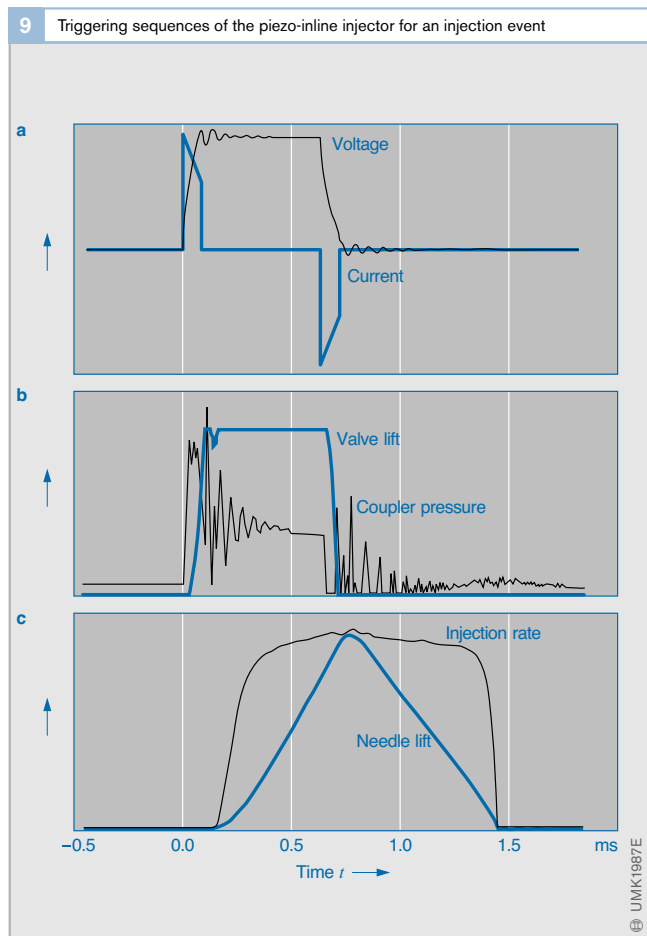


Fig. 9

- a Current and voltage curves for triggering the injector
- b Valve-lift curve and coupler pressure
- c Valve-lift curve and injection rate

The piezoelectric effect

In 1880 Pierre Curie and his brother Jacques discovered a phenomenon that is still very little known today, but is present in the everyday lives of millions of people: the piezoelectric effect. For example, it keeps the pointers of a crystal clock operating in time.

Certain crystals (e.g. quartz and turmaline) are piezoelectric: Electric charges are induced on the crystal surface by exerting a compression or elongation force along certain crystal axes. This electrical polarization arises by shifting positive and negative ions in the crystal relative to each other by exerting force (see Fig., b). The shifted centers of charge gravity within the crystal compensate automatically, but an electric field forms between the end faces of the crystal. Compressing and elongating the crystal create inverse field directions.

On the other hand, if an electrical voltage is applied to the end faces of the crystal, the effect reverses (inverse piezoelectric effect): The positive ions in the electric field migrate toward the negative electrode, and negative ions toward the positive electrode. The crystal then contracts or expands depending on the direction of the electric field strength (see Fig., c).

The following applies to piezoelectric field strength E_p :

$$E_p = \delta \Delta x/x$$

$\Delta x/x$: relative compression or elongation
 δ : piezoelectric coefficient, numeric value 10^9 V/cm through 10^{11} V/cm

The change in length Δx results from the following when a voltage U is applied:
 $U / \delta = \Delta x$ (using quartz as an example: deformation of about 10^{-9} cm at $U = 10$ V)

The piezoelectric effect is not only used in quartz clocks and piezo-inline injectors, it has many other industrial applications, either as a direct or inverse effect:

Piezoelectric sensors are used for knock control in gasoline engines. For example, they detect high-frequency engine vibrations as a feature of combustion knock. Converting mechanical vibration to electric voltage is also used in the crystal audio pickup of a record player or crystal microphones. The piezoelectric igniter (e.g. in a firelighter) causes mechanical pressure to produce the voltage to generate a spark.

On the other hand, if an alternating voltage is applied to a piezoelectrical crystal, it vibrates mechanically at the same frequency as the alternating voltage. Oscillating crystals are used as stabilizers in electrical oscillating circuits or as piezoelectric acoustic sources to generate ultrasound.


When used in clocks, the oscillating quartz is excited by an alternating voltage whose frequency is the same as the quartz's natural frequency. This is how an extremely time-constant resonant frequency is generated. In a calibrated quartz, it deviates by only approx. 1/1,000 second per year.

Principle of the piezoelectric effect (represented as a unit cell)

a Quartz crystal SiO_2

b Piezoelectric effect: When the crystal is compressed, negative O^{2-} ions shift upward, positive Si^{4+} ions shift downward: Electric charges are induced at the crystal surface.

c Inverse piezoelectric effect: By applying an electrical voltage, O^{2-} ions shift upward, Si^{4+} ions shift downward: The crystal contracts.

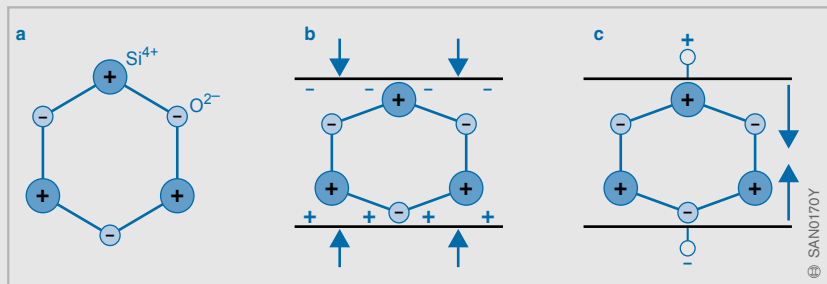

▶ Where does the word “electronics” come from?

This term actually goes back to the ancient Greeks. For them, the word “electron” meant amber. Its force of attraction on woollen threads or similar was known to Thales von Milet over 2,500 years ago.

Electrons, and therefore electronics as such, are extremely fast due to their very small mass and electric charge. The term “electronics” comes directly from the word “electron”.

The mass of an electron has as little effect on a gram of any given substance as a 5 gram weight has on the total mass of our earth.


The word “electronics” was born in the 20th century. There is no evidence available as to when the word was used for the first time. It could be Sir John Ambrose Fleming, one of the inventors of the electron tube in about 1902.

Even the first “Electronic Engineer” already existed in the 19th century. Fleming was listed in the 1888 edition of “Who’s Who”, published during the reign of Queen Victoria. The official title was “Kelly’s Handbook of Titled, Landed and Official Classes”. The Electronic Engineer can be found under the title “Royal Warrant Holders”, that is the list of persons who had been awarded a Royal Warrant.

What was this Electronic Engineer’s job? He was responsible for the correct functioning and cleanliness of the gas lamps at court. And why did he have such a splendid title? Because he knew that “electrons” in ancient Greece stood for glitter, shine, and sparkle.

Source:

“Basic Electronic Terms” (“Grundbegriffe der Elektronik”) – Bosch publication (reprint from the “Bosch Zünder” (Bosch Company Newspaper), 1988.

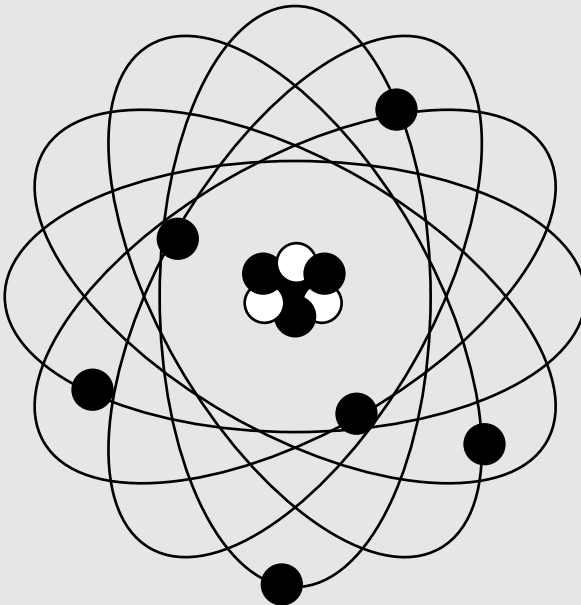

High-pressure pumps

Design and requirements

The high-pressure pump is the interface between the low-pressure and high-pressure stages. Its function is to make sure there is always sufficient fuel under pressure available in all engine operating conditions. At the same time it must operate for the entire service life of the vehicle. This includes providing a fuel reserve that is required for quick engine starting and rapid pressure rise in the fuel rail.

The high-pressure pump generates a constant system pressure for the high-pressure accumulator (fuel rail) independent of fuel injection. For this reason, fuel – compared to conventional fuel-injection systems – is not compressed during the injection process.

A 3-plunger radial-piston pump is used as the high-pressure pump to generate pressure in passenger-car systems. 2-plunger in-line fuel-injection pumps are also used on commercial vehicles. Preferably, the high-pressure pump is fitted to the diesel engine at the same point as a conventional distributor injection pump. The pump is driven by the engine via coupling, gearwheel, chain, or toothed belt. Pump speed is therefore coupled to engine speed via a fixed gear ratio.

The pump plunger inside of the high-pressure pump compresses the fuel. At three delivery strokes per revolution, the radial-piston pump produces overlapping delivery strokes (no interruption in delivery), low drive peak torques, and an even load on the pump drive.

On passenger-car systems, torque reaches 16 Nm, i.e. only 1/9th of the drive torque required for a comparable distributor injection pump. As a result, the common-rail system places fewer demands on the pump-drive system than conventional fuel-injection systems. The power required to drive the pump increases in proportion to the pressure in the fuel rail and the rotational speed of the pump (delivery quantity).

On a 2-liter engine, the high-pressure pump draws a power of 3.8 kW at nominal speed and a pressure of 1,350 bar in the fuel rail (at a mechanical efficiency of approx. 90%). The higher power requirements of common-rail systems compared to conventional fuel-injection systems is caused by leakage and control volumes in the injector, and – on the high-pressure pump CP1 – the pressure drop to the required system pressure across the pressure-control valve.

The high-pressure radial-piston pumps used in passenger cars are lubricated by fuel. Commercial-vehicle systems may have fuel- or oil-lubricated radial-piston pumps, as well as oil-lubricated 2-plunger in-line fuel-injection pumps. Oil-lubricated pumps are more robust against poor fuel quality.

High-pressure pumps are used in a number of different designs in passenger cars and commercial vehicles. There are versions of pump generations that have different delivery rates and delivery pressures (Table 1).

| 1 Bosch high-pressure pumps for common-rail systems | | |
|---|-----------------|-------------|
| Pump | Pressure in bar | Lubrication |
| CP1 | 1,350 | Fuel |
| CP1+ | 1,350 | Fuel |
| CP1H | 1,600 | Fuel |
| CP1H-OHW | 1,100 | Fuel |
| CP3.2 | 1,600 | Fuel |
| CP3.2+ | 1,600 | Fuel |
| CP3.3 | 1,600 | Fuel |
| CP3.4 | 1,600 | Oil |
| CP3.4+ | 1,600 | Fuel |
| CP2 | 1,400 | Oil |
| CPN2.2 | 1,600 | Oil |
| CPN2.2+ | 1,600 | Oil |
| CPN2.4 | 1,600 | Oil |

Table 1

H Increased pressure section
+ Higher delivery rate
OHW Off-Highway

Radial-piston pump (CP1)

Design

The drive shaft in the housing of CP1 is mounted in a central bearing (Fig. 1, 1). The pump elements (3) are arranged radially with respect to the central bearing and offset by 120°. The eccentric (2) fitted to the drive shaft forces the pump plunger to move up and down.

Force is transmitted between the eccentric shaft and the delivery plunger by means of a drive roller, a sliding ring mounted on the shaft eccentric, and a plunger base plate attached to the plunger base plate.


Operating concept

Fuel delivery and compression

The presupply pump – an electric fuel pump or a mechanically driven gear pump – delivers fuel via a filter and water separator to the inlet of the high-pressure pump (6). The inlet is located inside of the pump on passenger-car systems with a gear pump flanged to the high-pressure pump. A safety valve is fitted

behind the inlet. If the delivery pressure of the presupply pump exceeds the opening pressure (0.5 to 1.5 bar) of the safety valve, the fuel is pressed through the restriction bore of the safety valve into the lubrication and cooling circuit of the high-pressure pump. The drive shaft with its eccentric moves the pump plunger up and down to mimic the eccentric lift. Fuel passed through the high-pressure pump's inlet valve (4) into the element chamber and the pump plunger moves downward (inlet stroke).

When the bottom-dead center of the pump plunger is exceeded, the inlet valve closes, and the fuel in the element chamber can no longer escape. It can then be pressurized beyond the delivery pressure of the presupply pump. The rising pressure opens the outlet valve (5) as soon as pressure reaches the level in the fuel rail. The pressurized fuel then passes to the high-pressure circuit.

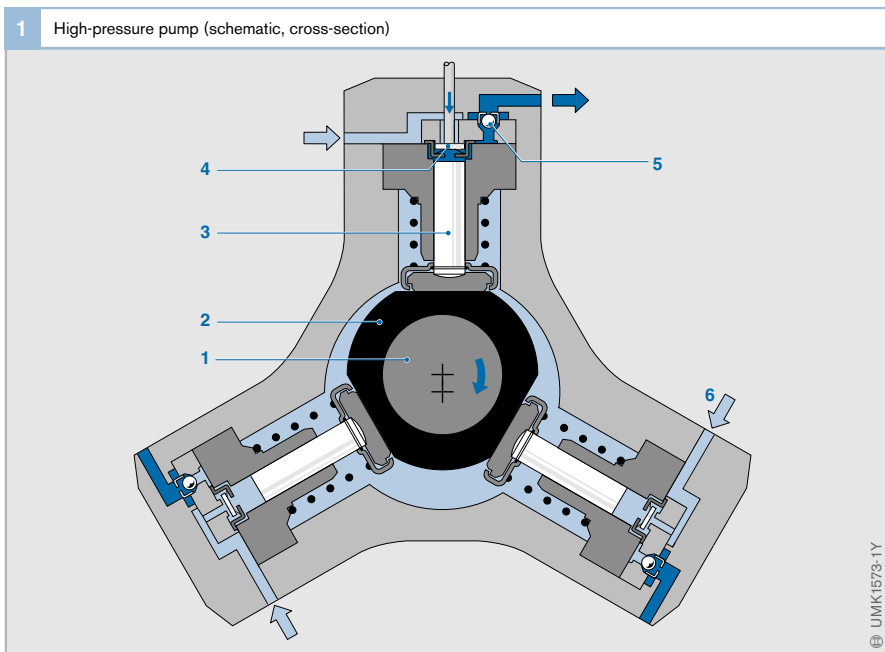

The pump plunger continues to deliver fuel until it reaches its top-dead center position (delivery stroke). The pressure then drops so that the outlet valve closes. The remaining fuel is depressurized and the pump plunger moves downward.

When the pressure in the element chamber exceeds the pre-delivery pressure, the inlet valve reopens, and the process starts over.

Transmission ratio

The delivery quantity of a high-pressure pump is proportional to its rotational speed. In turn, the pump speed is dependent on the engine speed. The transmission ratio between the engine and the pump is determined in the process of adapting the fuel-injection system to the engine so as to limit the volume of excess fuel delivered. At the same time it makes sure that the engine's fuel demand at WOT is covered to the full extent. Possible gear ratios are 1:2 or 2:3 relative to the crankshaft.

Delivery rate

As the high-pressure pump is designed for high delivery quantities, there is a surplus of pressurized fuel when the engine is idling or running in part-load range. On first-generation systems with a CPI, excess fuel delivered is returned to the fuel tank by the pressure-control valve on the fuel rail. As the compressed fuel expands, the energy imparted by compression is lost; overall efficiency drops. Compressing and then expanding the fuel also heats the fuel.

2 High-pressure pump (CPI), variant with mounted pressure-control valve (3D view)

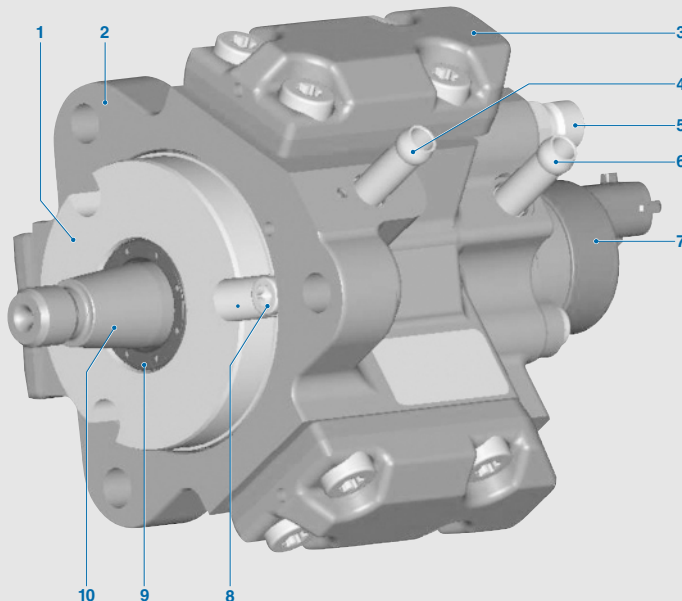


Fig. 2

- 1 Flange
- 2 Pump housing
- 3 Engine cylinder head
- 4 Inlet connection
- 5 High-pressure inlet
- 6 Return connection
- 7 Pressure-control valve
- 8 Barrel bolt
- 9 Shaft seal
- 10 Eccentric shaft

Radial-piston pump (CP1H)

Modifications

An improvement in energetic efficiency is possible by controlling fuel delivery by the high-pressure pump on the fuel-delivery side (suction side). Fuel flowing into the pump element is metered by an infinitely variable solenoid valve (metering unit, ZME). This valve adapts the fuel quantity delivered to the rail to system demand. This fuel-delivery control not only drops the performance demand of the high-pressure pump, it also reduces the maximum fuel temperature. This system designed for the CP1H was taken over by the CP3.

Compared to the high-pressure pump CP1, the CP1H is designed for higher pressures up to 1,600 bar. This was achieved by reinforcing the drive mechanism, modifying the valve units, and introducing measures to increase the strength of the pump housing.

The metering unit is mounted on the high-pressure pump (Fig. 3, 13).

Design of the metering unit (ZME)

Fig. 4 shows the design of the metering unit. The plunger operated by solenoid force frees up a metering orifice depending on its position.

The solenoid valve is triggered by a PWM signal.

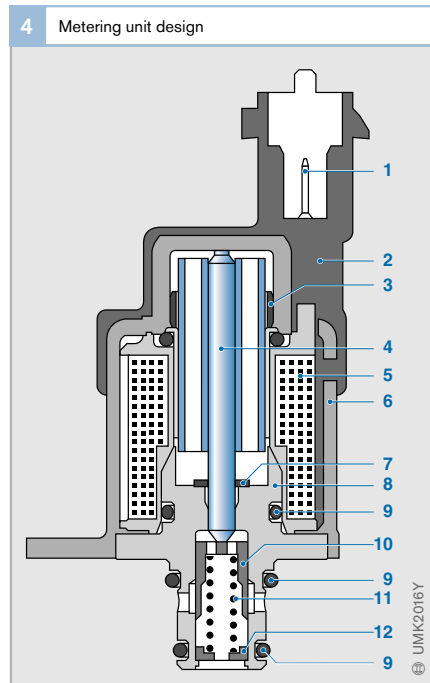


Fig. 4

- 1 Plug with electrical interface
- 2 Magnet housing
- 3 Bearing
- 4 Armature with tappet
- 5 Winding with coil body
- 6 Cup
- 7 Residual air-gap washer
- 8 Magnetic core
- 9 O-ring
- 10 Plunger with control slots
- 11 Spring
- 12 Safety element

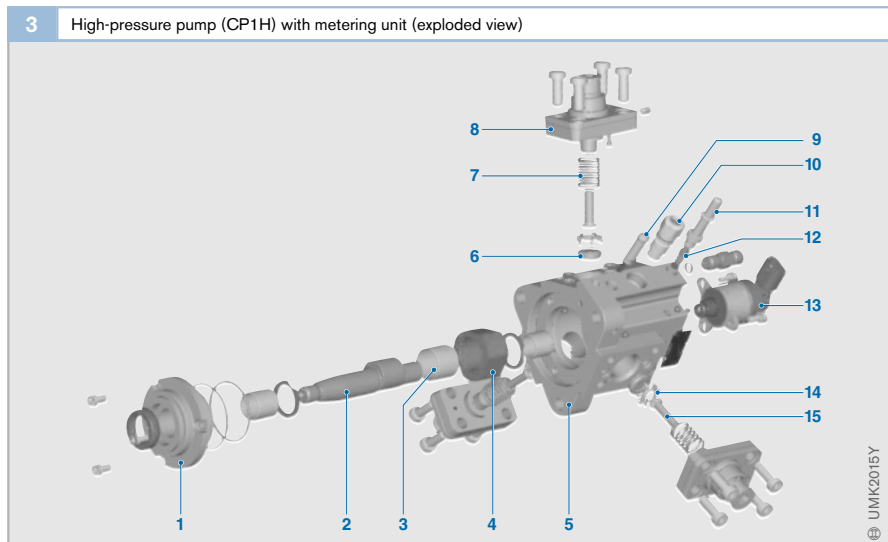


Fig. 3

- 1 Flange
- 2 Eccentric shaft
- 3 Bushing
- 4 Drive roller
- 5 Pump housing
- 6 Plate
- 7 Spring
- 8 Engine cylinder head
- 9 Return-flow connection
- 10 Overflow valve
- 11 Inlet connection
- 12 Filter
- 13 Metering unit
- 14 Cage
- 15 Pump plunger

Radial-piston pump (CP3)

Modifications

The CP3 is a high-pressure pump with suction-side fuel-delivery control by means of a metering unit (ZME). This control was first used on the CP3 and was assumed later on the CP1H.

The principle design of the CP3 (Fig. 5) is similar to the CP1 and the CP1H. The main difference in features are:

- Monobloc housing: This construction reduces the number of leak points in the high-pressure section, and permits a higher delivery rate.
- Bucket tappets: Transverse forces arising from the transverse movement of the eccentric drive roller are not removed directly by the pump plungers but by buckets on the housing wall. The pump then has greater stability under load and is capable of withstanding higher pressures. Potentially, it can withstand pressures up to 1,800 bar.


Variants

Pumps of the CP3 family are used in both passenger cars and commercial vehicles. A number of different variants are used depending on the delivery rate required. The size, and thus the delivery rate, increases from the CP3.2 to the CP3.4. The oil-lubricated CP3.4 is only used on heavy-duty trucks. On light-duty trucks and vans, pumps primarily designed for passenger cars may also be used.

A special feature of systems for medium-duty and heavy-duty trucks is the fuel filter located on the pressure side. It is situated between the gear pump and the high-pressure pump, and permits a greater filter storage capacity before requiring a change. The high-pressure pump requires an external connection for the fuel inlet in any case, even if the gear pump is flanged onto the high-pressure pump.

5

High-pressure pump CP3 with metering unit and mounted gear presupply pump

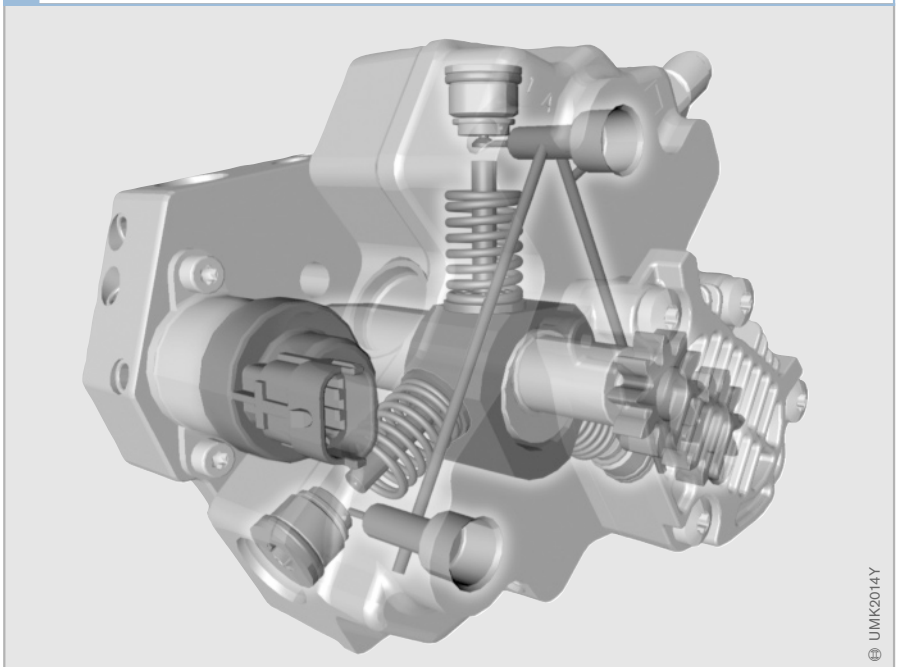

In-line piston pump (CP2)

Design

The oil-lubricated, quantity-controlled high-pressure pump (CP2) is only used on commercial vehicles. This is a 2-plunger pump with an in-line design, i.e. the two pump plungers are arranged adjacently (Fig. 6).

A gear pump with a high gear ratio is located on the camshaft extension. Its function is to draw fuel from the fuel tank and route it to the fine filter. From there, the fuel passes through another line to the metering unit located on the upper section of the high-pressure pump. The metering unit controls the fuel quantity delivered for compression dependent on actual demand in the same way as other common-rail high-pressure pumps of the recent generation.

Lube oil is supplied either directly via the mounting flange of the CP2 or a side-mounted inlet.

The drive gear ratio is 1:2. The CP2 is therefore mountable together with conventional in-line fuel-injection pumps.

Operating concept

Fuel enters the pump element and the compressed fuel is conveyed to the fuel rail via a combined inlet/outlet valve on the CP2.

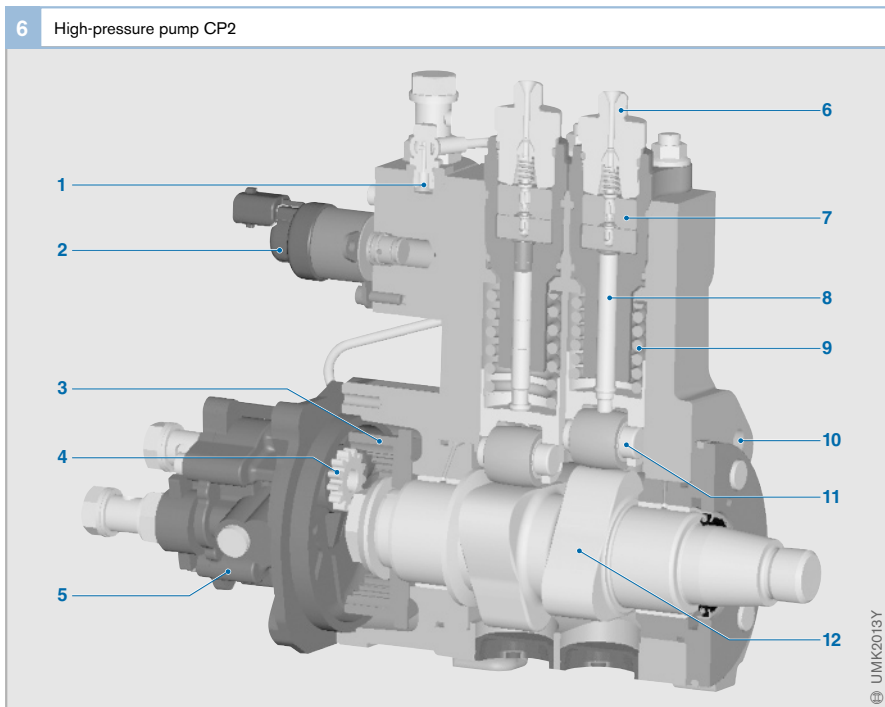


Fig. 6

- 1 Zero delivery restrictor
- 2 Metering unit
- 3 Internal gear
- 4 Pinion
- 5 Gear presupply pump
- 6 High-pressure connection
- 7 Two-part inlet/outlet valve
- 8 C-coated plunger
- 9 Plunger return spring
- 10 Oil inlet
- 11 C-coated roller bolt
- 12 Concave cam

Fuel rail (high-pressure accumulator)

Function

The function of the high-pressure accumulator (fuel rail) is to maintain the fuel at high pressure. In so doing, the accumulator volume has to dampen pressure fluctuations caused by fuel pulses delivered by the pump and the fuel-injection cycles. This ensures that, when the injector opens, the injection pressure remains constant. On the one hand, the accumulator volume must be large enough to meet this requirement. On the other hand, it must be small enough to ensure a fast enough pressure rise on engine start. Simulation calculations are conducted during the design phase to optimize the performance features.

Besides acting as a fuel accumulator, the fuel rail also distributes fuel to the injectors.

Design

The tube-shaped fuel rail (Fig. 1, 1) can have as many designs as there are engine mounting variants. It has mountings for the rail-pressure sensor (5) and a pressure-relief valve or pressure-control valve (2).

Operating concept

The pressurized fuel delivered by the high-pressure pump passes via a high-pressure fuel line to the fuel-rail inlet (4). From there, it is distributed to the individual injectors (hence the term “common rail”).

The fuel pressure is measured by the rail-pressure sensor and controlled to the required value by the pressure-control valve. The pressure-relief valve is used as an alternative to the pressure-control valve – depending on system requirements – and its function is to limit fuel pressure in the fuel rail to the maximum permissible pressure. The highly compressed fuel is routed from the fuel rail to the injectors via high-pressure delivery lines.

The cavity inside the fuel rail is permanently filled with pressurized fuel. The compressibility of the fuel under high pressure is utilized to achieve an accumulator effect. When fuel is released from the fuel rail for injection, the pressure in the high-pressure accumulator remains virtually constant, even when large quantities of fuel are released.

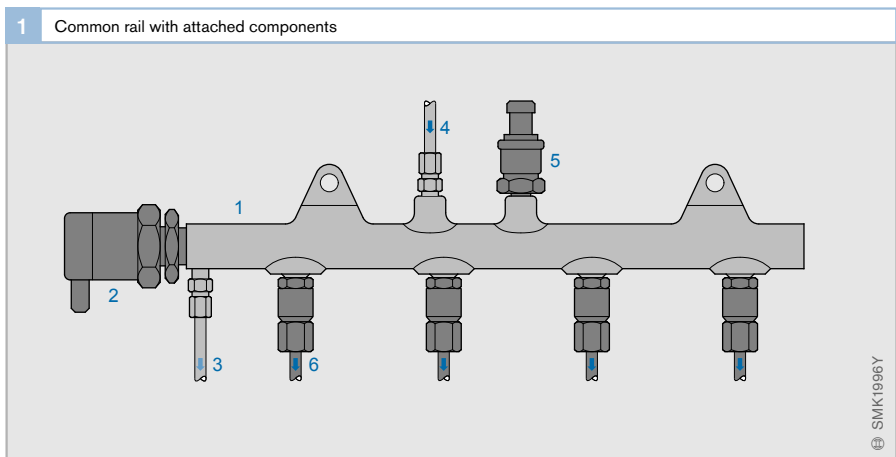


Fig. 1
 1 Fuel rail
 2 Pressure-control valve
 3 Return line from fuel rail to fuel tank
 4 Inlet from high-pressure pump
 5 Rail-pressure sensor
 6 Fuel line to injector

High-pressure sensors

Application

In automotive applications, high-pressure sensors are used for measuring the pressures of fuels and brake fluids.

Diesel rail-pressure sensor

In the diesel engine, the rail-pressure sensor measures the pressure in the fuel rail of the common-rail accumulator-type injection system. Maximum operating (nominal) pressure p_{\max} is 160 MPa (1,600 bar). Fuel pressure is controlled by a closed control loop, and remains practically constant independent of load and engine speed. Any deviations from the setpoint pressure are compensated for by a pressure-control valve.

Gasoline rail-pressure sensor

As its name implies, this sensor measures the pressure in the fuel rail of the DI Motronic with gasoline direct injection. Pressure is a function of load and engine speed and is 5...12 MPa (50...120 bar), and is used as an actual (measured) value in the closed-loop rail-pressure control. The rpm and load-dependent setpoint value is stored in a map and is adjusted at the rail by a pressure control valve.

Brake-fluid pressure sensor

Installed in the hydraulic modulator of such driving-safety systems as ESP, this high-pressure sensor is used to measure the brake-fluid pressure which is usually 25 MPa (250 bar). Maximum pressure p_{\max} can climb to as much as 35 MPa (350 bar). Pressure measurement and monitoring is triggered by the ECU which also evaluates the return signals.

Design and operating concept

The heart of the sensor is a steel diaphragm onto which deformation resistors have been vapor-deposited in the form of a bridge circuit (Fig. 1, 3). The sensor's pressure-measuring range depends on diaphragm thickness (thicker diaphragms for higher

pressures and thinner ones for lower pressures). When the pressure is applied via the pressure connection (4) to one of the diaphragm faces, the resistances of the bridge resistors change due to diaphragm deformation (approx. 20 μm at 1,500 bar).

The 0...80 mV output voltage generated by the bridge is conducted to an evaluation circuit which amplifies it to 0...5 V. This is used as the input to the ECU which refers to a stored characteristic curve in calculating the pressure (Fig. 2).


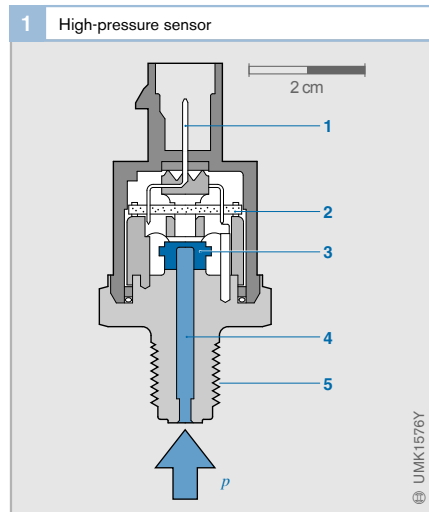


Fig. 1

- 1 Electrical connection (socket)
- 2 Evaluation circuit
- 3 Steel diaphragm with deformation resistors
- 4 Pressure connection
- 5 Mounting thread

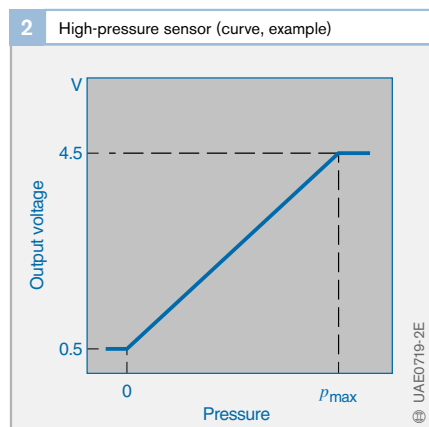

Pressure-control valve

Function

The function of the pressure-control valve is to adjust and maintain the pressure in the fuel rail as a factor of engine load, i.e.:

- It opens when the rail pressure is too high. Part of the fuel then returns from the fuel rail via a common line to the fuel tank.
- It closes when the rail pressure is too low, thus sealing the high-pressure side from the low-pressure side.

Design

The pressure-control valve (Fig. 1) has a mounting flange which attaches it to the high-pressure pump or the fuel rail. The armature (5) forces a valve ball (6) against the valve seat in order to seal the high-pressure stage from the low-pressure stage; this is achieved by the combined action of a valve spring (2) and an electromagnet (4) which force the armature downwards.

Fuel flows around the whole of the armature for lubrication and cooling purposes.

Operating concept

The pressure-control valve has two closed control loops:

- A slower, closed electrical control loop for setting a variable average pressure level in the fuel rail.
- A faster hydromechanical control loop for balancing out high-frequency pressure pulses.

Pressure-control valve not activated

The high pressure present in the fuel rail or at the high-pressure pump outlet is applied to the pressure-control valve via the high-pressure fuel supply. As the deenergized electromagnet exerts no force, the high-pressure force is greater than the spring force. The pressure-control valve opens to a greater or lesser extent depending on the delivery quantity. The spring is dimensioned to maintain a pressure of approx. 100 bar.

Pressure-control valve activated


When the pressure in the high-pressure circuit needs to be increased, the force of the electromagnet is added to that of the spring. The pressure-control valve is activated and closes until a state of equilibrium is reached between the high pressure and the combined force of the electromagnet and the spring. At this point, it remains in partly open position and maintains a constant pressure. Variations in the delivery quantity of the high-pressure pump and the withdrawal of fuel from the fuel rail by the injectors are compensated by varying the valve aperture. The magnetic force of the electromagnet is proportional to the control current. The control current is varied by pulse-width modulation. A pulse frequency of 1 kHz is sufficiently high to prevent adverse armature movement or pressure fluctuations in the fuel rail.

Designs

The pressure-control valve DRV1 is used in first-generation common-rail systems. Second- and third-generation CR systems operate using the two-actuator concept. Here, the rail pressure is adjusted by both a metering unit as well as a pressure-control valve. In this

Fig. 1

- 1 Electrical connections
- 2 Valve spring
- 3 Armature
- 4 Valve housing
- 5 Solenoid coil
- 6 Valve ball
- 7 Support ring
- 8 O-ring
- 9 Filter
- 10 High-pressure fuel supply
- 11 Valve body
- 12 Drain to low-pressure circuit

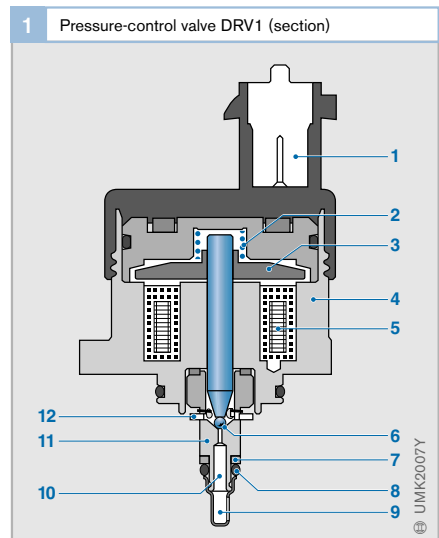

case, either the pressure-control valve DRV2 is used or the DRV3 variant for higher pressures. This control strategy achieves lower fuel heating and eliminates the need for a fuel cooler.

The DRV2/3 (Fig. 2) differs from the DRV1 in the following features:

- Hard seal to the high-pressure interface (bite edge).
- Optimized magnetic circuit (lower power consumption).
- Flexible mounting concept (free plug orientation).

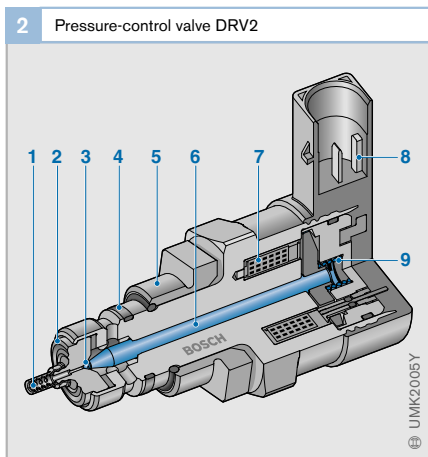


Fig. 2

- 1 Filter
- 2 Bite edge
- 3 Valve ball
- 4 O-ring
- 5 Union bolt with circlip
- 6 Armature
- 7 Solenoid coil
- 8 Electrical connection
- 9 Valve spring

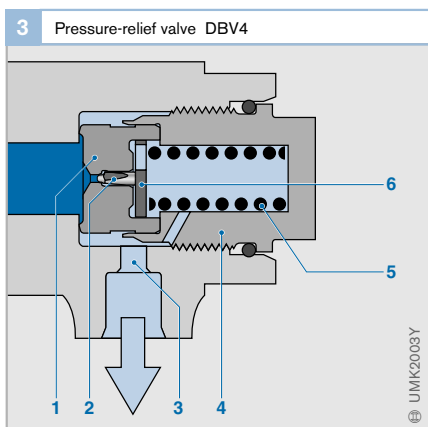


Fig. 3

- 1 Valve insert
- 2 Valve plunger
- 3 Low-pressure section
- 4 Valve holder
- 5 Spring
- 6 Diaphragm disc

Pressure-relief valve

Function

The pressure-relief valve has the same function as a pressure limiter. The latest version of the internal pressure-relief valve now has an integrated limp-home function. The pressure-relief valve limits pressure in the fuel rail by releasing a drain hole when pressure exceeds a certain limit. The limp-home function ensures that a certain pressure is maintained in the fuel rail to permit the vehicle to continue running without any restriction.

Design and operating concept

The pressure-relief valve (Fig. 3) is a mechanical component. It consists of the following parts:

- A housing with an external thread for screwing to the fuel rail.
- A connection to the fuel-return line to the fuel tank (3).
- A movable plunger (2).
- A plunger return spring (5).

At the end which is screwed to the fuel rail, there is a hole in the valve housing which is sealed by the tapered end of the plunger resting against the valve seat inside the valve housing. At normal operating pressure, a spring presses the plunger against the valve seat so that the fuel rail remains sealed.

Only if the pressure rises above the maximum system pressure is the plunger forced back against the action of the spring by the pressure in the fuel rail so that the high-pressure fuel can escape. The fuel is routed through passages into a central bore of the plunger and returned to the fuel tank via a common line. As the valve opens, fuel can escape from the fuel rail to produce a reduction in fuel-rail pressure.

Injection nozzles

The injection nozzle injects the fuel into the combustion chamber of the diesel engine. It is a determining factor in the efficiency of mixture formation and combustion and, therefore has a fundamental effect on engine performance, exhaust-gas behavior, and noise. In order that injection nozzles can perform their function as effectively as possible, they have to be designed to match the fuel-injection system and engine in which they are used.

The injection nozzle is a central component of any fuel-injection system. It requires highly specialized technical knowledge on the part of its designers. The nozzle plays a major role in:

- Shaping the rate-of-discharge curve (precise progression of pressure and fuel distribution relative to crankshaft rotation)
- Optimum atomization and distribution of fuel in the combustion chamber, and
- Sealing off the fuel-injection system from the combustion chamber

Due to its exposed position in the combustion chamber, the nozzle is subjected to constant pulsating mechanical and thermal stresses from the engine and the fuel-injection system. The fuel flowing through the nozzle must also cool it. When the engine is overrunning, when no fuel is being injected, the nozzle temperature increases steeply. Therefore, it must have sufficient high-temperature resistance to cope with these conditions.


In fuel-injection systems based on in-line injection pumps (Type PE) and distributor injection pumps (Type VE/VR), and in unit pump (UP) systems, the nozzle is combined with the nozzle holder to form the nozzle-and-holder assembly (Fig. 1) and installed in the engine. In high-pressure fuel-injection systems, such as the Common Rail (CR) and unit injector (UI) systems the nozzle is a single integrated unit so that the nozzle holder is not required.

Indirect-Injection (IDI) engines use pintle nozzles, while direct-injection engines use hole-type nozzles.

The nozzles are opened by the fuel pressure. The nozzle opening, injection duration, and rate-of-discharge curve (injection pattern) are the essential determinants of injected fuel quantity. The nozzles must close rapidly and reliably when the fuel pressure drops. The closing pressure is at least 40 bar above the maximum combustion pressure in order to prevent unwanted post-injection or intrusion of combustion gases into the nozzle. The nozzle must be designed specifically for the type of engine in which it is used as determined by:

- The injection method (direct or indirect)
- The geometry of the combustion chamber
- The required injection-jet shape and direction
- The required penetration and atomization of the fuel jet
- The required injection duration, and
- The required injected fuel quantity relative to crankshaft rotation

Standardized dimensions and combinations provide the required degree of adaptability combined with the minimum of component diversity. Due to the superior performance combined with lower fuel consumption that it offers, all new engine designs use direct injection (and therefore hole-type nozzles).

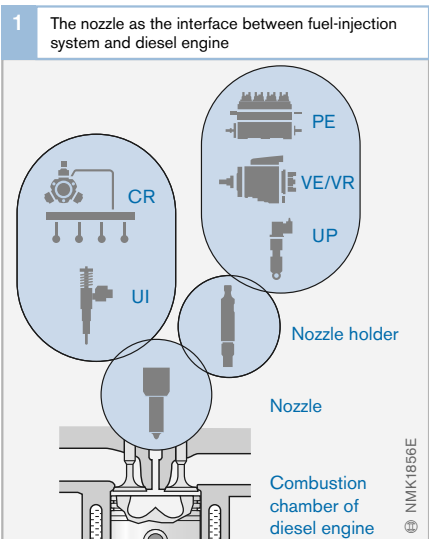

Dimensions of diesel fuel-injection technology

The world of diesel fuel injection is a world of superlatives.

The valve needle of a commercial-vehicle nozzle will open and close the nozzle more than a billion times in the course of its service life. It provides a reliable seal at pressures as high as 2,050 bar as well as having to withstand many other stresses such as:


- The shocks caused by rapid opening and closing (on cars, this can take place as frequently as 10,000 times a minute if there are pre- and post-injection phases)
- The high flow-related stresses during fuel injection, and
- The pressure and temperature of the combustion chamber

The facts and figures below illustrate what modern nozzles are capable of:

- The pressure in the fuel-injection chamber can be as high as 2,050 bar. That is equivalent to the pressure produced by the weight of a large luxury sedan acting on an area the size of a fingernail.

- The injection duration is 1...2 milliseconds (ms). In one millisecond, the sound wave from a loudspeaker only travels about 33 cm.
- The injection durations on a car engine vary between 1 mm³ (pre-injection) and 50 mm³ (full-load delivery); on a commercial vehicle, between 3 mm³ (pre-injection) and 350 mm³ (full-load delivery). 1 mm³ is equivalent to half the size of a pinhead. 350 mm³ is about the same as 12 large raindrops (30 mm³ per raindrop). That amount of fuel is forced at a velocity of 2,000 km/h through an opening of less than 0.25 mm² in the space of only 2 ms.
- The valve-needle clearance is 0.002 mm (2 μm). A human hair is 30 times thicker (0.06 mm).

Such high-precision technology demands an enormous amount of expertise in development, materials, production, and measurement techniques.

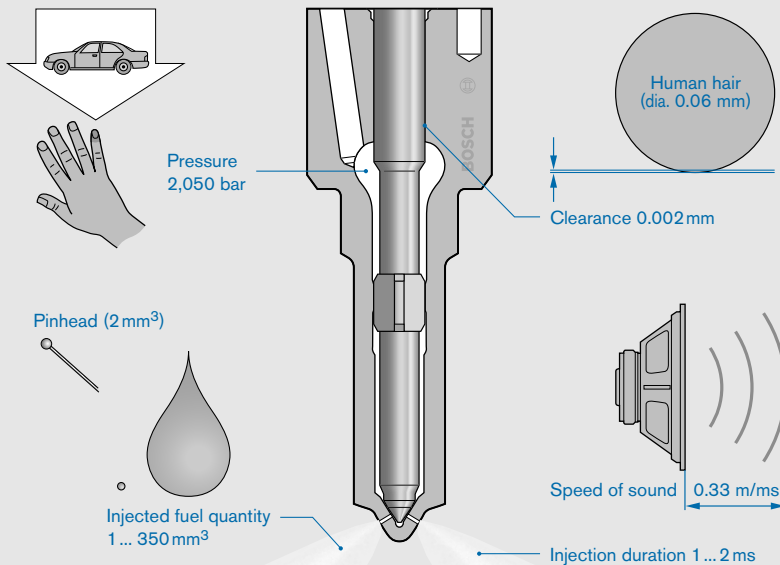

Pintle nozzles

Usage

Pintle nozzles are used on Indirect Injection (IDI) engines, i.e. engines that have prechambers or whirl chambers. In this type of engine, the mixing of fuel and air is achieved primarily by the whirl effects created inside the cylinder. The shape of the injection jet can also assist the process. Pintle nozzles are not suitable for direct-injection engines as the peak pressures inside the combustion chamber would open the nozzle. The following types of pintle nozzle are available:

- Standard pintle nozzles
- Throttling pintle nozzles and
- Flatted-pintle nozzles

Design and method of operation

The fundamental design of all pintle nozzles is virtually identical. The differences between them are to be found in the geometry of the pintle (Fig. 1, 7). Inside the nozzle body is the nozzle needle (3) It is pressed downwards by the force F_F exerted by the spring and the pressure pin in the nozzle holder so that it seals off the nozzle from the combustion chamber. As the pressure of the fuel in the pressure chamber (5) increases, it acts on the pressure shoulder (6) and forces the nozzle needle upwards (force F_D). The pintle lifts away from the injector orifice (8) and opens the way for fuel to pass through into the combustion chamber (the nozzle “opens”; opening pressure 110...170 bar). When the pressure drops, the nozzle closes again. Opening and closing of the nozzle is thus controlled by the pressure inside the nozzle.

Design variations

Standard pintle nozzle

The nozzle needle of (Fig. 1, 3) of a standard pintle nozzle has a pintle (7) that fits into the injector orifice (8) of the nozzle with a small degree of play. By varying the dimensions and geometry of the of the pintle, the characteristics of the injection jet produced can be modified to suit the requirements of different engines.

Throttling pintle nozzle

One of the variations of the pintle nozzle is the throttling pintle nozzle. The profile of the pintle allows a specific rate-of-discharge curve to be produced. As the nozzle needle opens, at first only a very narrow annular orifice is provided which allows only a small amount of fuel to pass through (throttling effect).


As the pintle draws further back with increasing fuel pressure, the size of the gap through which fuel can flow increases. The greater proportion of the injected fuel quantity is only injected as the pintle approaches the limit of its upward travel. By modifying the rate-of-discharge curve in this way, “softer” combustion is produced because the pressure in the combustion chamber does not rise so quickly. As a result, combustion noise is reduced in the part-load range. This means that the shape of the pintle in combination with the throttling gap and the characteristic of the compression spring in the nozzle holder produces the desired rate-of-discharge curve.

Fig. 1

- 1 Stroke-limiting shoulder
- 2 Ring groove
- 3 Nozzle needle
- 4 Nozzle body
- 5 Pressure chamber
- 6 Pintle shoulder
- 7 Pintle
- 8 Injection orifice
- 9 Seat lead-in
- 10 Inlet port
- 11 Nozzle-body shoulder
- 12 Nozzle-body collar
- 13 Sealing face
- 14 Pressure pin
- 15 Pressure-pin contact face


F_F Spring force

F_D Force acting on pressure shoulder due to fuel pressure

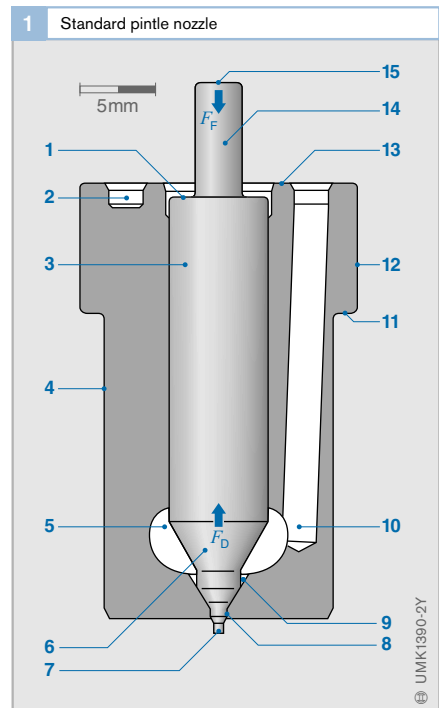

Flatted-pintle nozzle

The flatted-pintle nozzle (Fig. 3) has a pintle with a flatted face on its tip which, as the nozzle opens (at the beginning of needle lift travel) produces a wider passage within the annular orifice. This helps to prevent deposits at that point by increasing the volumetric flow rate. As a result, flatted-pintle nozzles “coke” to a lesser degree and more evenly. The annular orifice between the jet orifice and the pintle is very narrow ($< 10 \mu\text{m}$). The flatted face is frequently parallel to the axis of the nozzle needle. By setting the flatted face at an angle, the volumetric flow rate, Q , can be increased in the flatter section of the rate-of-discharge curve (Fig. 4). In this way, a smoother transition between the initial phase and the fully-open phase of the rate-of-discharge curve can be obtained. Specially designed variations in pintle geometry allow the flow-rate pattern to be modified to suit particular engine requirements. As a result, engine noise in the part-load range is reduced and engine smoothness improved.

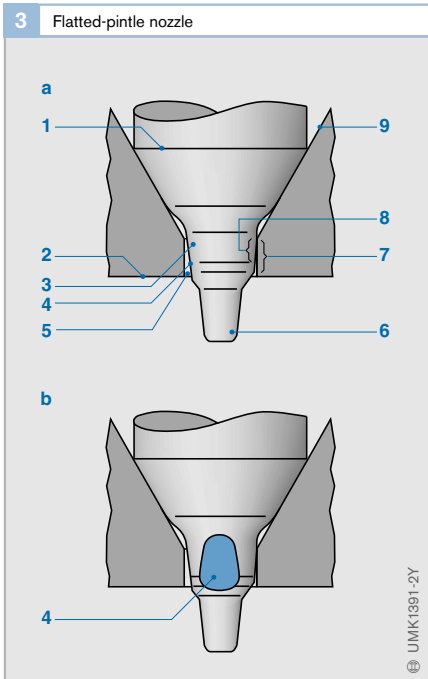

Heat shielding

Temperatures above 220°C also promote nozzle coking. Thermal-protection plates or sleeves (Fig. 2) help to overcome this problem by conducting heat from the combustion chamber into the cylinder head.

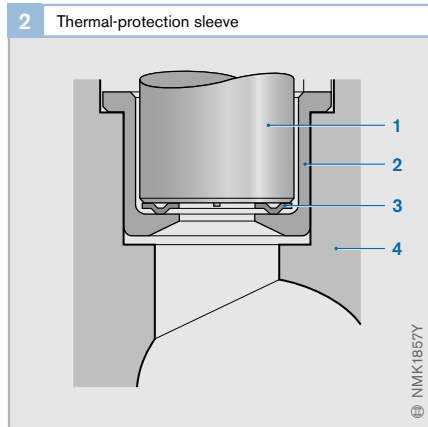


Fig. 2
 1 Pintle nozzle
 2 Thermal-protection sleeve
 3 Protective disc
 4 Cylinder head

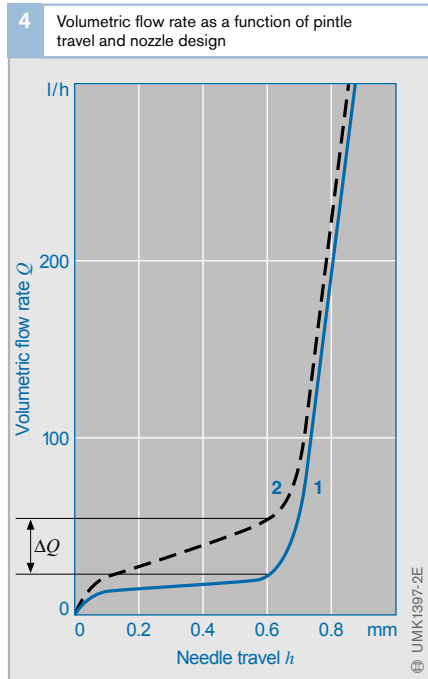


Fig. 3
 a Side view
 b Front view (rotation of 90° relative to side view)

Fig. 4
 1 Throttling pintle nozzle
 2 Flatted-pintle nozzle (throttling pintle nozzle with flatted face)

ΔQ Difference in volumetric flow rate due to flatted face

Hole-type nozzles

Application

Hole-type nozzles are used on engines that operate according to the Direct-Injection process (DI). The position in which the nozzles are fitted is generally determined by the engine design. The injection orifices are set at a variety of angles according to the requirements of the combustion chamber (Fig. 1). Hole-type nozzles are divided into:

- Blind-hole nozzles
- Sac-less (vco) nozzles

Hole-type nozzles are also divided according to size into:

- *Type P* which have a needle diameter of 4 mm (blind-hole and sac-less (vco) nozzles).
- *Type S* which have a needle diameter of 5 or 6 mm (blind-hole nozzles for large engines).

In Common-Rail (CR) and Unit Injector (UI) fuel-injection systems, the hole-type nozzle is a single integrated unit. It combines, therefore, the functions of the nozzle holder.

The opening pressure of hole-type nozzles is in the range 150...350 bar.

Design

The injection orifices (Fig. 2, 6) are located on the sheath of the nozzle cone (7). The number and diameter are dependent on:

- The required injected fuel quantity
- The shape of the combustion chamber
- The air vortex (whirl) inside of the combustion chamber

The diameter of the injection orifices is slightly larger at the inner end than at the outer end. This difference is defined by the port taper factor. The leading edges of the injection orifices may be rounded by using the hydro-erosion (HE) process. This involves the use of an HE fluid that contains abrasive particles which smooth off the edges at points where high flow velocities occur (leading edges of injection orifices). Hydro-erosion can be used both on blind-hole and sac-less (vco) nozzles. Its purpose is to:


- optimize the flow-resistance coefficient
- pre-empt erosion of edges caused by particles in the fuel, and/or
- tighten flow-rate tolerances

Nozzles have to be carefully designed to match the engine in which they are used. Nozzle design plays a decisive role in the following:

- Precise metering of injected fuel (injection duration and injected fuel quantity relative to degrees of crankshaft rotation).
- Fuel conditioning (number of jets, spray shape and atomization of fuel).
- Fuel dispersal inside the combustion chamber.
- Sealing the fuel-injection system against the combustion chamber.

The pressure chamber (10) is formed by Electrochemical Machining (ECM). An electrode, through which an electrolyte solution is passed, is introduced into the pre-bored nozzle body. Material is then removed from the positively charged nozzle body (anodic dissolution).

Fig. 1
1 Nozzle holder or injector
2 Sealing washer
3 Hole-type nozzle
 γ Inclination
 δ Jet cone angle

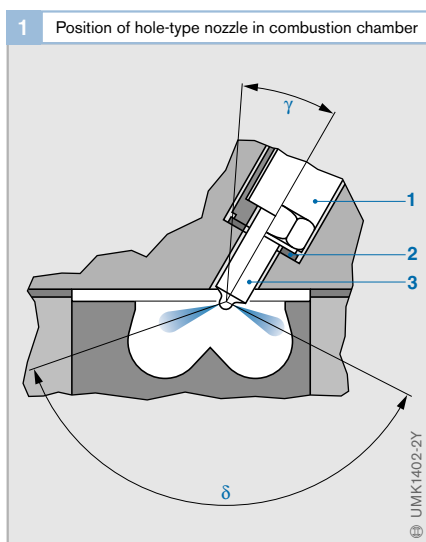

Designs

Fuel in the volume below the nozzle-needle seat evaporates after combustion. This produces a large part of the engine's hydrocarbon emissions. For this reason, it is important to keep the dead volume, or "detrimental" volume, as small as possible.

In addition, the geometry of the needle seat and the shape of the nozzle cone have a decisive influence on the opening and closing characteristics of the nozzle. This, in turn, affects the soot and NO_x emissions produced by the engine.

The consideration of these various factors, in combination with the demands of the engine and the fuel-injection system, has resulted in a variety of nozzle designs.

There are two basic designs:

- Blind-hole nozzles
- Sac-less (vco) nozzles

Among the blind-hole nozzles, there are a number of variants.

Blind-hole nozzle

The injection orifices in the blind-hole nozzle (Fig. 2, 6) are arranged around a blind hole.

If the nozzle has a *rounded tip*, the injection orifices are drilled either mechanically or by electro-erosion, depending on the design.

In blind-hole nozzles with a *conical tip*, the injection orifices are generally created by electro-erosion.

Blind-hole nozzles may have a cylindrical or conical blind hole of varying dimensions.

Blind-hole nozzles with a cylindrical blind hole and rounded tip (Fig. 3), which consists of a cylindrical and a hemispherical section, offer a large amount of scope with regard to the number of holes, length of injection orifices, and spray-hole cone angle. The nozzle cone is hemispherical in shape, which – in combination with the shape of the blind hole – ensures that all the spray holes are of equal length.

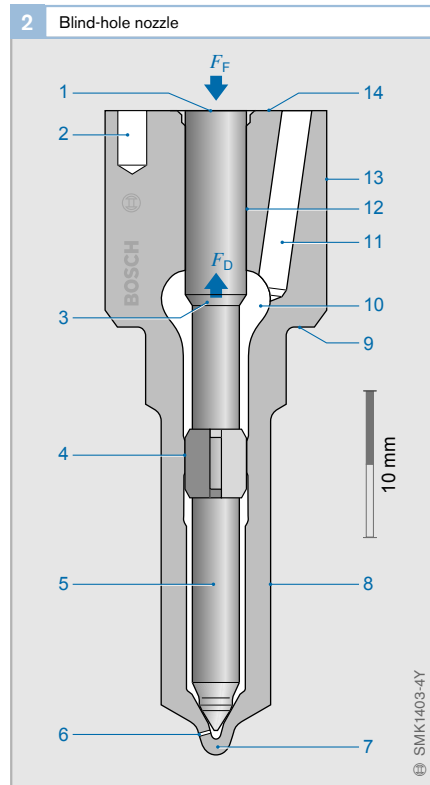


Fig. 2

- 1 Stroke-limiting shoulder
- 2 Fixing hole
- 3 Pressure shoulder
- 4 Secondary needle guide
- 5 Needle shaft
- 6 Injection orifice
- 7 Nozzle cone
- 8 Nozzle body
- 9 Nozzle-body shoulder
- 10 Pressure chamber
- 11 Inlet passage
- 12 Needle guide
- 13 Nozzle-body collar
- 14 Sealing face

F_F Spring force
 F_D Force acting on pressure shoulder due to fuel pressure

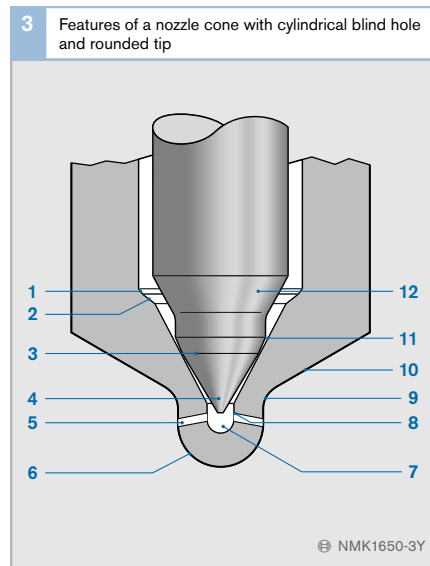


Fig. 3

- 1 Shoulder
- 2 Seat lead-in
- 3 Needle-seat face
- 4 Needle tip
- 5 Injection orifice
- 6 Rounded tip
- 7 Cylindrical blind hole (dead volume)
- 8 Injection orifice leading edge
- 9 Neck radius
- 10 Nozzle-cone taper
- 11 Nozzle-body seat face
- 12 Damping taper

⊕ NMK1650-3Y

The blind-hole nozzle with a cylindrical blind hole and conical tip (Fig. 4a) is only available for spray-hole lengths of 0.6 mm. The conical tip shape increases tip strength as a result of a greater wall thickness between the neck radius (3) and the nozzle body seat (4).

Blind-hole nozzles with conical blind holes and conical tip (Fig. 4b) have a smaller dead volume than nozzles with a cylindrical blind hole. The volume of the blind hole is between that of a sac-less (vco) nozzle and a blind-hole nozzle with a cylindrical blind hole. In order to obtain an even wall thickness throughout the tip, it is shaped conically to match the shape of the blind hole.

A further refinement of the blind-hole nozzle is the micro-blind-hole nozzle (Fig. 4c). Its blind-hole volume is around 30% smaller than that of a conventional blind-hole nozzle. This type of nozzle is particularly suited to use in common-rail systems, which operate with a relatively slow needle lift and, consequently, a comparatively long nozzle-seat restriction. The micro-blind-hole nozzle currently represents the best compromise between minimizing dead volume and even spray dispersal when the nozzle opens for common-rail systems.

Sac-less (vco) nozzles

In order to minimize dead volume – and therefore HC emissions – the injection orifice exits from the nozzle-body seat face. When the nozzle is closed, the nozzle needle more or less covers the injection orifice so that there is no direct connection between the blind hole and the combustion chamber (Fig. 4d). The blind-hole volume is considerably smaller than that of a blind-hole nozzle. Sac-less (vco) nozzles have a significantly lower stress capacity than blind-hole nozzles and can therefore only be produced with a spray-hole length of 1 mm. The nozzle tip has a conical shape. The injection orifices are generally produced by electro-erosion.

Special spray-hole geometries, secondary needle guides, and complex needle-tip geometries are used to further improve spray dispersal, and consequently mixture formation, on both blind-hole and sac-less (vco) nozzles.

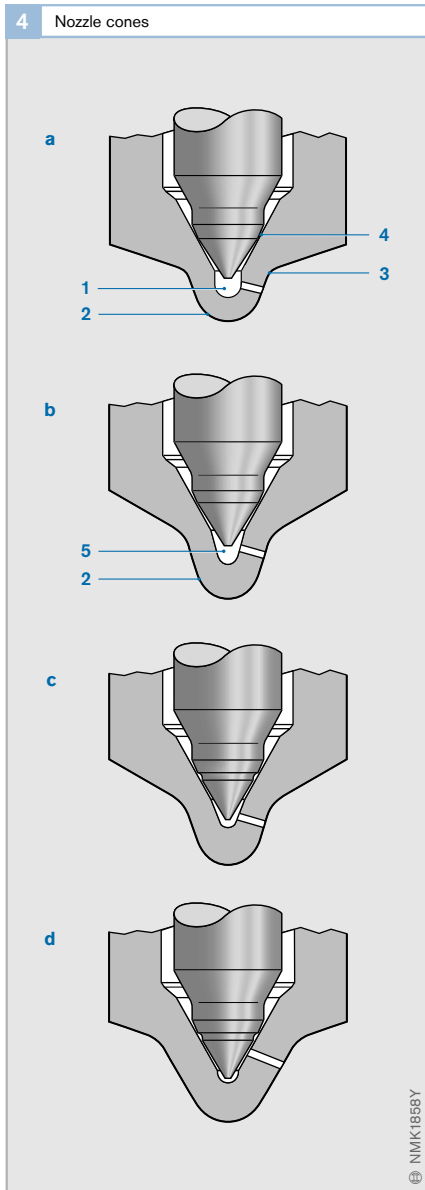


Fig. 4

Heat shield

The maximum temperature capacity of hole-type nozzles is around 300°C (heat resistance of material). Thermal-protection sleeves are available for operation in especially difficult conditions, and there are even cooled nozzles for large-scale engines.

Effect on emissions

Nozzle geometry has a direct effect on the engine's exhaust-gas emission characteristics.

- The *spray-hole geometry* (Fig. 5, 1) influences particulate and NO_x emissions.
- The *needle-seat geometry* (2) affects engine noise due to its effect on the pilot volume, i.e. the volume injected at the beginning of the injection process. The aim of optimizing spray-hole and seat geometry is to produce a durable nozzle capable of mass production to very tight dimensional tolerances.
- *Blind-hole geometry* (3) affects HC emissions, as previously mentioned. The designer can select and combine the various nozzle characteristics to obtain the optimum design for a particular engine and vehicle concerned.

For this reason, it is important that the nozzles are designed specifically for the vehicle, engine and fuel-injection system in which they are to be used. When servicing is required, it is equally important to use genuine OEM parts in order to ensure that engine performance is not impaired and exhaust-gas emissions are not increased.

Spray shapes

Basically, the shape of the injection jet for car engines is long and narrow because these engines produce a large degree of whirl inside of the combustion chamber. There is no whirl effect in commercial-vehicle engines. Therefore, the injection jet tends to be wider and shorter. Even where there is a large amount of whirl, the individual injection jets must not intermingle, otherwise fuel would be injected into areas where combustion has already taken place and, therefore, where there is a lack of air. This would result in the production of large amounts of soot.

Hole-type nozzles have up to six injection orifices in passenger cars and up to ten in commercial vehicles. The aim of future development will be to further increase the number of injection orifices and to reduce their bore size (<0.12 mm) in order to obtain even finer dispersal of fuel.


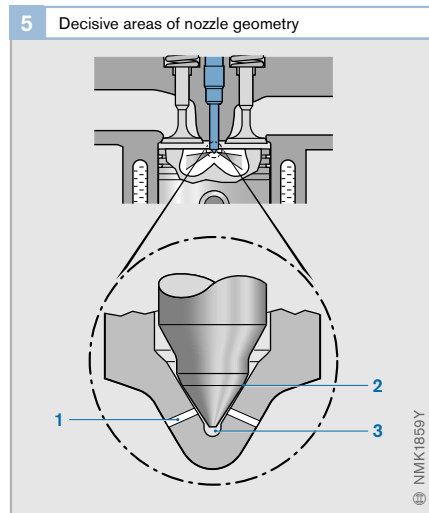


Fig. 5

- 1 Injection-orifice geometry
- 2 Seat geometry
- 3 Blind-hole geometry

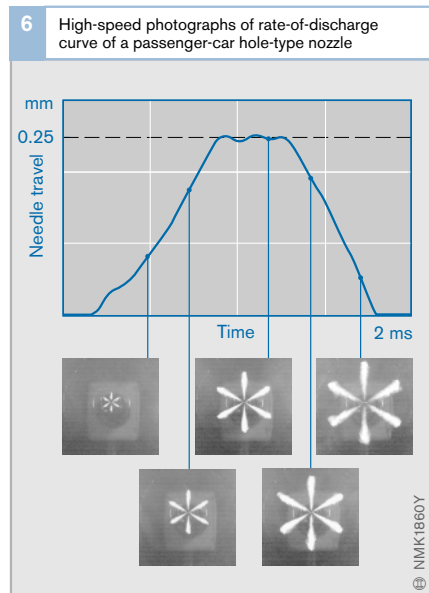

Future development of the nozzle


In view of the rapid development of new, high-performance engines and fuel-injection systems with sophisticated functionality (e.g. multiple injection phases), continuous development of the nozzle is a necessity. In addition, there are number of aspects of nozzle design which offer scope for innovation and further improvement of diesel engine performance in the future. The most important aims are:

- Minimize untreated emissions to reduce or totally avoid the outlay for an expensive exhaust-gas treatment (e.g. particulate filter).
- Minimize fuel consumption.
- Optimize engine noise.

There various different areas on which attention can be focused in the future development of the nozzle (Fig. 1) and a corresponding variety of development tools (Fig. 2). New materials are also constantly being developed to offer improvements in durability. The use of multiple-injection phases also has consequences for the design of the nozzle.


The use of other fuels (e.g. designer fuels) affects nozzle shape due to differences in viscosity or flow response.

Such changes will, in some cases, also demand new production processes, such as laser drilling for the injection orifices.

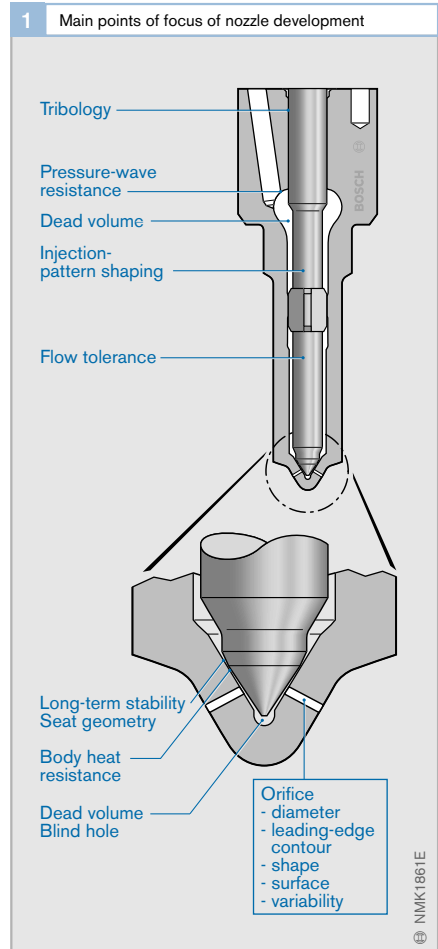

2

Development tools for nozzles

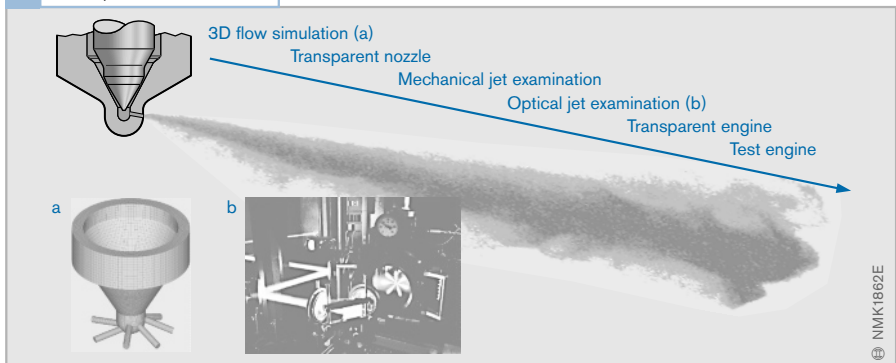

High-precision technology

The image associated with diesel engines in many people's minds is more one of heavy-duty machinery than high-precision engineering. But modern diesel fuel-injection systems are made up of components that are manufactured to the highest degrees of accuracy and required to withstand enormous stresses.

The nozzle is the interface between the fuel-injection system and the engine. It has to open and close precisely and reliably for the entire life of the engine. When it is closed, it must not leak. This would increase fuel consumption, adversely affect exhaust-gas emissions, and might even cause engine damage.

To ensure that the nozzles seal reliably at the high pressures generated in modern fuel-injection systems such as the VR (VP44), CR, UPS and UIS designs (up to 2,050 bar), they have to be specially designed and very precisely manufactured. By way of illustration, here are some examples:

- To ensure that the sealing face of the nozzle body (1) provides a reliable seal, it has a dimensional tolerance of 0.001 mm (1 μm). That means it must be accurate to within approximately 4,000 metal atom layers!
- The nozzle-needle guide clearance (2) is 0.002...0.004 mm (2...4 μm). The dimensional tolerances are similarly less than 0.001 mm (1 μm).


The injection orifices (3) in the nozzles are created by an electro-erosion machining process. This process erodes the metal by vaporization caused by the high temperature generated by the spark discharge between an electrode and the workpiece. Using high-precision electrodes and accurately configured parameters, extremely precise injection orifices with diameters of 0.12 mm can be produced. This means that the smallest injection orifice diameter is only twice the thickness of a human hair (0.06 mm). In order to obtain better injection characteristics, the leading edges of the nozzle injection orifices are rounded off by special abrasive fluids (hydro-erosion machining).

The minute tolerances demand the use of highly specialized and ultra-accurate measuring equipment such as:

- Optical 3D coordinate measuring machine for measuring the injection orifices, or
- Laser interferometers for checking the smoothness of the nozzle sealing faces.

The manufacture of diesel fuel-injection components is thus "high-volume, high-technology".

A matter of high-precision

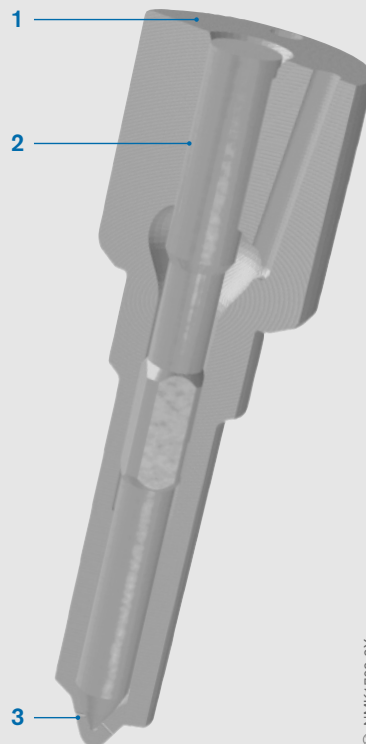

© NIMK1709-2Y

- 1 Nozzle-body sealing face
- 2 Guide clearance between nozzle needle and nozzle body
- 3 Injection orifice

Nozzle holders

A nozzle holder combines with the matching nozzle to form the nozzle-and-holder assembly. There is a nozzle-and-holder assembly fitted in the cylinder head for each engine cylinder (Fig. 1). These components form an important part of the fuel-injection system and help to shape engine performance, exhaust emissions and noise characteristics. In order that they are able to perform their function properly, they must be designed to suit the engine in which they are used.


The nozzle (4) in the nozzle holder sprays fuel into the diesel-engine combustion chamber (6). The nozzle holder contains the following essential components:

- **Valve spring(s) (9)** which act(s) against the nozzle needle so as to close the nozzle
- **Nozzle-retaining nut (8)** which retains and centers the nozzle
- **Filter (11)** for keeping dirt out of the nozzle
- **Connections** for the fuel supply and return lines which are linked via the *pressure channel (10)*


Depending on design, the nozzle holder may also contain seals and spacers. Standardized dimensions and combinations provide the required degree of adaptability combined with the minimum of component diversity.

Fig. 1

- 1 Fuel supply
- 2 Holder body
- 3 Fuel return
- 4 Nozzle
- 5 Sealing gasket
- 6 Combustion chamber of diesel engine
- 7 Cylinder head
- 8 Nozzle-retaining nut
- 9 Valve spring
- 10 Pressure channel
- 11 Filter

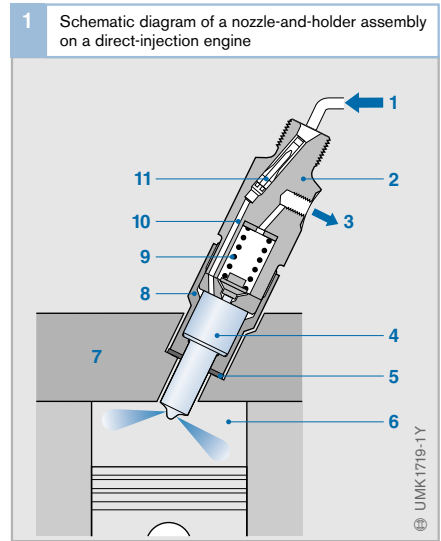

2 Bosch type designation codes for nozzle holders

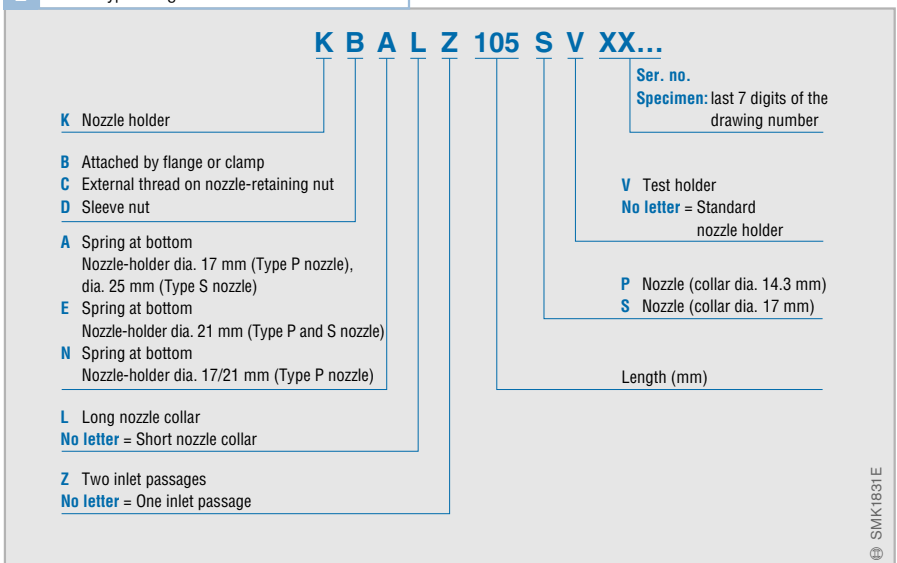

The design of the nozzle holder for direct-injection (DI) and indirect-injection (IDI) engines is basically the same. But since modern diesel engines are almost exclusively direct-injection, the nozzle-and-holder assemblies illustrated here are mainly for DI engines. The descriptions, however, can be applied to IDI nozzles as well, but bearing in mind that the latter use pintle nozzles rather than the hole-type nozzles found in DI engines.

Nozzle holders can be combined with a range of nozzles. In addition, depending on the required injection pattern, there is a choice of

- *standard nozzle holder* (single-spring nozzle holder) or
- *two-spring nozzle holder* (not for unit pump systems).

A variation of those designs is the *stepped holder* which is particularly suited to situations where space is limited.

Depending on the fuel-injection system in which they are used, nozzle holders may or may not be fitted with *needle-motion sensors*.

The needle-motion sensor signals the precise start of injection to the engine control unit.

Nozzle holders may be attached to the cylinder block by flanges, clamps, sleeve nuts or external threads. The fuel-line connection is in the center or at the side.

The fuel that leaks past the nozzle needle acts as lubrication. In many nozzle-holder designs, it is returned to the fuel tank by a fuel-return line.

Some nozzle holders function without fuel leakage – i.e. without a fuel-return line. The fuel in the spring chamber has a damping effect on the needle stroke at high injection volumes and engine speeds so that a similar injection pattern to that of a two-spring nozzle holder is generated.


In the common-rail and unit-injector high-pressure fuel-injection systems, the nozzle is integral with the injector, so that a nozzle-and-holder assembly is unnecessary.

For large-scale engines with a per-cylinder output of more than 75 kW, there are application-specific fuel-injector assemblies which may also be cooled.

Fig. 3

- Stepped nozzle holder for commercial vehicles
- Standard nozzle holder for various engine types
- Two-spring nozzle holder for cars
- Standard nozzle holder for various engine types
- Stepped nozzle holder without fuel-leakage connection for commercial vehicles
- Stepped nozzle holder for commercial vehicles
- Stepped nozzle holder for various engine types
- Two-spring nozzle holder for cars
- Stepped nozzle holder for various engine types
- Standard nozzle holder with pintle nozzle for various types of IDI engine

3 Examples of nozzle-and-holder assemblies

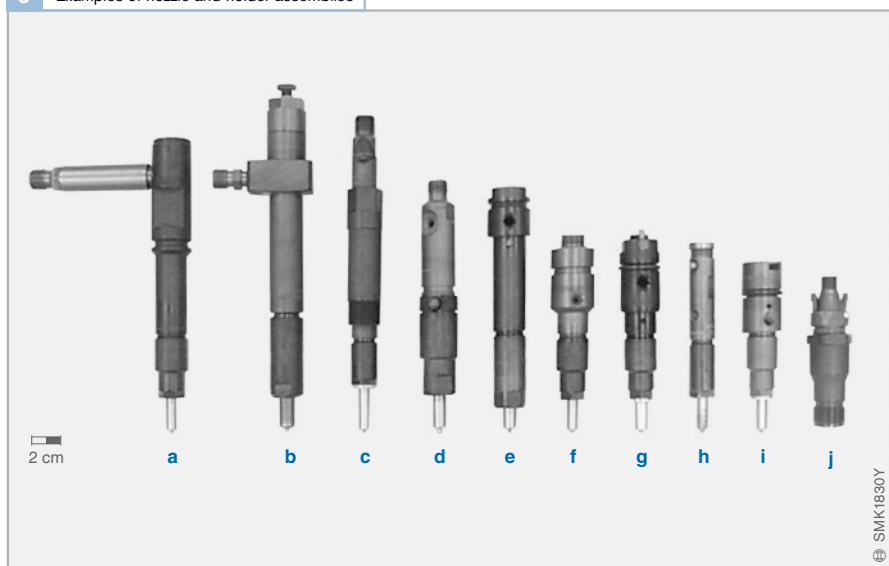

1 Standard nozzle-and-holder assembly for direct-injection (DI) engines

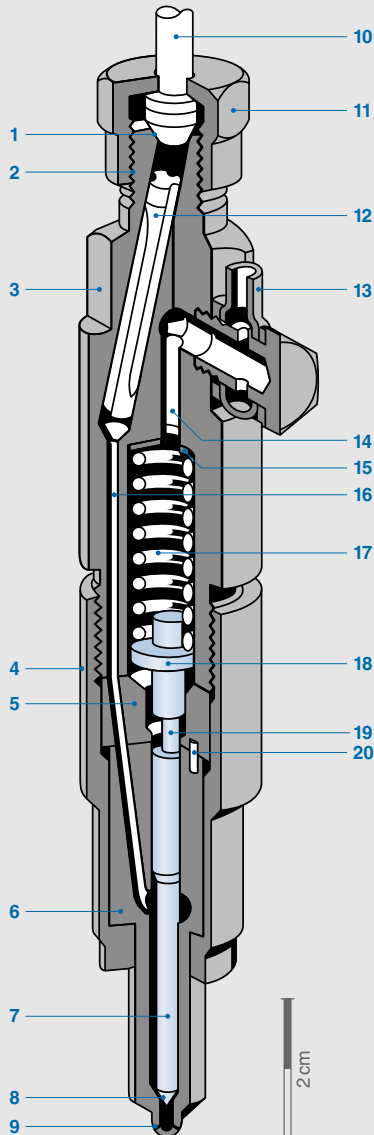


Fig. 1

- 1 Sealing cone
- 2 Screw thread for central pressure connection
- 3 Holder body
- 4 Nozzle-retaining nut
- 5 Intermediate disk
- 6 Nozzle body
- 7 Nozzle needle
- 8 Nozzle-body seat face
- 9 Injection orifice
- 10 Fuel inlet
- 11 Sleeve nut
- 12 Edge-type filter
- 13 Leak fuel connection
- 14 Leak fuel port
- 15 Shim
- 16 Pressure passage
- 17 Compression spring
- 18 Pressure pin
- 19 Pressure pin
- 20 Locating pin

Standard nozzle holders

Design and usage

The key features of standard nozzle holders are as follows:

- Cylindrical exterior with diameters of 17, 21, 25 and 26 mm
- Non-twist hole-type nozzles for engines with direct injection and
- Standardized individual components (springs, pressure pins, nozzle retaining nuts) that permit different combinations

The nozzle-and-holder assembly is made up of nozzle holder and nozzle (Fig. 1, with hole-type nozzle). The nozzle holder consists of the following components:

- Holder body (3)
- Intermediate disk (5)
- Nozzle-retaining nut (4)
- Pressure pin (18)
- Compression spring (17)
- Shim (15) and
- Locating pin (20)

The nozzle is attached centrally to the holder by the nozzle-retaining nut. When the retaining nut and holder body are screwed together, the intermediate disk is pressed against the sealing faces of the holder and nozzle body. The intermediate disk acts as a limiting stop for the needle lift and also centers the nozzle relative to the nozzle holder by means of the locating pins.

The pressure pin centers the compression spring and is guided by the nozzle-needle pressure pin (19).

The pressure passage (16) inside the nozzle holder body connects through the channel in the intermediate disk to the inlet passage of the nozzle, thus connecting the nozzle to the high-pressure line of the fuel-injection pump. If required, an edge-type filter (12) may be fitted inside the nozzle holder. This keeps out any dirt that may be contained in the fuel.


Method of operation

The compression spring inside the nozzle holder acts on the nozzle needle via the pressure pin. The spring tension is set by means of a shim. The force of the spring thus determines the opening pressure of the nozzle.

The fuel passes through the edge-type filter (12) to the pressure passage (16) in the holder body (3), through the intermediate disk (5) and finally through the nozzle body (6) to the space (8) surrounding the nozzle needle.

During the injection process, the nozzle needle (7) is lifted upwards by the pressure of the fuel (110...170 bar for pintle nozzles and 150...350 bar for hole-type nozzles). The fuel passes through the injection orifices (9) into the combustion chamber. The injection process comes to an end when the fuel pressure drops to a point where the compression spring (17) is able to push the nozzle needle back against its seat. Start of injection is thus controlled by fuel pressure. The injected fuel quantity depends essentially on how long the nozzle remains open.

In order to limit needle lift for pre-injection, some designs have a nozzle-needle damper (Fig. 2).

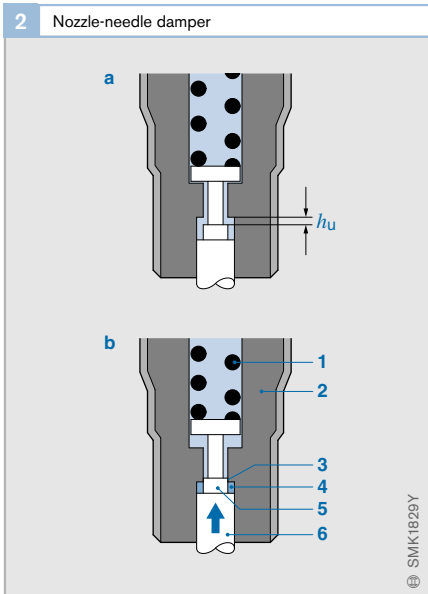

Stepped nozzle holders

Design and usage

On multi-valve commercial-vehicle engines in particular, where the nozzle-and-holder assembly has to be fitted vertically because of space constraints, stepped nozzle-and-holder assemblies are used (Fig. 3). The reason for the name can be found in the graduated dimensions (1).

The design and method of operation are the same as for standard nozzle holders. The essential difference lies in the way in which the fuel line is connected. Whereas on a standard nozzle holder it is screwed centrally to the top end of the nozzle holder, on a stepped holder it is connected to the holder body (11) by means of a delivery connection (10). This type of arrangement is normally used to achieve very short injection fuel lines, and has a beneficial effect on the injection pressure because of the smaller dead volume in the fuel lines.

Stepped nozzle holders are produced with or without a leak fuel connection (9).

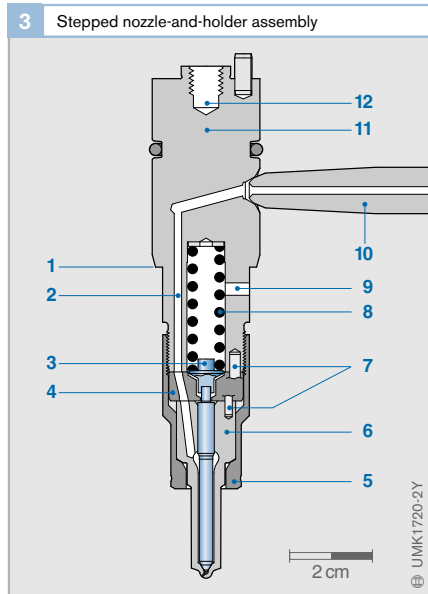


Fig. 2


- a Closed nozzle
- b Damped lift

- 1 Compression spring
- 2 Holder body
- 3 Leak gap
- 4 Hydraulic cushion
- 5 Damper piston
- 6 Nozzle needle

h_u Undamped lift (approx. 1/3 of full lift)

Fig. 3

- 1 Step
- 2 Pressure passage
- 3 Pressure pin
- 4 Intermediate disk
- 5 Nozzle-retaining nut
- 6 Nozzle body
- 7 Locating pin
- 8 Compression spring
- 9 Leak fuel port
- 10 Delivery connection
- 11 Holder body
- 12 Thread for extractor bolt

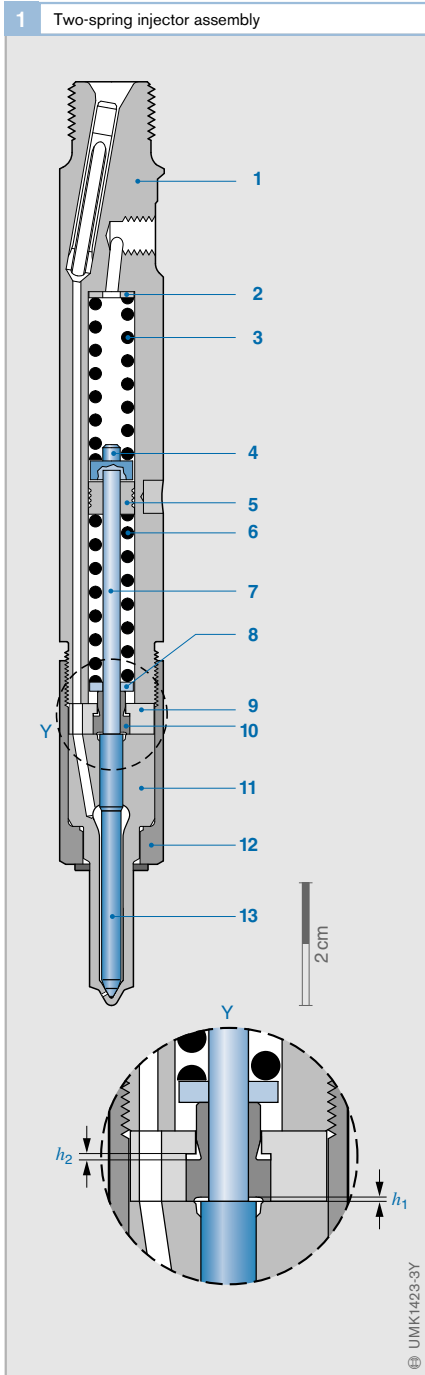

Two-spring nozzle holders


Usage

The two-spring nozzle holder is a refinement of the standard nozzle holder. It has the same external dimensions. Its graduated rate-of-discharge curve (Fig. 2) produces “softer” combustion and therefore a quieter engine, particularly at idle speed and part load. It is used primarily on direct-injection (DI) engines.

Design and method of operation

The two-spring nozzle holder (Fig. 1) has two compression springs positioned one behind the other. Initially, only one of the compression springs (3) is acting on the nozzle needle (13) and thus determines the opening pressure. The second compression spring (6) rests against a stop sleeve (10) which limits the plunger lift to port closing. During the injection process, the nozzle needle initially moves towards the plunger lift to port closing, h_1 (0.03...0.06 mm for DI engines, 0.1 mm for IDI engines). This allows only a small amount of fuel into the combustion chamber.

As the pressure inside the nozzle holder continues to increase, the stop sleeve overcomes the force of both compression springs (3 and 6). The nozzle needle then completes the main lift ($h_1 + h_2$, 0.2...0.4 mm) so that the main injected fuel quantity is injected.

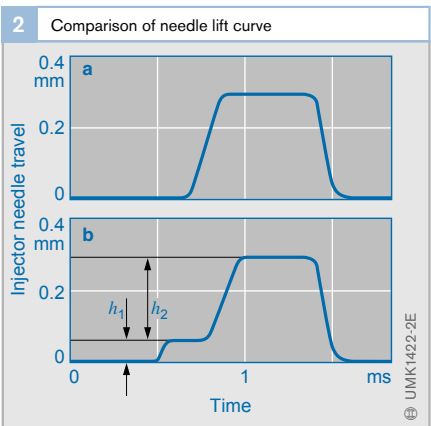

Nozzle holders with needle-motion sensors

Usage

Start of delivery is a key variable for optimizing diesel-engine performance. Detection of this variable allows the adjustment of start of delivery according to engine load and speed within a closed control loop. In systems with distributor and in-line fuel-injection pumps, this is achieved by means of a nozzle with a needle-motion sensor (Fig. 2) which transmits a signal when the nozzle needle starts to move upwards. It is sometimes also called a needle-motion sensor.

Design and method of operation

A current of approximately 30 mA is passed through the detector coil (Fig. 2, 11). This produces a magnetic field. The extended pressure pin (12) slides inside the guide pin (9). The penetration depth X determines the magnetic flux in the detector coil. By virtue of the change in magnetic flux in the coil, movement of the nozzle needle induces a velocity-dependent voltage signal (Fig. 1) in the coil which is processed by an analyzer circuit in the electronic control unit. When the signal level exceeds a threshold voltage, it is interpreted by the analyzer circuit to indicate the start of injection.

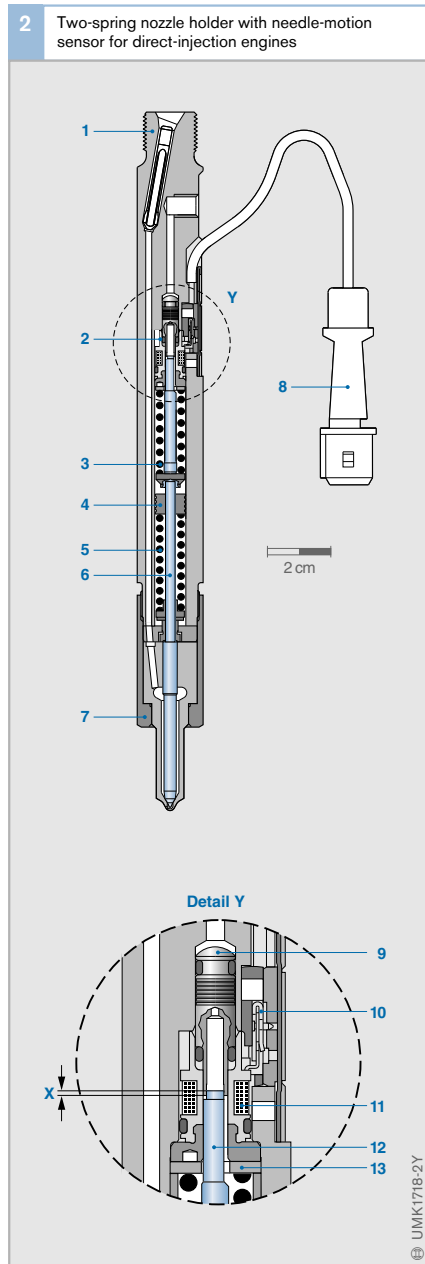
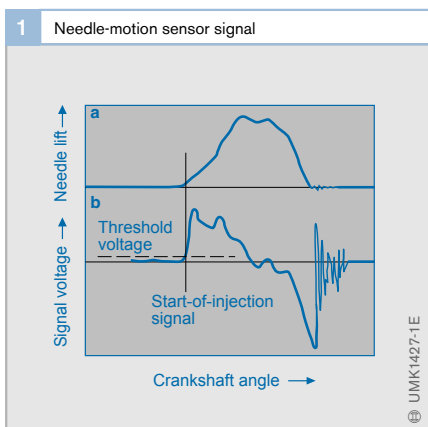


Fig. 1
 a Needle-lift curve
 b Corresponding coil signal voltage curve

Fig. 2

- 1 Holder body
- 2 Needle-motion sensor
- 3 Compression spring
- 4 Guide washer
- 5 Compression spring
- 6 Pressure pin
- 7 Nozzle-retaining nut
- 8 Connection to analyzer circuit
- 9 Guide pin
- 10 Contact tab
- 11 Detector coil
- 12 Pressure pin
- 13 Spring seat

X Penetration depth

High-pressure lines

Regardless of the basic system concept – in-line fuel-injection pump, distributor injection pump or unit pump systems – it is the high-pressure delivery lines and their connection fittings that furnish the links between the fuel-injection pump(s) and the nozzle-and-holder assemblies at the individual cylinders. In common-rail systems, they serve as the connection between the high-pressure pump and the rail as well as between rail and nozzles. No high-pressure delivery lines are required in the unit-injector system.

High-pressure connection fittings

The high-pressure connection fittings must supply secure sealing against leakage from fuel under the maximum primary pressure. The following types of fittings are used:

- Sealing cone and union nut
- Heavy-duty insert fittings, and
- Perpendicular connection fittings

Sealing cone with union nut

All of the fuel-injection systems described above use sealing cones with union nuts (Fig. 1). The advantages of this connection layout are:

- Easy adaptation to individual fuel-injection systems

- Fitting can be disconnected and reconnected numerous times
- The sealing cone can be shaped from the base material

At the end of the high-pressure line is the compressed pipe-sealing cone (3). The union nut (2) presses the cone into the high-pressure connection fitting (4) to form a seal. Some versions are equipped with a supplementary thrust washer (1). This provides a more consistent distribution of forces from the union nut to the sealing cone. The cone's open diameter should not be restricted, as this would obstruct fuel flow. Compressed sealing cones are generally manufactured in conformity with DIN 73 365 (Fig. 2).

Heavy-duty insert fittings

Heavy-duty insert fittings (Fig. 3) are used in unit-pump and common-rail systems as installed in heavy-duty commercial vehicles. With the insert fitting, it is not necessary to route the fuel line around the cylinder head to bring it to the nozzle holder or nozzle. This allows shorter fuel lines with associated benefits when it comes to space savings and ease of assembly.

The screw connection (8) presses the line insert (3) directly into the nozzle holder (1) or nozzle. The assembly also includes a mainte-

Fig. 1

- 1 Thrust washer
- 2 Union nut
- 3 Pipe sealing cone on high-pressure delivery line
- 4 Pressure connection on fuel-injection pump or nozzle holder


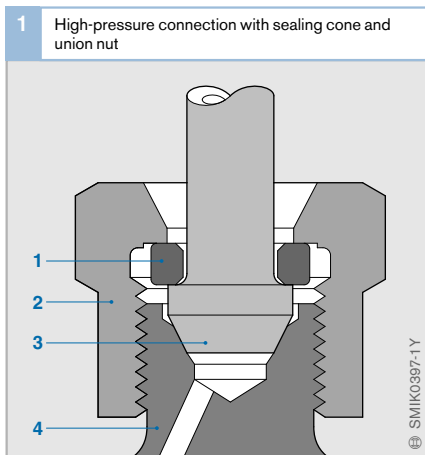


Fig. 2

- 1 Sealing surface

- d Outer line diameter
 d_1 Inner line diameter
 d_2 Inner cone diameter
 d_3 Outer cone diameter
 k Length of cone
 R_1, R_2 Radii

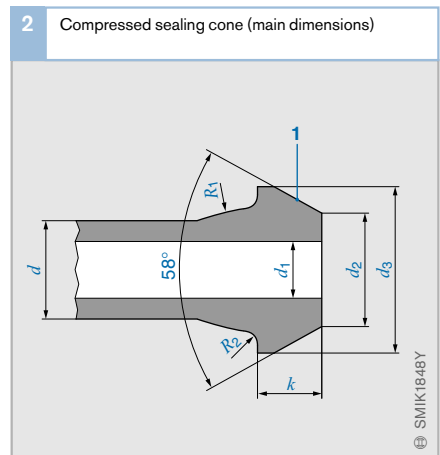

nance-free edge-type filter (5) to remove coarse contamination from the fuel. At its other end, the line is attached to the high-pressure delivery line (7) with a sealing cone and union nut (6).

Perpendicular connection fittings

Perpendicular connection fittings (Fig. 4) are used in some passenger-car applications. They are suitable for installations in which there are severe space constraints. The fitting contains passages for fuel inlet and return (7, 9). A bolt (1) presses the perpendicular fitting onto the nozzle holder (5) to form a sealed connection.

High-pressure delivery lines

The high-pressure fuel lines must withstand the system's maximum pressure as well as pressure variations that can attain very high fluctuations. The lines are seamless precision-made steel tubing in killed cast steel which has a particularly consistent microstructure. Dimensions vary according to pump size (Table 1, next page).

All high-pressure delivery lines are routed to avoid sharp bends. The bend radius should not be less than 50 mm.

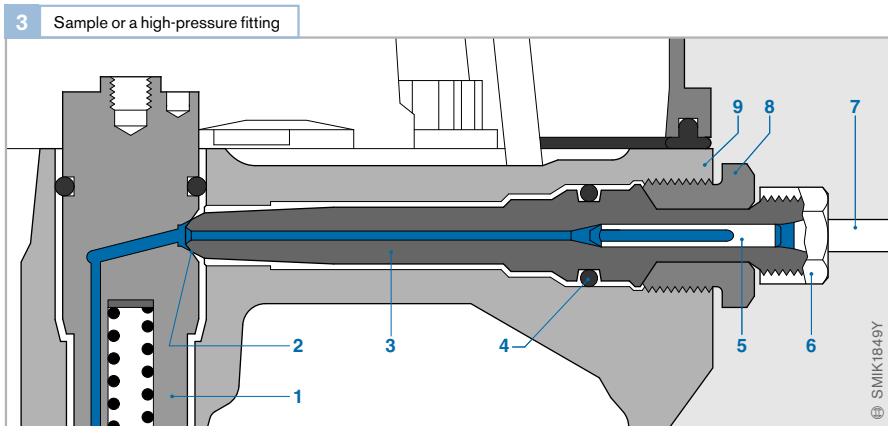


Fig. 3
 1 Nozzle holder
 2 Sealing cone
 3 High-pressure fitting
 4 Seal
 5 Edge-type filter
 6 Union nut
 7 High-pressure delivery line
 8 Screw connections
 9 Cylinder head

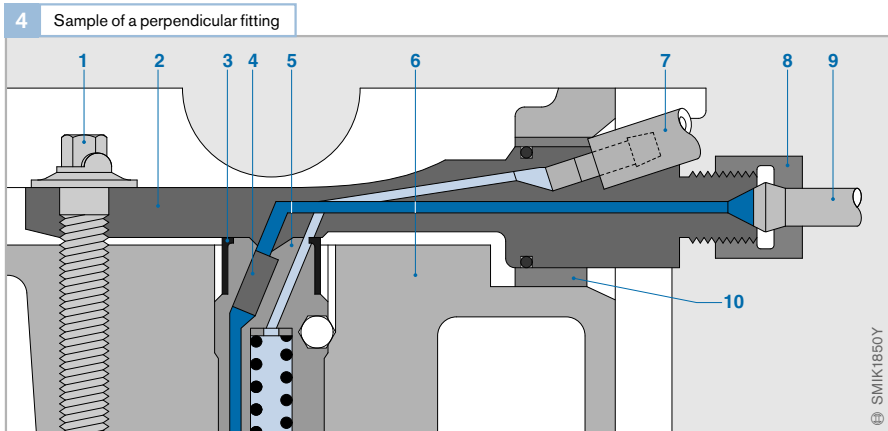


Fig. 4
 1 Expansion bolt
 2 Perpendicular fitting
 3 Molded seal
 4 Edge-type filter
 5 Nozzle holder
 6 Cylinder head
 7 Fuel return line (leakage-fuel line)
 8 Union nut
 9 High-pressure delivery line
 10 Clamp

Length, diameter and wall depth of the high-pressure lines all affect the injection process. To cite some examples: Line length influences the rate of discharge dependent on speed, while internal diameter is related to throttling loss and compression effects, which will be reflected in the injected-fuel quantity. These considerations lead to prescribed line dimensions that must be strictly observed. Tubing of other dimensions should never be installed during service and repairs. Defective high-pressure tubing should always be replaced by OEM lines. During servicing or maintenance, it is also important to observe precautions against fouling entering the system. This applies in any case to all service work on fuel-injection systems.

A general priority in the development of fuel-injection systems is to minimize the length of high-pressure lines. Shorter lines produce better injection-system performance.

Injection is accompanied by the formation of pressure waves. These are pulses that propagate at the speed of sound before finally being reflected on impact at the ends. This phenomenon increases in intensity as engine speed rises. Engineers exploit it to raise injection pressure. The engineering process entails defining line lengths that are precisely matched to the engine and the fuel-injection system.

All cylinders are fed by high-pressure delivery lines of a single, uniform length. More or less angled bends in the lines compensate for the different distances between the outlets from the fuel-injection pump or rail, and the individual engine cylinders.

The primary factor determining the high-pressure line's compression-pulsating fatigue strength is the surface quality of the inner walls of the lines, as defined by material and peak-to-valley height. Especially demanding performance requirements are satisfied by prestressed high-pressure delivery lines (for applications of 1,400 bar and over). Before installation on the engine, these customized lines are subjected to extremely high pressures (up to 3,800 bar). Then pressure is suddenly relieved. The process compresses the material on the inner walls of the lines to provide increased internal strength.

The high-pressure delivery lines for vehicle engines are normally mounted with clamp brackets located at specific intervals. This means that transfer of external vibration to the lines is either minimal or nonexistent.

The dimensions of high-pressure lines for test benches are subject to more precise tolerance specifications.

Table 1
 d Outer line diameter
 d_1 Inner line diameter

Wall thicknesses indicated in **bold** should be selected when possible.

Dimensions for high-pressure lines are usually indicated as follows:

$d \times s \times l$
 l Line length

| 1 Main dimensions of major high-pressure delivery lines in mm | | | | | | | | | | | | | | | | | |
|---|--------------------|-------------|------------|------------|----------|-----|-------------|------------|------------|------------|----------|------|------------|------------|----------|------------|----------|
| d_1 | 1.4 | 1.5 | 1.6 | 1.8 | 2.0 | 2.2 | 2.5 | 2.8 | 3.0 | 3.6 | 4.0 | 4.5 | 5.0 | 6.0 | 7.0 | 8.0 | 9.0 |
| d | Wall thickness s | | | | | | | | | | | | | | | | |
| 4 | 1.3 | 1.25 | 1.2 | | | | | | | | | | | | | | |
| 5 | 1.8 | 1.75 | 1.7 | 1.6 | | | | | | | | | | | | | |
| 6 | | 2.25 | 2.2 | 2.1 | 2 | 1.9 | 1.75 | 1.6 | 1.5 | | | | | | | | |
| 8 | | | | | 3 | 2.9 | 2.75 | 2.6 | 2.5 | 2.2 | 2 | | | | | | |
| 10 | | | | | | | 3.75 | 3.6 | 3.5 | 3.2 | 3 | 2.75 | 2.5 | | | | |
| 12 | | | | | | | | | 4.5 | 4.2 | 4 | 3.75 | 3.5 | | | | |
| 14 | | | | | | | | | | | 5 | 4.75 | 4.5 | 4 | | 3 | |
| 17 | | | | | | | | | | | | | 6 | 5.5 | 5 | 4.5 | |
| 19 | | | | | | | | | | | | | | | | | 5 |
| 22 | | | | | | | | | | | | | | | | 7 | |

Cavitation in the high-pressure system

Cavitation can damage fuel-injection systems (Fig. 1). The process takes place as follows:

Local pressure variations occur at restrictions and in bends when a fluid enters an enclosed area at extremely high speeds (for instance, in a pump housing or in a high-pressure line). If the flow characteristics are less than optimum, low-pressure sectors can form at these locations for limited periods of time, in turn promoting the formation of vapor bubbles.

These gas bubbles implode in the subsequent high-pressure phase. If a wall is located immediately adjacent to the affected sector, the concentrated high energy can create a cavity in the surface over time (erosion effect). This is called cavitation damage.

As the vapor bubbles are transported by the fluid's flow, cavitation damage will not necessarily occur at the location where the bubble forms. Indeed, cavitation damage is frequently found in eddy zones.

The causes behind these temporary localized low-pressure areas are numerous and varied. Typical factors include:

- Discharge processes
- Closing valves
- Pumping between moving gaps and
- Vacuum waves in passages and lines

Attempts to deal with cavitation problems by improving material quality and surface-hardening processes cannot produce anything other than very modest gains. The ultimate objective is and remains to prevent the vapor bubbles from forming, and, should complete prevention prove impossible, to improve flow behavior to limit the negative impacts of the bubbles.

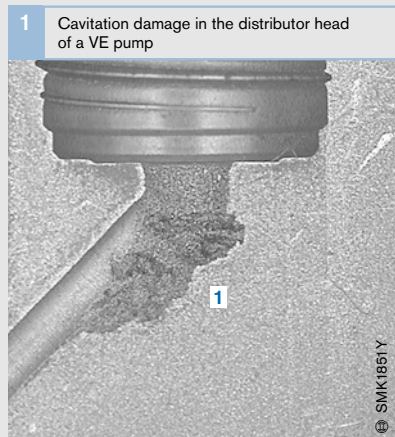


Fig. 1

1 Cavitation

2 Implosion of a cavitation bubble

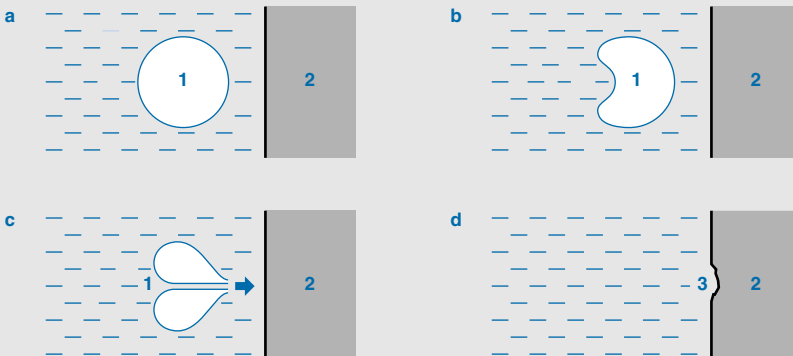


Fig. 2

- a A vapor bubble is formed
- b The vapor bubble collapses
- c The collapsed sections form a sharp edge with extremely high energy
- d The imploding vapor bubble leaves a recess on the surface

- 1 Vapor bubble
- 2 Wall
- 3 Recess

SMK1852Y

Start-assist systems

The colder the diesel engine, the more reluctant it is to start. Leakage and thermal losses reduce the compression pressure in the cold cylinders and with it the temperature of the compressed air. Cold engines have an outside-temperature limit, under which starting without the assistance of auxiliary start-assist devices is no longer possible.

Compared with gasoline, diesel fuel is very easily combustible. That is why warm pre-combustion-chamber and whirl-chamber diesel engines and direct-injection (DI) engines will start spontaneously at low outside temperatures down to $\geq 0^\circ\text{C}$. Here, the spontaneous ignition temperature for diesel fuel of 250°C is achieved with the engine turning at starting speed. Cold precombustion-chamber and whirl-chamber diesel engines require start assistance at ambient temperatures of $< 40^\circ\text{C}$ and $< 20^\circ\text{C}$ respectively, while DI engines only need such intervention below 0°C .

Overview


Systems for passenger cars and light commercial vehicles

Preheating systems are used for passenger cars and light commercial vehicles. These systems increase starting comfort and help the engine to run smoothly and with minimal emissions after starting and in the warm-up period.

Preheating systems consist of sheathed-element glow plugs, a switch a preheating software in the engine-management system. Conventional preheating systems use glow plugs with a nominal voltage of 11 V which are activated by the vehicle system voltage. New low-voltage preheating systems require glow plugs with nominal voltages below 11 V whose heat output is adapted to the engine's requirements by an electronic glow control unit.

In precombustion-chamber and whirl-chamber diesel engines (IDI), the glow plug extends into the secondary combustion chamber, while in DI engines, it extends into the main combustion chamber of the engine cylinder.

1 Components of a preheating system

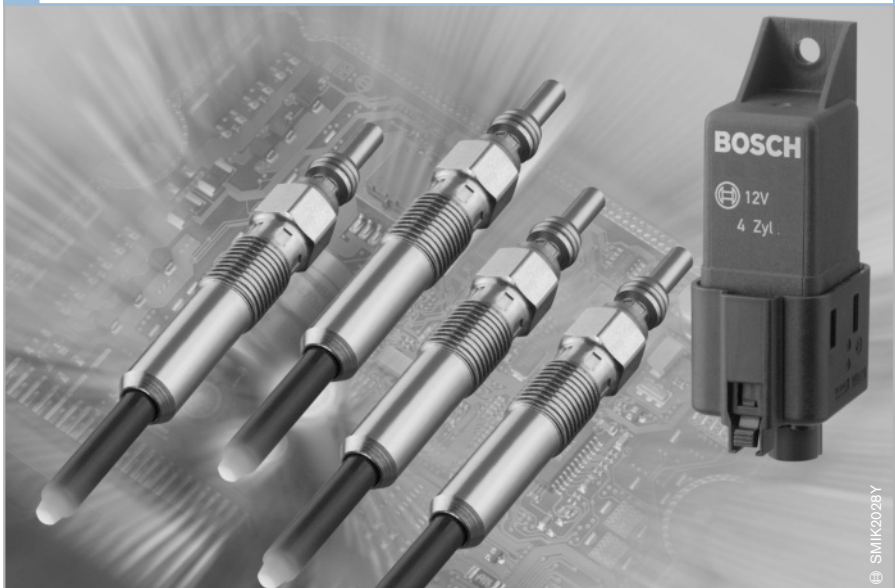

© SMIK2028Y

The air/fuel mixture is directed past the hot tip of the glow plug and heated. The ignition temperature is reached in combination with the heating of the intake air during the compression cycle.

Preheating systems are usually replaced by flame starting systems in diesel engines with a displacement of more than 1 l/cylinder (commercial vehicles).

Requirements

The more exacting comfort requirements of today's diesel drivers have decisively shaped the development of modern preheating systems. Nowadays, drivers will no longer accept a cold start together with the "diesel minute's silence".

More stringent emission limits and the desire for higher specific engine power have resulted in the development of low-compression engines. The cold-starting and cold-running performance of these engines is problematic, but this can be controlled by higher preheating temperatures and longer preheating times.

Due to the dramatic increase in the number of electrical loads/consumers, low power consumption by electrical components will become increasingly important in the future.

To summarize, a preheating system must satisfy the following requirements:

- Fastest possible preheating rate (1,000°C/s) even in the event of a dip in the vehicle system voltage
- High preheating-system service life (commensurate with the engine service life)
- Extended post- and intermediate-heating times in minutes
- Ideal adaptation of heating output to engine requirements
- Continuous heating temperature up to 1,150°C for low-compression engines
- Reduced load on the vehicle electrical system
- EURO IV- and US 07-compatible
- On-Board Diagnosis according to OBD II and EOBD

Preheating systems

Preheating phases

The preheating process consists of five phases.

- During preheating, the glow plug is heated to operating temperature.
- During standby heating, the preheating system maintains a glow-plug temperature necessary for starting for a defined period.
- Glow-plug start assist is used while the engine runs up.
- The post-heating phase starts after starter release.
- The glow plugs are subjected to intermediate heating after engine cooling by over-running or to support particulate-filter regeneration.

Conventional preheating system

Design and construction

Conventional preheating systems consist of

- a metal glow plug with a nominal voltage of 11 V
- a relay glow control unit and
- a software module for the preheating function integrated in the engine control unit (Electronic Diesel Control, EDC)

Method of operation

The preheating software in EDC starts and ends the preheating process in accordance with operation of the glow-plug starter switch and parameters stored in the software. The glow control unit activates the glow plugs with vehicle system voltage via a relay during the preheating, standby, start and post-heating phases. The nominal voltage of the glow plugs is 11 V. The heating output is therefore dependent on the current vehicle system voltage and the glow-plug thermistor (PTC). The glow plug thus has a self-regulating function. In conjunction with an engine-load-dependent cutout function in the engine-management preheating software, it is possible to safely prevent the glow plug from suffering temperature overload. Adaptation of the post-heating time to the engine requirements extends the glow plug's service life and enhances its cold-running properties.

Duraterm sheathed-element glow plug

Design and properties

The glow element consists of a tubular heating element which is sealed inside the gas-tight plug body (Fig. 1, 3). The tubular heating element consists of a hot-gas and corrosion-resistant element sheath (4) which encloses a filament surrounded by compressed magnesium oxide powder (6). That filament is made up of two resistors connected in series – the heating filament (7) located in the tip of the sheath, and the control filament (5).

Whereas the heating filament has an electrical impedance that is independent of temperature, the control filament has a positive temperature coefficient (PTC). In the latest generation of glow plugs (Type GSK2), its impedance increases even more steeply as the temperature rises than with the older designs (Type S-RSK). The Type GSK2 glow plugs are thus faster at reaching the temperature required for igniting the diesel fuel (850°C in 4 s) and also have a lower steady-state temperature. This means that the temperature is kept below the critical level for the glow plug. Consequently, it can remain in operation for up to three minutes after the engine has started. This post-heating function results in a more effective engine cold-idle phase with substantially lower noise and emission output.

The heating filament is welded into the cap of the element sheath for grounding. The control filament is contacted at the terminal stud, which establishes the connection to the vehicle electrical system.

Function

When voltage is applied to the glow plug, most of the electrical energy of the heating filament is initially converted into heat; the temperature at the tip of the glow plug increases sharply. The temperature of the control filament – and with it also the impedance – increase with a time delay. The current draw and thus the total heating output of the glow plug decrease and the temperature approaches a steady-state condition. The heating characteristics shown in Figure 2 are produced.

Fig. 2

- 1 S-RSK
- 2 GSK2


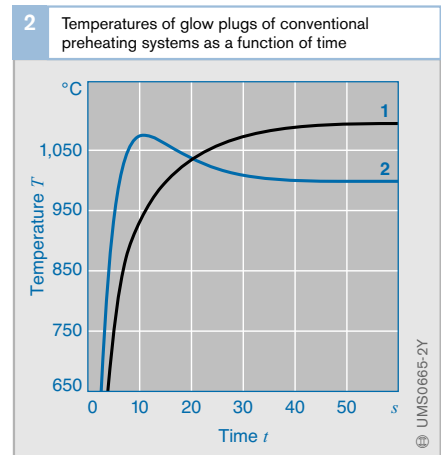


Fig. 1

- 1 Connector
- 2 Insulating washer
- 3 Body
- 4 Element sheath
- 5 Control filament
- 6 Magnesium oxide powder
- 7 Heating filament
- 8 Element seal
- 9 Double seal
- 10 Knurled nut

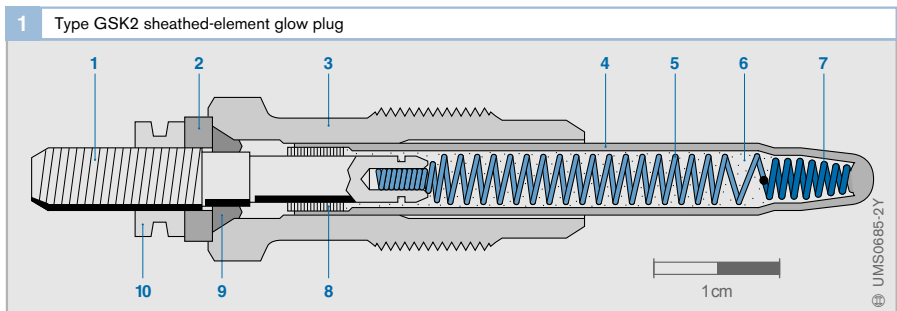

Low-voltage preheating system

Design and construction

Depending on the application, the low-voltage preheating system contains

- ceramic Rapiterm sheathed-element glow plugs or HighSpeed metal sheathed-element glow plugs of low-voltage configuration $< 11\text{ V}$,
- an electronic glow control unit, and
- a software module for the preheating function integrated in the engine control unit (Electronic Diesel Control, EDC).

Operating concept

The glow control unit activates the glow plugs in such a way that the heating temperature is adapted to the engine requirements in the preheating, standby, start, post-heating and intermediate-heating phases. In order during preheating to achieve as quickly as possible the heating temperature required for engine starting, the glow plugs are briefly operated in this phase with push voltage, which is above the glow-plug nominal voltage. The activating voltage is then reduced to the glow-plug nominal voltage during start-standby heating.

During glow-plug start assist, the activation voltage is increased again in order to compensate for the cooling of the glow plug by the cold intake air. This is also possible in the post- and intermediate-heating phases. The required voltage is generated from the vehicle system voltage by Pulse-Width Modulation (PWM). Here, the associated PWM value is taken from a program map, which is adapted to the relevant engine within an application. The program map is stored in the preheating module of the EDC software and contains the following parameters:

- Speed
- Injected fuel quantity (i.e., load)
- Time after starter release (currently three post-heating phases are defined, within which the temperature of the glow plug can be adapted)
- Coolant temperature

Map-controlled activation reliably prevents thermal overloading of the glow plug in all engine operating states.

The heating function implemented in EDC contains an overheating-protection facility in the event of repeat heating. This is brought about by an energy integration model. During heating, the energy introduced into the glow plug is integrated. After deactivation, the amount of energy dissipated from the glow plug by radiation and heat discharge is subtracted from this amount of energy. This enables the current temperature of the glow plug to be estimated. If the temperature drops below a threshold stored in EDC, the glow plug can be heated up again with push voltage.

The heating temperature which can be adjusted as a function of the coolant temperature prolongs the service life of the glow plug while maintaining its excellent cold-starting and cold-running properties. This is achieved by lowering the glow-plug temperature when the coolant is “hot” – e.g. in TDI engines from approx. -10°C – and shortening the post-heating time. The application of the preheating system can therefore be matched to the requirements of the vehicle manufacturer.

These preheating systems facilitate a rapid start when HighSpeed metal glow plugs are used and an immediate start when Rapiterm glow plugs are used similar to a gasoline engine up to -28°C .

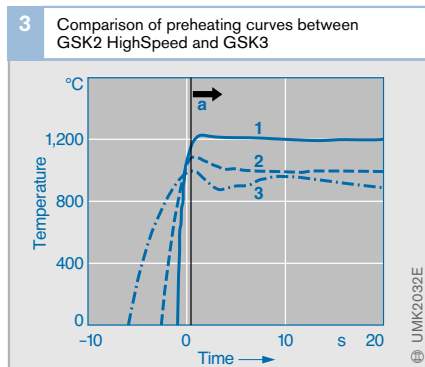


Fig. 3

a From $t = 0\text{ s}$
flow velocity of
 11 m/s

- 1 Rapiterm glow plug (7 V)
- 2 HighSpeed metal glow plug (5 V)
- 3 Metal glow plug (11 V)

HighSpeed metal sheathed-element glow plug

Figure 4 shows a HighSpeed metal sheathed-element glow plug with a nominal voltage of 4.4 V (push voltage of 11 V when heating for 1.8 s, then reduction to nominal voltage) with an M8 body.

The basic design and operation of the HighSpeed glow plug is the same as that of the Duraterm. The heating and control filaments are designed here for a lower nominal voltage and a high preheating rate.

The slender shape is designed to suit the restricted space in four-valve engines. The glow element (dia. 4/3.3 mm) is tapered at the front in order to accommodate the heating filament closer to the element sheath. This allows preheating rates of up to 1,000°C/3 s with the push mode used here. The maximum heating temperature is in excess of 1,000°C. The temperature during start-standby heating and in post-heating mode is approx. 980°C. These functional properties are adapted to the requirements of diesel engines with a compression ratio of $\epsilon \geq 18$.

Rapiterm sheathed-element glow plug

Rapiterm sheathed-element glow plugs (Fig. 5) have glow elements made from a new, high-temperature-resistant, ceramic composite material with adjustable electric conductivity. On account of their very high oxidation

stability and thermal-shock resistance, they allow an immediate start, maximum heating temperatures of 1,300°C, and post- and intermediate heating lasting minutes at 1,150°C. Their low power consumption and long service life make them superior to other sheathed-element glow plugs.

This is achieved by

- the special properties of the composite material
- the configuration of the low-voltage glow plug
- the heating zone situated on the surface and
- optimized activation by the combination of glow control unit and EDC

Bosch has developed this Rapiterm glow plug for the special requirements of engines with a low compression ratio of $\epsilon \leq 16$.

Reduced emissions in diesel engines with a low compression ratio

By lowering the compression ratio in modern diesel engines from $\epsilon = 18$ to $\epsilon = 16$, it is possible to reduce the NO_x and soot emissions while simultaneously increasing the specific power. However, the cold-starting and cold-running performance is problematic in these engines. In order to obtain minimal exhaust-gas opacity values and heightened smooth running during cold starting and cold run-

4 HighSpeed metal sheathed-element glow plug



5 Rapiterm sheathed-element glow plug



ning, temperatures at the glow plug of over 1,150°C are required – 850°C is sufficient for conventional engines. During the cold-starting phase, these low emission values – blue-smoke and soot emissions – can only be maintained by post-heating lasting several minutes. Compared with standard preheating systems, the Rapiterm preheating system from Bosch reduces the exhaust-gas opacity values by up to 60%.

Glow control unit

The glow control unit controls the glow plugs via a power relay or power transistors. It receives its starting signal from the engine management module or a temperature sensor.

Autarkic glow control units assume all the control and display functions. The preheating process is controlled by temperature sensors in these systems. If the injected fuel quantity exceeds a critical level, a load switch interrupts the post-heating process. This prevents the glow plugs from overheating. These systems have in the meantime been superseded by EDC-controlled glow control units.

EDC-controlled relay glow control unit for 11 V glow plugs

The glow control unit activates the 11 V glow plugs with vehicle system voltage via a relay in accordance with the EDC specifications. The heating output of the preheating system is therefore dependent on the current vehicle system voltage and the glow-plug thermistor (PTC characteristic). Preheating systems with relay glow control units are characterized by low application expenditure. Malfunctioning glow plugs or relay faults are detected and signaled to EDC by diagnostic flag.

EDC-controlled transistor glow control unit for low-voltage glow plugs

The new electronic glow control units allow specific voltage control of the low-voltage glow plugs. The required effective voltage is generated from the vehicle system voltage by Pulse-Width Modulation (PWM). Here, the associated PWM value is taken from an engine-specific program map which is stored in the preheating module of the EDC software. In this way, the heating output of the preheating system can be perfectly adapted to the engine requirements. Staggered activation of the glow plugs reduces the maximum load on the vehicle electrical system during the cold-starting and post-heating phases to a minimum.

The glow control unit incorporates self-diagnosis and glow-plug monitoring facilities. Faults occurring in the preheating system are reported to and stored in the EDC ECU. This facilitates On-Board Diagnosis in accordance with OBD II (USA) and EOBD (Europe). The error codes stored in EDC enable the service personnel to identify quickly and clearly the failure cause – a glow plug, the glow control unit or the main fuse.

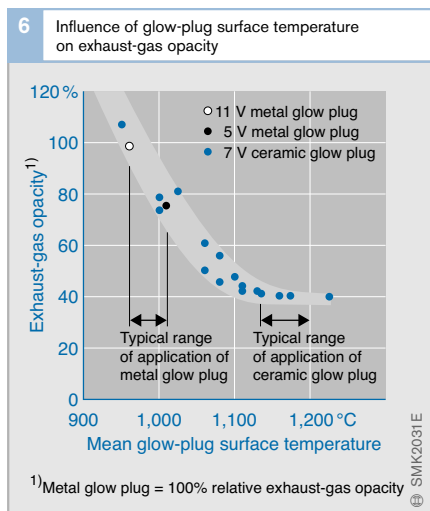


Fig. 6

Starting temperature:
–20°C

Compression ratio: 16:1

Minimizing emissions inside of the engine

When the air/fuel mixture is burned, the main byproducts include pollutants such as NO_x , soot, CO, and HC. The amount of these pollutants contained in the untreated exhaust gas (exhaust gas after combustion before exhaust-gas treatment) mainly depends on engine operating conditions. Besides combustion-chamber shape and air-flow path (supercharging/turbocharging, exhaust-gas recirculation, whirl control), the fuel-injection system plays a key role in minimizing emissions.

The introduction of new emission standards in Europe (Euro 3 since the year 2000) has placed much more stringent requirements on combustion processes in passenger-car diesel engines. To obtain the best tradeoff between conflicting factors, such as NO_x emissions and low combustion noise, pre-injection and main injection must occur at precisely the right time and in the exact quantities. This can only be achieved by electronic control of fuel-injection systems. Electronic Diesel Control (EDC) allows enhanced fuel-delivery control, more precise adjustment of start of injection, optimized combus-

tion processes dependent on the operating point, reduced fuel consumption, and lower pollutant emissions.

In future more severe standards and greater customer demands related to convenience and drivability will only be achievable for diesel engines through the use of modern fuel-injection systems, such as the Unit Injector System/Unit Pump System, or common rail.

It will no longer be possible to meet continuing reductions in emission limits by making internal modifications to the engine alone. There will also be a need for additional exhaust-gas treatment methods.

By the time Euro 5 is introduced in Europe, it will be absolutely necessary to fit a particulate filter to comply with the very low particulate limits.

New, even more flexible high-pressure fuel-injection systems are under development to comply with the ultra-low U.S. NO_x limits of Tier 2 (valid since 2004) in order to dispense with complex systems required to extract NO_x from the exhaust gas.

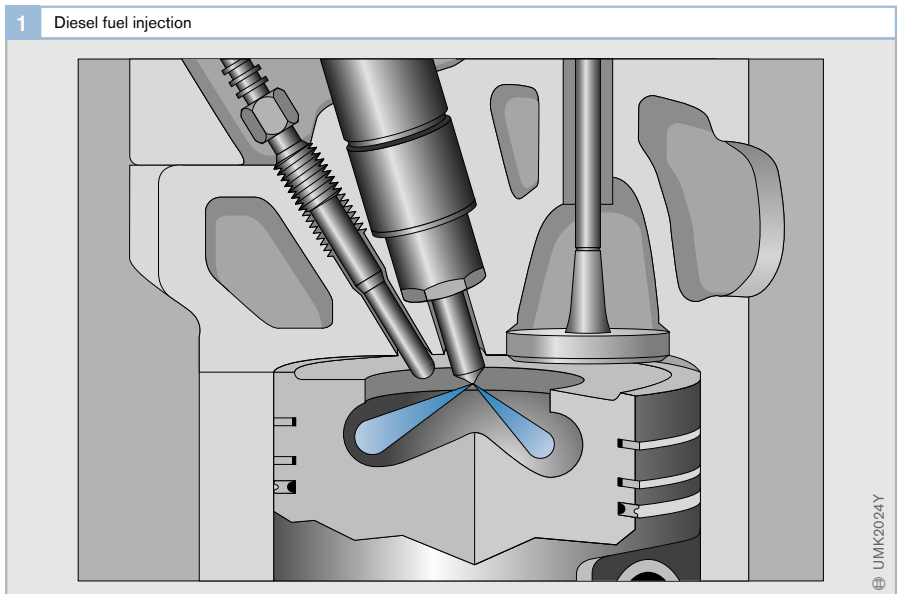


Fig. 1
In order to atomize fuel very finely, it is injected through the nozzle holes into the combustion chamber at high pressure.

Combustion process

The combustion process and its adjustment play a key role in the diesel engine when it comes to achievable performance, fuel consumption, and emissions.

Engine performance is limited by the black-smoke emission value (maximum permitted exhaust-gas opacity at full load) and the maximum permitted exhaust-gas temperature. The material properties of the exhaust-gas turbocharger define the limit value of the exhaust-gas temperature at the turbine inlet.

Combustion in the diesel engine can be divided into three phases:

- Ignition lag, i.e. the time between start of injection and start of ignition
- Premixed combustion
- Diffusion flame (mixture-controlled combustion)

Ignition lag, and thus a small quantity of injected fuel, is required during the first phase to limit combustion noise. After combustion starts, a good mixture formation is needed to achieve low soot and NO_x emissions.

The following factors have a decisive influence on the combustion phases:

- Pressure and temperature states within the combustion chamber
- Mass, composition, and movement of the charge
- Injection pressure process

These parameters are adjustable firstly by engine-specific parameters, and secondly by variable operating parameters.

The following fixed, engine-specific parameters are important for a given cylinder displacement:

- Compression ratio
- Stroke/bore ratio
- Shape of piston recess
- Intake port geometry
- Intake and exhaust valve timing

The fuel-injection system plays a key role in the combustion process since it defines the point of 50% mass fraction burnt and mixture formation by determining the injection point and rate-of-discharge curve. In turn, the last two parameters are key factors controlling emissions and efficiency.

Besides the fuel-injection system, development focus is increasing on the air-flow system since compliance with ever more stringent NO_x emission limits requires very high exhaust-gas recirculation rates.

Fig. 2 (on the next page) shows the main engine-specific and operation-dependent influencing variables that affect the combustion process.

Fuel-injection system

On the air-intake side, mixture formation is influenced by movement of the charge inside of the cylinder. This, in turn, depends on intake-duct geometry and combustion-chamber shape. As injection pressures have risen, the function of mixture formation has gradually shifted to the fuel-injection system. As a result, this has led to the development of the low-whirl combustion process.

On the fuel-injection side, extremely small nozzle holes with flow-optimized geometries promote good mixture formation as the injected fuel is then well prepared. At the same time this shortens ignition lag, and only small quantities of fuel are injected. During diffusion combustion that follows, optimized atomization results in high EGR compatibility, and this produces less NO_x and soot.

Air-flow system

Besides the fuel-injection system, more attention is also focusing on the air-flow system, since compliance with ever more stringent NO_x emission limits requires very high EGR compatibility of the combustion process. This minimizes the formation of NO_x so that the particulate filter (now fitted in ever greater numbers) can cope with the quantity of particulate emissions produced.

It requires a system that is capable of combining comparatively high charge-air pressures at high, precise EGR rates identical for all cylinders, and at the lowest possible intake temperatures.

Cylinder charge


Other measures carried out on the engine have an impact on cylinder charge from peripheral systems, and ultimately on the concentration of pollutants in the exhaust gas.

The most important measure for minimizing pollutants here is exhaust-gas recirculation. Exhaust gas recirculated to the intake manifold raises the proportion of inert gas, thus causing a drop in peak combustion temperature. It also reduces the production of nitrogen oxides (see the section on “Exhaust-gas recirculation”).

Exhaust-gas turbocharging

Although turbocharging is primarily intended to increase specific performance, it also increases EGR compatibility in the program map by producing a greater charge mass in the combustion chamber. This makes for a more favorable NO_x /soot tradeoff. It also makes Variable-Turbine-Geometry (VTG) turbochargers indispensable since they vary charge-air pressure by means of variable turbine blades. This variability makes it possible to use a larger turbine that has a lower exhaust-gas backpressure than a wastegate turbocharger. Decreasing the compression ratio, i.e. making the piston recess bigger, means that the free jet length at full load is larger, and air efficiency increases. At the same time the final compression temperature is lower, peak temperatures during combustion drop, and there is less formation of NO_x .

2 Influencing variables in the combustion process

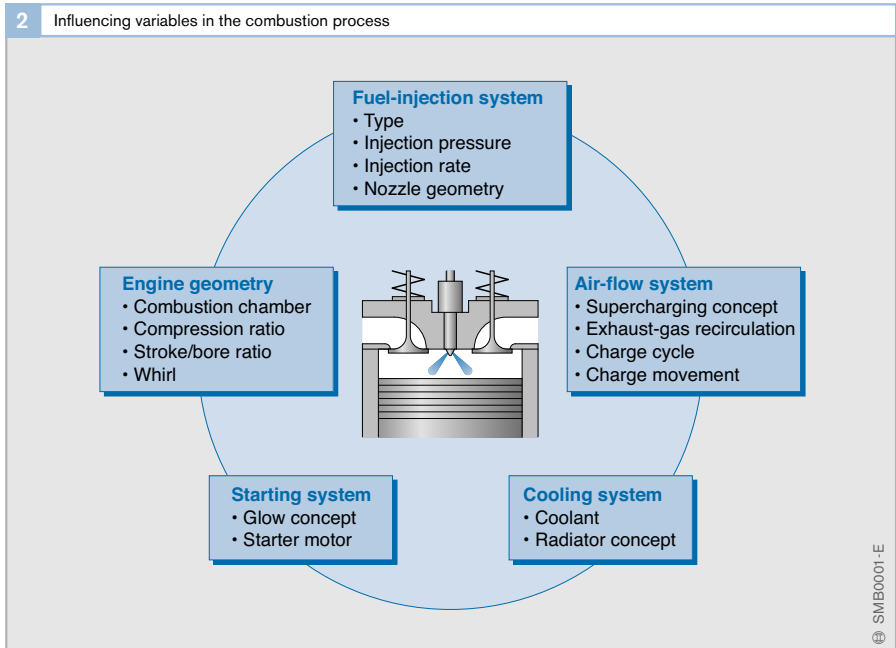

Combustion temperature

Together with the excess-air factor, the combustion temperature has a significant influence on the formation of NO_x . High temperatures and excess air ($\lambda > 1$) promote the formation of nitrogen oxides. In heterogeneous diffusion combustion, local, lean zones are inevitable, thus increasing the formation of nitrogen oxides. The aim of optimizing the combustion process, therefore, is to lower peak temperatures in the combustion chamber by raising the inert-gas component (EGR), and optimizing mixture formation at the same time in order to lessen the slight increase in soot production. In poor combustion conditions and at low temperatures, the flame front tends to extinguish prematurely. This occurs mainly when the engine is cold and load is low, causing a strong rise in CO and HC, which are the products of incomplete combustion. To counteract this, EGR coolers are bypassed when the engine is running cold. These coolers normally have a high cooling capacity required to reduce NO_x emissions when the engine is operating at normal running temperatures.

Nitrogen oxides form at high temperatures with excess air. Localized peak temperatures and localized, high excess-air factors must then be lowered. This is only achievable by retarding the start of injection at high injection rates during diffusion combustion. Combustion starts shortly before top dead center. This avoids almost any compression of combustion products that could increase the temperature. The high injection rate results in rapid turnover with 50% mass fraction burnt and high EGR compatibility. High combustion-chamber temperatures promote the formation of NO_x .

Other impacts on pollutant emissions

Engine speed

A higher engine speed means greater friction losses in the engine and a higher power input by the ancillary assemblies (e.g. water pump). Engine efficiency, therefore, drops as engine speed increases.

If a specific performance is produced at high engine speed, it requires a greater fuel quantity than if the same performance is produced at low engine speed. It also produces more pollutant emissions.

Nitrogen oxides (NO_x)

As the time available to form NO_x in the combustion chamber is shorter at higher engine speeds, NO_x emissions decrease as engine speed increases. In addition, the residual-gas content in the combustion chamber must be considered since it causes lower peak temperatures. As the residual-gas content normally drops with rising engine speed, this effect runs counter to the interdependence described above.

Hydrocarbons (HC) and carbon monoxide (CO)

As engine speed rises, HC and CO emissions rise as the time for mixture preparation and combustion shortens. As piston speed rises, combustion-chamber pressure drops faster in the expansion phase. This results in poorer combustion conditions, especially at low loads, and combustion efficiency suffers. On the other hand, charge movement and turbulence increase the rate of combustion as engine speed rises. Combustion time becomes shorter, and this compensates at least partly for the poorer marginal conditions.

Soot

Normally, soot becomes less as engine speed increases, since charge movement is more intense, thus resulting in better mixture formation.

Torque

As torque increases, so does the temperature in the combustion chamber, and this improves the combustion conditions. The untreated NO_x emissions, therefore, increase, whereas the products of incomplete combustion, such as CO and HC emissions, initially decrease. As full load approaches, and thus low excess-air factors ($\lambda < 1.4$), soot and CO emissions increase due to oxygen deficiency.

Soot

Soot occurs due to localized oxygen deficiency due to thermal cracking of the hydrocarbon molecules at local temperatures above approx. 1,500 K. Consequently, enhanced air efficiency leads to the formation of less soot, or it allows the injection of larger quantities of fuel, and thus increased performance for the same soot factors.

Fuel

Another decisive factor for enhanced exhaust-gas values are quality improvements in the fuel. For example, sulfur-dioxide emissions have dropped to negligible values in road traffic since the introduction of low-sulfur or sulfur-free fuel.

With respect to conventional combustion, diesel fuel should have the highest possible cetane number, i.e. optimized ignition quality. This shortens ignition lag, and has a favorable impact on combustion noise. The fuel should also possess good lubricity, and a low water and impurity content to ensure proper functioning of the fuel-injection system throughout its service life.

The demands placed on fuel quality have also risen due to constantly rising engine performance. Various additives increase the cetane number, enhance fuel lubricity and flowability, and protect the fuel system from corrosion.

Fuel consumption

The quantity of emitted CO_2 is proportional to fuel consumption – therefore, any reduction in CO_2 is only obtainable by lowering fuel consumption.

Measures for diminishing NO_x emissions to comply with more stringent limits, for example increasing the rate of exhaust-gas recirculation, result in a lower rate of combustion. In turn, this retards combustion into the expansion phase. The point of 50% mass fraction burnt also shifts towards the expansion phase. The generally poorer combustion conditions lead to a drop in engine efficiency. Without measures to lower fuel consumption, e.g. optimizing friction, this will hike fuel consumption, as was the case when Euro 3 was introduced.

Development of homogeneous combustion processes

New homogeneous combustion processes are presently under development with a view to complying with future NO_x limits (in Europe, Euro 4/Euro 5, in the U.S., Tier 2, Bin 5). They have enormous potential for minimizing NO_x emissions compared to standard combustion processes.

The aim is to inject the largest possible fuel quantity, or the total quantity, during the ignition lag to reduce or totally avoid the diffusive phase. Striving for homogenization in the cylinder charge (air, fuel, exhaust gas from exhaust-gas recirculation) minimizes localized differences in the excess-air factor. This will almost stop the formation of NO_x and soot.

In a first stage (partly Homogeneous Compressed Combustion Ignition (pHCCI)), partial homogenization is implementable on conventional diesel engines within a limited engine-speed and load range. This is mainly achieved by adapting the fuel-injection strategy to control ignition lag and the rate of combustion. This will be followed by further development phases that aim to achieve totally premixed combustion (Homogeneous Compressed Combustion Ignition (HCCI)) in extended program-map areas. This requires an

optimization of systems and components, such as the shape of the combustion chamber and injection nozzles.

The disadvantage of these processes is much higher HC and CO emissions compared to standard combustion processes since the air/fuel mixture punches through to the combustion-chamber wall as a result of pre-mixing. This produces wall-quenching effects¹⁾ similar to gasoline engines. The high exhaust-gas recirculation rates also lead to a reduction in bulk quenching, and thus to a rise in the products of incomplete combustion.

Homogenization becomes gradually more problematic as increases occur in load, injected fuel quantity, combustion-chamber temperatures, and pressures. Under these conditions, a change to standard combustion is avoidable, with the result that it must always be possible to control both operating modes. Homogeneous combustion requires more development work and control concepts to cope with operating-mode switch-over, sensitivity to the slightest fluctuations in the exhaust-gas recirculation rate with regard to combustion noise and stability, and increased HC and CO emissions.

¹⁾ Flame front extinguished by low temperatures at the cylinder wall

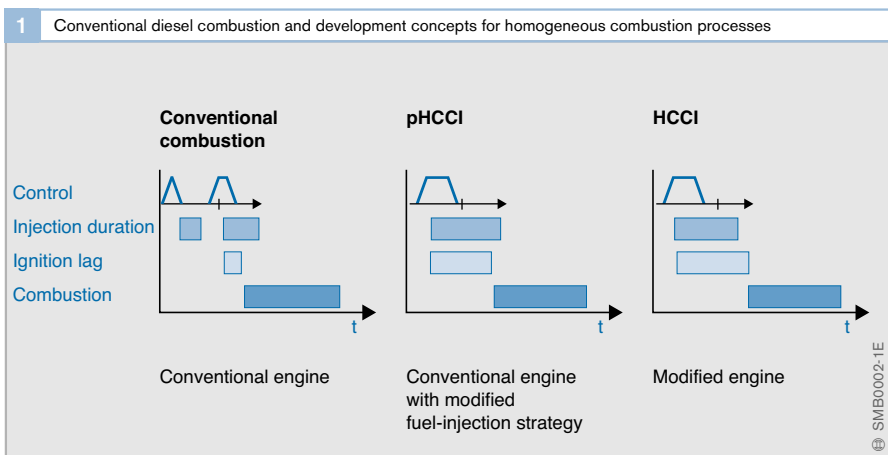


Fig. 1
Conventional combustion: Influencing ignition lag by means of mixture formation and the state of the combustion chamber; premixed and diffusive combustion

pHCCI: Influencing ignition lag mainly by means of the EGR rate; largely premixed combustion

HCCI: Influencing ignition lag mainly by means of the EGR rate; premixed combustion only

Diesel fuel injection

The combustion processes in the diesel engine, also linked to engine performance, fuel consumption, exhaust-gas composition, and combustion noise, depend to a great extent on how the air/fuel mixture is prepared. The fuel-injection parameters that are decisive on the quality of the mixture formation are primarily:

- start of injection
- rate-of-discharge curve and injection duration
- injection pressure
- number of injection events

On the diesel engine, exhaust-gas and noise emissions are largely reduced by measures inside of the engine, i.e. combustion-process control.

Until the 1980s injected fuel quantity and start of injection were controlled on vehicle engines by mechanical means only. However, compliance with prevailing emission limits requires the high-precision adjustment of injection parameters, e.g. pre-injection, main injection, injected fuel quantity, injection pressure, and start of injection, adapted to the engine operating state. This is only achievable using an electronic control unit that calculates injection parameters as a factor of temperature, engine speed, load, altitude (elevation), etc. Electronic Diesel Control (EDC) has generally become widespread on diesel engines.

As exhaust-gas emission standards become more severe in future, further measures for minimizing pollutants will have to be introduced. Emissions, as well as combustion noise, can continue to be reduced by means of very high injection pressures, as achieved by the Unit Injector System, and by a rate-of-discharge curve that is adjustable independent of pressure buildup, as implemented by the common-rail system.

Mixture distribution

Excess-air factor λ

The excess-air factor λ (lambda) was introduced to indicate the degree by which the actual air/fuel mixture actually deviates from the stoichiometric¹⁾ mass ratio. It indicates the ratio of intake-air mass to air mass required for stoichiometric combustion:

$$\lambda = \frac{\text{Air mass}}{\text{Fuel mass} \cdot \text{Stoichiometric ratio}}$$

$\lambda = 1$: The intake-air mass is equal to the air mass theoretically required to burn all of the fuel injected.

$\lambda < 1$: The intake-air mass is less than the amount required and, therefore, the mixture is rich.


$\lambda > 1$: The intake-air mass is greater than the amount required and, therefore, the mixture is lean.

¹⁾ The stoichiometric ratio indicates the air mass in kg required to completely burn 1 kg of fuel (m_a/m_k). For diesel fuel, this is approx. 14.5.

Fig. 1
Special engines with glass inserts and mirrors allow observation of the fuel injection and combustion processes.

The times are measured from the start of spontaneous combustion.

- a 200 μs
- b 400 μs
- c 522 μs
- d 1,200 μs

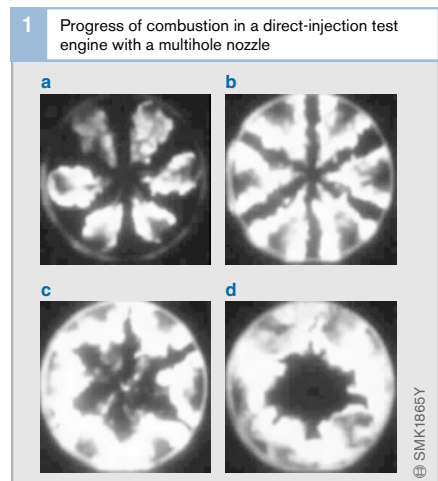

Lambda levels in diesel engines

Rich areas of mixture are responsible for sooty combustion. In order to prevent the formation of too many rich areas of mixture, diesel engines – in contrast to gasoline engines – must run with an overall excess of air.

The lambda levels for turbocharged diesel engines at full load range from $\lambda = 1.15$ to $\lambda = 2.0$. When idling, and under no-load conditions, these figures rise to $\lambda > 1.0$.

These excess-air factors represent the ratio of total masses of fuel and air in the cylinder. However, the lambda factor, which is subject to strong spatial fluctuation, is primarily responsible for auto-ignition and the production of pollutants.

Diesel engines operate with heterogeneous mixture formation and auto-ignition. It is not possible to achieve complete homogeneous mixing of the injected fuel with the air charge prior to or during combustion. Within the heterogeneous mixture in a diesel engine, the localized excess-air factors can cover the entire range from $\lambda = 0$ (pure fuel) in the spray core close to the injector, through $\lambda = \infty$ (pure air) at the spray periphery. Around the outer zone of a single liquid droplet (vapor envelope), there are localized lambda levels of 0.3 to 1.5 (Figs. 2 and 3). From this, it can be deduced that optimized atomization (large

numbers of very small droplets), high levels of excess air, and “metered” motion of the air charge produce large numbers of localized zones with lean, combustible lambda levels. This results in less soot occurring during combustion. EGR compatibility then rises, and NO_x emissions are reduced.

Optimized fuel atomization is achieved by high injection pressures that range up to max. 2,200 bar for UIS. Common-Rail Systems (CRS) operate at an injection pressure of max. 1,800 bar. This leads to a high relative velocity between the fuel spray and the air in the cylinder, resulting in a scattering of the fuel spray.

With a view to reducing engine weight and cost, the aim is to obtain as much power as possible from a given engine capacity. To achieve this, the engine must run on the lowest possible excess air at high loads. On the other hand, a deficiency in excess air increases the amount of soot emissions. Therefore, soot has to be limited by precisely metering the injected fuel quantity to match the available air mass as a factor of engine speed.

Low atmospheric pressure (e.g. at high elevations) also requires adjustment of the injected fuel quantity to the smaller amount of available air.

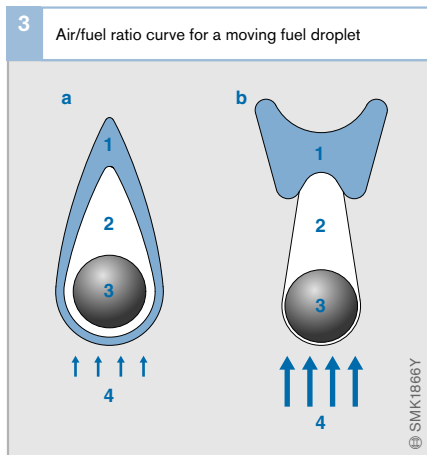
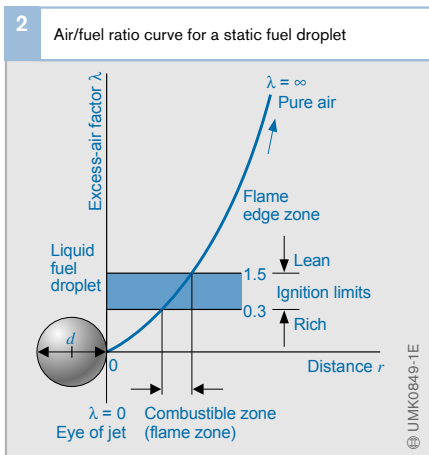


Fig. 2
d Droplet diameter (approx. 2...20 μm)

Fig. 3
a Low relative velocity
b High relative velocity
1 Flame zone
2 Vapor envelope
3 Fuel droplet
4 Air flow

Start of injection and delivery

Start of injection

The point at which injection of fuel into the combustion chamber starts has a decisive effect on the point at which combustion of the air/fuel mixture starts and, therefore, on emission levels, fuel consumption, and combustion noise. For this reason, start of injection plays a major role in optimizing engine performance characteristics.

Start of injection specifies the position stated in degrees of crankshaft rotation relative to crankshaft Top Dead Center (TDC) at which the injection nozzle opens, and fuel is injected into the engine combustion chamber.

The position of the piston relative to top dead center at that moment influences the flow of air inside of the combustion chamber, as well as air density and temperature. Accordingly, the degree of mixing of air and fuel is also dependent on start of injection. Thus, start of injection affects emissions such as

soot, nitrogen oxides (NO_x), unburned hydrocarbons (HC), and carbon monoxide (CO).

The start-of-injection setpoints vary according to engine load, speed, and temperature. Optimized values are determined for each engine, taking into consideration the impacts on fuel consumption, pollutant emission, and noise. These values are then stored in a start-of-injection program map (Fig. 4). Load-dependent start-of-injection variability is controlled across the program map.

Compared with cam-controlled systems, common-rail systems offer more freedom in selecting the quantity and timing of injection events and injection pressure. As a consequence, fuel pressure is built up by a separate high-pressure pump, optimized to every operating point by the engine management system, and fuel injection is controlled by a solenoid valve or piezoelectric element.

Fig. 4



- 1 Cold start (< 0°C)
- 2 Full load
- 3 Part load

Fig. 5

Example of an application:

α_N Optimized start of injection at no-load: low HC emissions while NO_x emissions at no load are low anyway.

α_V Optimized start of injection at full load: low NO_x emissions while HC emissions are low at full load anyway.

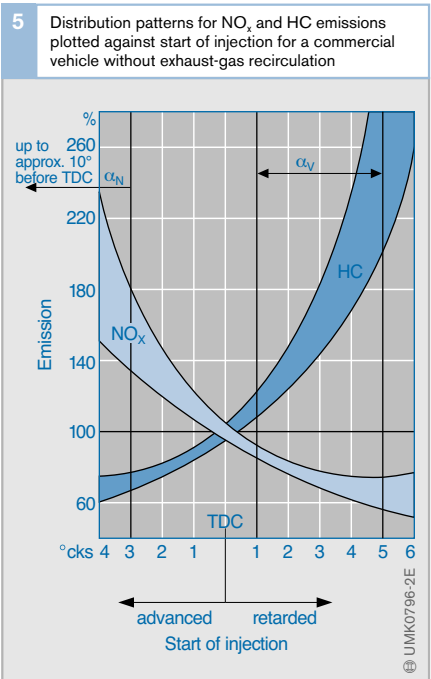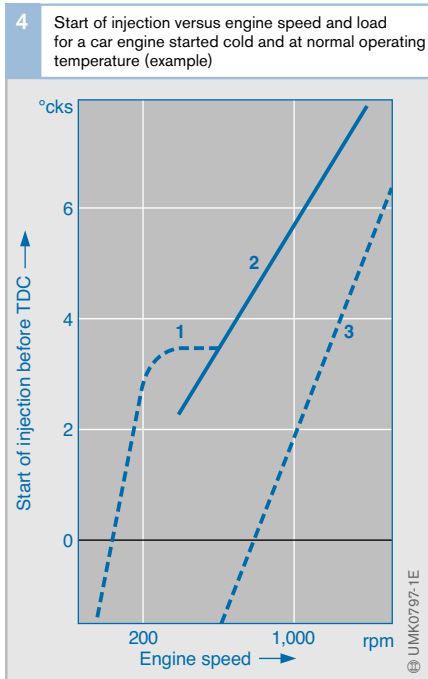

Standard values for start of injection

On a diesel-engine data map, the optimum points of combustion start for low fuel consumption are in the range of 0...8° crankshaft angle before TDC. As a result, and based on statutory exhaust-gas emission limits, the start of injection points are as follows:

Direct-injection car engines:

- No load: 2° crankshaft angle before TDC to 4° crankshaft angle after TDC
- Part load: 6° crankshaft angle before TDC to 4° crankshaft angle after TDC
- Full load: 6 to 15° crankshaft angle before TDC

Direct-injection commercial-vehicle engines (without exhaust-gas recirculation):

- No load: 4 to 12° crankshaft angle before TDC
- Full load: 3 to 6° crankshaft angle before TDC to 2° crankshaft angle after TDC

When the engine is cold, the start of injection for car and commercial-vehicle engines is 3 to 10° earlier. Combustion time at full load is 40 to 60° crankshaft angle.

Advanced start of injection

The highest compression temperature (final compression temperature) occurs shortly before piston Top Dead Center (TDC). If combustion starts a long way before TDC, combustion pressure rises steeply, and acts as a retarding force against the piston stroke. Heat lost in the process diminishes engine efficiency and, therefore, increases fuel consumption. The steep rise in compression pressure also makes combustion much noisier.

An advanced start of injection increases temperature in the combustion chamber. As a result, NO_x emission levels rise, but HC emissions are lower (Fig. 5).

Minimizing blue and white smoke levels requires advanced start of injection and/or pre-injection when the engine is cold.

Retarded start of injection

A retarded start of injection at low-load conditions can result in incomplete combustion and, therefore, in the emission of unburned hydrocarbons (HC) and carbon monoxide (CO) since the temperature in the combustion chamber is already dropping (Fig. 5).

The partially conflicting tradeoffs of specific fuel consumption and hydrocarbon emissions on the one hand, and soot (black smoke) and NO_x emissions on the other, demand compromises and very tight tolerances when modifying the start of injection to suit a particular engine.

Start of delivery

In addition to start of injection, start of delivery is another aspect that is often considered. It relates to the point at which the fuel-injection pump starts to deliver fuel to the injector.

On older fuel-injection systems, start of delivery plays an important role since the in-line or distributor injection pump must be allocated to the engine. The relative timing between pump and engine is fixed at start of delivery, since this is easier to define than the actual start of injection. This is made possible because there is a definite relationship between start of delivery and start of injection (injection lag¹⁾).

Injection lag results from the time it takes the pressure wave to travel from the high-pressure pump through to the injection nozzle. Therefore, it depends on the length of the line. At different engine speeds, there is a different injection lag measured as a crankshaft angle (degrees of crankshaft rotation). At higher engine speeds, the engine has a greater ignition lag²⁾ related to the crankshaft position (in degrees of crankshaft angle). Both of these effects must be compensated for – which is why a fuel-injection system must be able to adjust the start of delivery/start of injection in response to engine speed, load, and temperature.

1) Time or crankshaft angle swept from start of delivery through start of injection

2) Time or crankshaft angle swept from start of injection through start of ignition

Injected-fuel quantity

The required fuel mass, m_e , for an engine cylinder per power stroke is calculated using the following equation:

$$m_e = \frac{P \cdot b_e \cdot 33.33}{n \cdot z} [\text{mg/stroke}]$$

where:

P engine power in kilowatts

b_e engine specific fuel consumption in g/kWh

n engine speed in rpm

z number of engine cylinders

The corresponding fuel volume (injected fuel quantity), Q_H , in $\text{mm}^3/\text{stroke}$ or $\text{mm}^3/\text{injection cycle}$ is then:

$$Q_H = \frac{P \cdot b_e \cdot 1,000}{30 \cdot n \cdot z \cdot \rho} [\text{mm}^3/\text{stroke}]$$

Fuel density, ρ , in g/cm^3 is temperature-dependent.

Engine power output at an assumed constant level of efficiency ($\eta \sim 1/b_e$) is directly proportional to the injected fuel quantity.

The fuel mass injected by the fuel-injection system depends on the following variables:

- The fuel-metering cross-section of the injection nozzle
- The injection duration
- The variation over time of the difference between the injection pressure and the pressure in the combustion chamber
- The density of the fuel

Diesel fuel is compressible, i.e. it is compressed at high pressures. This increases the injected fuel quantity. The deviation between the setpoint quantity in the program map and the actual quantity impacts on performance and pollutant emissions. In high-precision fuel-injection systems controlled by electronic diesel control, the required injected fuel quantity can be metered with a high degree of accuracy.

Injection duration





One of the main parameters of the rate-of-discharge curve is injection duration. During this period, the injection nozzle is open, and fuel flows into the combustion chamber. This parameter is specified in degrees of crankshaft or camshaft angle, or in milliseconds. Different diesel combustion processes require different injection durations, as illustrated by the following examples (approximate figures at rated output):

- Passenger-car direct-injection (DI) engine approx. 32...38° crankshaft angle
- Indirect-injection car engines: 35...40° crankshaft angle
- Direct-injection commercial-vehicle engines: 25...36° crankshaft angle

A crankshaft angle of 30° during injection duration is equivalent to a camshaft angle of 15°. This results in an injection pump speed¹⁾ of 2,000 rpm, equivalent to an injection duration of 1.25 ms.

In order to minimize fuel consumption and emissions, the injection duration must be defined as a factor of the operating point and start of injection (Figs. 6 through 9).

¹⁾ Equivalent to half the engine speed on four-stroke engines

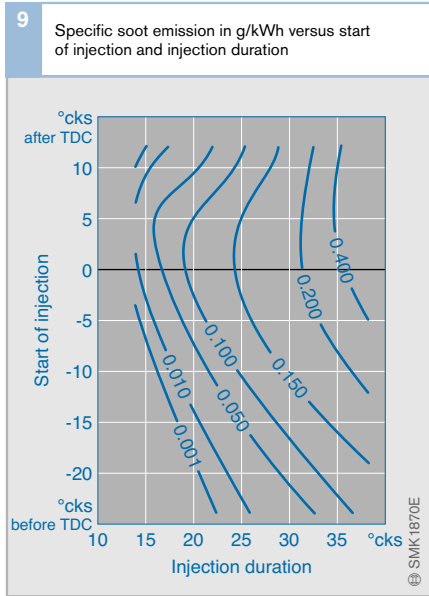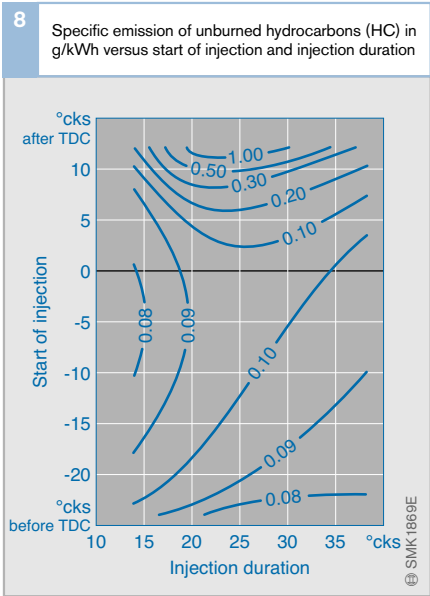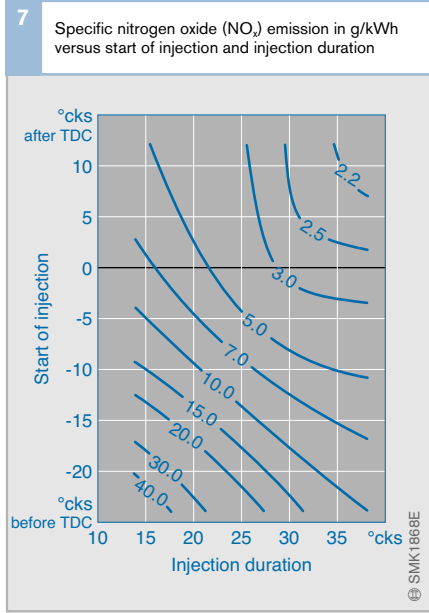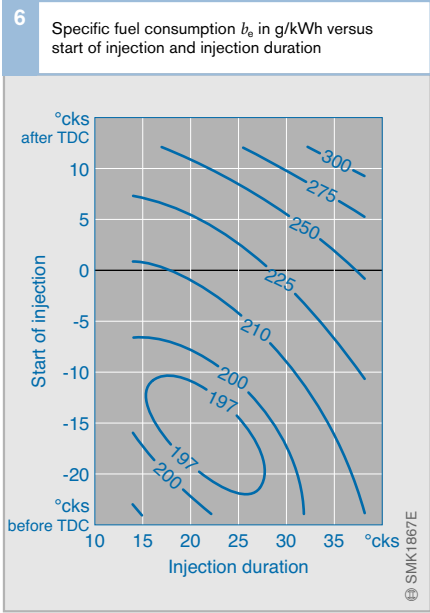

Figs. 6 to 9
 Engine:
 Six-cylinder commercial-vehicle diesel engine with common-rail fuel injection
 Operating conditions:
 $n = 1,400$ rpm,
 50% full load.

The injection duration is varied in this example by changing the injection pressure to such an extent that a constant injected fuel quantity results for each injection event.

Rate-of-discharge curve

The rate-of-discharge curve describes the fuel-mass flow plotted against time when injected into the combustion chamber during the injection duration.

Rate-of-discharge curve on cam-controlled fuel-injection systems

On cam-controlled fuel-injection systems, pressure is built up continuously throughout the injection process by the fuel-injection pump. Thus, the speed of the pump has a direct impact on fuel delivery rate and, consequently, on injection pressure.

Port-controlled distributor and in-line fuel-injection pumps do not permit any pre-injection. With two-spring nozzle-and-holder assemblies, however, the injection rate can be reduced at the start of injection to improve combustion noise.

Pre-injection is also possible with solenoid-valve controlled distributor injection pumps. Unit Injector Systems (UIS) for passenger cars are equipped with hydro-mechanical pre-injection, but its control is only limited in time.

Pressure generation and delivery of the injected fuel quantity are interlinked by the cam and the injection pump in cam-controlled systems. This has the following impacts on injection characteristics:

- Injection pressure rises as engine speed and injected fuel quantity increase, and until maximum pressure is reached (Fig. 10).
- Injection pressure rises at the start of injection, but drops back to nozzle-closing pressure before the end of injection (starting at end of delivery).

The consequences of this are as follows:

- Small injected fuel quantities are injected at lower pressure.
- The rate-of-discharge curve is approximately triangular in shape.

This triangular curve promotes combustion in part-load and at low engine speeds since it achieves a shallower rise, and thus quieter combustion; however, this curve is less beneficial at full-load as a square curve achieves better air efficiency.

On indirect-injection engines (engines with prechamber or whirl chambers), throttling-pintle nozzles are used to produce a single jet of fuel and define the rate-of-discharge curve. This type of injection nozzle controls the outlet cross-section as a function of needle lift. It produces a gradual increase in pressure and, consequently, “quiet combustion”.

Fig. 10
 1 High engine speeds
 2 Medium engine speeds
 3 Low engine speeds


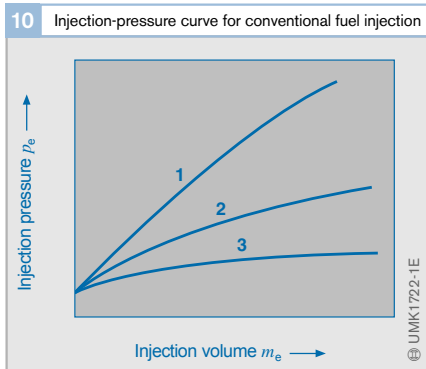


Fig. 11
 p_r Fuel-rail pressure
 p_o Nozzle-opening pressure

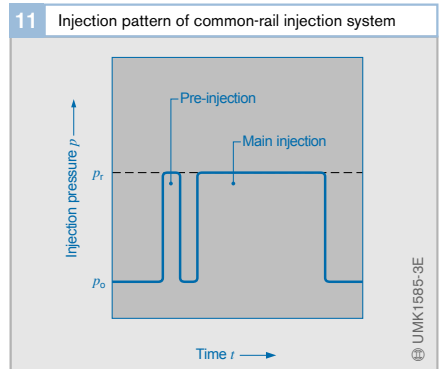

Rate-of-discharge curve in the common-rail system

A high-pressure pump generates the fuel-rail pressure independently of the injection cycle. Injection pressure during the injection process is virtually constant (Fig. 11). At a given system pressure, the injected fuel quantity is proportional to the length of time the injector is open, and it is independent of engine or pump speed (time-based injection).

This results in an almost square rate-of-discharge curve which intensifies with short injection durations and the almost constant, high spray velocities at full-load, thus permitting higher specific power outputs.


However, this is not beneficial to combustion noise since a large quantity of fuel is injected during ignition lag because of the high injection rate at the start of injection. This leads to a high pressure rise during premixed combustion. As it is possible to exclude up to two pre-injection events, the combustion chamber can be preconditioned. This shortens ignition lag and achieves the lowest possible noise emissions.

Since the electronic control unit triggers the injectors, start of injection, injection duration, and injection pressure are freely definable for the various engine operating points in an engine application. They are controlled by Electronic Diesel Control (EDC). EDC balances out injected-fuel-quantity spread in individual injectors by means of injector delivery compensation (IMA).

Modern piezoelectric common-rail fuel-injection systems permit several pre-injection and secondary injection events. In fact, up to five injection events are possible during a power cycle.

Fig. 12
Adjustments aimed at low NO_x levels require starts of injection close to TDC. The fuel delivery point is significantly in advance of the start: injection lag is dependent on the fuel-injection system

- 1 Pre-injection
 - 2 Main injection
 - 3 Steep pressure gradient (common-rail system)
 - 4 "Boot-shaped" pressure rise (UPS with 2-stage opening solenoid-valve needle (CCRS). Dual-spring nozzle holders can achieve a boot-shaped curve of the needle lift (not pressure curve!).
 - 5 Gradual pressure gradient (conventional fuel injection)
 - 6 Flat pressure drop (in-line and distributor injection pumps)
 - 7 Steep pressure drop (UIS, UPS, slightly less steep with common rail)
 - 8 Advanced secondary injection
 - 9 Retarded post-injection
- p_s Peak pressure
 p_o Nozzle-opening pressure
 b Duration of combustion for main injection phase
 v Duration of combustion for pre-injection phase
 IL Ignition lag of main injection

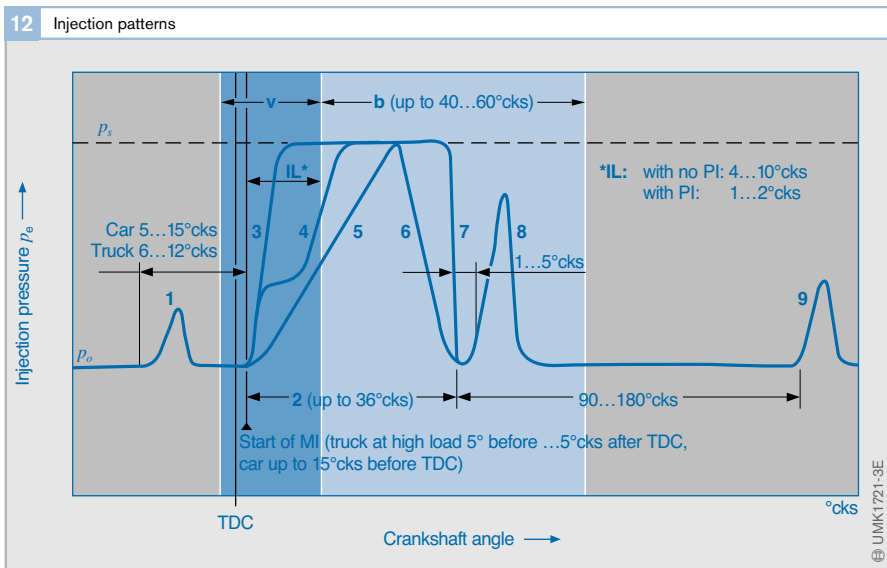

Injection functions

Depending on the application for which the engine is intended, the following injection functions are required (Fig. 12):

- *Pre-injection* (1) reduces combustion noise and NO_x emissions, in particular on DI engines.
- *Positive-pressure gradient during the main injection event* (3) reduces NO_x emissions on engines without exhaust-gas recirculation.
- *Two-stage pressure gradient* (4) during the main injection event reduces NO_x and soot emissions on engines without exhaust-gas recirculation.
- *Constant high pressure* during the main injection event (3, 7) reduces soot emissions when operating the engine with exhaust-gas recirculation.
- *Advanced secondary injection* (8) reduces soot emissions.
- *Retarded secondary injection* (9).

Pre-injection

The pressure and temperature levels in the cylinder at the point of main injection rise if a small fuel quantity (approx. 1 mg) is burned during the compression phase. This shortens the ignition lag of the main injection event and has a positive impact on combustion noise, since the proportion of fuel in the

premixed combustion process decreases. At the same time the quantity of diffuse fuel combusted increases. This increases soot and NO_x emissions, also due to the higher temperature prevailing in the cylinder.

On the other hand, the higher combustion-chamber temperatures are favorable mainly at cold start and in the low load range in order to stabilize combustion and reduce HC and CO emissions.

A good compromise between combustion noise and NO_x emissions is obtainable by adapting the time interval between pre-injection and main injection dependent on the operating point, and metering the pre-injected fuel quantity.

Retarded secondary injection

With retarded secondary injection, fuel is not combusted, but is evaporated by residual heat in the exhaust gas. The secondary-injection phase follows the main-injection phase during the expansion or exhaust stroke at a point up to 200° crankshaft angle after TDC. It injects a precisely metered quantity of fuel into the exhaust gas. The resulting mixture of fuel and exhaust gas is expelled through the exhaust ports into the exhaust-gas system during the exhaust stroke.

Retarded secondary injection is mainly used to supply hydrocarbons which also cause an increase in exhaust-gas temperature by oxidation in an oxidation-type catalytic converter. This measure is used to regenerate downstream exhaust-gas treatment systems, such as particulate filters or NO_x accumulator-type catalytic converters.

Since retarded secondary injection may cause thinning of the engine oil by the diesel fuel, it needs clarification with the engine manufacturer.

Advanced secondary injection

On the common-rail system, secondary injection can occur directly after main injection while combustion is still taking place. In this way, soot particles are returned, and soot emissions can be reduced by 20 to 70%.

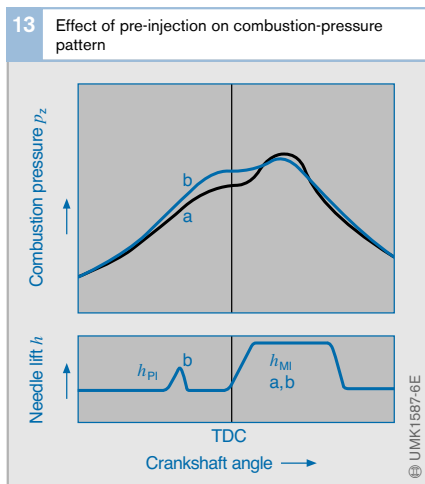


Fig. 13

- a Without pre-injection
b With pre-injection

h_{PI} Needle lift during pre-injection

h_{MI} Needle lift during main injection

Timing characteristics of fuel-injection systems

Figure 14 presents an example of a radial-piston distributor pump (VP44). The cam on the cam ring starts delivery, and fuel then exits from the nozzle. It shows that pressure and injection patterns vary greatly between the pump and the nozzle, and are determined by the characteristics of the components that control injection (cam, pump, high-pressure valve, fuel line, and nozzle). For this reason, the fuel-injection system must be precisely matched to the engine.

The characteristics are similar for all fuel-injection systems in which pressure is generated by a pump plunger (in-line injection pumps, unit injectors, and unit pumps).

Detrimental volume in conventional injection systems

The term “detrimental volume” refers to the volume of fuel on the high-pressure side of the fuel-injection system. This is made up of the high-pressure side of the fuel-injection pump, the high-pressure fuel lines, and the volume of the nozzle-and-holder assembly. Every time fuel is injected, the detrimental volume is pressurized and depressurized. As a result, compression losses occur, thus retarding injection lag. The fuel volume inside of the pipes is compressed by the dynamic processes generated by the pressure wave.

The greater the detrimental volume, the poorer the hydraulic efficiency of the fuel-injection system. A major consideration when developing a fuel-injection system is, therefore, to minimize detrimental volume as much as possible. The unit injector system has the smallest detrimental volume.

In order to guarantee uniform control of the engine, the detrimental volume must be equal for all cylinders.

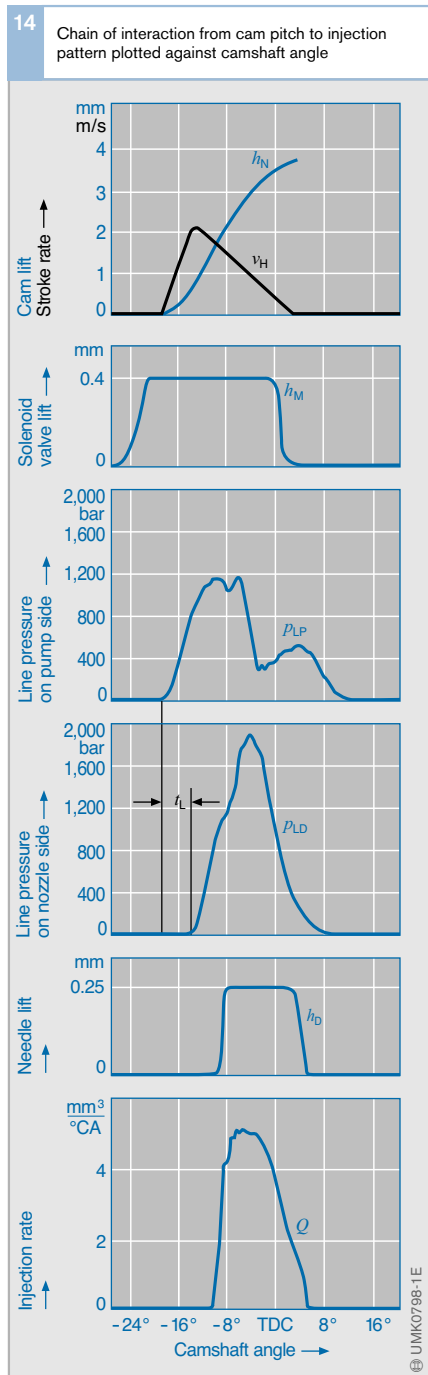


Fig. 14 Example of radial-piston distributor injection pump (VP44) at full load without pre-injection

t_L Time for fuel to pass through line

Injection pressure

The process of fuel injection uses pressure in the fuel system to induce the flow of fuel through the injector jets. A high fuel-system pressure results in a high rate of fuel outflow at the injection nozzle. Fuel atomization is caused by the collision of the turbulent jet of fuel with the air inside of the combustion chamber. Therefore, the higher the relative velocity between fuel and air, and the higher the density of the air, the more finely the fuel is atomized. The injection pressure at the nozzle may be higher than in the fuel-injection pump because of the length of the high-pressure fuel line, whose length is matched to the reflected pressure wave.

Direct-injection (DI) engines

On diesel engines with direct injection, the velocity of the air inside of the combustion chamber is relatively slow since it only moves as a result of its mass moment of inertia (i.e. the air “attempts” to maintain the velocity at which it enters the cylinder; this causes whirl). The piston stroke intensifies whirl in the cylinder since the restricted flow forces the air into the piston recess, and thus into a smaller diameter. In general, however, air motion is less and in indirect-injection engines.

The fuel must be injected at high pressure due to low air flow. Modern direct-injection systems now generate full-load peak pressures of 1,000...2,050 bar for car engines, and 1,000...2,200 bar for commercial vehicles. However, peak pressure is available only at higher engine speeds – except on the common-rail system.

A decisive factor to obtain an ideal torque curve with low-smoke operation (i.e. with low particulate emission) is a relatively high injection pressure adapted to the combustion process at low full-load engine speeds. Since the air density in the cylinder is relatively low at low engine speeds, injection pressure must be limited to avoid depositing fuel on the cylinder wall. Above about 2,000 rpm, the maximum charge-air pressure becomes available, and injection pressure can rise to maximum.

To obtain ideal engine efficiency, fuel must be injected within a specific, engine-speed-dependent angle window on either side of TDC. At high engine speeds (rated output), therefore, high injection pressures are required to shorten the injection duration.

Engines with indirect injection (IDI)

On diesel engines with divided combustion chambers, rising combustion pressure expels the charge out of the prechamber or whirl chamber into the main combustion chamber. This process runs at high air velocities in the whirl chamber, in the connecting passage between the whirl chamber, and the main combustion chamber.

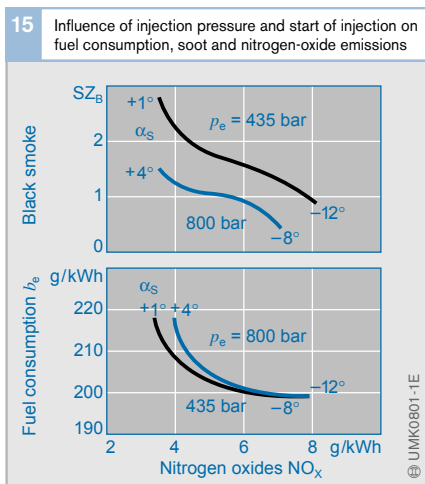


Fig. 15
Direct-injection engine,
engine speed 1,200 rpm,
mean pressure 16.2 bar

- p_e Injection pressure
- α_S Start of injection after TDC
- SZ_B Black smoke number

© UMMK0801-1E

Nozzle and nozzle-and-holder assembly designs

Secondary injection

Unintended secondary injection has a particularly undesirable effect on exhaust-gas quality. Secondary injection occurs when the injection nozzle shortly re-opens after closing and allows poorly conditioned fuel to be injected into the cylinder at a late stage in the combustion process. This fuel is not completely burned, or may not be burned at all, with the result that it is released into the exhaust gas as unburned hydrocarbons. This undesirable effect can be prevented by rapidly closing nozzle-and-holder assemblies, at sufficiently high closing pressure and low static pressure in the supply line.

Dead volume

Dead volume in the injection nozzle on the cylinder side of the needle-seat seats has a similar effect to secondary injection. The fuel accumulated in such a volume runs into the combustion chamber on completion of combustion, and partly escapes into the exhaust pipe. This fuel component also increases the level of unburned hydrocarbons in the exhaust gas (Fig. 16). Sac-less nozzles, in which the injection orifices are drilled into

the needle-seat seats, have the smallest dead volume.

Injection direction

Direct-injection (DI) engines

Diesel engines with direct injection generally have hole-type nozzles with between 4 and 10 injection orifices (most commonly 6 to 8 injection orifices) arranged as centrally as possible. The injection direction is very precisely matched to the combustion chamber. Divergences of the order of only 2 degrees from the optimum injection direction lead to a detectable increase in soot emission and fuel consumption.

Engines with indirect injection (IDI)

Indirect-injection engines use pintle nozzles with only a single injection jet. The nozzle injects the fuel into the precombustion or whirl chamber in such a way that the glow plug is protruding in the injection jet by just a fraction. The injection direction is matched precisely to the combustion chamber. Any deviations in injection direction result in poorer utilization of combustion air and, therefore, to an increase in soot and hydrocarbon emissions.

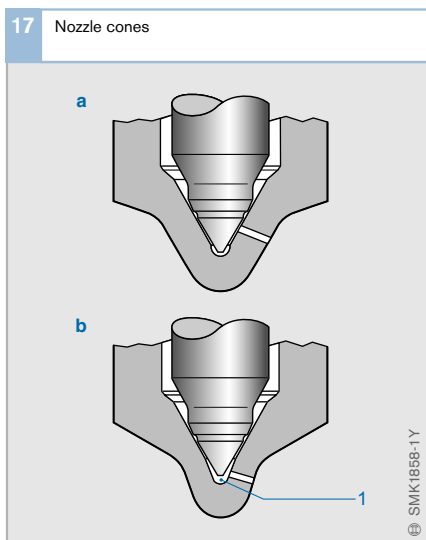
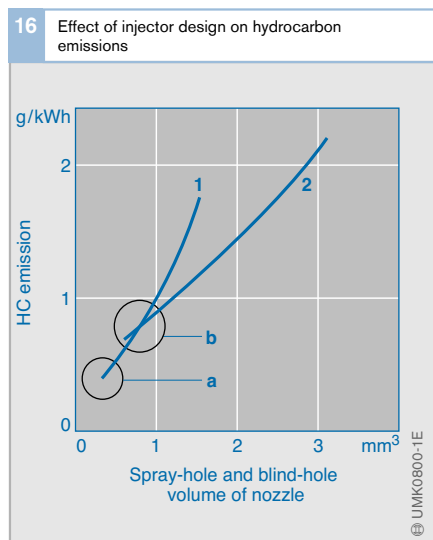


Fig. 16
 a Sac-less nozzle
 b Injector with micro-blind hole

1 Engine with 1 // cylinder
 2 Engine with 2 // cylinders

Fig. 17
 a Sac-less nozzle
 b Injector with micro-blind hole
 1 Dead volume

Exhaust-gas recirculation

Concept

Exhaust-Gas Recirculation (EGR) is a highly effective internal engine measure to lower NO_x emissions on diesel engines. A distinction is made between:

- Internal EGR, which is determined by valve timing and residual gas.
- External EGR, which is routed to the combustion chamber through additional lines and a control valve.

The NO_x -reducing effect is mainly due to the following causes:

- Reduction in exhaust-gas mass flow.
- Drop in the rate of combustion, and thus local peak temperatures due to an increase in the inert-gas component in the combustion chamber.
- Reduction in partial oxygen pressure or local excess-air factor.

Since high local temperatures ($> 2,000\text{ K}$) and a sufficiently high partial oxygen pressure are required to form NO_x , the measures listed above result in a drastic reduction in the formation of NO_x as the EGR rate rises. Reducing the reactive components in the combustion chamber also leads to a rise in black smoke, which limits the quantity of recirculated exhaust gas.

The quantity of recirculated exhaust gas also affects the period of ignition lag. If EGR rates are sufficiently long in the lower part-load range, ignition lag is so great that the diffusive combustion component, that is so typical of diesel engines, is strongly diminished, and combustion only starts after a large percentage of the air and fuel has been mixed. This partial homogenization is used in new or future (p)HCCI combustion processes to achieve extremely low- NO_x and low-particulate combustion in the low part-load ranges.

High-pressure EGR

Operating concept

EGR systems that are presently in production are high-pressure EGRs (Fig. 1). This means that exhaust gas is tapped upstream of the exhaust-gas turbocharger turbine and is routed through a mixer to the engine upstream of the intake plenum. The EGR volume depends on the pressure difference between the exhaust-gas backpressure upstream of the turbine, intake-manifold pressure, and the position of the pneumatically or electrically operated EGR valve.

On car engines, the driving pressure drop in the emission-related program-map areas is sufficient for the most part. Only in the lowest load points is it frequently necessary to restrict gas flow on the intake-manifold side to achieve sufficiently high EGR rates.

On truck engines, suitable measures, e.g. VTG superchargers, venturi mixers, or flutter valves, are always required to implement EGR. This is because of the extended emission-related load range up to full-load, and enhanced turbocharger efficiencies.

EGR control

Standard EGR-rate control on passenger cars is presently performed by measuring the air mass and can be made more precise by combining this with a lambda closed-loop control. On trucks, control is by means of a differential-pressure signal sent to a measuring venturi.

Low-pressure EGR

Operating concept

In future, low-pressure EGR may also come into use besides high-pressure EGR (Fig. 2). Recirculated exhaust gas is routed downstream of the turbine, tapped from the exhaust-gas treatment system, and injected on the air side upstream of the compressor.

The advantages of this are:

- Optimized EGR uniform distribution between individual cylinders.
- More intensive cooling of the homogeneous mixture of exhaust gas and fresh air after passing through the compressor and the intercooler.
- Increase and complete decoupling of possible charge-air pressure from EGR rate since the full exhaust-gas mass flow is routed through the turbine.

On the other hand, low-pressure EGR is less favorable than high-pressure EGR because of the larger volume contaminated with exhaust gas in dynamic operation.

Exhaust-gas cooling

In order to enhance the effects of EGR, the recirculated exhaust-gas quantity is cooled in a heat exchanger cooled by engine coolant. This raises gas density in the intake manifold and causes a lower final compression temperature. In general, the effects of higher localized excess-air factors cancel each other out as a result of increased charge density and reduced peak compression temperatures due to the lower final compression temperature. At the same time, however, EGR compatibility rises to produce possibly higher exhaust-gas recirculation rates at much lower NO_x emissions.

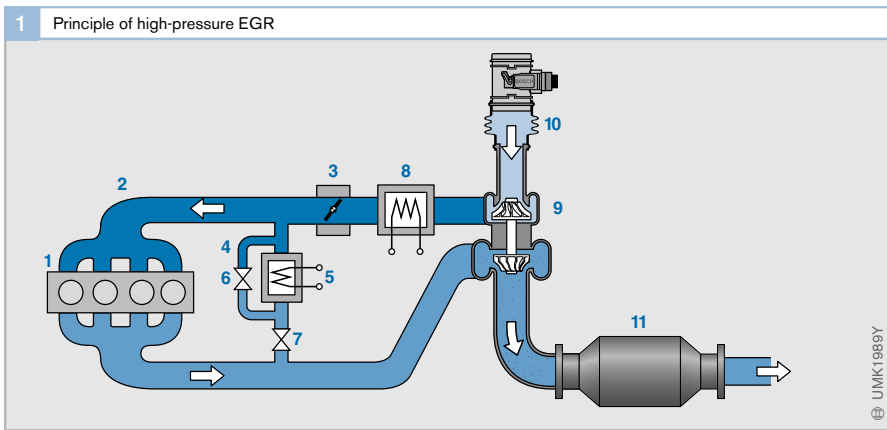


Fig. 1
 1 Engine
 2 Intake manifold
 3 Throttle
 4 Bypass
 5 EGR cooler
 6 Bypass valve
 7 EGR valve
 8 Intercooler
 9 Turbocharger
 10 Air-mass meter
 11 Oxidation-type catalytic converter

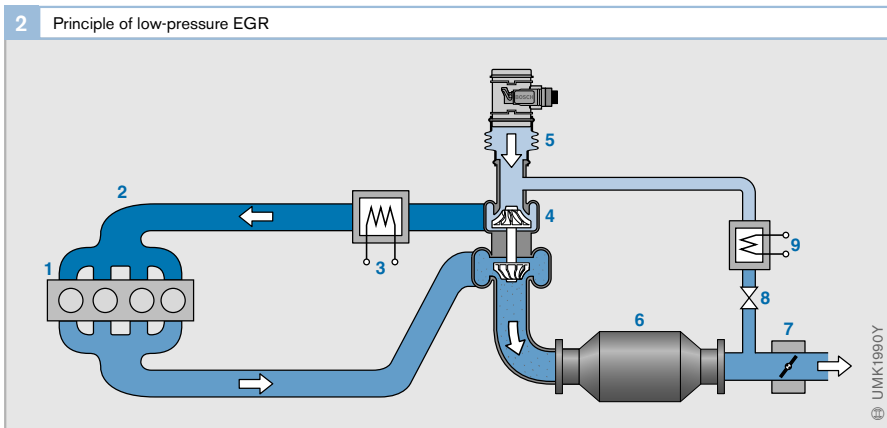


Fig. 2
 1 Engine
 2 Intake manifold
 3 Intercooler
 4 Turbocharger
 5 Air-mass meter
 6 Oxidation-type catalytic converter
 7 Throttle
 8 EGR valve
 9 EGR cooler

Since diesel-engine exhaust gas already has a low temperature at very low load points anyway, cooling the recirculated exhaust gas at the high EGR rates required to reduce NO_x emissions leads to unstable combustion. This then results in a significant rise in HC and CO emissions. A switchable EGR cooler is very effective to increase combustion-chamber temperature, stabilize combustion, reduce untreated HC and CO emissions, and raise exhaust-gas temperature. In particular, this occurs in the cold start phase of the car emission test, during which the oxidation-type catalytic converter has not reached its lightoff temperature. It also helps the oxidation-type catalytic converter to reach its operating temperature much faster.


Outlook

EGR with variable valve timing

An internal EGR achieved using variable valve timing would be suitable to obtain the best possible dynamic operating behavior. Conceivable scenarios could be, for example, increasing the amount of residual exhaust gas in the cylinder by advancing the “Close exhaust port” signal, or opening the exhaust valves during the intake phase, or opening the intake valves during the exhaust stroke. This would allow an adjustment of the exhaust-gas recirculation rate from one working cycle to the other by controlling the valve gear. The tradeoff, however, would be a high temperature of the recirculated exhaust gas, which would considerably limit the possible EGR rates.

NO_x emission minimizing concepts

Complying with future emission limits on both cars and trucks places high demands on the exhaust-gas concept of diesel engines. The key measure to lower untreated NO_x emissions continues to be exhaust-gas recirculation. As a result, EGR rates will continue to rise in conjunction with an increase in EGR compatibility of the combustion process. EGR control must be fast and precise for every cylinder in order to achieve very low emissions and best possible drivability. It appears that a combination of internal EGR controlled by variable valve timing and low-pressure EGR is an ideal solution.

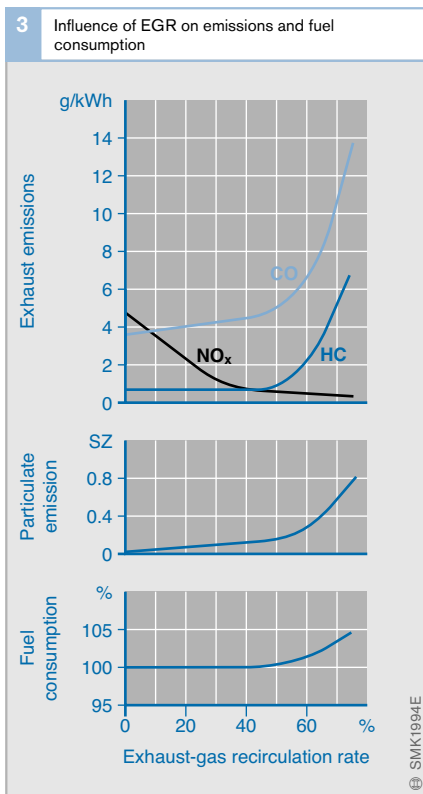

Positive crankcase ventilation

Blowby gas

Crankcase ventilation gas (blowby gas) is produced as a result of combustion processes in an internal-combustion engine. Gas flows out of the combustion chamber and into the crankcase through design-related gaps between the cylinder walls and pistons, pistons and piston rings, through the ring gaps of the piston rings, and through valve seals. Crankcase blowby gases, related to engine exhaust gas, may contain a multiple of hydrocarbon concentrations. In addition to products arising from complete and incomplete combustion, water (vapor), soot, and carbon residue, this gas contains engine oil in the form of minute droplets.

Particularly in connection with turbocharged diesel engines and spark-ignition engines with direct fuel injection, engine oil and soot contained in the blowby gas can cause deposits that form on turbochargers, in the intercooler, on valves, and in the downstream soot or particulate filter (ash deposits from inorganic additives in the engine oil). Consequently, this may impair operation.

One way to minimize oil consumption caused by engine oil escaping through crankcase ventilation is to return the oil via an oil separator and only ventilate the gas.

Ventilation

In a closed-circuit ventilation system, the untreated gas flow from the crankcase is routed through a ventilation system comprising additional components (e.g. oil separator, pressure-control devices, non-return valves) to the combustion-air intake, and from there it is returned to the combustion chamber. In open-loop ventilation systems, the treated gas is blown off directly to the atmosphere. However, legislation now restricts the use of open systems to only a few exceptional cases.

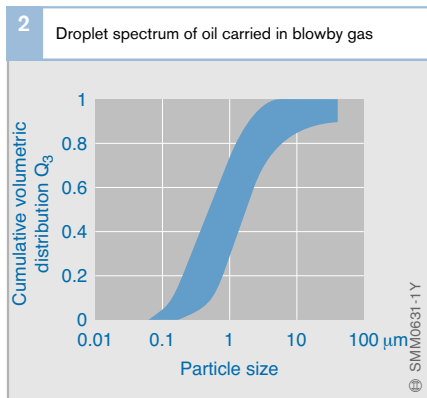
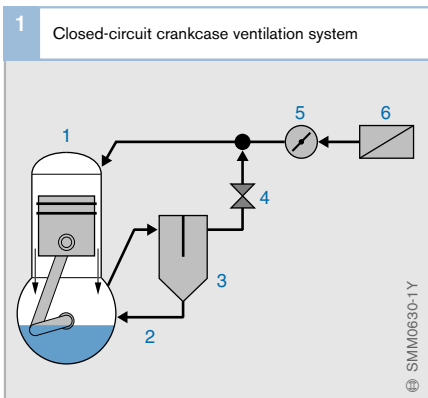


Fig. 1

- 1 Engine
- 2 Oil return
- 3 Oil separator
- 4 Vacuum-limit valve
- 5 Throttle valve
- 6 Intake filter

Fig. 2

Aerodynamic diameter, determined in various types of engine.

Exhaust-gas treatment

In the past, diesel-engine emissions were minimized mainly by measures implemented inside of the engine. However, the untreated emissions produced by many diesel-engined cars will exceed future emission limits in Europe, the U.S.A., and Japan. The high minimization rates required will presumably only be achievable by an efficient combination of measures inside and downstream of the engine. For this reason, intense development work is also ongoing on exhaust-gas treatment systems for diesel engines in analogy to tried and tested processes for gasoline engines.

In the 1980s the three-way catalytic converter was introduced on gasoline engines to reduce nitrogen oxides (NO_x), hydrocarbons (HC), and carbon monoxide (CO) to form nitrogen. Three-way catalytic converters operate at a λ value of 1.

In diesel engines operating with excess air, the three-way catalytic converter can be used not only for NO_x reduction. This is because, in the lean diesel exhaust gas, HC and CO emissions in the catalytic converter prefer


not to react with NO_x but with exhaust-gas oxygen.

It is relatively simple to remove HC and CO emissions from diesel exhaust gas by means of an oxidation catalyst. However, it is more complicated to remove nitrogen oxides when oxygen is present in the exhaust gas. Basically, it is possible to remove nitrogen in a NO_x storage catalyst, or an SCR catalytic converter (Selective Catalytic Reduction).

Mixture formation inside of the diesel engine produces much larger quantities of soot emissions than in the gasoline engine. The present trend on passenger cars is to remove soot by means of a particulate filter downstream of the engine, and concentrate on internal engine measures for NO_x reduction and noise suppression. On trucks, NO_x emissions are normally reduced by an SCR system downstream of the engine.

Fig. 1

- A: DPF control
(Diesel Particulate Filter)
- B: DPF and NSC control
(Diesel Particulate Filter and NO_x Storage Catalyst), application for passenger cars only
- 1 Engine ECU
 - 2 Air-mass meter (HFM)
 - 3 Injection nozzle
 - 4 Fuel rail
 - 5 High-pressure pump
 - 6 Accelerator pedal
 - 7 Turbocharger
 - 8 Diesel oxidation catalyst
 - 9 NO_x storage catalyst
 - 10 Particulate filter
 - 11 Muffler

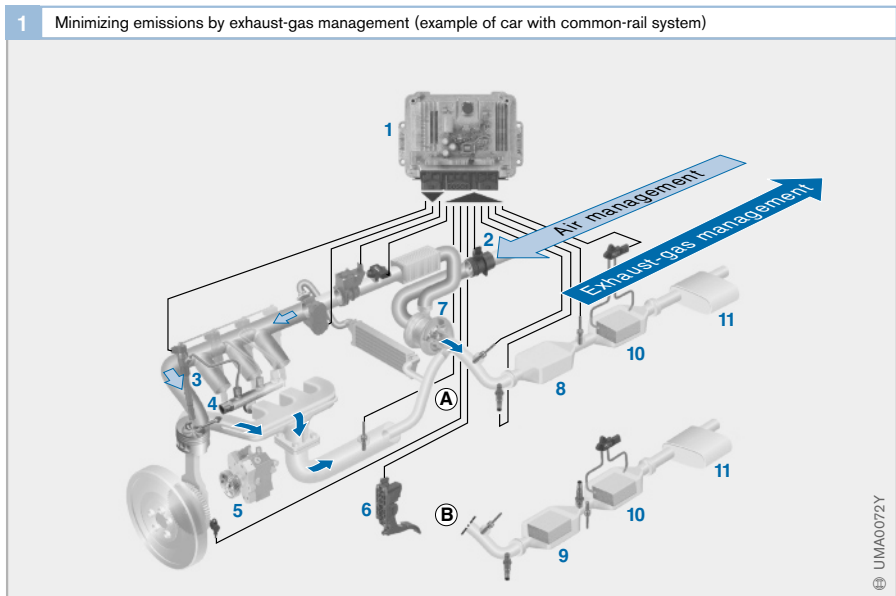

NO_x storage catalyst

The NO_x Storage Catalyst (NSC) reduces nitrogen oxides in two stages:

- Loading phase: Continuous NO_x storage in storage components of the catalyst in the lean exhaust gas.
- Regeneration: Periodic NO_x removal and conversion in the rich exhaust gas.


Depending on the operating point, the loading phase lasts from 30 to 300 s. Accumulator regeneration takes from 2 to 10 s.

NO_x storage

The NO_x storage catalyst is coated with chemical compounds that have a strong tendency to bind strongly with NO₂. However, this is a chemically reversible bond. Examples here are the oxides and carbonates of alkalines and alkaline metals. Due to the temperature response, barium nitrate is the main chemical used.

As only NO₂ can be stored directly, but not NO, the NO components in the exhaust gas are oxidized on the surface of a platinum coating in an upstream or integrated oxidation catalyst to form NO₂. This reaction takes place in several stages since the concentration of free NO₂ in the exhaust gas is reduced during storage, and additional NO is then oxidized to form NO₂.

In the NO_x storage catalyst, NO₂ reacts with the compounds on the catalyst surface (e.g. barium carbonate, BaCO₃, as storage material), and oxygen (O₂) from the lean diesel gas to form nitrates:



The NO_x storage catalyst stores nitrogen oxides in this way. Storage is only optimized in a material-dependent temperature interval of the exhaust gas ranging from 250 to 450°C. Below this temperature, NO oxidizes very slowly to form NO₂; above this temperature, the NO₂ is non-stable. Accumulator-type catalytic converters also have a certain storage capability (surface storage) at low tempera-

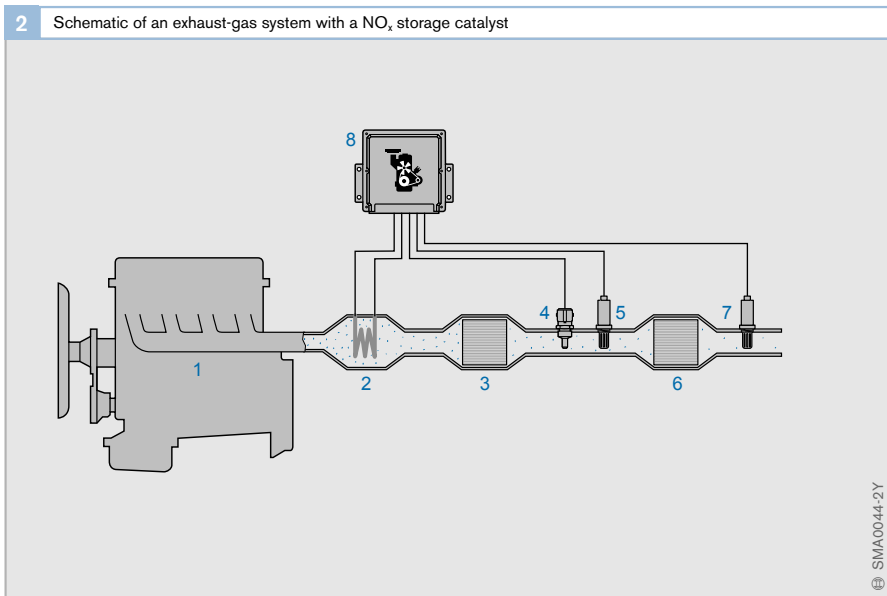


Fig. 2

- 1 Diesel engine
- 2 Exhaust heater (optional)
- 3 Oxidation catalyst
- 4 Temperature sensor
- 5 Broadband lambda oxygen sensor
- 6 NO_x storage catalyst
- 7 NO_x sensor
- 8 Engine control unit

tures. This is sufficient to store nitrogen oxides produced at low temperatures during the start process.

As the amount of stored nitrogen oxides (saturation) increases, the ability to continue to bind additional nitrogen oxides decreases. The volume of nitrogen oxides passing through the catalytic converter then increases with time. There are two ways of detecting when the catalytic converter is charged to such a degree that the storage phase needs to be terminated.


- A model-based process calculates the volume of stored nitrogen oxides, taking account of the converter state, and derives the remaining storage capacity.
- A NO_x sensor downstream of the NO_x storage catalyst measures the concentration of nitrogen oxide in the exhaust gas, thus determining the present storage level.

NO_x removal and conversion

At the end of the storage phase, the catalytic converter must be regenerated, i.e. the stored nitrogen oxides must be removed from the storage components and converted into nitrogen (N₂) and carbon dioxide (CO₂). The processes for NO_x removal and conversion take place separately. For this purpose, the air deficiency in the exhaust gas (rich, $\lambda < 1$) must be adjusted. The reducing agents employed are the substances present in the exhaust gas, i.e. CO, H₂, and various hydrocarbons. Removal – described in the following using CO as reducing agent – occurs by CO reducing the nitrate (e.g. barium nitrate, Ba(NO₃)₂) to form N₂, and then forming a carbonate together with barium:



This results in CO₂ and NO. A rhodium coating then reduces the nitrogen oxides into N₂ and CO₂ using CO in the familiar way known from the three-way catalytic converter:



There are two methods of detecting when the removal phase is complete:

- The model-based process calculates the quantity of nitrogen oxides remaining in the NO_x storage catalyst.
- A lambda oxygen sensor downstream of the catalytic converter measures the oxygen excess in the exhaust gas, and indicates a change in voltage from “lean” to “rich” when removal has ended.

On diesel engines, rich operating conditions ($\lambda < 1$) can be adjusted by retarding the injection point and throttling the intake air. During this phase, the engine operates at poorer efficiency. In order to minimize any additional fuel consumption, the regeneration phase should be as short as possible compared to the storage phase. It must be guaranteed that the vehicle remains fully drivable during the switchover from lean to rich mode, and that torque, response, and noise remain constant.

Desulfating

One problem faced by NO_x storage catalysts is their sensitivity to sulfur. Sulfur compounds contained in fuel and lube oil oxidize to form sulfur dioxide (SO₂). The coatings used in the catalytic converter for forming nitrates (BaCO₃), however, have a very great affinity to sulfate, i.e. SO₂ is removed from the exhaust gas more effectively than NO_x, and is bound in the storage material by forming sulfate. Sulfate bonding is not separate when the storage is regenerated normally. The quantity of the stored sulfate, therefore, rises continuously over service time. This reduces the number of storage places for the NO_x, and NO_x conversion decreases. To ensure sufficient NO_x storage capacity, the catalytic converter must be desulfated (sulfur regenera-

tion) at regular intervals. If fuel contains 10 mg/kg of sulfur ("sulfur-free fuel"), regeneration must take place at intervals of about 5,000 km.

During the desulfating process, the catalytic converter is heated to a temperature of over 650°C for a period of over 5 minutes, and it is purged with rich exhaust gas ($\lambda < 1$). To increase the temperature, the same measures are used to regenerate the Diesel Particulate Filter (DPF). As opposed to DPF regeneration, however, O₂ is completely removed from the exhaust gas by controlling the combustion process. Under these conditions, barium sulfate is converted back to barium carbonate.

The choice of a suitable desulfating process control (e.g. oscillating λ about 1) must make sure that the SO₂ removed is not reduced to hydrogen sulfide (H₂S) by a continuous deficiency of exhaust-gas oxygen, O₂. H₂S is already highly toxic in very small concentrations and is perceptible by its intensive odor.

The controlled conditions for desulfating must also avoid excessive aging of the catalyst. Although high temperatures (>750°C) accelerate the desulfating process, they also speed up catalyst aging. For this reason, optimized catalyst desulfating must take place within a limited temperature and excess-air-factor window, and may only have a negligible impact on drivability.

A high sulfur content in fuel will speed up catalyst aging, since desulfating takes place more frequently, and will also increase fuel consumption. Ultimately, the use of storage catalysts is dependent on general availability of sulfur-free fuel at the filling station.

Selective catalytic reduction of nitrogen oxides

Overview


As opposed to the NSC process (NO_x Storage Catalyst), Selective Catalytic Reduction (SCR process) operates continuously, and does not intervene in engine operation. The process is now being launched on production truck models. It offers the possibility of minimizing NO_x emissions and reducing fuel consumption at the same time. On the other hand, NO_x removal and conversion causes a higher fuel consumption in the NSC process.

In large furnaces, selective catalytic reduction has become a tried and tested method of waste-gas denitrification. It is based on reducing certain nitrogen oxides (NO_x) in the presence of oxygen using selected reducing agents. Here, “selective” means that the reducing agent prefers to oxidize selectively with the oxygen contained in the nitrogen oxides instead of with the molecular oxygen present in much greater quantities in the exhaust gas. Ammonia (NH₃) has proven to be a highly selective reducing agent in this case. In a car environment, the quantities of NH₃

required would raise safety issues due to the toxicity of the chemical. However, NH₃ can be produced from nontoxic carrier substances, such as urea or ammonium carbamate. Urea has proved to be a good catalyst carrier. Urea, (NH₂)₂CO, is produced on an industrial scale as fertilizer and feedstuff. It is biologically compatible with groundwater, and chemically stable for the environment. Urea is highly soluble in water, and can therefore be added to the exhaust gas as an easy-to-meter urea/water solution.

At a mass concentration of 32.5% urea in water, the freezing point has a localized minimum at -11°C. A eutectic solution forms, but does not separate when frozen.

The DENOXTRONIC 1 system was developed to meter the reducing agent in the exhaust gas precisely. This system is resistant to freezing. The main components can be heated to ensure the metering function starts shortly after a cold start.

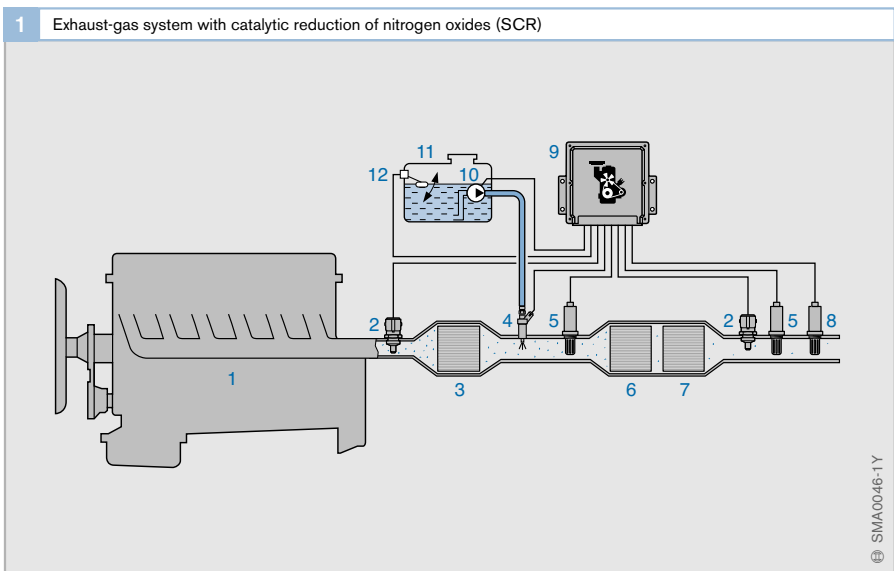


The urea/water solution will be obtainable under the brand name of AdBlue – firstly at depots, and then at all highway filling stations. The first official AdBlue pump opened in Stuttgart (Germany) at the end of 2003.


AdBlue complies with the draft standard DIN 70070 which defines the solution properties.

Chemical reactions



Urea first forms ammonia before the actual SCR reaction starts. This takes place in two reaction steps, which are together termed a hydrolysis reaction. Firstly, NH_3 and isocyanic acid are formed in a thermolysis reaction:



Then isocyanic acid is converted with water in a hydrolysis reaction to form ammonia and carbon dioxide.



To prevent the precipitation of solids, the second reaction must take place rapidly by selecting suitable catalysts and temperatures that are sufficiently high (starting at 250°C). Modern SCR reactors also assume the function of a hydrolyzing catalyst, thus dispensing with an upstream hydrolyzing catalyst as previously necessary. Ammonia produced by thermohydrolysis reacts in the SCR catalytic converter according to the following equations:



At low temperatures ($< 300^\circ\text{C}$), conversion mainly takes place using reaction 2. For this reason, it is necessary to set a $\text{NO}_2:\text{NO}$ ratio of about 1:1 to achieve good conversion at low temperatures. Under these circumstances, reaction 2 can take place at temperatures starting at 170 to 200°C .

Oxidizing NO to form NO_x occurs in an upstream oxidation catalyst, and this is necessary to achieve optimized efficiency.

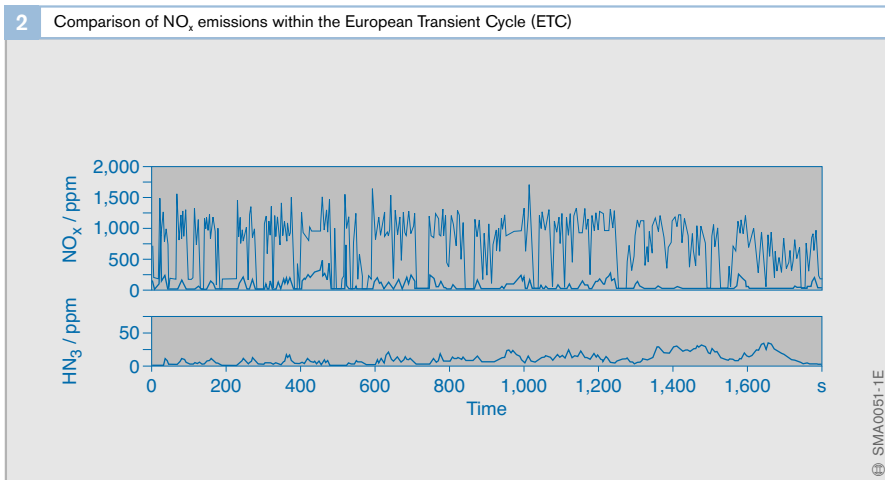


Fig. 2

— With no admixture of urea/water solution: 10.9 g/kWh

— With admixture of 32.5% urea/water solution: 1.0 g/kWh

If more reducing agent is dispensed than is converted in reduction with NO_x , it may result in NH_3 leakage. NH_3 is a gas and has a very low odor threshold (15 ppm). This may cause a nuisance to the environment, but it is avoidable. NH_3 is removable by placing an additional oxidation catalyst downstream of the SCR catalytic converter. This blocking catalytic converter oxidizes any ammonia that may occur to form N_2 and H_2O . In addition, a careful application of metered AdBlue is essential.

One key parameter for the application is the feed ratio α , which is defined as the molar ratio of metered NH_3 as a factor of NO_x present in the exhaust gas. Under ideal operating conditions (no NH_3 leakage, no secondary reactions, no NH_3 oxidation), α is directly proportional to the NO_x reduction rate: At $\alpha = 1$, NO_x reduction of 100% is achievable in theory. In practice, however, a NO_x reduction of 90% in fixed and mobile operation is achievable at an NH_3 leakage of < 20 ppm. The quantity of AdBlue required


for this is approximately equivalent to 5% of the quantity of diesel fuel used.

The reducing-agent requirement depends on the specific NO_x emission ($\text{g}_{\text{NO}_x}/\text{kg}_{\text{diesel}}$). The SCR process can be compensated for higher NO_x emissions in the untreated exhaust gas occurring in the efficiency-optimized combustion process by adding AdBlue.

By arranging the hydrolysis reaction upstream, modern SCR catalytic converters achieve a NO_x conversion rate of $> 50\%$ only at temperatures above approx. 250°C . Optimized conversion rates are attained within a temperature window of 250 to 450°C . Present catalytic-converter research is concentrating on extending the work temperature window, and, in particular, on optimizing activity at low temperatures.

Fig. 3

- 1 Compressor
- 2 Air tank
- 3 Delivery module
- 4 Filter
- 5 AdBlue tank
- 6 AdBlue quality sensor
- 7 Temperature sensor
- 8 Level sensor
- 9 Dosing module
- 10 ECU
- 11 Actuators
- 12 Sensors
- 13 Diesel oxidation catalyst
- 14 Dosing tube
- 15 SCR catalytic converter
- 16 Exhaust-gas sensor

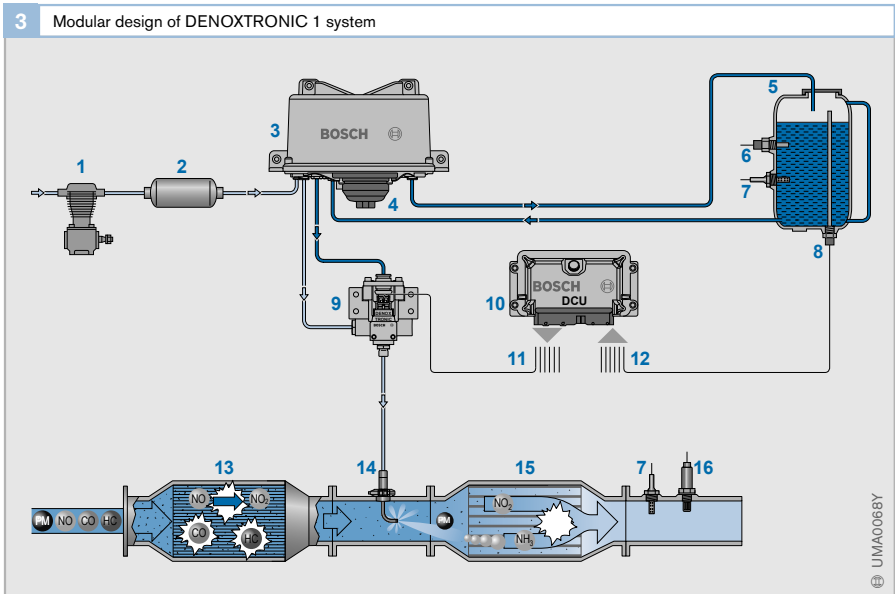

DENOXTRONIC 1

System overview

The modular DENOXTRONIC 1 system meters the reducing agent and comprises the following modules:

- Delivery module, to deliver the urea/water solution at the required pressure to the dosing module.
- Dosing module, to meter the precise quantity of urea/water solution and add compressed air.
- Dosing tube, to atomize and distribute the urea/water solution in the exhaust pipe.
- Control unit, to exchange information with the engine ECU via CAN. This unit is fitted in the delivery module.

Compressed air is provided from an onboard supply to enhance atomization of the reducing-agent solution in the exhaust-gas system.

Delivery module

In the delivery module, reducing agent flows through a prefilter to a diaphragm pump which has an integrated pressure attenuator and overflow valve. The solution then runs through the main filter to the dosing module at a max. pressure of 3.5 bar. Pressure and temperature are monitored constantly. As required, a bleeder valve opens. It is electrically switched and connected to the supply reservoir. After conditioning in this way, the reducing agent flows finally to the dosing module.

Compressed air from the onboard air tank enters the delivery module via a separate line. An air-control valve and air-pressure sensor ensure a constant admission pressure upstream of the central choke valve. Central choke-valve operation is supercritical. Pressure control ensures a constant air-mass flow from the delivery module to the dosing module. This is a key factor for precision dosing. A second air-pressure sensor located downstream of the central choke valve provides additional safety.

The delivery module is mounted as usual on the vehicle chassis.

Dosing module

The urea/water solution is metered precisely in the dosing module by a clocked solenoid valve. The clock rate is normally 4 Hz. Precise metering is achieved in a different control range if system dynamics are still sufficient. The metered urea/water solution then flows into the venturi. Compressed air also enters the venturi through a non-return valve and forms a carrier air flow that transports the urea/water solution in the form of an aerosol and a film to the dosing tube.

The dosing module is mounted as close to the dosing point as possible to achieve high system dynamics.

Dosing tube

The dosing tube represents the interface between the dosing module and the exhaust-gas system. It provides optimized mixture formation and homogeneous mixture distribution in the exhaust pipe. There are normally eight holes with a diameter of 0.5 mm arranged symmetrically around the dosing-tube circumference. The carrier-air flow passes through these holes at high velocity, atomizing the entrained urea/water solution into small drops that quickly evaporate. This accelerates the drops to high velocities to reach all parts of the exhaust pipe.

Control unit, DCU 15

The control unit is located in the delivery module. It reads out signals from internal and external sensors, triggers internal and external actuators, and performs control and monitoring functions. Components are monitored, and all inputs are checked for plausibility. The main function is to calculate the required dosing quantity based on the preset dosing strategy. The control unit also monitors the temperatures of system components and secures operation at low temperatures by actively triggering a heating system.

Besides internal sensors, other parameters detected are the fluid level in the tank, tank temperature, and the exhaust-gas temperature in the catalytic converter. Later construction phases planned include other exhaust-gas components and exhaust-gas monitoring.


Communication with the engine control unit runs over a CAN bus. Diagnostics take place over an ISO-K or CAN interface.

DENOXTRONIC dosing strategy

A model-based calculation for the optimum dosing quantity is required to optimize NO_x reduction while minimizing NH_3 leakage – i.e. permeation of NH_3 through the catalyst system. The quantity measured – e.g. on the engine test bench – is corrected as a factor of the catalytic-converter temperature and the quantity of NH_3 stored in the catalytic converter.

Standard model

The dosing quantity for the reducing agent is stored as a function of injected fuel quantity and engine speed. In program map A, measured either on the test bench, or calculated by *a priori* assumptions. The system feeds in correction parameters, such as engine temperature (to consider the effects of operating temperature on NO_x production), and the number of system operating hours (to consider aging).

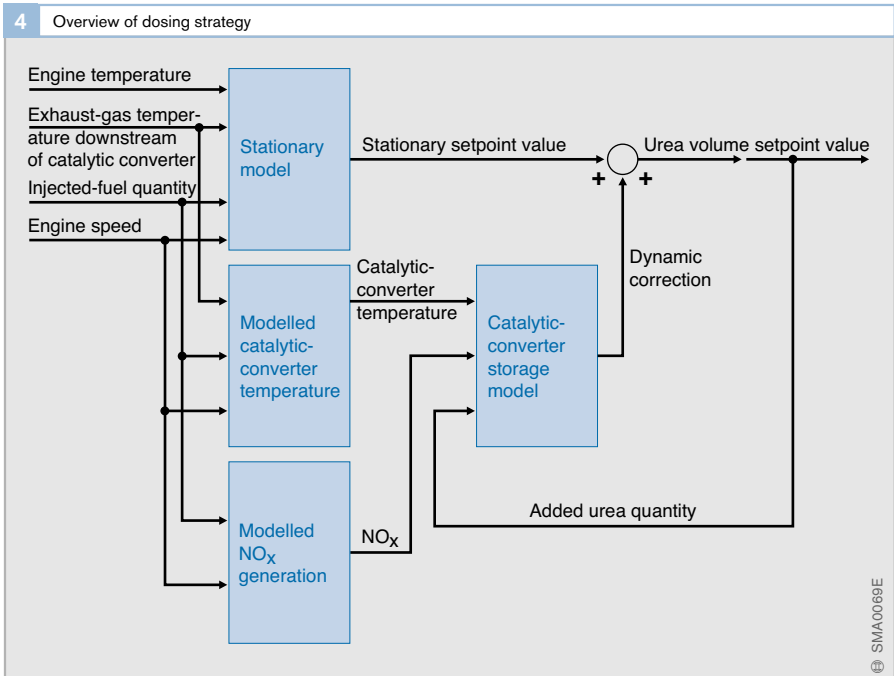


The difference between fixed catalytic-converter temperature (stored in program map B) and the exhaust-gas temperature measured downstream of the catalytic converter is used to determine a correction factor for reducing-agent dosing in a third program map C when switching between two fixed operating points. This correction factor minimizes NH_3 leakage.

Expansion with storage block

On catalytic converters with high NH_3 storage capacity, in particular, it is recommended to model the transient processes and the quantity of NH_3 actually stored. Since NH_3 storability in SCR catalytic converters drops as temperature rises, there may otherwise be some undesirable occurrence of NH_3 leakage in transient mode and, in particular, as exhaust-gas temperature rises.

To avoid this effect, the catalytic-converter temperature and the quantity of NO_x produced are estimated by program maps and time-lag devices. Catalytic-converter efficiency is saved to a program map as a function of temperature and the quantity of NH_3 stored. The product of the catalyst coefficient and the NO_x present in the catalyst is equivalent to the converted quantity of reducing agent. The difference between added and converted reducing agent results in a (positive or negative) factor added to the quantity of ammonia stored in the catalyst. This is calculated continuously. If the figure for the quantity of NH_3 stored exceeds a fixed temperature-dependent threshold, the dosing quantity is reduced to avoid NH_3 leakage. If the quantity of NH_3 stored drops below the threshold, the dosing quantity is increased to optimize NO_x conversion.

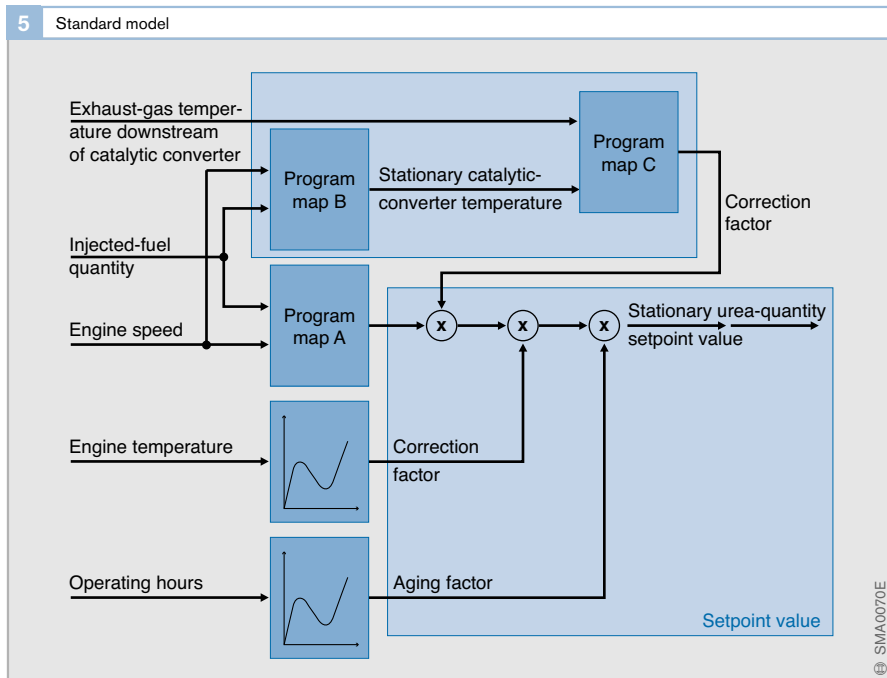

Diesel Particulate Filter (DPF)

Soot particles emitted from a diesel engine can be efficiently removed from the exhaust gas by Diesel Particulate Filters (DPF). Particulate filters used so far in passenger cars consist of porous ceramics. Particulate filters made of sintered metal are now under development.

Ceramic particulate filter

Ceramic particulate filters consist of a honeycomb structure made of silicon carbide or Cordierite, which has a large number of parallel, mostly square channels. The thickness of the channel walls is typically 300 to 400 μm . Channel size is specified by their cell density (Channels per Square Inch (cpsi); typical value: 100...300 cpsi).

Adjacent channels are closed off at each end by ceramic plugs to force the exhaust gas to penetrate through the porous ceramic walls. As soot particles pass through the walls, they are transported into the pore walls by diffusion (inside of the ceramic walls) where they adhere (deep-bed filtration). As the filter becomes increasingly saturated with soot, a layer of soot forms on the surface of the channel walls (on the side opposite to the inlet channels). This provides highly efficient surface filtration for the following operating phase. However, excessive saturation must be prevented (see the section entitled “Regeneration”).

As opposed to deep-bed filters, wall-flow filters store the particles on the surface of the ceramic walls (surface filtration).

Besides filters with a symmetrical arrangement of square inlet and outlet channels, ceramic “octosquare substrates” are now on offer (Fig. 2). They have larger octagonal inlet channels and smaller square outlet channels. The large inlet channels considerably increase the storability of the particulate filter for ash, non-combustible residue from burned engine oil, and additive ash (see the section entitled “Additive system”). Octosquare filters will shortly be launched onto the market.

Particulate filters made of sintered metal

In the sintered metal filter, the filter surfaces comprise a metallic carrier structure composed of mesh filled with sintered metal powder. The filter’s design has a specific geometry: The filter surfaces form concentric, wedge-shaped filter pockets through which the exhaust gas flows. Since the slats are closed at the rear, the exhaust gas must pass through the walls of the filter pockets. The soot particles are deposited on the pore walls in a similar way to the ceramic substrate.

Fig. 1

- 1 Inflowing exhaust gas
- 2 Housing
- 3 Ceramic plug
- 4 Honeycomb ceramic
- 5 Outflowing exhaust gas



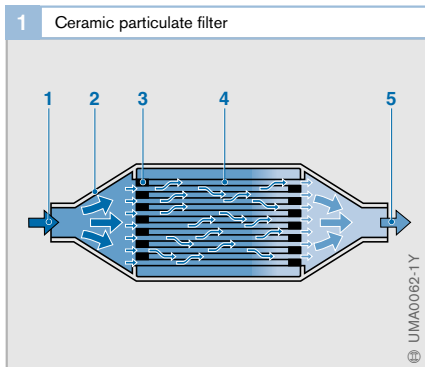


Fig. 2

- a Square channel cross-section
- b Octosquare design

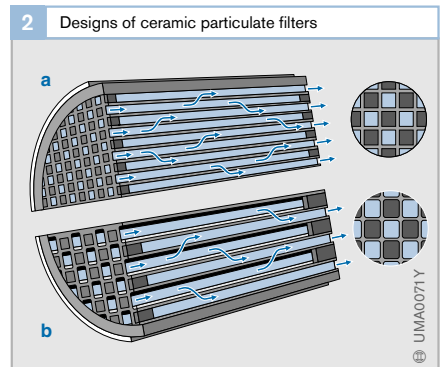

3 Particulate filters made of sintered metal

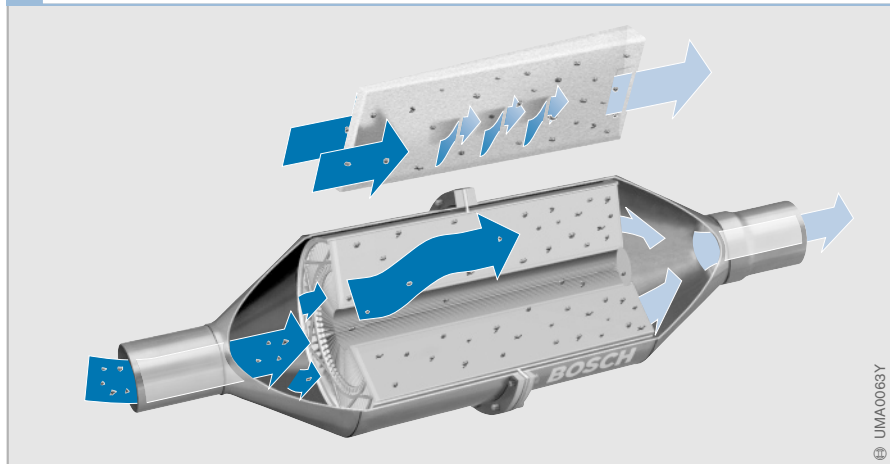

Both particulate filters made of sintered metal and ceramic filters achieve a retention efficiency of more than 95% for particles across the entire spectrum range in question (10 nm to 1 μm).

Regeneration

Irrespective of the particulate-filter material – ceramics or sintered metal – the material must be freed from time to time from the deposited particles, i.e. it must be regenerated. The growing amount of soot deposited in the filter gradually increases the exhaust-gas backpressure. This impairs engine efficiency and acceleration power.

Regeneration must be carried out approximately every 500 kilometers; this figure is subject to strong fluctuation dependent on the untreated soot emission and filter size (approx. 300 to 800 kilometers). Regeneration takes about 10 to 15 minutes. The additive system takes slightly less time. It is also dependent on engine operating conditions.

The filter is regenerated by burning off the soot that has collected in the filter. The particle carbon component can be oxidized (burned) using the oxygen constantly present in the exhaust gas above a temperature of approx. 600°C to form nontoxic CO_2 . Such high temperatures occur only when the engine is operating at rated output. It is highly rare in normal vehicle operation. For this reason, measures must be taken to lower the soot burnoff temperature and/or raise the exhaust-gas temperature.

Soot oxidizes at temperatures as low as 300...450°C using NO_2 as oxidizer. This method is used industrially in the continuously regenerating trap (CRT®) system.

Compared with the ceramic filter, the sintered metal filter has the advantage that its thermal conductivity is better. After the soot is ignited in part of the filter, the reaction heat occurring there is transported more easily to adjacent areas. The soot layer is burned off evenly. This avoids any non-regenerated soot areas which may occur in ceramic filters under worst-case scenarios.

Additive system

The soot oxidation temperature of 600°C can be lowered to approx. 450...500°C by using an additive – usually cerium or iron compounds – in diesel fuel. But even this temperature is not always reached in the exhaust-gas system when the vehicle is operating. The result is that the soot is not burned off continuously. Active regeneration is triggered, therefore, above a specific level of soot saturation in the particulate filter (see the section entitled “Saturation detection”). To achieve this, the combustion control in the engine is modified so that the exhaust-gas temperature rises to the soot burnoff temperature. This is possible by retarding the injection point (see the section entitled “Measures inside of the engine to raise the exhaust-gas temperature”).

The additive in the fuel is retained in the filter as a residue (ash) after regeneration. This ash, as well as ash from engine-oil or fuel residue, gradually clogs the filter, thus raising the exhaust-gas backpressure. The pressure loss across the sintered metal filter is lower than for the ceramic filter with the same ash saturation.

To reduce the pressure rise, the ash storability of sintered metal filters and ceramic octosquare filters must be increased by making the cross-sections of the inlet channels as large as possible. This provides the filters with sufficient capacity to accommodate all the ash residue occurring on burnoff during the normal service life of the vehicle.

With conventional ceramic filters, it is assumed that the filter is removed approximately every 120,000 km when additive-based regeneration is used, and cleaned mechanically.


Catalyzed Diesel Particulate Filter (CDPF)

Soot-particle burnoff can also be improved by coating the filter with noble metals (mainly platinum). However, the effect is less than when using an additive.

The CDPF requires further measures for regeneration to raise the exhaust-gas temperature, similar to the measures taken with the additive system. Compared with the additive system, however, the catalyzed coating has the advantage that no additive ash occurs in the filter.

Fig. 4

- 1 Additive control unit
- 2 Engine control unit
- 3 Additive pump
- 4 Fluid-level sensor
- 5 Additive tank
- 6 Additive metering unit
- 7 Fuel tank
- 8 Diesel engine
- 9 Oxidation catalyst
- 10 Particulate filter
- 11 Temperature sensor
- 12 Differential-pressure sensor
- 13 Soot sensor

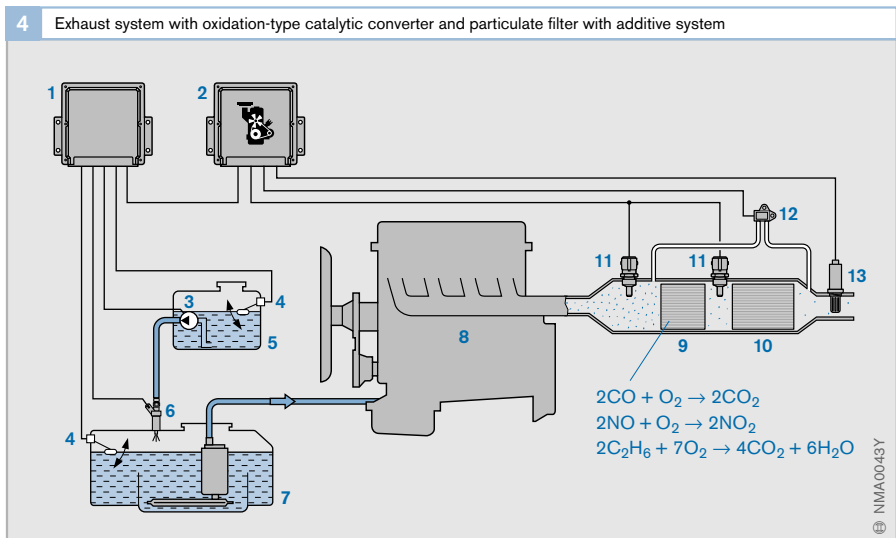

The catalyzed coating has several functions:

- It oxidizes CO and HC
- It oxidizes NO to form NO₂
- It oxidizes CO to form CO₂

Oxidizing CO and HC

It also oxidizes CO and HC, as in the oxidation-type catalytic converter. At high CO and HC emissions, the energy released can be significant (see the section entitled "Oxidation catalyst"). The resulting temperature hike acts directly on the point where high temperatures are required to ignite the soot. This avoids heat losses that may occur with an upstream catalytic burner.

Oxidizing NO to form NO₂

NO is oxidized on the catalyzed coating to form NO₂. NO₂ is a more active oxidizer than O₂ and, therefore, oxidizes soot at lower temperatures (CRT[®] effect). In this reaction, NO₂ is again reduced to NO. Since exhaust-gas flow velocity through the filter wall is slow, any NO occurring can diffuse contrary to the flow direction and oxidize soot in further oxidation reducing cycles.

Oxidizing CO to form CO₂

Another phenomenon is oxidizing CO produced during soot oxidation at low regeneration temperatures to form CO₂. Soot burnoff is enhanced by localized heat generation.

CRT[®] system

Truck engines run close to maximum torque more frequently than car engines, i.e. causing comparatively high NO_x emissions. On trucks, therefore, it is possible to perform continuous regeneration of the particulate filter based on the CRT[®] principle (Continuously Regenerating Trap).

According to this principle, soot combusts with NO₂ at temperatures as low as 300 to 450°C. The process is reliable at these temperatures if the mass ratio of NO₂/soot is greater than 8:1. To apply the process, an oxidation catalyst is arranged upstream of the particulate filter to oxidize NO into NO₂. In most cases, this provides ideal conditions for regeneration using the CRT[®] system on trucks at normal operation. The method is also termed "passive regeneration", since soot is burned continuously without the need for active measures.

The efficiency of this process was demonstrated in truck fleet trials. However, other regeneration processes are provided for trucks.

On cars, which normally run in the low-load range, complete regeneration of the particulate filter is not possible using the CRT[®] effect.

System configuration

Irrespective of the applied particulate filter process, the regeneration process requires a system for control and monitoring. The system senses the state of the filter (state functions), i.e. it detects saturation level, defines regeneration strategy, and monitors the filter. In addition, it controls regeneration by intervening in the fuel-injection and air-intake systems. When operating an additive system, there are also functions for tank-level detection and additive dosing.

The basic configuration is almost identical for all systems.

Besides the particulate filter (DPF), the DPF system comprises other components and sensors:

- **Diesel Oxidation Catalyst (DOC)**
The main function of the DOC is to minimize HC and CO emissions. In DPF applications, it also acts as a “catalytic burner”: By oxidizing specific hydrocarbons entrained (retarded secondary injection) in the DOC, the required regeneration temperature is reached in the exhaust gas. The DOC is also required for oxidizing NO into NO₂ in the CRT® system.
- **Differential-pressure sensor**
The differential-pressure sensor measures the pressure drop across the particulate filter; this figure is then used to calculate filter saturation. The differential pressure is also used to calculate the exhaust-gas backpressure in the engine so that it can be limited to the maximum permitted level. Optionally, an absolute-pressure sensor can be fitted upstream of the DPF instead of a differential-pressure sensor.
- **Temperature sensor upstream of the DPF**
In regeneration mode, the temperature upstream of the DPF is the key parameter to determine soot burnoff in the filter.
- **Temperature sensor upstream of the DOC**
The temperature upstream of the DOC helps to determine HC convertibility (*lightoff*) in the DOC.
- **Lambda oxygen sensor**
The lambda oxygen sensor is not directly a DPF system component, but it enhances system response even for the DPF, since a specific emission behavior is achieved by precise exhaust-gas recirculation.


Control-unit functions

Saturation detection

Two processes are used in parallel for saturation detection. Flow resistance in the particulate filter is calculated from the pressure drop across the filter and volumetric flow. This is a measure of filter permeability, and thus soot mass.

In addition, a model is used to calculate the soot mass stored in the DPF. The (untreated) soot-mass flow of the engine is integrated in this model. Corrections for system dynamics, such as the residual oxygen part in the exhaust gas, etc. are taken into consideration, as well as continuous particulate oxidation by NO₂. During thermal regeneration, soot burnoff is calculated in the control unit as a factor of DPF temperature and oxygen mass flow.

Soot mass is calculated by a coordinator using the soot masses determined in both processes, and this becomes the key factor in the regeneration strategy.

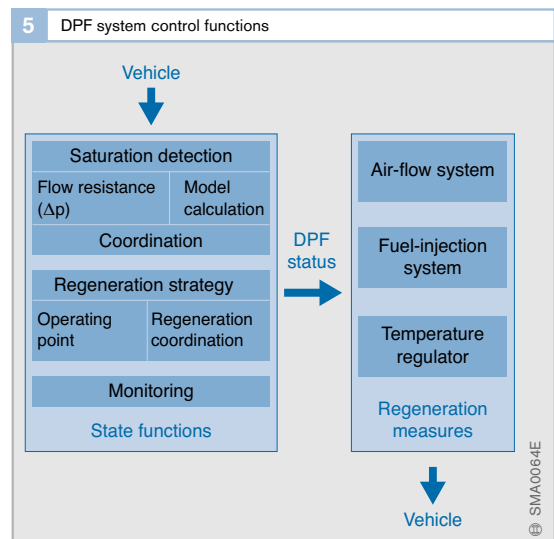

Regeneration strategy

As the quantity of soot mass rises in the filter, regeneration must be triggered in good time. As filter saturation increases, the quantity of heat released during soot burnoff increases, as well as peak temperatures in the filter. To prevent these temperatures from destroying the filter, regeneration must be triggered before a critical saturation state is reached. Depending on the filter material, 5 to 10 g of soot per liter of filter volume is cited as the critical saturation mass.

A good strategy is to bring forward regeneration when conditions are favorable (e.g. when driving on the highway), or delay regeneration when the conditions are poor.

The regeneration strategy defines when and what regeneration measures are performed, dependent on the soot mass in the filter, and the engine and vehicle operating states. These parameters are transmitted as status values to all other engine-control functions.

Monitoring

The differential-pressure sensor helps to monitor whether the filter is possibly blocked, broken, or removed. The DPF-system sensors are also monitored. Besides standard monitoring, the plausibility of values of the downstream differential-pressure sensor is also monitored. In dynamic operation, the supply line between the exhaust-gas system and the pressure sensor is monitored


by a signal-curve evaluation circuit. The temperature sensors upstream of the DOC and the DPF are checked at cold start for plausibility with other EDC temperature sensors.

Regeneration measures in the fuel-injection and air-intake systems

When a regeneration request is received, the fuel-injection and air-intake systems are switched over to other setpoint parameters via ramp signals. The driver does not perceive any change in torque or noise. The interventions to achieve the required regeneration temperature in the exhaust gas depend on the operating point (see the section entitled “Measures inside of the engine to raise the exhaust-gas temperature”).

Exhaust-gas temperature controller

The exhaust-gas temperature is controlled during unfavorable ambient conditions and throughout the entire filter service life to ensure reliable regeneration. The controller design is cascaded to mirror the split in regeneration measures (see the section entitled “Measures inside of the engine to raise the exhaust-gas temperature”).

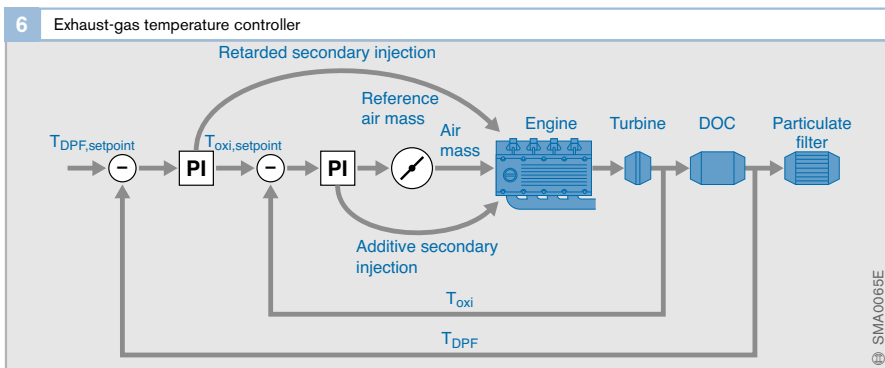

Measures inside of the engine to raise the exhaust-gas temperature

The temperature level of 550 to 650°C required for regeneration during standard diesel-engine operation is only reached at high engine speeds and at full load.


The main measures taken inside of the engine (*engine burner*) to increase exhaust-gas temperature are advanced, “burnoff” or “additive” secondary injection, retarded main injection, and intake-air throttling. Depending on the engine operating point, one or several of these measures are triggered during regeneration. In some operating points, these measures are supplemented by retarding secondary injection. This leads to a further increase in exhaust-gas temperature due to oxidation of fuel in the DOC no longer converted in the combustion chamber (*cat burner*).

Figures 7 and 8 shows typical exhaust-gas temperatures and engine measures required for regeneration as a factor of engine speed and load. Using the described combination of measures, only one temperature of 600°C is set downstream of the DOC at a residual oxygen content of >5%. The residual oxygen content is important since soot burnoff is too slow at lower O₂ concentrations.

Across the entire program map, exhaust-gas recirculation is shut down during regeneration to avoid high components of unburned hydrocarbons in the combustion air. At the same time this provides a stable single-controller concept for air-mass control.

The program map is roughly divided into six areas which feature different measures for raising temperature.

7 Typical exhaust-gas temperature of a standard application as a function of engine speed and load (for a diesel engine)

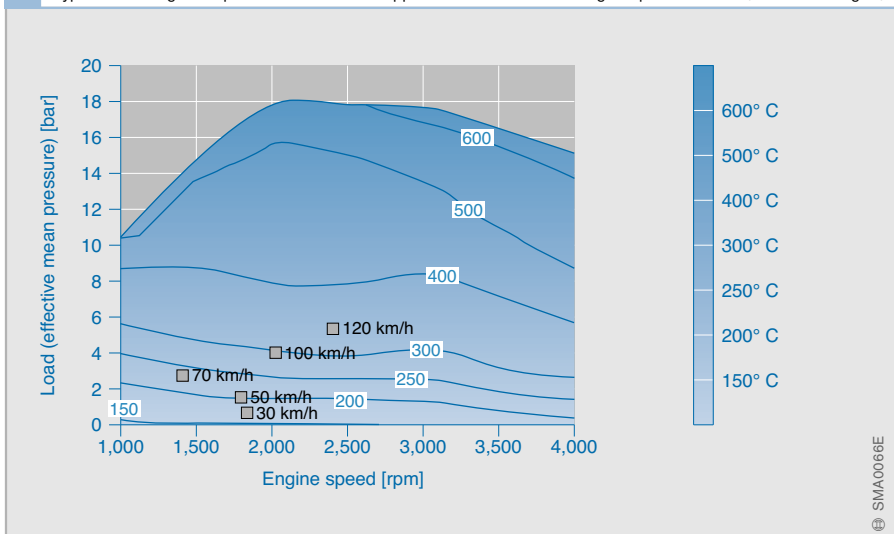

Area 1:

No engine measures are required since the exhaust-gas temperature in the basic application is over 600°C.

Area 2:

Firstly, the start of injection for main injection is retarded; secondly, a secondary injection event is added. Here, secondary injection is still part of the combustion process and contributes to the torque produced.

Area 3:

Due to the low supercharge and the large quantity of fuel, the excess-air factor in this area is $\lambda < 1.4$. An added, i.e. advanced, secondary injection event would lead to localized, extremely low excess-air factors, and thus to a drastic increase in black-smoke emissions; for this reason, a delayed, i.e. retarded secondary injection event is applied instead.

Area 4:


The required temperature rise is achieved by a combination of lowering charge-air pressure, triggering secondary injection, and by retarding main injection. The parts of the individual measures must be optimized with respect to emissions, fuel consumption, and noise. In most cases, not all of these measures are required at the same time.

Area 5:

This area requires a large temperature hike compared with normal operation. For this reason, the air mass must be reduced by the throttle valve in addition to the measures described above. Further measures for stabilizing the combustion process are needed, e.g. increasing the quantity of fuel for pre-injection, and adapting the time interval between pre-injection and main injection.

Area 6:

Only in this small area is it not possible to achieve stable regeneration at temperatures > 600°C downstream of the catalytic converter.

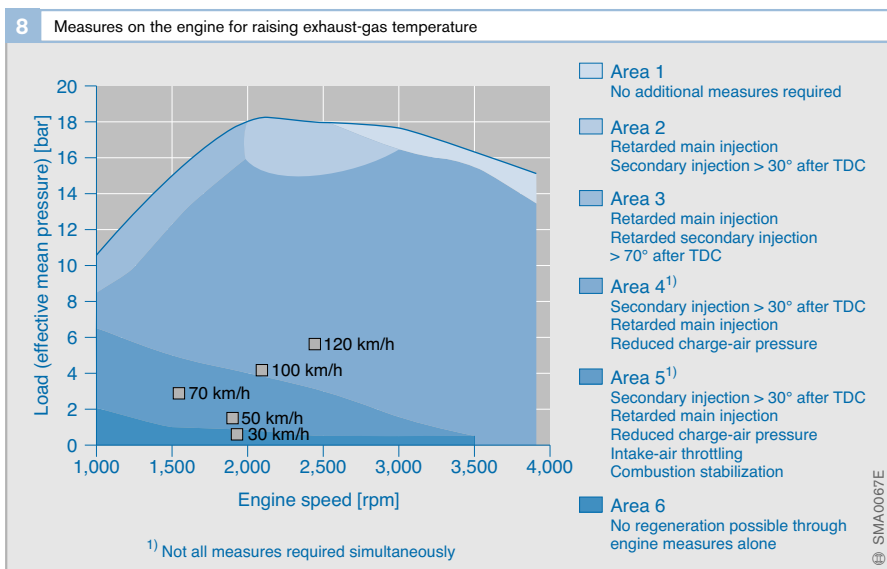

Diesel oxidation catalyst

Operation

The Diesel Oxidation Catalyst (DOC) fulfils a variety of functions for exhaust-gas treatment:

- Reduction in CO and HC emissions.
- Reduction in particle mass.
- Oxidation of NO to form NO₂.
- Use as catalytic burner.

Reduction in CO and HC emissions

Carbon monoxide (CO) and hydrocarbons (HC) are oxidized to form carbon dioxide (CO₂) and water vapor (H₂O) in the DOC. Oxidation in the DOC is almost complete, starting from a specific limit temperature, i.e. the lightoff temperature. Depending on exhaust-gas composition, flow velocity, and catalyst composition, the lightoff temperature takes place at about 170 to 200°C. Starting with this temperature, conversion rises up to over 90% within a temperature interval of 20...30°C.

Reduction in particle mass

The particles emitted by the diesel engine consist partly of hydrocarbons which desorb from the particle core as temperature rises. Particle Mass (PM) can be reduced by 15 to 30% by oxidizing these hydrocarbons in the DOC.

Oxidation of NO to form NO₂

A prime function of the DOC is to oxidize NO to form NO₂. A high NO₂ component in the NO_x is vital for a number of downstream components (particulate filter, NSC, SCR).

In the untreated engine exhaust gas, the NO₂ component in the NO_x is only about 1:10 at most operating points. NO₂ is in temperature-dependent equilibrium with NO in the presence of oxygen (O₂). This equilibrium is on the part of NO₂ at low temperatures (<250°C). Above about 450°C, however, NO becomes the thermodynamically preferred component. The function of the DOC is to raise the NO₂:NO ratio at low temperatures by inducing thermodynamic equilibrium. Depending on the catalyst coating and composition of the exhaust gas, this is achieved above a temperature of 180 to 230°C, when the concentration of NO₂ rises sharply within this temperature range. In compliance with thermodynamic equilibrium, the NO₂ concentration continues to drop as the temperature rises.

Catalytic burner

The oxidation catalyst can also be used as a catalytic heater (catalytic burner, cat burner). Reaction heat released when CO and HC are oxidized is used to raise the exhaust-gas temperature downstream of the DOC. CO and HC emissions are raised specifically for this purposes by means of an engine secondary injection, or a fuel injector downstream of the engine.

Catalytic burners are used to raise the exhaust-gas temperature during particulate-filter regeneration, for example.

As an approximation for the heat released during oxidation, the temperature of the exhaust gas rises by about 90°C for every 1% volume of CO. Since the temperature rise is very rapid, a steep temperature gradient becomes set in the catalytic converter. In the worst-case scenario, CO and HC are converted and heat is released only in the front area of the catalytic converter. The resulting stress in the ceramic carrier and catalytic converter is limited to the permitted temperature hike of about 200 to 250°C.

Design

Structural design

Oxidation catalysts consist of a carrier structure made of ceramics or metal, an oxide mixture (washcoat) composed of aluminum oxide (Al_2O_3), cerium (IV) oxide (CeO_2), zirconium oxide (ZrO_2), and active catalytic noble metals, such as platinum (Pt), palladium (Pd), and rhodium (Rh).

The prime function of the washcoat is to provide a large surface area for the noble metal, and to slow down catalyst sintering that occurs at high temperatures, leading to an irreversible drop in catalyst activity. The highly porous structure of the washcoat must be stable enough to resist against sintering processes.

The quantity of noble metals used for the coating, often referred to as the loading, is specified in g/ft^3 . The loading is approximately 50 to 90 g/ft^3 (1.8...3.2 g/l). Since only surface atoms are chemically active, development aims at producing and stabilizing noble-metal particles that are as small as possible (of the order of magnitude of a few nm) in order to minimize the use of noble metals.

Differences in the structural design of the catalytic converter and choice of catalyst composition change major properties, such as lightoff temperature, conversion, temperature stability, tolerance to poisoning, as well as manufacturing costs.

Internal structure

The main parameters of a catalytic converter are channel density (specified in cpsi (channels per square inch)), wall thickness of the individual channels, and the external dimensions of the catalytic converter (cross-sectional area and length). Channel density and wall thickness determine heatup response, exhaust-gas backpressure, and mechanical stability of the catalytic converter.

Design


The catalyst volume V_{cat} is defined as a factor of exhaust-gas volumetric flow, which is itself proportional to the swept volume V_{stroke} of the engine. Typical design figures for an oxidation catalyst are $V_{\text{cat}}/V_{\text{stroke}} = 0.6...0.8$.

The ratio of exhaust-gas volumetric flow to catalyst volume is termed flow velocity (unit: h^{-1}). Typical figures for an oxidation catalyst are 150,000...250,000 h^{-1} .

Operating conditions

Besides use of the correct catalyst, the main factors governing the efficiency of exhaust-gas treatment are the correct operating conditions. They are adjustable by the engine management system within a wide range.

If the operating temperatures are excessively high, sintering processes will occur, i.e. several small noble-metal particles will clump together to form a larger particle with a correspondingly smaller surface area, and thus reduced activity. The function of exhaust-gas temperature management is, therefore, to enhance the service life of the catalytic converter by avoiding excessive temperatures.

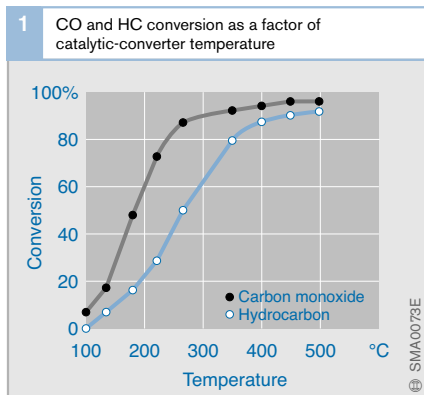

Electronic Diesel Control (EDC)

Electronic control of a diesel engine allows fuel-injection parameters to be varied precisely for different conditions. This is the only means by which a modern diesel engine is able to satisfy the many demands placed upon it. The EDC (Electronic Diesel Control) system is subdivided into three areas, “Sensors and desired-value generators”, “Control unit”, and “Actuators”.

System overview


Requirements

Present-day development in the field of diesel technology is focused on lowering fuel consumption and exhaust-gas emissions (NO_x , CO, HC, particulate), while increasing engine performance and torque. In recent years this has led to an increase in the popularity of the direct-injection (DI) diesel engine, which uses much higher fuel-injection pressures than indirect-injection (IDI) engines with whirl or prechamber systems. Due to the more efficient mixture formation and the absence of flow-related losses between the whirl chamber/prechamber and the main combustion chamber, the fuel consumption of direct-injection engines is 10...20% lower than that achieved by indirect-injection designs.

In addition, diesel engine development has been influenced by the high levels of comfort and convenience demanded in modern cars. Noise levels, too, are subject to more and more stringent requirements.

As a result, the performance demanded of fuel-injection and engine-management systems has also increased, specifically with regard to:

- High fuel-injection pressures
- Rate-of-discharge curve control
- Pre-injection and, where applicable, secondary injection
- Variation of injected fuel quantity, charge-air pressure, and start of injection to suit operating conditions
- Temperature-dependent excess-fuel quantity for starting
- Control of idle speed independent of engine load
- Controlled exhaust-gas recirculation (cars)
- Cruise control
- Tight tolerances for injection duration and injected fuel quantity, and maintenance of high precision over the service life of the system (long-term performance)

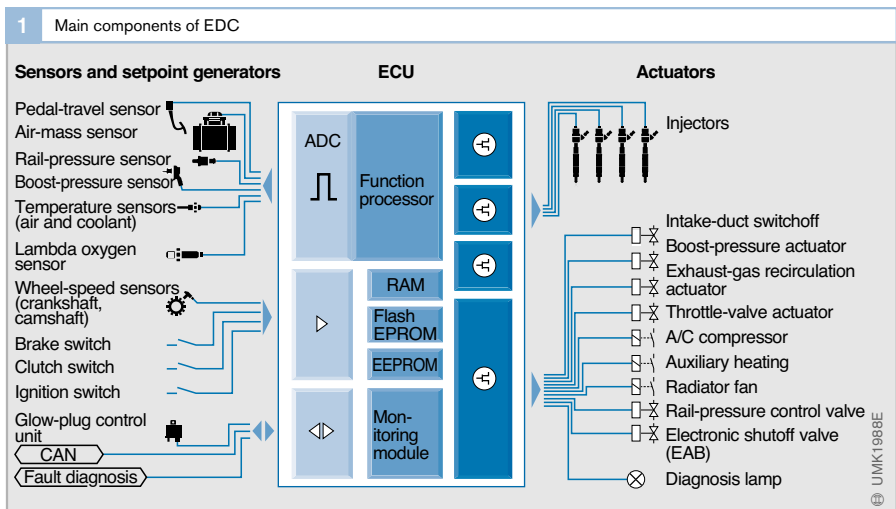

Conventional mechanical governing of engine speed uses a number of adjusting mechanisms to adapt to different engine operating conditions and ensures a high mixture formation quality. Nevertheless, it is restricted to a simple engine-based control loop and there are a number of important influencing variables that it cannot take account of or cannot respond quickly enough to.

As demands have increased, what was originally a straightforward system using electric actuator shafts has developed into the present-day EDC, a complex electronic control system capable of processing large amounts of data in real time. It can form part of an overall electronic vehicle control system (“drive-by-wire”). And a result of the increasing integration of electronic components, the control-system circuitry can be accommodated in a very small space.

Operating concept

Electronic Diesel Control (EDC) is capable of meeting the requirements listed above as a result of microcontroller performance that has risen considerably in the last few years.

In contrast with diesel-engine vehicles with conventional mechanically controlled fuel-injection pumps, the driver of a vehicle equipped with EDC has no direct control over the injected fuel quantity via the accelerator pedal and cable. The injected fuel quantity is actually determined by a number of different influencing variables. They include:

- The vehicle response desired by the driver (accelerator-pedal position)
- The engine operating status
- The engine temperature
- Interventions by other systems (e.g. TCS)
- The effect on exhaust-gas emission levels, etc.

The control unit calculates the injected fuel quantity on the basis of all these influencing variables. Start of delivery can also be varied. This demands a comprehensive monitoring concept that detects inconsistencies and initiates appropriate actions in accordance with the effects (e.g. torque limitation or limp-

home mode in the idle-speed range). EDC, therefore incorporates a number of control loops.

Electronic diesel control allows data exchange with other electronic systems, such as the Traction Control System (TCS), Electronic Transmission Control (ETC), or Electronic Stability Program (ESP). As a result, the engine management system can be integrated in the vehicle’s overall control system network, thereby enabling functions such as reduction of engine torque when the automatic transmission changes gear, regulation of engine torque to compensate for wheel spin, disabling of fuel injection by the engine immobilizer, etc.

The EDC system is fully integrated in the vehicle’s diagnostic system. It meets all OBD (On-Board Diagnosis) and EOBD (European OBD) requirements.

System modules

Electronic Diesel Control (EDC) is divided into three system modules (Fig. 1):

1. *Sensors and setpoint generators* detect operating conditions (e.g. engine speed) and setpoint values (e.g. switch position). They convert physical variables into electrical signals.
2. The *electronic control unit* processes data from the sensors and setpoint generators based on specific open- and closed-loop control algorithms. It controls the actuators by means of electrical output signals. In addition, the control unit acts as an interface to other systems and to the vehicle diagnostic system.
3. *Actuators* convert electrical output signals from the control unit into mechanical parameters (e.g. the solenoid valve for the fuel-injection system).

▶ Where does the word "electronics" come from?

This term actually goes back to the ancient Greeks. For them, the word "electron" meant amber. Its force of attraction on woollen threads or similar was known to Thales von Milet over 2,500 years ago.

Electrons, and therefore electronics as such, are extremely fast due to their very small mass and electric charge. The term "electronics" comes directly from the word "electron".

The mass of an electron has as little effect on a gram of any given substance as a 5 gram weight has on the total mass of our earth.


The word "electronics" was born in the 20th century. There is no evidence available as to when the word was used for the first time. It could be Sir John Ambrose Fleming, one of the inventors of the electron tube in about 1902.

Even the first "Electronic Engineer" already existed in the 19th century. Fleming was listed in the 1888 edition of "Who's Who", published during the reign of Queen Victoria. The official title was "Kelly's Handbook of Titled, Landed and Official Classes". The Electronic Engineer can be found under the title "Royal Warrant Holders", that is the list of persons who had been awarded a Royal Warrant.


What was this Electronic Engineer's job? He was responsible for the correct functioning and cleanliness of the gas lamps at court. And why did he have such a splendid title? Because he knew that "electrons" in ancient Greece stood for glitter, shine, and sparkle.

Source:


"Basic Electronic Terms" ("Grundbegriffe der Elektronik") – Bosch publication (reprint from the "Bosch Zünder" (Bosch Company Newspaper)), 1988.

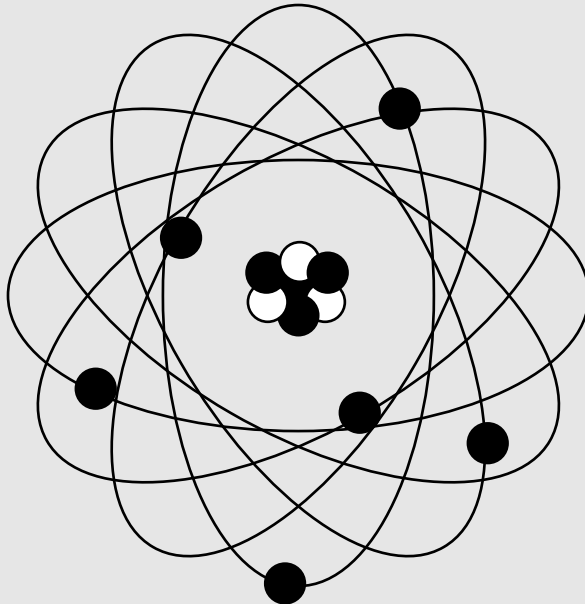


In-line fuel-injection pumps

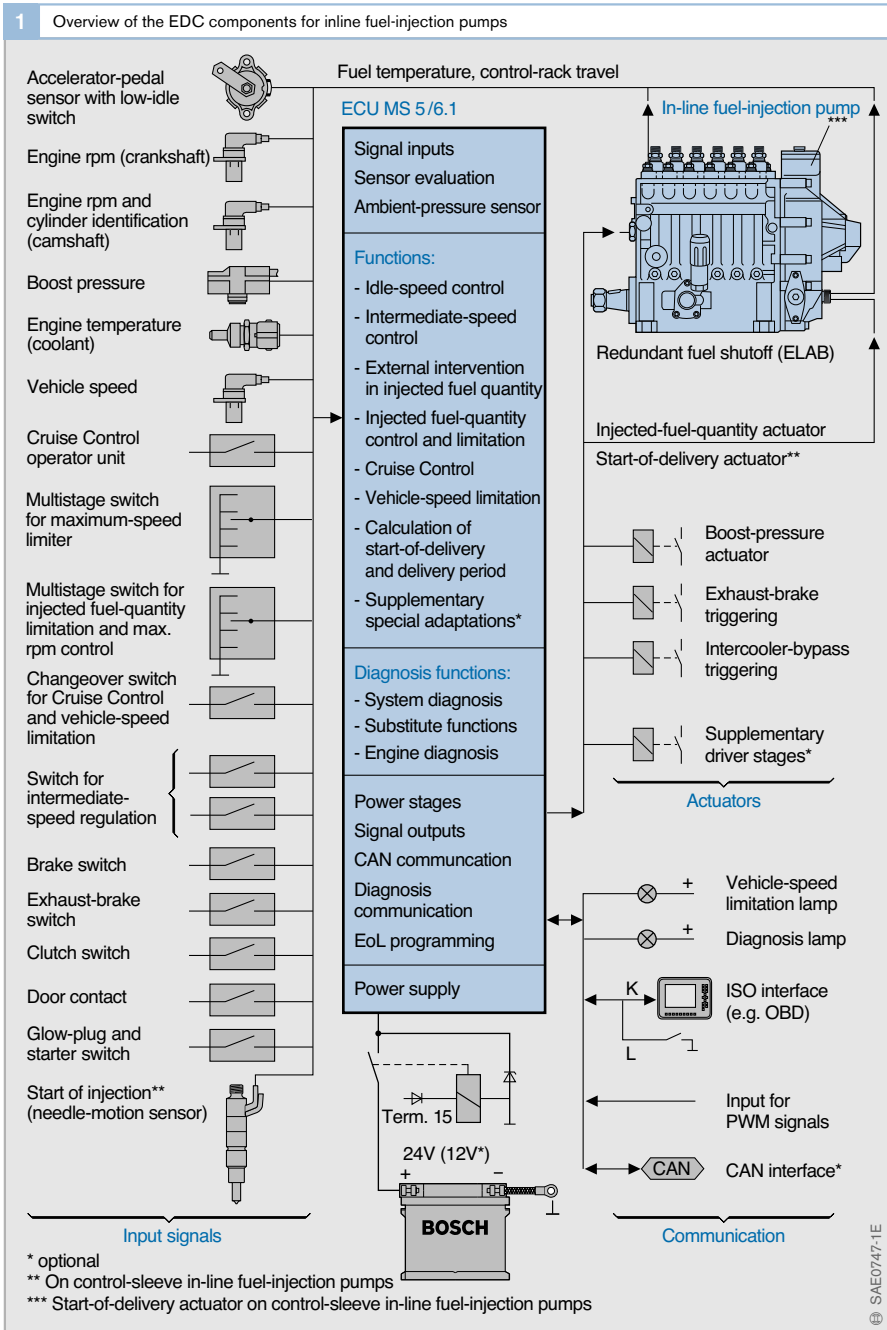

Helix and port-controlled axial-piston distributor pumps

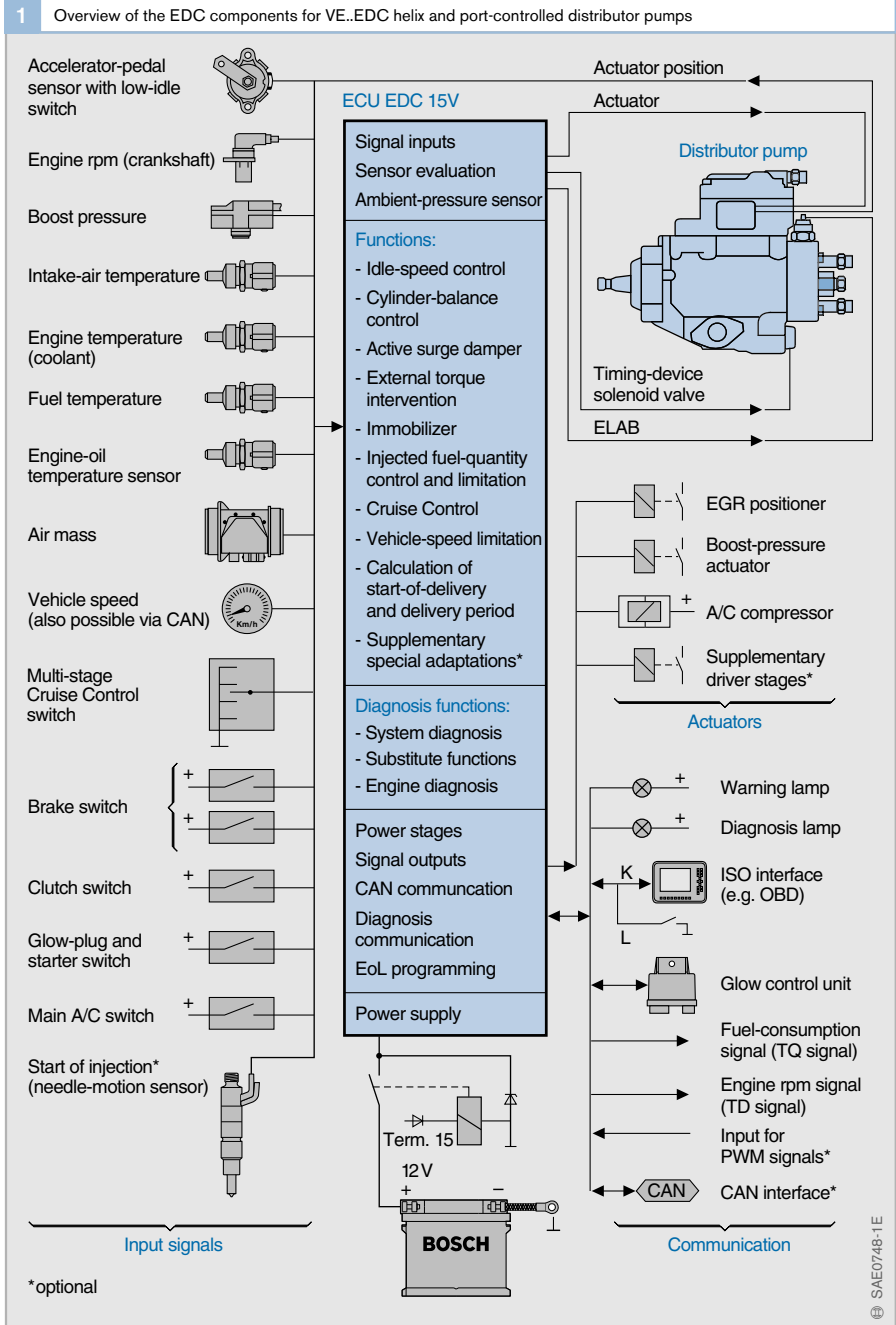


Solenoid-valve-controlled axial-piston and radial-piston distributor pumps

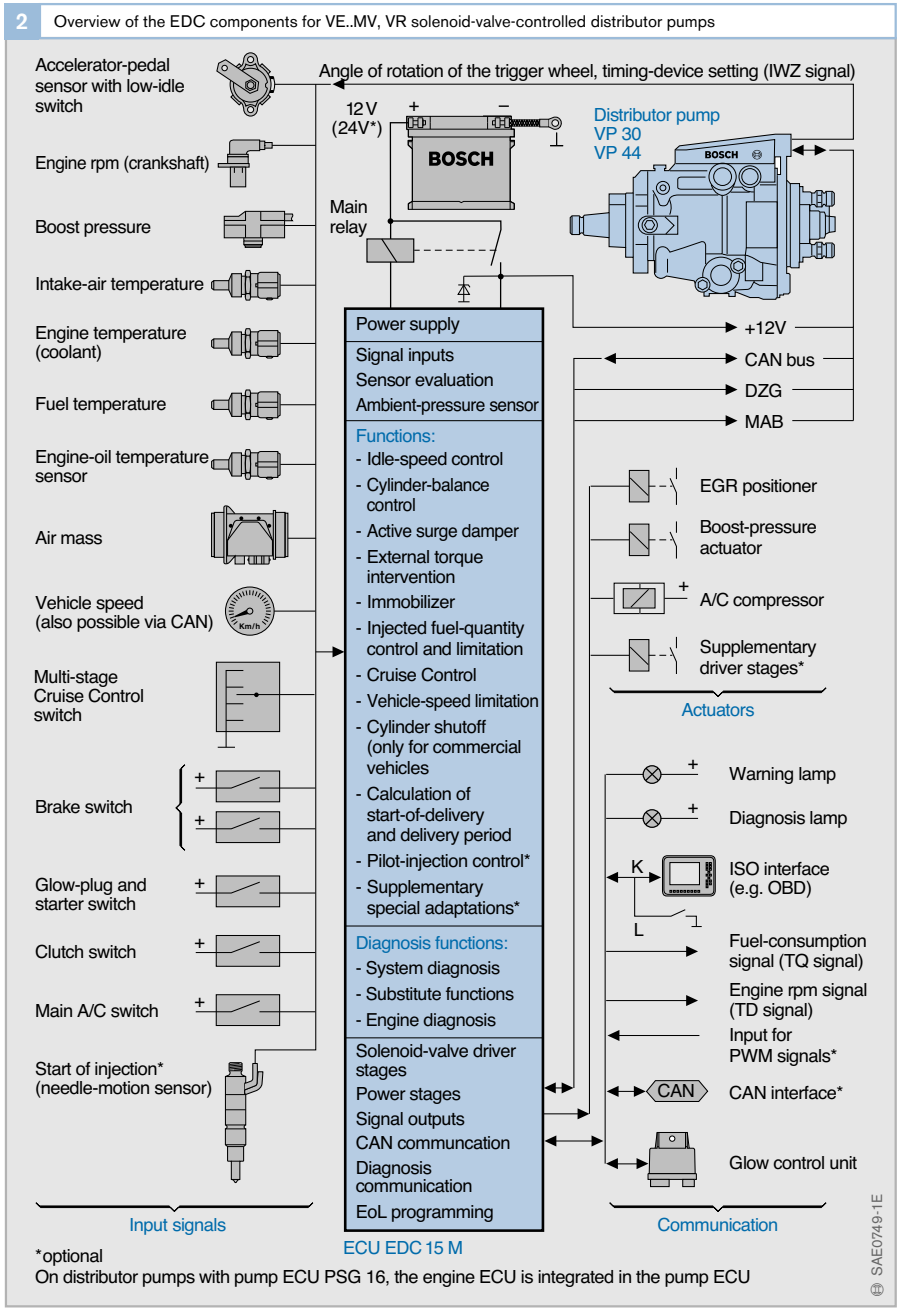


Unit Injector System (UIS) for passenger cars

1 Overview of the EDC components for Unit Injector Systems in passenger cars

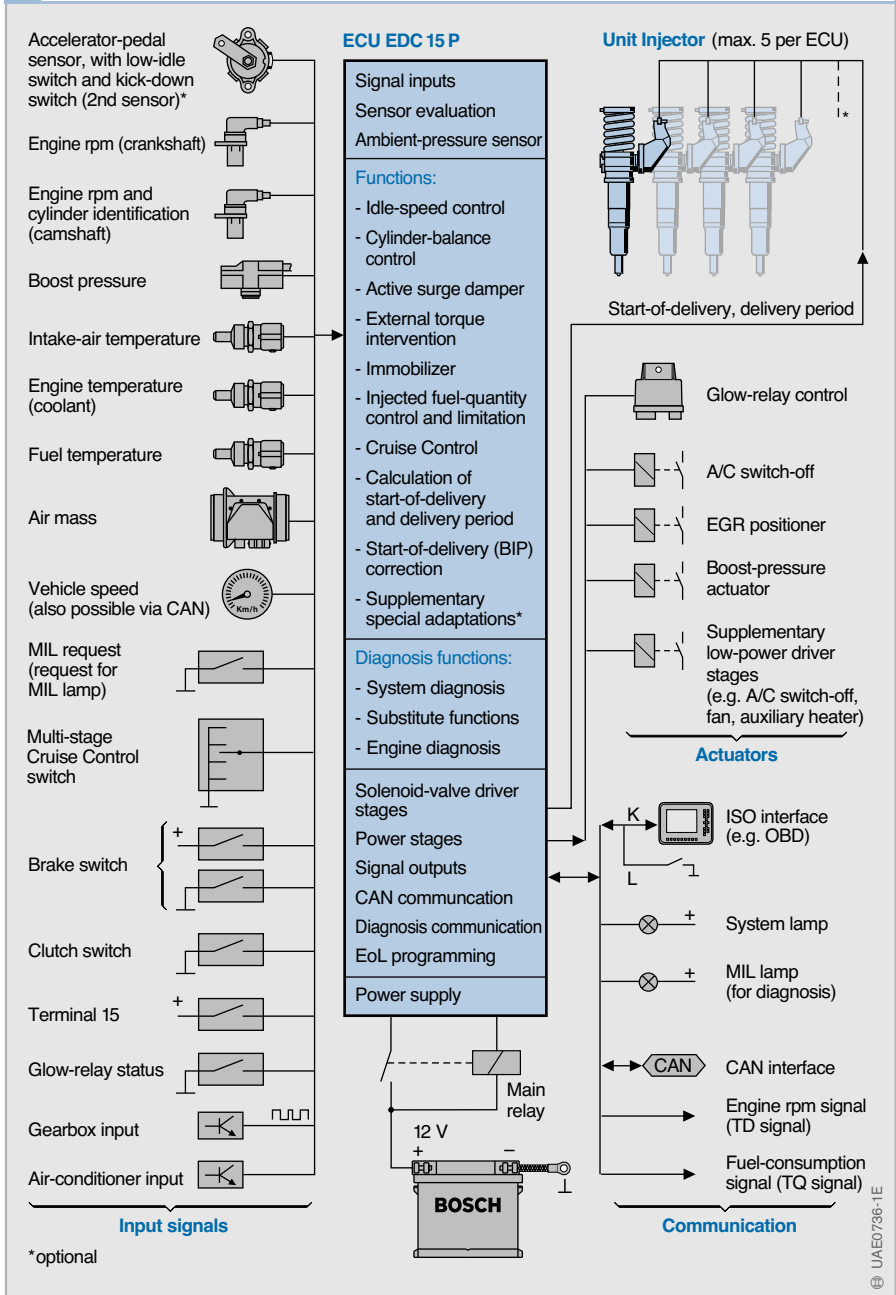


Unit Injector System (UIS) and Unit Pump System (UPS) for commercial vehicles


2 Overview of the EDC components for Unit Injector Systems (UIS) and Unit Pump Systems (UPS) in commercial vehicles

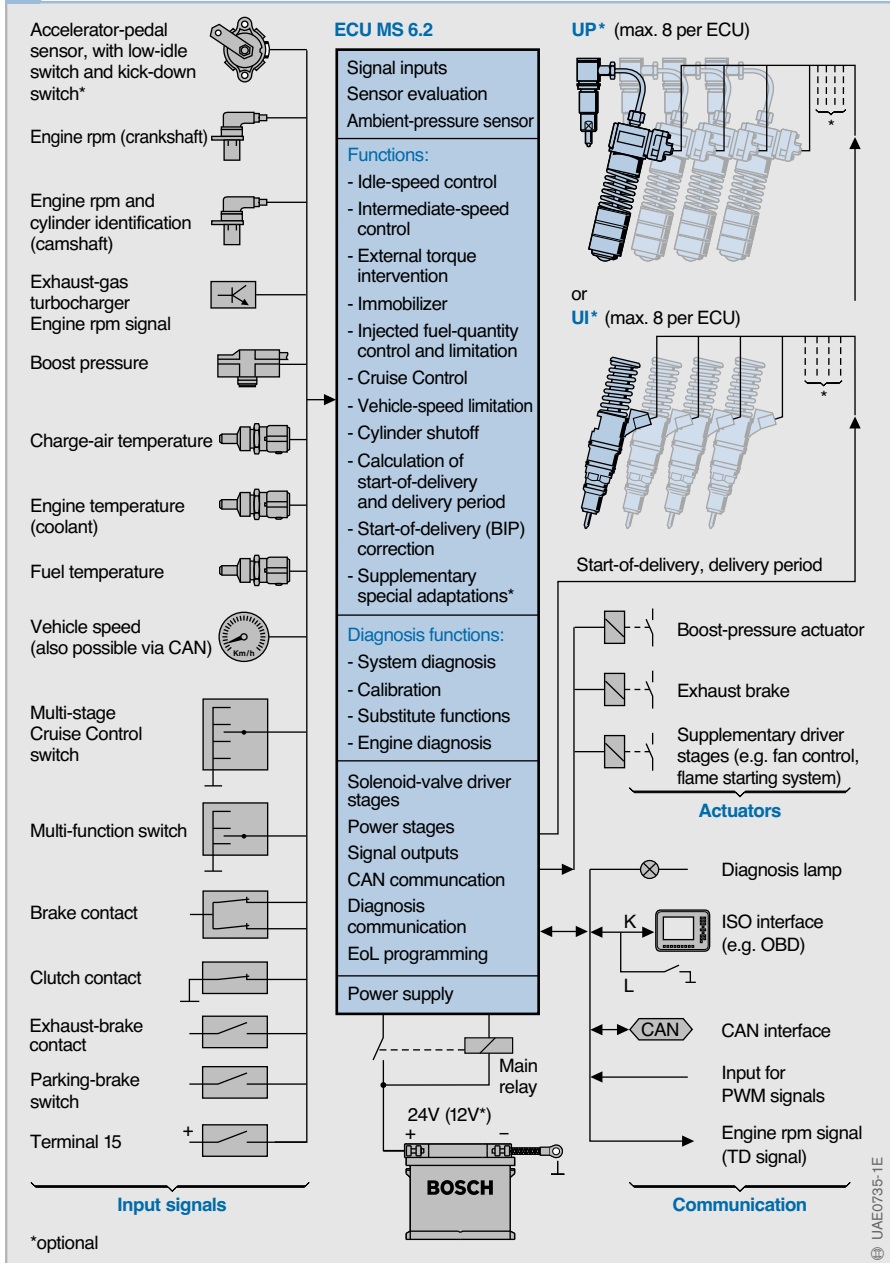

Common Rail System (CRS) for passenger cars

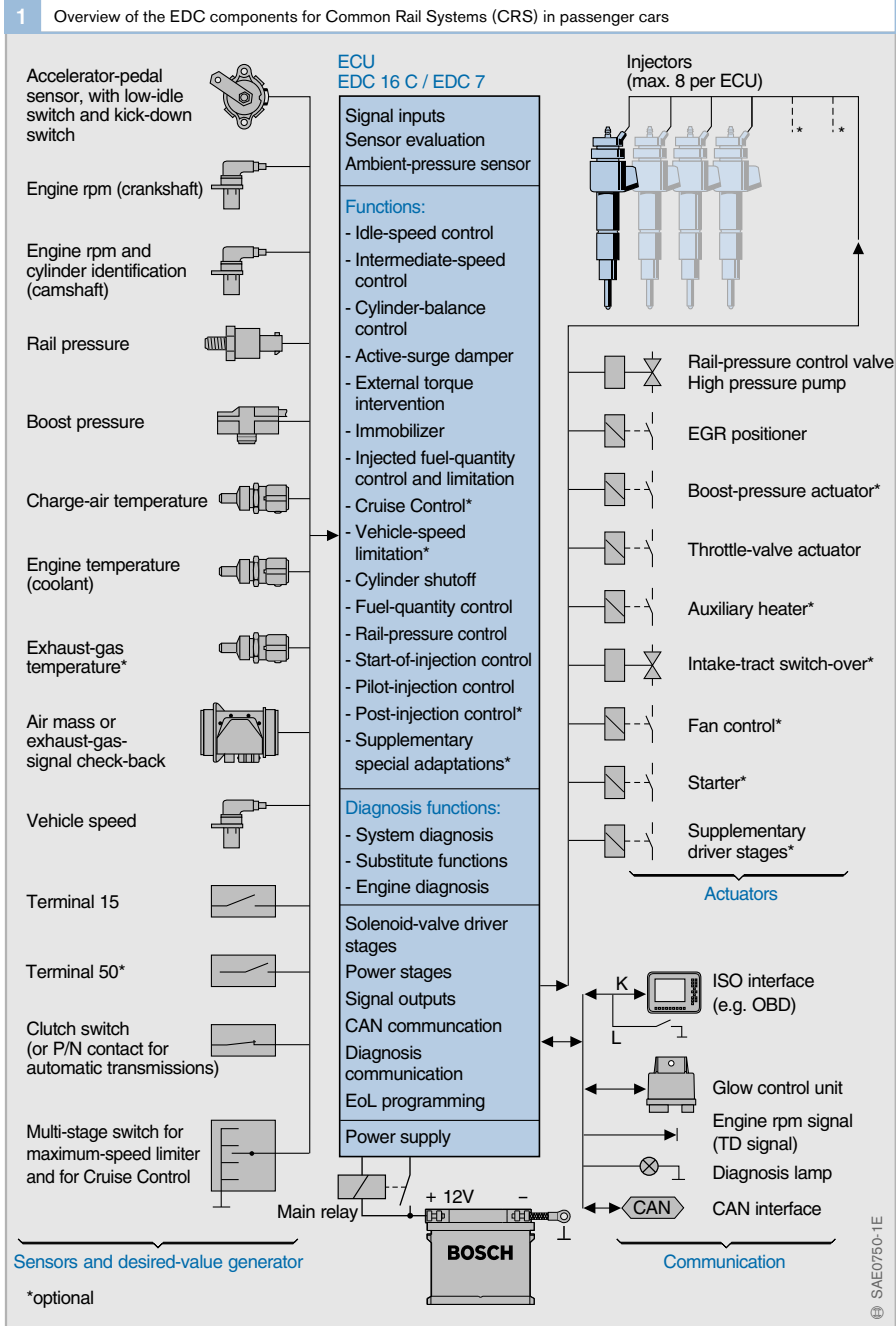

Common Rail System (CRS) for commercial vehicles

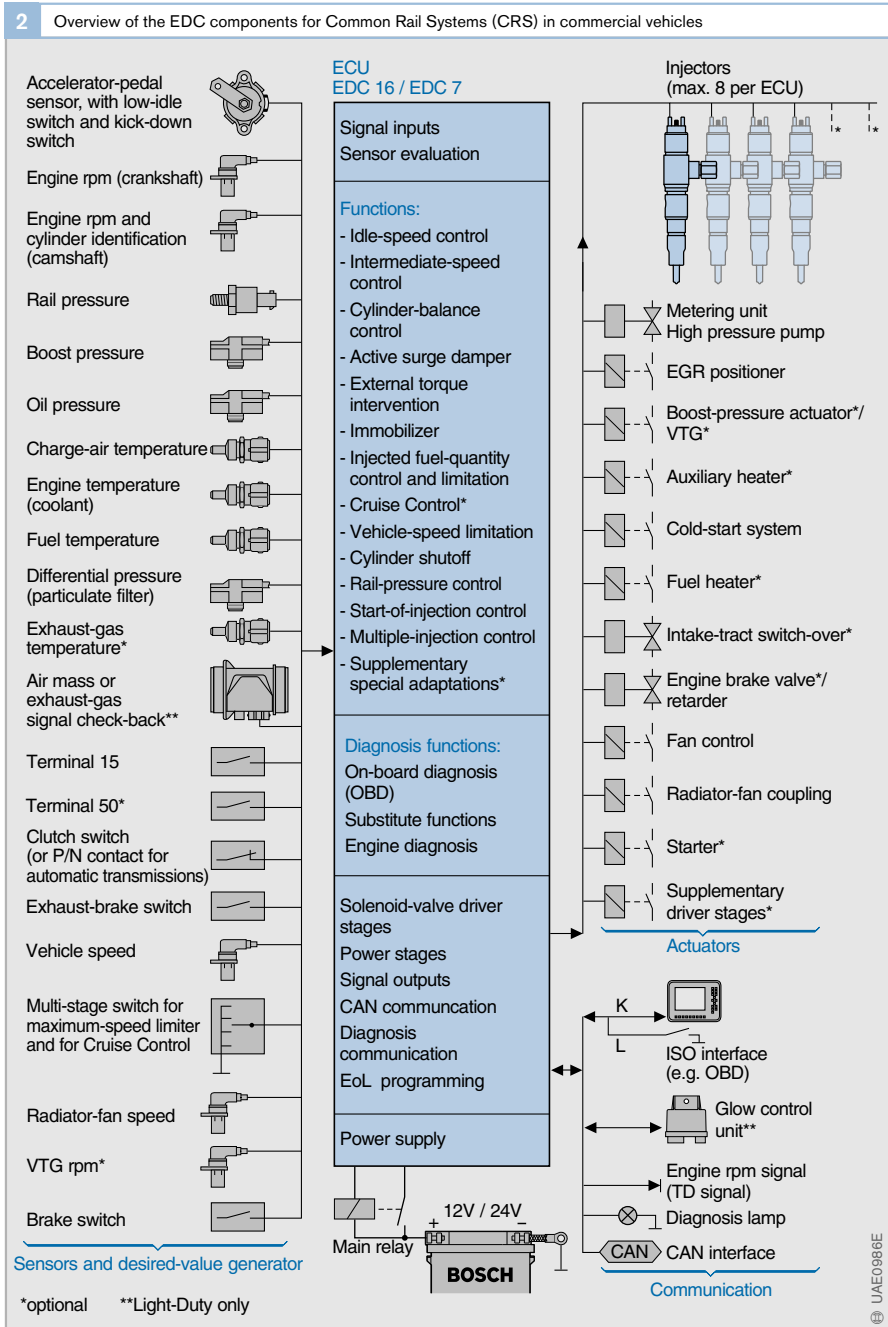


Data processing

The main function of the Electronic Diesel Control (EDC) is to control the injected fuel quantity and the injection timing. The common-rail fuel-injection system also controls injection pressure. Furthermore, on all systems, the engine ECU controls a number of actuators. For all components to operate efficiently, the EDC functions must be precisely matched to every vehicle and every engine. This is the only way to optimize component interaction (Fig. 2).


The control unit evaluates the signals sent by the sensors and limits them to the permitted voltage level. Some input signals are also checked for plausibility. Using these input data together with stored program maps, the microprocessor calculates injection timing and its duration. This information is then converted to a signal characteristic which is aligned to the engine's piston strokes. This calculation program is termed the "ECU software".

The required degree of accuracy together with the diesel engine's outstanding dynamic response requires high-level computing power. The output signals trigger output stages that supply sufficient power for the actuators (e.g. high-pressure solenoid valves for the fuel-injection system, exhaust-gas recirculation positioners, and boost-pressure actuators). Apart from this, a number of other auxiliary-function components (e.g. glow relay and air-conditioning system) are triggered.

Faulty signal characteristics are detected by output-stage diagnostic functions for the solenoid valves. Furthermore, signals are exchanged with other systems in the vehicle via the interfaces. The engine ECU monitors the complete fuel-injection system as part of a safety strategy.

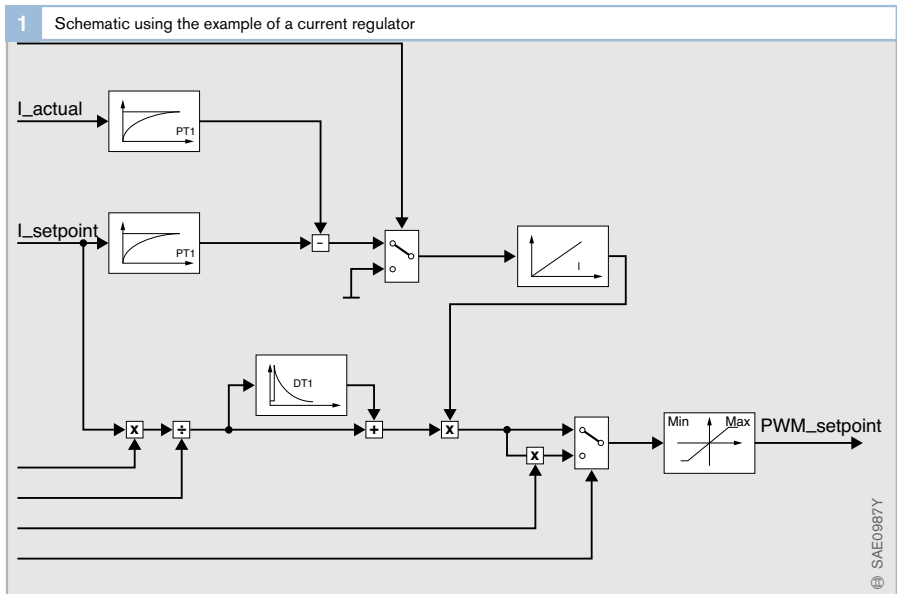

2 Electronic Diesel Control (EDC): Basic sequence

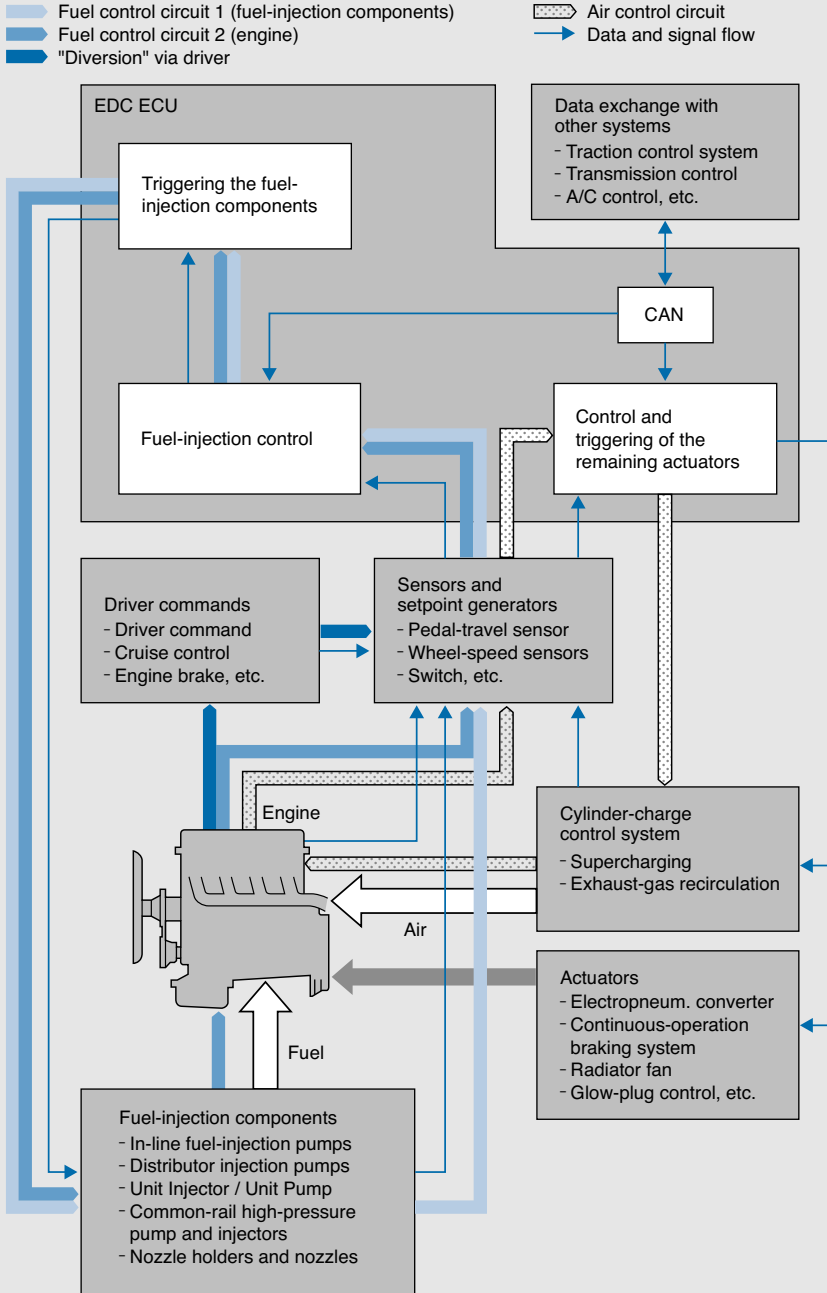

Fuel-injection control

An overview of the various control functions which are possible with the EDC control units is given in Table 1. Fig. 1 opposite shows the sequence of fuel-injection calculations with all functions, a number of which are special options. These can be activated in the ECU by the workshop when retrofit equipment is installed.

In order that the engine can run with optimal combustion under all operating conditions, the ECU calculates exactly the right injected fuel quantity for all conditions. Here, a number of parameters must be taken into account. On a number of solenoid-valve-controlled distributor pumps, the sol-enoid valves for injected fuel quantity and start of injection are triggered by a separate pump ECU (PSG).

| 1 EDC variants for road vehicles: Overview of functions | | | | | |
|---|-------------------------|--|---|---|--------------------|
| Fuel-injection system | In-line injection pumps | Helix-controlled distributor injection pumps | Solenoid-valve-controlled distributor injection pumps | Unit Injector System and Unit Pump System | Common Rail System |
| | PE | VE-EDC | VE-M, VR-M | UIS, UPS | CR |
| Function | | | | | |
| Injected-fuel-quantity limitation | ● | ● | ● | ● | ● |
| External torque intervention | ● ³ | ● | ● | ● | ● |
| Vehicle-speed limitation | ● ³ | ● | ● | ● | ● |
| Vehicle-speed control (Cruise Control) | ● | ● | ● | ● | ● |
| Altitude compensation | ● | ● | ● | ● | ● |
| Boost-pressure control | ● | ● | ● | ● | ● |
| Idle-speed control | ● | ● | ● | ● | ● |
| Intermediate-speed control | ● ³ | ● | ● | ● | ● |
| Active surge damping | ● ² | ● | ● | ● | ● |
| BIP control | – | – | ● | ● | – |
| Intake-tract switch-off | – | – | ● | ● ² | ● |
| Electronic immobilizer | ● ² | ● | ● | ● | ● |
| Controlled pilot injection | – | – | ● | ● ² | ● |
| Glow control | ● ² | ● | ● | ● ² | ● |
| A/C switch-off | ● ² | ● | ● | ● | ● |
| Auxiliary coolant heating | ● ² | ● | ● | – | ● |
| Cylinder-balance control | ● ² | ● | ● | ● | ● |
| Control of injected fuel quantity compensation | ● ² | – | ● | ● | ● |
| Fan (blower) triggering | – | ● | ● | ● | ● |
| EGR control | ● ² | ● | ● | ● ² | ● |
| Start-of-injection control with sensor | ● ^{1,3} | ● | ● | – | – |
| Cylinder shutoff | – | – | ● ³ | ● ³ | ● ³ |

Table 1

- 1 Only control-sleeve in-line injection pumps
 2 Passenger cars only
 3 Commercial vehicles only

1 Calculation of fuel-injection process in the ECU

Inputs



Accelerator-pedal sensor
(driver input)

Vehicle-speed controller
(Cruise Control),
vehicle-speed limiter



Inputs from
other systems
(e.g. ABS, TCS, ESP)

Calculations



External torque intervention

Selection of the required
injected fuel quantity



Idle-speed controller,
or controller for injected-fuel-
quantity compensation

Injected-fuel-quantity limit



Smooth-running controller

Active surge damper



Start quantity

Start Drive mode
Switch



Control of start of injection,
and/or start of delivery


Fuel-quantity metering
(pump map)

Triggering

Timing-device
triggering

Solenoid-valve
triggering

Pump ECU
triggering

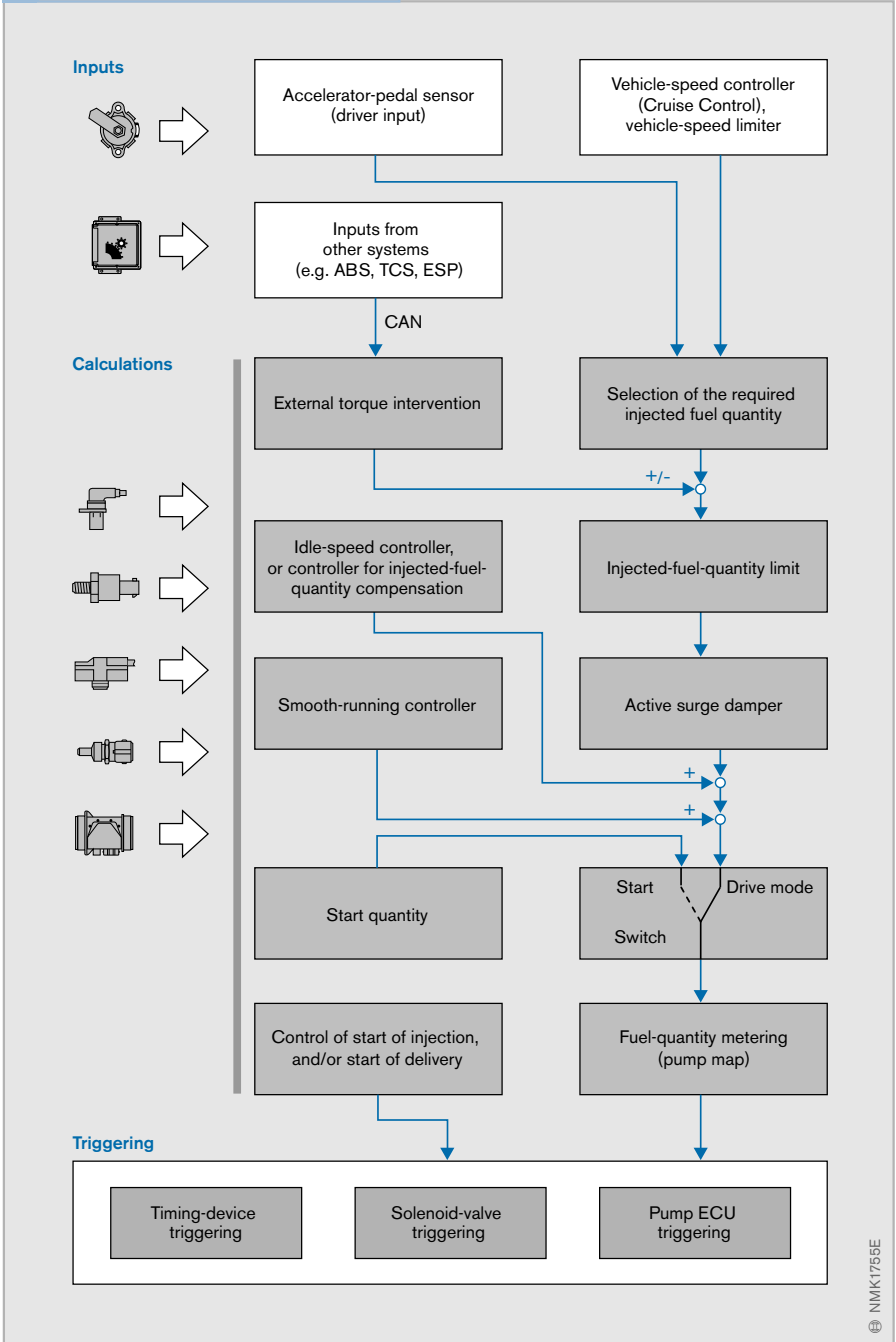

Start quantity

For starting, the injected fuel quantity is calculated as a function of coolant temperature and cranking speed. Start-quantity signals are generated from the moment the starting switch is turned (Fig. 1, switch in “Start” position) until a given minimum engine speed is reached.

The driver cannot influence the start quantity.

Drive mode

When the vehicle is being driven normally, the injected fuel quantity is a function of the accelerator-pedal setting (accelerator-pedal sensor) and of the engine speed (Fig. 1, switch in “Drive” position). Calculation depends upon maps which also take other influences into account (e.g. fuel and intake-air temperature). This permits best-possible alignment of the engine’s output to the driver’s wishes.

Idle-speed control

The function of idle speed control (LLR) is to regulate a specific setpoint speed at idle when the accelerator pedal is not operated. This can vary depending on the engine’s particular operating mode. For instance, with the engine cold, the idle speed is usually set higher than when it is hot. There are further instances when the idle speed is held somewhat higher. For instance, when the vehicle’s electrical-system voltage is too low, when the air-conditioning system is switched on, or when the vehicle is freewheeling. When the vehicle is driven in stop-and-go traffic, together with stops at traffic lights, the engine runs a lot of the time at idle. Considerations concerning emissions and fuel consumption dictate, therefore, that idle speed should be kept as low as possible. This, of course, is a disadvantage with respect to smooth-running and pulling away.

When adjusting the stipulated idle speed, the idle-speed control must cope with heavily fluctuating requirements. The input power needed by the engine-driven auxiliary equipment varies considerably.

At low electrical-system voltages, for instance, the alternator consumes far more power than it does when the voltages are higher. In addition, the power demands from the A/C compressor, the steering pump, and the high-pressure generation for the diesel injection system must all be taken into account. Added to these external load moments is the engine’s internal friction torque which is highly dependent on engine temperature, and must also be compensated for by the idle-speed control.

In order to regulate the desired idle speed, the controller continues to adapt the injected fuel quantity until the actual engine speed corresponds to the desired idle speed.

Maximum-rpm control

The maximum-rpm control ensures that the engine does not run at excessive speeds. To avoid damage to the engine, the engine manufacturer stipulates a permissible maximum speed which may only be exceeded for a very brief period.

Above the rated-power operating point, the maximum-speed governor reduces the injected fuel quantity continuously, until just above the maximum-speed point when fuel-injection stops completely. In order to prevent engine surge, a ramp function is used to ensure that the drop-off in fuel injection is not too abrupt. This is all the more difficult to implement, the closer the nominal performance point and maximum engine speed are to each other.

Intermediate-speed control

Intermediate-speed control (ZDR) is used on commercial vehicles and light-duty trucks with power take-offs, e.g. crane), or for special vehicles (e.g. ambulances with a power generator). With the control in operation, the engine is regulated to a load-independent intermediate speed.

With the vehicle stationary, the intermediate-speed control is activated via the cruise-control operator unit. A fixed rotational speed can be called up from the data store at the push of a button. In addition, this operator unit can be used for preselecting specific engine speeds. The intermediate-speed control is also applied on passenger cars with automated transmissions (e.g. Tiptronic) to control the engine speed during gearshifts.

Vehicle-speed controller (cruise control)

Cruise control allows the vehicle to be driven at a constant speed. It controls the vehicle speed to the speed selected by the driver without him/her needing to press the accelerator pedal. The driver can set the required speed either by operating a lever or by pressing buttons on the steering wheel. The injected fuel quantity is either increased or decreased until the desired (set) speed is reached.

On some cruise-control applications, the vehicle can be accelerated beyond the current set speed by pressing the accelerator pedal. As soon as the accelerator pedal is released, cruise control regulates the speed back down to the previously set speed.

If the driver depresses the clutch or brake pedal while cruise control is activated, control is terminated. On some applications, the control can be switched off by the accelerator pedal.

If cruise control has been switched off, the driver only needs to shift the lever to the restore position to reselect the last speed setting.

The operator controls can also be used for a step-by-step change of the selected speed.

Vehicle-speed limiter

Variable limitation

Vehicle-speed limitation (FGB, also called the limiter) limits the maximum speed to a set value, even if the driver continues to depress the accelerator pedal. On very quiet vehicles, where the engine can hardly be heard, this is a particular help for the driver who can no longer exceed speed limits inadvertently.

The vehicle-speed limiter keeps the injected fuel quantity down to a limit corresponding to the selected maximum speed. It can be deactivated by pressing the lever or depressing the kickdown switch. In order to reselect the last speed setting, the driver only needs to press the lever to the restore position.

The operator controls can also be used for a step-by-step change of the selected speed.

Fixed limitation

In a number of countries, fixed maximum speeds are mandatory for certain classes of vehicles (for instance, for heavy trucks). Vehicle manufacturers also limit the maximum speeds of their heavy vehicles by installing a fixed speed limit which cannot be deactivated.

In the case of special vehicles, the driver can also select from a range of fixed, programmed speed limits (for instance, when workers are standing on the platform of a garbage truck).

Active-surge damping

Sudden engine-torque changes excite the vehicle's drivetrain, which, as a result, goes into bucking oscillation. These oscillations are perceived by the vehicle's occupants as unpleasant periodic changes in acceleration (Fig. 2, a). The function of the active-surge damper (ARD) is to reduce these changes in acceleration (b).

Two different methods are used:

- In case of sudden changes in the torque required by the driver (through the accelerator pedal), a precisely matched filter function reduces drivetrain excitation (1).
- The speed signals are used to detect drivetrain oscillations which are then damped by an active control. In order to counteract the drivetrain oscillations (2), the active control reduces the injected fuel quantity when rotational speed increases, and increases it when speed drops.

Smooth-running control (SRC)/ Control of injected-fuel-quantity compensation (MAR)

Presuming a constant injection duration, not all of the engine's cylinders generate the same torque. This can be due to differences in cylinder-head sealing, as well as differences in cylinder friction, and hydraulic-injection components. These differences in torque output lead to rough engine running and an increase in exhaust-gas emissions.

Smooth-running control (LRR) or fuel-balancing control (MAR) have the function of detecting these differences based on the resulting fluctuations in engine speed, and to compensate by adjusting the injected fuel quantity in the cylinder affected. Here, the rotational speed at a given cylinder after injection is compared to a mean speed. If the particular cylinder's speed is too low, the injected fuel quantity is increased; if it is too high, the fuel quantity is reduced (Fig. 3).


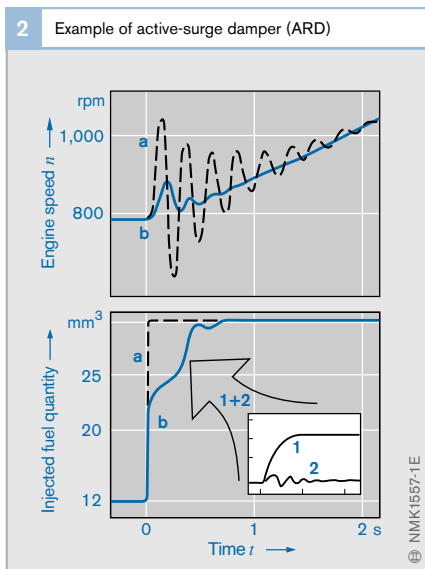


Fig. 2

- a Without active-surge damper
b With active-surge damper
1 Filter function
2 Active correction

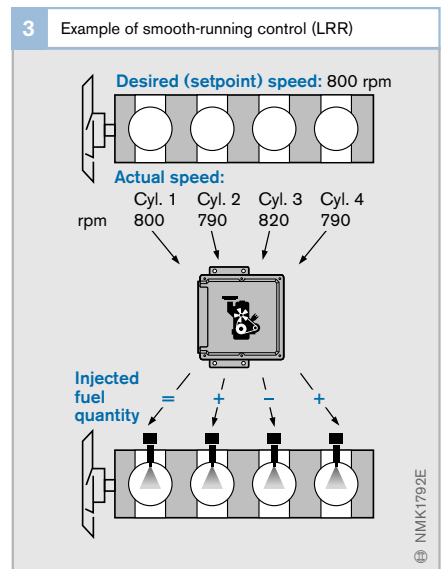

Smooth-running control is a convenience feature. Its primary object is to ensure that the engine runs smoothly at near-idle. The injected-fuel-quantity compensation function is aimed at not only improving comfort at idle, but also at reducing exhaust-gas emissions in the medium-speed ranges by ensuring identical injected fuel quantities for all cylinders.

On commercial vehicles, smooth-running control is also known as the AZG (adaptive cylinder equalization).

Injected-fuel-quantity limit

There are a number of reasons why the fuel quantity actually required by the driver, or that which is physically possible, should not always be injected. The injection of such fuel quantities could have the following effects:

- Excessive exhaust-gas emissions
- Excessive soot
- Mechanical overloading due to high torque or excessive engine speed
- Thermal overloading due to excessive temperatures of the exhaust gas, coolant, oil, or turbocharger
- Thermal overloading of the solenoid valves if they are triggered too long

To avoid these negative effects, a number of input variables (for instance, intake-air quantity, engine speed, and coolant temperature) are used to generate this limitation figure. The result is that the maximum injected fuel quantity is limited and with it the maximum torque.

Engine-brake function

When a truck's engine brake is applied, the injected fuel quantity is either reduced to zero, or the idle fuel quantity is injected. For this purpose, the ECU detects the position of the engine-brake switch.

Altitude compensation

Atmospheric pressure drops as altitude increases so that the cylinder is charged with less combustion air. This means that the injected fuel quantity must be reduced accordingly, otherwise excessive soot will be emitted.

In order that the injected fuel quantity can be reduced at high altitudes, the atmospheric pressure is measured by the ambient-pressure sensor in the ECU. This reduces the injected fuel quantity at higher elevations. Atmospheric pressure also has an effect on boost-pressure control and torque limitation.

Cylinder shutoff

If less torque is required at high engine speeds, very little fuel needs to be injected. As an alternative, cylinder shutoff can be applied to reduce torque. Here, half of the injectors are switched off (commercial-vehicle UIS, UPS, and CRS). The remaining injectors then inject correspondingly more fuel which can be metered with even higher precision.

When the injectors are switched on and off, special software algorithms ensure smooth transitions without noticeable torque changes.

Injector delivery compensation

New functions are added to common-rail (CR) and UIS/UPS systems to enhance the high precision of the fuel-injection system further, and ensure them for the service life of the vehicle.

With injector delivery compensation (IMA), a mass of measuring data is detected for each injector during the injector manufacturing process. The data is then affixed to the injector in the form of a data-matrix code. With piezo-inline injectors, data on lift response is included. This data is transferred to the ECU during vehicle production. While the engine is running, these values are used to compensate for deviations in metering and switching response.

Zero delivery calibration

The reliable mastery of small pre-injection events for the service life of the vehicle is vitally important to achieve the required level of comfort (through reduced noise) and exhaust-gas emission targets. There must be some form of compensation for fuel-quantity drifts in the injectors. For this reason, a small quantity of fuel is injected in one cylinder in overrun conditions in second- and third-generation CR systems. The wheel-speed sensor detects the resulting torque increase as a minor dynamic change in engine speed. This increase in torque, which remains imperceptible to the driver, is clearly linked to the injected fuel quantity. The process is then repeated for all cylinders and at various operating points. A teach-in algorithm detects minor changes in pre-injection quantity and corrects the injector triggering period accordingly for all pre-injection events.

Average delivery adaption

The deviation of the actually injected fuel quantity from the setpoint value is required to adapt exhaust-gas recirculation and charge-air pressure correctly. The average delivery adaption (MMA), therefore determines the average value of the injected fuel quantity for all cylinders from the signals received from the lambda oxygen sensor and the air-mass sensor. Correction values are then calculated from the setpoint and actual values (see “Lambda closed-loop control for passenger-car diesel engines”).

The MMA teach-in function ensures a constant level of favorable exhaust-gas emission values in the lower part-load range for the service life of the vehicle.

Pressure-wave correction

Injection events trigger pressure waves in the line between the nozzle and the fuel rail in all CR systems. These pressure pulses affect systematically the injected fuel quantity of later injection events (pre-injection/main injection/secondary injection) within a combustion cycle. The deviations of later injection events are dependent on the fuel quantity previously injected, the time interval between injection events, rail pressure, and fuel temperature. The control unit can calculate a correction factor by including these parameters in suitable compensation algorithms.

However, extremely high application resources are required for this correction function. The benefit is the possibility of flexibly adjusting the interval between pre-injection and main injection, for example, in order to optimize combustion.

Injector delivery compensation

Functional description

Injector delivery compensation (IMA) is a software function to make fuel quantity metering more precise and increase injector efficiency on the engine. The feature has the function of correcting injected fuel quantity to the setpoint value over the entire program map individually for every injector in a CR system. This reduces system tolerances and exhaust-gas emission spread. The compensation values required for IMA represent the difference from the setpoint value of each factory test point, and are inscribed on each injector in encoded form.

The entire engine environment is corrected by means of a correction program map that uses compensation values to calculate a correction quantity. At the end of the line of the car assembly plant, the EDC compensation values belonging to the injectors fitted and their cylinder assignment are programmed in the electronic control unit using EOL programming. The compensation values are also re-programmed when an injector is replaced at the customer service workshop.

Necessity for this function

The technical resources required for a further restriction of the manufacturing tolerances for injectors rise exponentially and appear to be financially unprofitable. IMA is a viable solution to increase efficiency, enhance the metering precision of fuel quantity injected in the engine, and reduce exhaust-gas emissions.

Measured values in testing

The end-of-line test measures every injector at several points that are representative for the spread of the particular injector type. Deviations from setpoint values at these points (compensation values) are calculated and then inscribed on the injector head.

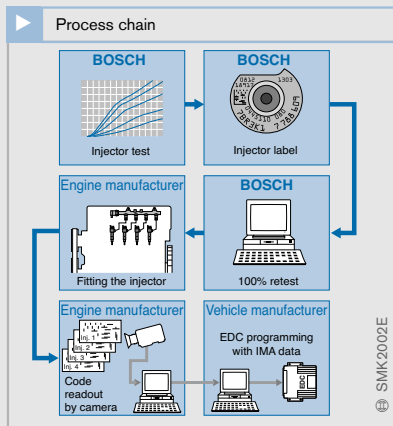
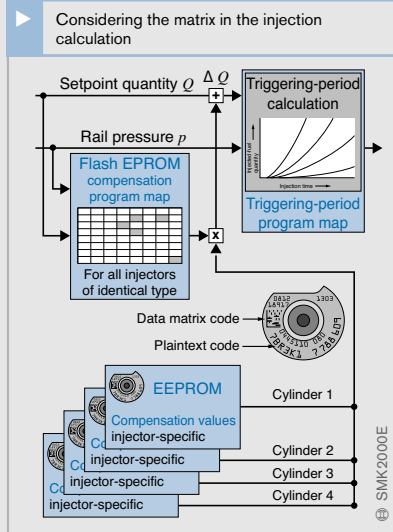
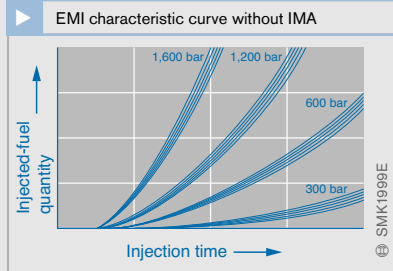


Fig. 1 Curves of various injectors as a function of rail pressure. IMA reduces curve spread. EMI Injected-fuel-quantity indicator

Fig. 2 Calculation of injector triggering period based on setpoint quantity, rail pressure, and correction values

Fig. 3 Schematic of process chain from injector delivery compensation at Bosch through to end-of-line programming at the vehicle manufacturer's plant

Start-of-injection control

The start of injection has a critical effect on power output, fuel consumption, noise, and emissions. The desired value for start of injection depends on engine speed and injected fuel quantity, and it is stored in the ECU in special maps. Adaptation is possible as a function of coolant temperature and ambient pressure.

Tolerances in manufacture and in the pump mounting on the engine, together with changes in the solenoid valve during its lifetime, can lead to slight differences in the solenoid-valve switching times which in turn lead to different starts of injection. The response behaviour of the nozzle-and-holder assembly also changes over the course of time. Fuel density and temperature also have an effect upon start of injection. This must be compensated for by some form of control strategy in order to stay within the prescribed emissions limits. The following closed-loop controls are employed (Table 2):

Closed-loop control using the needle-motion sensor

The inductive needle-motion sensor is fitted in an injection nozzle (reference nozzle, usually cylinder 1). When the needle opens (and closes) the sensor transmits a pulse (Fig. 4). The needle-opening signal is used by the ECU as confirmation of the start of injection. This means that inside a closed control loop the start of injection can be precisely aligned to the desired value for the particular operating point.

The needle-motion sensor’s untreated signal is amplified and interference-suppressed before being converted to precision square-wave pulses which can be used to mark the start of injection for a reference cylinder.

The ECU controls the actuator mechanism for the start of injection (for in-line pumps the solenoid actuator, and for distributor pumps the timing-device solenoid valve) so that the actual start of injection always corresponds to the desired/setpoint start of injection.


Table 2

| 2 Start-of-injection control | | | |
|---|------------------------------------|---------------------------|-------------|
| Closed-loop control | Control using needle-motion sensor | Start-of-delivery control | BIP control |
| Injection system | | | |
| In-line injection pumps | ● | – | – |
| Helix-controlled distributor pumps | ● | – | – |
| Solenoid-valve-controlled distributor pumps | ● | ● | – |
| Common Rail | – | – | – |
| Unit Injector/Unit Pump | – | – | ● |

Fig. 4

- 1 Untreated signal from the needle-motion sensor (NBF),
- 2 Signal derived from the NBF signal,
- 3 Untreated signal from the inductive engine-speed sensor
- 4 Signal derived from untreated engine-speed signal,
- 5 Evaluated start-of-injection signal

The start-of-injection control is not needed with the Common Rail System, since the high-voltage triggering used in the CRS permits highly reproducible starts of injection.

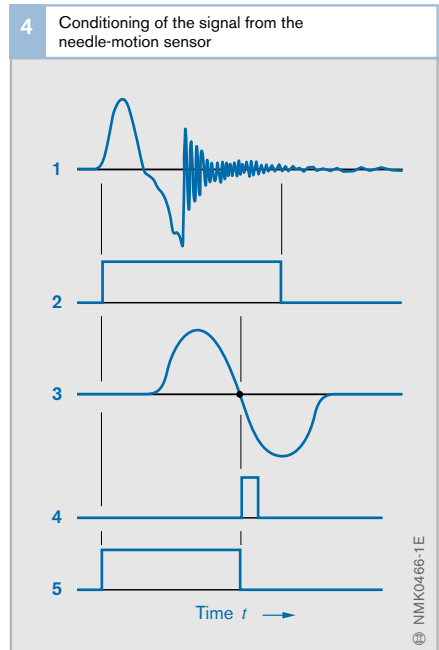

The start-of-injection signal can only be evaluated when fuel is being injected and when the engine speed is stable. During starting and overrun (no fuel injection), the needle-motion sensor cannot provide a signal which is good enough for evaluation. This means that the start-of-injection control loop cannot be closed because there is no signal available confirming the start-of-injection.

In-line fuel-injection pumps

On in-line pumps, a special digital current controller improves the control's accuracy and dynamic response by aligning the current to the start-of-injection controller's setpoint value practically without any delay at all.

In order to ensure start-of-injection accuracy in open-loop-controlled operation too, the start-of-delivery solenoid in the control-sleeve actuator mechanism is calibrated to compensate for the effects of tolerances. The current controller compensates for the effects of the temperature-dependent solenoid-winding resistance. All these measures ensure that the setpoint value for current as derived from the start map leads to the correct stroke of the start-of-delivery solenoid and to the correct start of injection.

Start-of-delivery control using the incremental angle/time signal (IWZ)

On the solenoid-valve-controlled distributor pumps (VP30, VP44), the start of injection is also very accurate even without the help of a needle-motion sensor. This high level of accuracy was achieved by applying positioning control to the timing device inside the distributor pump. This form of closed-loop control serves to control the start of delivery and is referred to as start-of-delivery control. Start of delivery and start of injection have a certain relationship to each other and this is stored in the so-called *wave-propagation-time map* in the engine ECU.

The signal from the crankshaft-speed sensor and the signal from the incremental angle/time system (IWZ signal) inside the pump, are used as the input variables for the timing-device positioning control.

The IWZ signal is generated inside the pump by the rotational-speed or angle-of-rotation sensor (1) on the trigger wheel (2) attached to the driveshaft. The sensor shifts along with the timing device (4) which, when it changes position, also changes the position of the tooth gap (3) relative to the TDC pulse of the crankshaft-speed sensor. The angle between the tooth gap, or the synchronization pulse generated by the tooth gap, and the TDC pulse is continually registered by the pump ECU and compared with the stored reference value. The difference between the two angles represents the timing device's actual position, and this is continually compared with its setpoint/desired position. If the timing-device position deviates, the triggering signal for the timing-device solenoid valve is changed until actual and setpoint position coincide with each other.

Since all cylinders are taken into account, the advantage of this form of start-of-delivery control lies in the system's rapid response. It has a further advantage in that it also functions during overrun when no fuel injection

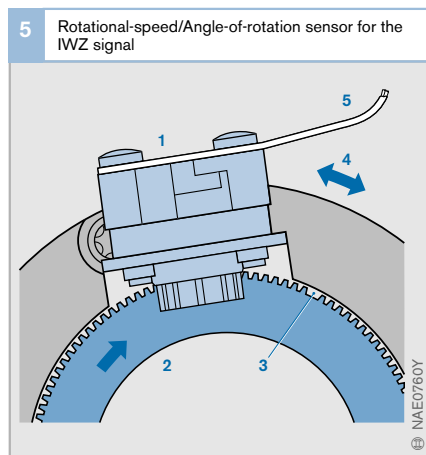


Fig. 5

- 1 Rotational-speed/angle-of-rotation sensor inside the injection pump
- 2 Trigger wheel
- 3 Trigger-wheel tooth gap
- 4 Shift due to timing device
- 5 Electrical plug-in connection

takes place which means that the timing device can be preset for when the next injection event occurs.

In case even more severe demands are made on the accuracy of the start of injection, the start-of-delivery control can have an optional start-of-injection control with needle-motion sensor superimposed upon it.

BIP control

BIP control is used with the solenoid-valve-controlled Unit Injector System (UIS) and Unit Pump System (UPS). The start of delivery – or BIP (Begin of Injection Period) – is defined as the instant in time in which the solenoid closes. As from this point, pressure buildup starts in the pump high-pressure chamber. The nozzle opens as soon as the nozzle-opening pressure is exceeded, and injection can commence (start of injection). Fuel metering takes place between start of delivery and end of solenoid-valve triggering. This period is termed the delivery period.

Since there is a direct connection between the start of delivery and the start of injection, all that is needed for the precise control of the start of injection is information on the instant of the start of delivery.

So as to avoid having to apply additional sensor technology (for instance, a needle-motion sensor), electronic evaluation of the solenoid-valve current is used in detecting the start of delivery. Around the expected instant of closing of the solenoid valve, constant-voltage triggering is used (BIP window, Fig. 6, 1). The inductive effects when the solenoid valve closes result in the curve having a specific characteristic which is registered and evaluated by the ECU. For each injection event, the deviation of the solenoid-valve closing point from the theoretical setpoint is registered and stored, and applied for the following injection sequence as a compensation value.

If the BIP signal should fail, the ECU changes over to open-loop control.

Shutoff

The *auto-ignition* principle of operation means that in order to stop the diesel engine it is only necessary to cut off its supply of fuel.


With EDC (Electronic Diesel Control), the engine is switched off due to the ECU outputting the signal “Fuel quantity zero” (that is, the solenoid valves are no longer triggered, or the control rack is moved back to the zero-delivery setting).

There are also a number of redundant (supplementary) shutoff paths (for instance, the electrical shutoff valve (ELAB) on the port-and-helix controlled distributor pumps).

The UIS and UPS are intrinsically safe, and the worst thing that can happen is that one single unwanted injection takes place. Here, therefore, supplementary shutoff paths are not needed.

Fig. 6

- 1 BIP window
- 2 BIP signal
- 3 Level of pickup current
- 4 Holding-current level

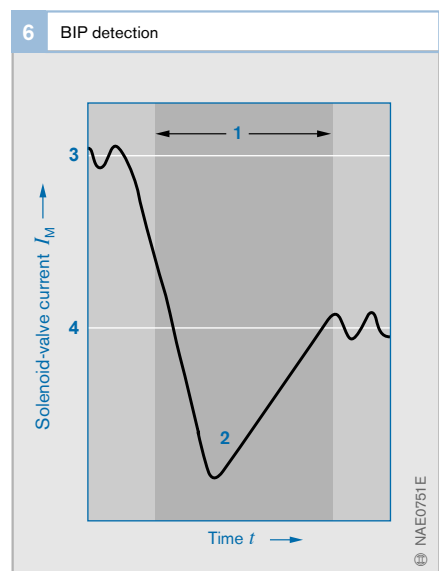

Further special adaptations

In addition to those described here, EDC permits a wide range of other functions. For instance, these include:

Drive recorder

On commercial vehicles, the Drive Recorder is used to record the engine's operating conditions (for instance, how long was the vehicle driven, under what temperatures and loads, and at what engine speeds). This data is used in drawing up an overview of operational conditions from which, for instance, individual service intervals can be calculated.

Special application engineering for competition trucks

On race trucks, the 160 km/h maximum speed may be exceeded by no more than 2 km/h. On the other hand, this speed must be reached as soon as possible. This necessitates special adaptation of the ramp function for the vehicle-speed limiter.

Adaptations for off-highway vehicles

Such vehicles include diesel locomotives, rail cars, construction machinery, agricultural machinery, boats and ships. In such applications, the diesel engine(s) is/are far more often run in the full-load range than is the case with road vehicles (90% full-load operation compared with 30%). The power output of such engines must therefore be reduced in order to ensure an adequate service life.

The mileage figures which are often used as the basis for the service interval on road vehicles are not available for such equipment as agricultural or construction machinery, and in any case if they were available they would have no useful significance. Instead, the Drive Recorder data is used here.

Racing trucks

The diesel engines and fuel-injection systems for trucks tuned for racing – also known as racing trucks – are adapted to the special requirements of racing sport. For instance, the engine of a production truck with a power output of about 300 kW (410 bhp) is increased by a factor of 3.7 to about 110 kW (1,500 bhp)! This means higher engine revs, greater cylinder charges (air mass), and therefore larger injected-fuel quantities within shorter periods of time.

During the races, the engines are driven within the range of $\lambda = 1$. It means even greater injected-fuel quantities, and this requires larger plunger-and-barrel assemblies and special nozzles. Even the injection cams – if fitted – must have a more pointed shape.

Just as in a production vehicle, the electronic systems have the task of providing highly precise control. Exact maintenance of the maximum speed requires special features when it comes to speed-regulation breakaway. In all other aspects, the Electronic Diesel Control (EDC) is

identical to production models.



(Source: MAN)


Lambda closed-loop control for passenger-car diesel engines

Application

The lawmakers are continually increasing the severity of legislation governing exhaust-gas emission limits for cars powered by diesel engines. Apart from the measures taken to optimize the engine's internal combustion, the open and closed-loop control of functions related to exhaust-gas emissions are continuing to gain in importance. Introduction of lambda closed-loop control offers major potential for reducing emission-value spread in diesel engines.

A broadband lambda oxygen sensor in the exhaust pipe (Fig. 1, 7) measures the residual oxygen content in the exhaust gas. This is an indicator of the A/F ratio (excess-air-factor lambda λ). The lambda oxygen-sensor signal is adapted while the engine is running. This ensures a high level of signal accuracy throughout the sensor's service life. The lambda oxygen-sensor signal is used as the basis for a number of lambda functions, which will be described in more detail in the following.

Lambda closed-loop control circuits are used to regenerate NO_x accumulator-type catalytic converters.

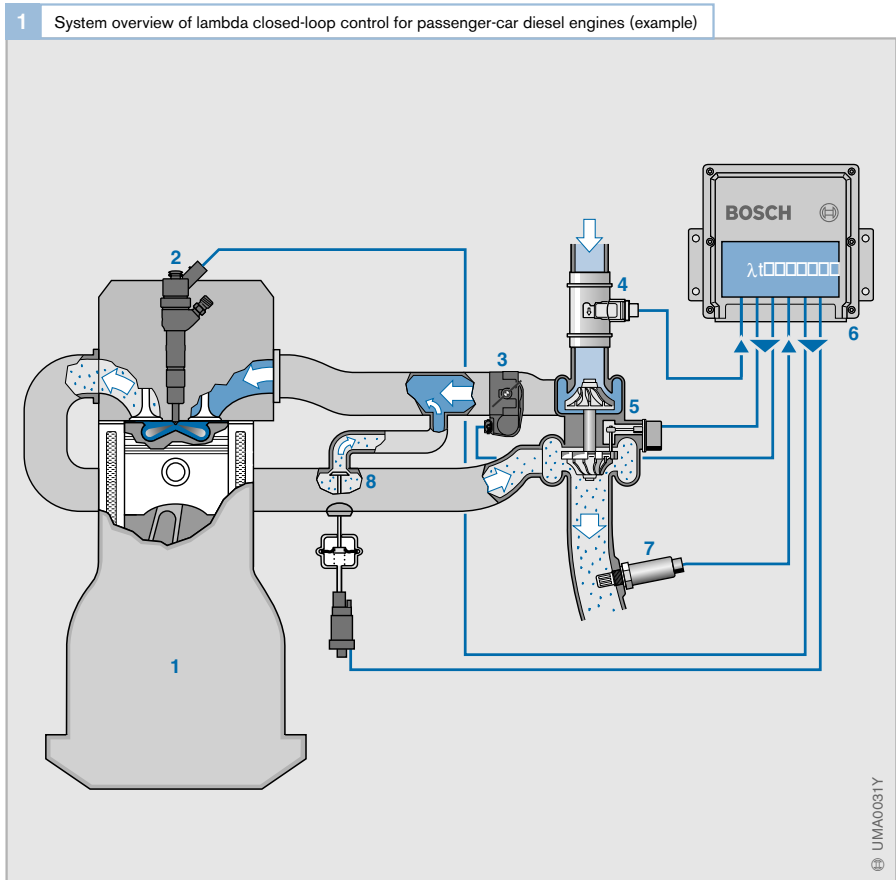

Lambda closed-loop control is designed for all passenger-car fuel-injection systems with engine control units dating from the EDC16 generation.

Basic functions

Pressure compensation

The unprocessed lambda oxygen-sensor signal is dependent on the oxygen concentration in the exhaust gas and the exhaust-gas pressure at the sensor installation point. The influence of pressure on the sensor signal must, therefore, be compensated.


The *pressure-compensation* function incorporates two program maps, one for exhaust-gas pressure, and one for pressure dependence of the lambda oxygen-sensor output signal. These two maps are used to correct the sensor output signal with reference to the particular operating point.

Adaption

In overrun mode (trailing throttle), lambda oxygen-sensor adaption takes into account the deviation of the measured oxygen concentration from the fresh-air oxygen concentration (approx. 21%). As a result, the system “learns” a correction value which is used at every engine operating point to correct the measured oxygen concentration. This leads to a precise, drift-compensated lambda output signal for the service life of the lambda oxygen sensor.

Lambda-based EGR control

Compared with air-mass-based exhaust-gas recirculation, detecting oxygen concentration in the exhaust gas allows tighter emission tolerance bands for an automotive manufacturer’s entire vehicle fleet. For future limits, an emission advantage of approx. 10...20% can be gained in this way for the exhaust-gas test.

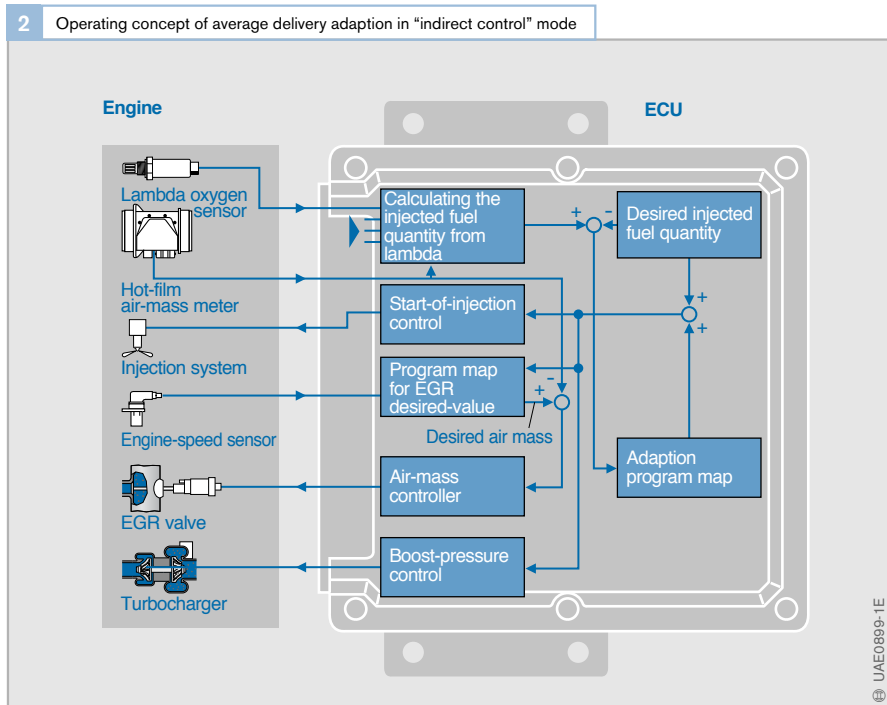

Average delivery adaption

Average delivery adaption supplies a precise injection quantity signal to form the setpoint for the exhaust-gas-related closed control loop. Correction of exhaust-gas recirculation plays a major role in emissions here. Average delivery adaption operates in the lower part-load range and determines the average deviation in the injected fuel quantity of all cylinders.

Fig. 2 (previous page) shows the basic structure of average delivery adaption and its influence on the exhaust-gas-related closed control loops.

The lambda oxygen-sensor signal and the air-mass signal are used to calculate the actually injected fuel mass, which is then compared to the desired injected fuel mass. Differences are stored in an adaption map in defined “learning points”. This procedure ensures that, when the operating point requires an injected fuel quantity correction, it can be imple-

mented without delay even during dynamic changes of state.


These correction quantities are stored in the EEPROM of the ECU and are available immediately the engine is started.

Basically speaking, there are two average-delivery adaption operating modes. They differ in the way they apply detected deviations in injected fuel quantity:

Operating mode: Indirect Control

In *Indirect Control* mode (Fig. 2), a precise injection quantity setpoint is used as the input variable in various exhaust-gas-related reference program maps. The injected fuel quantity is not corrected during the fuel-metering process.

3 Full-load smoke limitation using the lambda closed-loop control: Principle of operation

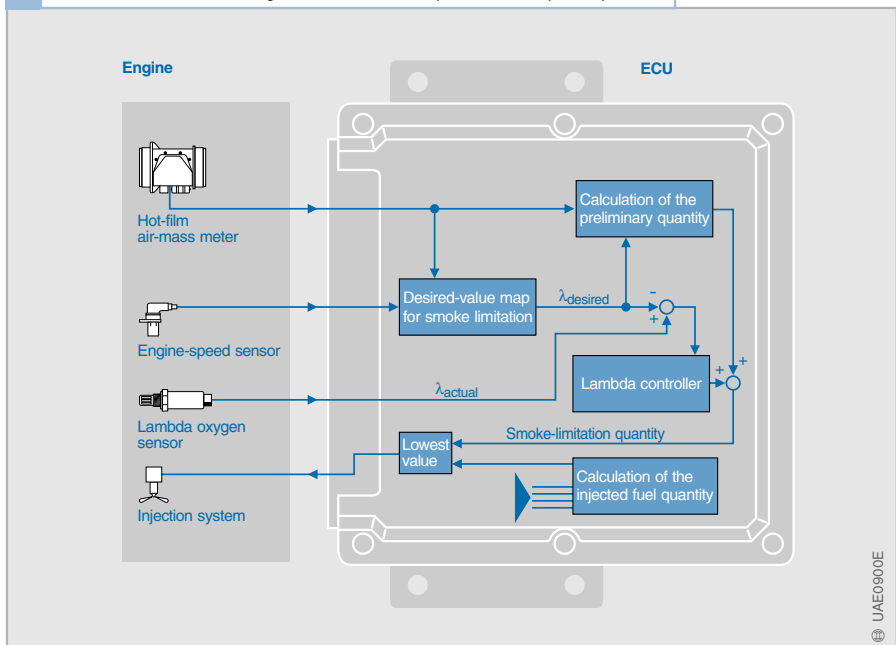

Operating mode: Direct Control

In *Direct Control* mode, the quantity deviation is used in the metering process to correct the injected fuel quantity so that the actual fuel quantity injected coincides more precisely with the reference injected fuel quantity. In this case, this is (more or less) a closed quantity control loop.

Full-load smoke limitation

Fig. 3 shows the block diagram of the control structure for full-load smoke limitation using a lambda oxygen sensor. The objective here is to determine the maximum fuel quantity which may be injected without exceeding a given smoke-emission value.

The signals from the air-mass meter and the engine-speed sensor are applied together with a smoke-limitation map to determine the desired air/fuel ratio value λ_{desired} . This, in turn, is applied together with the air mass to calculate the precontrol value for the maximum permissible injected fuel quantity.

This form of control is already in serial production, and has a lambda closed-loop control imposed on it. The lambda controller calculates a correction fuel quantity from the difference between the desired air/fuel ratio λ_{desired} and the actual air/fuel ratio value λ_{actual} . The maximum full-load injected fuel quantity is the total of the pilot-control quantity and the correction quantity.

This control architecture permits a high level of dynamic response due to pilot control, and improved precision due to the superimposed lambda control loop.

Detection of undesirable combustion

The lambda oxygen sensor signal helps to detect the occurrence of undesirable combustion in overrun mode. It is detected if the lambda oxygen-sensor signal drops below a calculated threshold. In this case, the engine can be switched off by closing a control flap and the EGR valve. The detection of undesirable combustion represents an additional engine safeguard function.

Summary

A lambda-based exhaust-gas recirculation system can substantially reduce emission-value spread over a manufacturer's vehicle fleet due to production tolerances or aging drift. This is achieved by using average delivery adaption.

Average delivery adaption supplies a precise injection quantity signal to form the setpoint for the exhaust-gas-related closed control loop. The precision of these control loops is increased as a result. Correction of exhaust-gas recirculation plays the major role on emissions here.

In addition, the application of lambda closed-loop control permits the precise metering of the full-load smoke quantity and detection of undesirable combustion in overrun (trailing throttle) mode.

Furthermore, the lambda oxygen sensor's high-precision signal can be used in a lambda closed control loop to regenerate NO_x catalytic converters.

▶
Closed-loop and open-loop control

Application

The *closed-loop* and *open-loop* control applications are of vital importance for various on-board systems.

The term (*open-loop*) control is used in many cases, not only for the process of controlling, but also for the entire system in which control takes place (for this reason, the general term “*control unit*” is used, although it may perform a closed-loop control function). Accordingly, arithmetic processes run in control units to calculate both closed-loop and open-loop functions.

Closed-loop control

Closed-loop control is a process in which a parameter (controlled variable x) is detected continuously, compared to another parameter (reference variable w_1), and adapted to the reference variable in an adjustment process depending on the result of the comparison. The resulting action takes place in a closed circuit (closed control loop).

Closed-loop control has the function of adjusting the value of controlled variables to a value specified by a reference variable, despite any disturbance influences that may occur.

The *closed control loop* (Fig. 1a) is a closed-loop control circuit with a discrete action. Controlled variable x acts within a loop configuration in a form of negative feedback. Contrary to open-loop control, closed-loop control considers the impact of all disturbance

Open-loop control

Open-loop control is the process within a system in which one or several parameters act as input variables affecting other parameters due to intrinsic laws governing the system. A feature of open-loop control is the open action sequence across an individual transfer element or the open control loop.

An *open control loop* (Fig. 1b) is an arrangement of elements that interact on each other in a loop structure. It may interact in any possible way with other systems as an entity within a higher-level system. The open control loop can only counter the impact of a disturbance value measured by the control unit (e.g. z_1); other disturbance values (e.g. z_2) may act unimpaired. Examples of open-loop systems in a vehicle:

- **Lambda closed-loop control**
- **Idle-speed control**
- **ABS/TSC/ESP control**
- **Air conditioning (interior temperature)**

Open-loop control

Open-loop control is the process within a system in which one or several parameters act as input variables affecting other parameters due to intrinsic laws governing the system. A feature of open-loop control is the open action sequence across an individual transfer element or the open control loop.

An *open control loop* (Fig. 1b) is an arrangement of elements that interact on each other in a loop structure. It may interact in any possible way with other systems as an entity within a higher-level system. The open control loop can only counter the impact of a disturbance value measured by the control unit (e.g. z_1); other disturbance values (e.g. z_2) may act unimpaired. Examples of open-loop systems in a vehicle:

- **Electronic Transmission Control (ETC)**
- **Injector delivery compensation and pressure-wave correction for calculating injected fuel quantity**

Fig. 1

a Closed control loop
 b Open control loop
 c Block diagram of a digital closed-control loop

w Reference variable
 x Controlled variable (closed loop)
 x_A Controlled variable (open loop)
 y Manipulated variable
 z_1, z_2 Disturbance values

T Sampling time
 $*$ Digital signal values
 A Analog
 D Digital

1
Closed-loop and open-loop control applications

a

b

c

Torque-controlled EDC systems

The engine-management system is continually being integrated more closely into the overall vehicle system. Through the CAN bus, vehicle dynamics systems such as TCS, and comfort and convenience systems such as cruise control, have a direct influence on the Electronic Diesel Control (EDC). Apart from this, much of the information registered and/or calculated in or by the engine management system must be passed on to other ECUs through the CAN bus.

In order to be able to incorporate the EDC even more efficiently in a functional alliance with other ECUs, and implement other changes rapidly and effectively, it was necessary to make far-reaching changes to the newest-generation controls. These changes resulted in the torque-controlled EDC which was introduced with the EDC16. The main feature is the changeover of the module interfaces to the parameters, as commonly encountered in practice in the vehicle.

Engine parameters

Essentially, an IC engine's output can be defined using the three parameters: power P , engine speed n , and torque M .

For 2 diesel engines. Fig. 1 compares typical curves of torque and power as a function of engine speed. Basically speaking, the following equation applies:

$$P = 2 \cdot \pi \cdot n \cdot M$$

In other words, it suffices to use the torque as the reference (command) variable. Engine power then results from the above equation. Since power output cannot be measured directly, torque has turned out to be a suitable reference (command) variable for engine management.

Torque control

When accelerating, the driver uses the accelerator pedal (sensor) to directly demand a

given torque from the engine. At the same time, but independent of the driver's requirements, via the interfaces other vehicle systems submit torque demands resulting from the power requirements of the particular component (e.g. air conditioner, alternator). Using these torque-requirement inputs, the engine management calculates the output torque to be generated by the engine and controls the fuel-injection and air-system actuators accordingly. This method has the following advantages:

- No single system (for instance, boost pressure, fuel injection, pre-glow) has a direct effect on engine management. This enables the engine management to also take into account higher-level optimization criteria (such as exhaust-gas emissions and fuel consumption) when processing external requirements, and thus control the engine in the most efficient manner,
- Many of the functions which do not directly concern the engine management can be designed to function identically for diesel and gasoline engines.
- Extensions to the system can be implemented quickly.

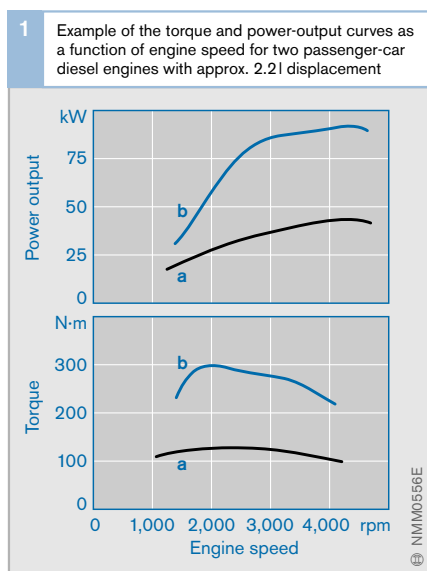


Fig. 1

a Year of manufacture 1968

b Year of manufacture 1998

Engine-management sequence

Fig. 2 shows (schematically) the processing of the setpoint inputs in the engine ECU. In order to be able to fulfill their assignments efficiently, the engine management's control functions all require a wide range of sensor signals and information from other ECUs in the vehicle.

Propulsion torque

The driver's input (that is, the signal from the accelerator-pedal sensor) is interpreted by the engine management as the request for a propulsive torque. The inputs from the cruise control and the vehicle speed limiter are processed in exactly the same manner.

Following this selection of the desired propulsive torque, should the situation arise, the vehicle-dynamics system (TCS, ESP) increases the desired torque value when there is the danger of wheel lockup and decreases it when the wheels show a tendency to spin.

Further external torque demands

The drivetrain's torque adaptation must be taken into account (drivetrain transmission ratio). This is defined for the most part by the ratio of the particular gear, or by the torque-converter efficiency in the case of automatic transmissions. On vehicles with an automatic-gearbox, the transmission control stipulates the torque requirement during the actual gear shift. Apart from reducing the load on the transmission, reduced torque at this point results in a comfortable, smooth gear shift. In addition, the torque required by other engine-powered units (for instance, air-conditioner compressor, alternator, servo pump) is determined. This torque requirement is calculated either by the units themselves or by the engine management.

Calculation is based on unit power and rotational speed, and the engine management adds up the various torque requirements. The vehicle's drivability remains unchanged despite varying requirements from the auxiliary units and changes in the engine's operating state.

Internal torque demands

At this stage, the idle-speed control and the active surge damper intervene.

For instance, if demanded by the situation, in order to prevent mechanical damage, or excessive smoke due to the injection of too much fuel, the torque limitation reduces the internal torque requirement.


In contrast to the previous engine-management systems, limitations are no longer only applied to the injected fuel-quantity, but instead, depending upon the required effects, also to the particular physical quantity involved.

The engine's losses are also taken into account (e.g. friction, drive for the high-pressure pump). The torque represents the engine's measurable effects to the outside. The engine management, though, can only generate these effects in conjunction with the correct fuel injection together with the correct injection point, and the necessary marginal conditions as apply to the air-intake system (e.g. boost pressure and EGR rate). The required injected fuel quantity is determined using the current combustion efficiency. The calculated fuel quantity is limited by a protective function (for instance, protection against overheating), and if necessary can be varied by Smooth-Running Control (SRC). During engine start, the injected fuel quantity is not determined by external inputs such as those from the driver, but rather by the separate "start-quantity control" function.

Actuator triggering

Finally, the desired values for the injected fuel quantity are used to generate the triggering data for the injection pump and/or the injectors, and for defining the optimum operating point for the intake-air system.

2 Engine-management sequence for torque-controlled diesel injection

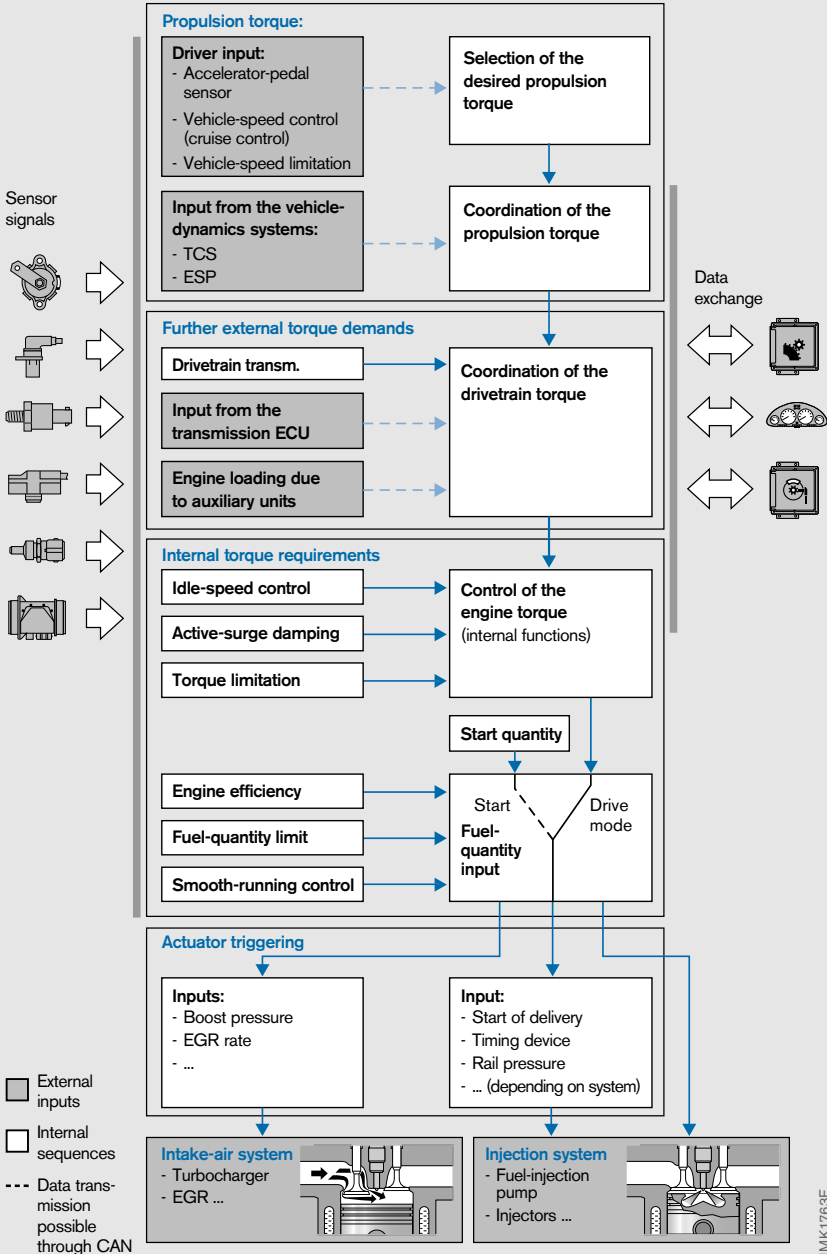

Control and triggering of the remaining actuators

In addition to the fuel-injection components themselves, EDC is responsible for the control and triggering of a large number of other actuators. These are used for cylinder-charge control, or for the control of engine cooling, or are used in diesel-engine start-assist systems. Here too, as is the case with the closed-loop control of injection, the inputs from other systems (such as TCS) are taken into account.

A variety of different actuators are used, depending upon the vehicle type, its area of application and the type of fuel injection. This chapter deals with a number of examples, and further actuators are covered in the Chapter “Actuators”.

A variety of different methods are used for triggering:

- The actuators are triggered directly from an output (driver) stage in the engine ECU using appropriate signals (e.g. the EGR valve).
- If high currents are involved (for instance for fan control), the ECU triggers a relay.
- The engine ECU transfers signals to an independent ECU, which is then used to trigger or control the remaining actuators (for instance, for glow control).

The advantage of incorporating all engine-control functions in the EDC ECU lies in the fact that not only the injected fuel quantity and instant of injection can be taken into account in the engine control concept, but also other engine functions such as EGR and boost-pressure control. This leads to a considerable improvement in engine management. Apart from this, the engine ECU has a vast amount of information at its disposal as needed for other functions (for instance, engine and intake-air temperature as used for glow control on the diesel engine).


Fig. 1
 1 Intake valve
 2 Turbulence duct
 3 Cylinder
 4 Piston
 5 Intake duct
 6 Flap

Auxiliary coolant heating

High-performance diesel engines are very efficient, and under certain circumstances do not generate enough waste heat to adequately heat the vehicle's interior. One solution for overcoming this problem is to install auxiliary coolant heating using glow plugs. Depending upon the power available from the alternator, this system is triggered in a number of steps. It is controlled by the engine ECU as used for EDC.

Intake-duct switch-off

In the lower engine-rpm ranges and at idle, a flap (Fig. 1, 6) operated by an electropneumatic transducer closes one of the intake ducts (5). Fresh air in then only inducted through the turbulence duct (2). This leads to improved air turbulence in the lower rpm ranges which in turn results in more efficient combustion. In the higher rpm ranges, the engine's volumetric efficiency is improved thanks to the open intake duct (5) and the power output increases as a result.

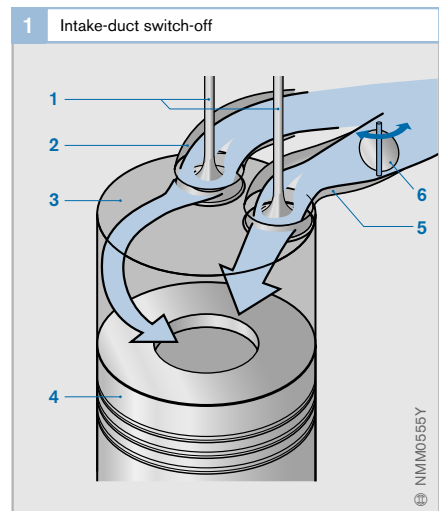

Boost-pressure control

Boost-pressure control applied to the exhaust-gas turbocharger improves the engine's torque curve in full-load operation, and its exhaust and refill cycle in the part-load range. The optimum (desired) boost pressure is a function of engine speed, injected fuel quantity, coolant and fuel temperature, and the surrounding air pressure. This optimum (desired) boost pressure is compared with the actual value registered by the boost-pressure sensor and, in the case of deviation, the ECU either operates the bypass valve's electropneumatic transducer or the guide blades of the VTG (Variable Turbine Geometry) exhaust-gas turbocharger (refer also to the Chapter "Actuators").

Fan triggering

When a given engine temperature is exceeded, the engine ECU triggers the engine cooling fan, which continues to rotate for a brief period after the engine is switched off. This run-on period is a function of the coolant temperature and the load imposed on the engine during the preceding driving cycle.

Exhaust-gas recirculation (EGR)

In order to decrease the NO_x emissions, exhaust gas is directed into the engine's intake duct through a channel, the cross section of which can be varied by an EGR valve. The EGR valve is triggered by an electropneumatic transducer or by an electric actuator.

Due to the high temperature of the exhaust gas and its high proportion of contamination, it is difficult to precisely measure the exhaust-gas flow which is recirculated back into the engine. Control, therefore, takes place indirectly through an air-mass meter located in the flow of fresh intake air. The meter's output signal is then compared in the ECU with the engine's theoretical air requirement which has been calculated from a variety of data (e.g. engine rpm). The lower the measured mass of the incoming fresh air compared to the theoretical air requirement, the higher is the proportion of recirculated exhaust gas.

Substitute functions

If individual input signals should fail, the ECU is without the important information it needs for calculations. In such cases, substitute functions are used. Two examples are given below:

Example 1: The fuel temperature is needed for calculation of the injected fuel quantity. If the fuel-temperature sensor fails, the ECU uses a substitute value for its calculations. This must be selected so that excessive soot formation is avoided, although this can lead to a reduction of engine power in certain operating ranges.

Example 2: Should the camshaft sensor fail, the ECU applies the crankshaft-sensor signal as a substitute. Depending on the vehicle manufacturer, there are a variety of different concepts for using the crankshaft signal to determine when cylinder 1 is in the compression cycle. The use of substitute functions leads to engine restart taking slightly longer.

Substitute functions differ according to vehicle manufacturer, so that many vehicle-specific functions are possible.

The diagnosis function stores data on all malfunctions that occur. This data can then be accessed in the workshop (refer also to the Chapter "Electronic Diagnosis (OBD)").

Data exchange with other systems

Fuel-consumption signal

The engine ECU (Fig. 1, 3) determines fuel consumption and sends this signal via CAN to the instrument cluster or a separate on-board computer (6), where the driver is informed of current fuel consumption and/or the range that can be covered with the remaining fuel in the tank. Older systems used Pulse-Width Modulation (PWM) for the fuel-consumption signal.

Starter control

The starter motor (8) can be triggered from the engine ECU. This ensures that the driver cannot operate the starter motor with the engine already running. The starter motor only turns long enough to allow the engine to reach a self-sustaining speed reliably. This function leads to a lighter, and thus lower-priced, starter motor.

Glow control unit

The glow control unit (GZS, 5) receives information from the engine ECU to control glow start and duration. It then triggers the glow plugs accordingly and monitors the glow process, and reports back to the engine ECU on any faults (diagnostic function). The pre-glow indicator lamp is usually triggered from the engine ECU.

Electronic immobilizer

To prevent unauthorized starting and drive-off, the engine cannot be started before a special immobilizer (7) ECU removes the block from the engine ECU.

The driver can signal the immobilizer ECU that he/she is authorized to use the vehicle, either by remote control or by means of the glow-plug and starter switch ("Ignition" key). The immobilizer ECU then removes the block on the engine ECU to allow engine start and normal operation.

1 Possible components involved in the exchange of data with the Electronic Diesel Control (EDC)

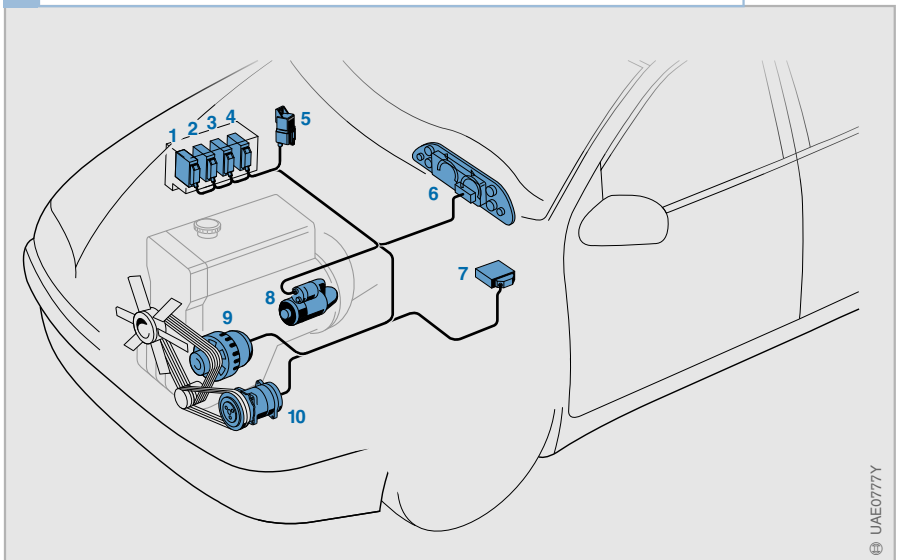


Fig. 1

- 1 ESP ECU (with ABS and TCS)
- 2 ECU for transmission-shift control
- 3 Engine ECU (EDC)
- 4 A/C ECU
- 5 Glow control unit
- 6 Instrument cluster with onboard computer
- 7 Immobilizer ECU
- 8 Starter motor
- 9 Alternator
- 10 A/C compressor

External torque intervention

In the case of external torque intervention, the injected fuel quantity is influenced by another (external) ECU (for instance, for transmission-shift control, or TCS). This informs the engine ECU whether the engine torque is to be changed, and if so, by how much (this defines the injected fuel quantity).

Alternator control

By means of a standard serial interface, the EDC can control and monitor the alternator (9) remotely. The regulator voltage can be controlled, just the same as the complete alternator assembly can be switched off. In case of low battery power, for instance, the alternator's charging curve can be improved by increasing the idle speed. It is also possible to perform simple alternator diagnosis through this interface.

Air conditioner

In order to maintain comfortable temperatures inside the vehicle when the ambient temperature is high, the air conditioner (A/C) cools down cabin air with the help of an A/C compressor (10). Depending on the engine and operating conditions, the A/C compressor may draw as much as 30% of the engine's output power.


Immediately the driver hits the accelerator pedal (in other words he/she wishes maximum torque), the compressor can be switched off briefly by the engine ECU to concentrate all of the engine's power to the wheels. Since the compressor is only switched off very briefly, this has no noticeable effect on interior temperature.

Serial data transmission (CAN)

Modern-day vehicles are equipped with a constantly increasing number of electronic systems. Along with their need for extensive exchange of data and information in order to operate efficiently, the data volumes and speeds are also increasing at a rapid rate.

Although CAN (Controller Area Network) is a linear bus system (Fig. 1) specifically designed for automotive applications, it has already been introduced in other sectors (for instance, in building automation).

Data is relayed in serial form, that is, one after another on a common bus line. All CAN stations have access to this bus, and via a CAN interface in the ECUs, they can receive and transmit data over the CAN bus line. Since a considerable amount of data can be exchanged and repeatedly accessed on a single bus line, this network results in far fewer lines required. On conventional systems, data exchange takes place point to point over individually assigned data lines.

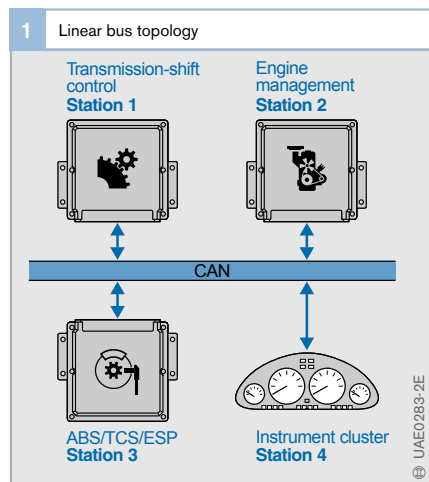

Applications in the vehicle

For CAN in the vehicle there are four areas of application each of which has different requirements. These are as follows:

Multiplex applications

Multiplex is suitable for use with applications controlling the open and closed-loop control of components in the sectors of body electronics, and comfort and convenience. These include climate control, central locking, and seat adjustment. Transfer rates are typically between 10 kbaud and 125 kbaud (1 kbaud = 1 kbit/s) (low-speed CAN).

Mobile communications applications

In the area of mobile communications, CAN networks such components as navigation system, telephone, and audio installations with the vehicle's central display and operating units. Networking here is aimed at standardizing operational sequences as far as possible, and at concentrating status information at one point so that driver distraction is reduced to a minimum. With this application, large quantities of data are transmitted and data transfer rates are in the 125 kbaud range. It is impossible to directly transmit audio or video data here.

Diagnosis applications

The diagnosis applications using CAN are aimed at applying the already existing network for the diagnosis of the connected ECUs. The presently common form of diagnosis using the special K line (ISO 9141) then becomes invalid. Large quantities of data are also transferred in diagnostic applications, and data transfer rates of 250 kbaud and 500 kbaud are planned.

Real-time applications

Real-time applications serve for the open- and closed-loop control of the vehicle's movements. Here, such electronic systems as engine management, transmission-shift control and Electronic Stability Program (ESP) are networked with each other via the CAN bus. Commonly, data transfer rates of between 125 kbaud and 1 Mbaud (high-speed CAN) are needed to guarantee the required real-time response.

Bus configuration

Configuration is understood to be the layout and interaction between the components in a given system. The CAN bus has a linear bus topology, which in comparison with other logical structures (ring bus and/or star bus) features a lower failure probability. If one of the stations fails, the bus still remains fully accessible to all the other stations. The stations connected to the bus can be either ECUs, display devices, sensors, or actuators. They operate using the Multi-Master principle, whereby the stations concerned all have equal priority regarding their access to the bus. It is not necessary to have a higher-order administration.

Content-based addressing

The CAN bus system does not address each station individually according to its features, but rather according to its message contents. It allocates each "message" a fixed "*identifier*" (message name) which identifies the contents of the message in question (e.g., engine speed). This identifier has a length of 11 bits (standard format) or 29 bits (extended format).

With content-based addressing each station must itself decide whether it is interested in the message or not (“message filtering” Fig. 2). This function can be performed by a special CAN module (Full-CAN), so that less load is placed on the ECU’s central microcontroller. Basic CAN modules “read” all messages. Using content-based addressing, instead of allocating station addresses, makes the complete system highly flexible so that equipment variants are easier to install and operate. If one of the ECUs requires new information which is already on the bus, all it needs to do is call it up from the bus. Similarly, provided they are receivers, new stations can be connected (implemented) without it being necessary to modify the already existing stations.

Bus arbitration

The identifier not only indicates the data content, but also defines the message’s priority rating. An identifier corresponding to a low binary number has high priority and vice versa. Message priorities are a function for instance of the speed at which their contents change, or their significance with respect to safety. There are never two (or more) messages of identical priority in the bus.

Each station can begin message transmission as soon as the bus is unoccupied. Conflict regarding bus access is avoided by applying bit-by-bit identifier arbitration (Fig. 3), whereby the message with the highest priority is granted first access without delay and without loss of data bits (nondestructive protocol).

The CAN protocol is based on the logical states “dominant” (logical 0) and “recessive” (logical 1). The “Wired And” arbitration principle permits the dominant bits transmitted by a given station to overwrite the recessive bits of the other stations. The station with the lowest identifier (that is, with the highest priority) is granted first access to the bus.

The transmitters with low-priority messages automatically become receivers, and repeat their transmission attempt as soon as the bus is vacant again.

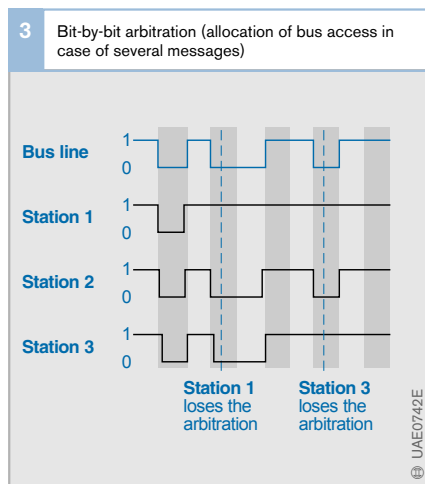
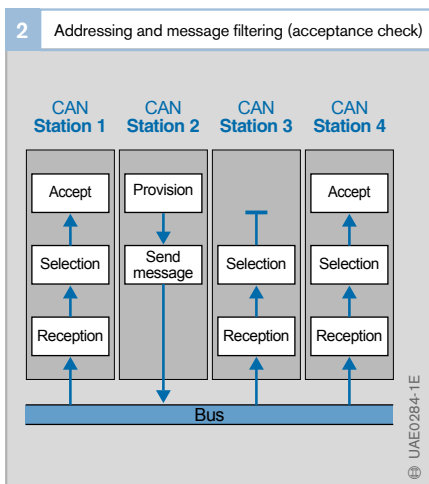


Fig. 2 Station 2 transmits, Station 1 and 4 accept the data.

Fig. 3 Station 2 gains first access (Signal on the bus = signal from Station 2)

- 0 Dominant level
- 1 Recessive level

In order that all messages have a chance of entering the bus, the bus speed must be appropriate to the number of stations participating in the bus. A cycle time is defined for those signals which fluctuate permanently (e.g. engine speed).

Message format

CAN permits two different formats which only differ with respect to the length of their identifiers. The standard-format identifier is 11 bits long, and the extended-format identifier 29 bits. Both formats are compatible with each other and can be used together in a network. The data frame comprises seven consecutive fields (Fig. 4) and is a maximum of 130 bits long (standard format) or 150 bits (extended format).

The bus is recessive at idle. With its dominant bit, the “Start of frame” indicates the beginning of a message and synchronizes all stations.

The “Arbitration Field” consists of the message’s identifier (as described above) and an additional control bit. While this field is being transmitted, the transmitter accompanies the transmission of each bit with a check to ensure that it is still authorized to transmit or whether another station with a higher-priority message has accessed the Bus. The control bit following the identifier is designated the RTR-bit (Remote Transmission Request). It defines whether the message is a “Data frame” (message with data) for a receiver station, or a “Remote frame” (request for data) from a transmitter station.

The “Control Field” contains the IDE bit (Identifier Extension Bit) used to differentiate between standard format (IDE = 0) and extended format (IDE = 1), followed by a bit reserved for future extensions. The remaining 4 bits in this field define the number of data bytes in the next data field. This enables the receiver to determine whether all data has been received.


The “Data Field” contains the actual message information comprised of between 0 and 8 bytes. A message with data length = 0 is used to synchronize distributed processes. A number of signals can be transmitted in a single message (e.g., engine temperature and engine speed).

The “CRC Field” (Cyclic Redundancy Check) contains the frame check word for detecting possible transmission interference.

The “ACK Field” contains the acknowledgment signals used by the receiver stations to confirm receipt of the message in non-corrupted form. This field comprises the ACK slot and the recessive ACK delimiter. The ACK slot is also transmitted recessively and overwritten “dominantly” by the receivers upon the message being correctly received. Here, it is irrelevant whether the message is of significance or not for the particular receiver in the sense of the message filtering or acceptance check. Only correct reception is confirmed.

The “End of Frame” marks the end of the message and comprises 7 recessive bits.

Fig. 4
 0 Dominant level
 1 Recessive level
 * Number of bits

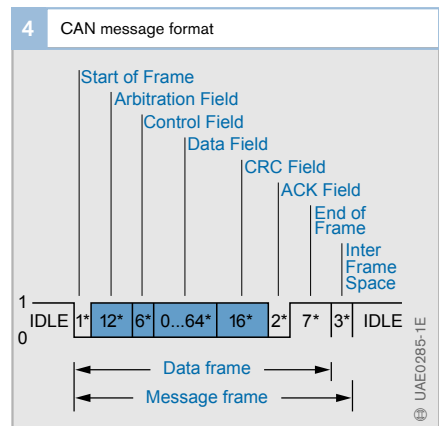

The “*Inter-Frame Space*” comprises three bits which serve to separate successive messages. This means that the bus remains in the recessive IDLE mode until a station starts a bus access.

As a rule, a sending station initiates data transmission by sending a “data frame”. It is also possible for a receiving station to call in data from a sending station by transmitting a “remote frame”.

Detecting errors

A number of control mechanisms for detecting errors are integrated in the CAN protocol.

In the “*CRC Field*”, the receiving station compares the received CRC sequence with the sequence calculated from the message.

With the “*Frame Check*”, frame errors are recognized by checking the frame structure.

The CAN protocol contains a number of fixed-format bit fields which are checked by all stations.

The “*ACK Check*” is the receiving stations’ confirmation that a message frame has been received. Its absence signifies for instance that a transmission error has been detected.

“*Monitoring*” indicates that the sender observes (monitors) the bus level and compares the differences between the bit that has been sent and the bit that has been checked.

Compliance with “*Bitstuffing*” is checked by means of the “Code check”. The stuffing convention stipulates that in every “*Data Frame*” or “*Remote Frame*” a maximum of five successive equal-priority bits may be sent between the “*Start of Frame*” and the end of the “*CRC Field*”. As soon as five identical bits have been transmitted in succession, the sender inserts an opposite-priority bit. The receiving station erases these opposite-priority bits after receiving the message. Line errors can be detected using the “bitstuffing” principle.

If one of the stations detects an error, it interrupts the actual transmission by sending an “Error frame” comprising six successive dominant bits. Its effect is based on the intended violation of the stuffing rule, and the object is to prevent other stations accepting the faulty message.

Defective stations could have a derogatory effect upon the bus system by sending an “error frame” and interrupting faultless messages. To prevent this, CAN is provided with a function which differentiates between sporadic errors and those which are permanent, and which is capable of identifying the faulty station. This takes place using statistical evaluation of the error situations.

Standardization

The International Organization for Standardization (ISO) and SAE (Society of Automotive Engineers) have issued CAN standards for data exchange in automotive applications:

- For low-speed applications up to 125 kbit/s: ISO 11 519-2, and
- For high-speed applications above > 125 kBit/s: ISO 11 898 and SAE J22 584 (passenger cars) and SAE J1939 (trucks and buses).
- Furthermore, an ISO Standard on CAN Diagnosis (ISO 15 765 – Draft) is being prepared.

1) Some parts of the adaptation process are also referred to as calibration.

Application-related adaptation 1) of car engines

Application-related adaptation means modification of an engine to suit a particular type of vehicle intended for a specific type of use. Adaptation of the fuel-injection system – and specifically of electronic diesel control EDC – is a major part of that process.

All new diesel engines for cars are now direct-injection (DI) engines. And they all have to comply with the Euro III emission control standards that have been in force since 2000, or other comparable standards. These emission standards – combined with the higher expectations in the area of vehicle user-friendliness – can only be met by the use of sophisticated electronic control systems. Such systems have the capability – and reflect the necessity – of controlling thousands of parameters (approx. 6,000 in the case of the present EDC generation). Those parameters are subdivided into:

- Individual parameter values (e.g. temperature thresholds at which specific functions are activated) and
- Ranges of parameter values in the form of two-dimensional or multi-dimensional

data maps (e.g. injection point t_E as a function of engine speed n , injected-fuel quantity m_o and start of delivery FB)

The optimization potential of EDC systems has become so great that it is now limited only by the constraints of time available and the cost of the personnel and the work involved in adapting and testing the various functions and their interaction.

Adaptation phases

Application-related adaptation of car engines is subdivided into the three stages described below.

Hardware adaptation

In the context of application-related adaptation of car engines, items such as the combustion chamber, the injection pump and the injectors are referred to as hardware. That hardware is primarily adapted in such a way that the performance and emission figures demanded are obtained. Hardware adaptation is performed initially on an engine test bench under static conditions. If dynamic tests are possible on the test bench, they are used to further optimize the engine and the fuel-injection system.

1 Vehicle-specific calibration using PC tools has become the standard



Software adaptation

Once the hardware adaptation is complete, the control-unit software is accordingly configured and adapted for optimum mixture preparation and combustion control. For example, this includes calculating and programming the engine data maps for start of injection, exhaust-gas recirculation and charge-air pressure. As with hardware adaptation, this work is carried out on the test bench.

Vehicle-related adaptation


When the basis for the initial vehicle trials has been established, adaptation of all parameters that affect engine response and dynamic characteristics takes place. This third stage involves the essential adaptation to the particular vehicle concerned. The work is for the greater part performed with the engine in situ (Fig. 1).

Interaction between the three phases

As there are reciprocal effects between the adaptation phases, recursions (repeated procedures) are required. As soon as possible, it is also necessary to run all three phases simultaneously with the engine in the vehicle and on the test bench.

For example, at low engine loads a very high exhaust-gas recirculation rate is aimed at in order to reduce the NO_x emissions. Under dynamic conditions, this can lead to poor “accelerator response” on the part of the engine. In order to obtain good acceleration characteristics, the static emissions settings programmed in the software adaptation phase must be re-adjusted. In turn, this may result in negative effects on emissions under certain engine operating conditions which have to be compensated for under other conditions.

In the example outlined, there is a fundamental conflict between the various objectives: on the one hand, strict requirements have to be met (e.g. statutory limits for exhaust emission levels), while on the other hand there are “optional” demands that are more attributable to the desire for comfort and performance (engine response, noise, etc.). The latter can result in opposing conclusions. A compromise between the different objectives offers the vehicle manufacturer the opportunity to imbue the vehicle with some of the features that make up its characteristic brand identity.

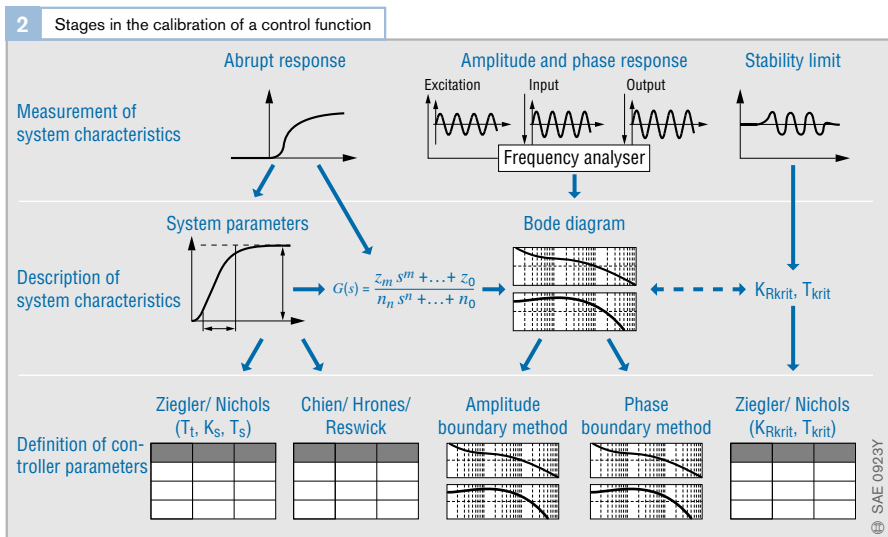

Adaptation to differing ambient conditions

The various controllers and adjustment parameters must be configured for a wide variety of different ambient conditions. To control idle speed, for example, there are several parameter sets for each individual gear which are further differentiated according to whether

- The vehicle is stationary or moving
- The engine is warm or cold
- The clutch is engaged or disengaged

That means that for this function alone, there are as many as 50 parameter sets.

The EDC also provides adaptation functions for extreme ambient conditions. These generally have to be verified by specifically targeted special trials involving

- Cold-weather testing in temperatures down to -25°C (e.g. winter trials in Sweden)
- Hot-weather testing in temperatures over 40°C (e.g. summer trials in Arizona)
- High-altitude/low atmospheric pressure testing (e.g. in the Alps) and
- Combined hot-weather and altitude or cold-weather and altitude testing, e.g. towing a heavy trailer over mountain passes (e.g. in Spain's Sierra Nevada or in the Alps)

For cold starting, very specific adjustments have to be made to the injected fuel quantity and the start of delivery based on engine coolant temperature. In addition, the glow plugs have to be switched on. At high altitudes with a cold engine, the effectively available pull-away torque is very low. For some applications, EDC suspends turbocharger operation for that short period because it would otherwise “use up” a large proportion of the engine’s torque output. Particularly in the case of vehicles with automatic transmission, this would prevent the vehicle from pulling away at all, as the torque available at the driving wheels would be insufficient.

Altitude compensation for turbocharged engines demands limitation of the required turbocharger pressure in response to atmospheric pressure, as otherwise the turbocharger would be destroyed by over-revving.

Other adjustments


Safety functions

As well as the functions that determine emission levels, power output and user-friendliness, there are also numerous safety functions that require adaptation (e.g. response to failure of a sensor or actuator).

Such safety functions are primarily intended to restore the vehicle to a safe operating condition for the driver and/or to ensure the safe operation of the engine (e.g. to prevent engine damage).

Communication

There are also numerous functions which require communication between the engine control unit and other control units on the vehicle (e.g. traction control, ESP, transmission control for automatic transmission and electronic immobilizer). For this reason, a special communication code is employed (input and output variables). Where necessary, additional measured data has to be calculated and encoded in the appropriate form.

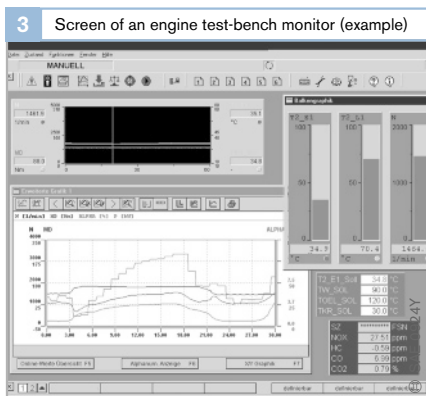

Examples of adaptation

Since the arrival of the EDC system in 1986, the possibilities for optimization, especially with regard to the convenience features, have considerably expanded. A wide variety of software functions (e.g. control functions) are used, all of which have to be specifically adapted to each individual vehicle. Some examples are outlined below.

Idle-speed control

This function controls the speed at which the engine runs when the accelerator pedal is not depressed. Idle-speed control must operate with absolute reliability under all possible engine operating conditions. Therefore, extensive adaptation work is required. Adjustment of the coasting response in all gears, for example, is highly involved, especially with regard to the interplay with the twin-mass flywheels generally used. This type of flywheel produces highly complex rotational vibration effects throughout the drivetrain.

The first stage of the process is an analytical definition (i.e. recording of the controlled system response, description of the controlled system by algorithms and definition of the control parameters).

This is followed by a comprehensive road test. A circular track (test track) provides the possibility for virtually unlimited flat-road driving. Particularly with active surge damping, conflict between objectives can arise as this function may prevent rapid compensation in response to abrupt changes in engine speed or load.

Apart from the drivetrain, the engine mountings also play an important part. In order to diminish the various conflicts in objectives, therefore, some applications employ variable-characteristic engine mountings which are controlled by the EDC. These can be set to a softer setting when the engine is idling and to a harder response when the engine is under load.

Smooth-running control

The engine smooth-running function ensures that the injection volumes are the same for all cylinders and in so doing improves engine smoothness and emission levels. Under certain circumstances, a malfunction can occur at very high or very low ambient temperatures if the vibration damping characteristics of the belt drive systems for auxiliary units (e.g. alternator, power-steering pump, air-conditioning compressor) significantly alter. Depending on the frequencies generated as a result of periodic speed fluctuations, the engine smooth-running function may attempt to even them out by alteration of the injected-fuel quantity volume for individual cylinders. Under unfavourable conditions, this may then result in higher exhaust-emission levels or make the engine run even more unevenly. For that reason, this function must be thoroughly tested under all operating conditions.

Pressure-charging controller

Almost all existing DI car diesel engines are fitted with turbochargers. On most of those engines, the charge-air pressure is controlled by the EDC system. The aim is to obtain optimum response characteristics (rapid generation of charge-air pressure) while ensuring reliable protection of the engine against excessive charge-air pressure and consequent excessively high cylinder pressure.

Exhaust-Gas Recirculation EGR

Exhaust-gas recirculation EGR is now a standard feature of DI car diesel engines. As previously indicated, together with the control of turbocharger pressure it is a determining factor in the amount of air that enters the engine. In order to ensure smokeless and low-NO_x combustion, the air-fuel mixture must conform to precisely defined parameters for all engine operating conditions. Those parameters are initially optimized under static conditions on the engine test bench. The control function then has the task of maintaining those parameters under dynamic operating conditions without adversely affecting the response characteristics of the engine.

1) Some parts of the adaptation process are also referred to as calibration.

Application-related adaptation 1) of commercial-vehicle engines

Particularly because of its economy and durability, the diesel has established itself as the engine of choice for commercial vehicles. Today all new engines are direct-injection (DI) designs.

Optimization objectives

For commercial-vehicle engines, the following attributes are optimized.

Torque

The aim is to obtain the maximum possible torque under all operating conditions in order to be able to move heavy loads in even the most difficult situations (e.g. when negotiating steep gradients or using PTO drives). When pursuing that objective, the engine's limits (e.g. maximum permissible cylinder pressure and exhaust temperature) as well as the smoke emission limit have to be taken into account.

Fuel consumption

For commercial vehicles, economy is a decisive factor. For that reason fuel consumption occupies a position of greater importance for commercial vehicles than is the case with cars. Minimizing fuel consumption (or CO₂ emissions) is therefore of prime significance in engine adaptation.

Durability

Modern commercial-vehicle engines are expected to be able to complete over a million kilometers of service.

Pollutant emissions

Since October 2000, new commercial vehicles registered in the European Union have been required to conform to the Euro III emission-control standard. Engine adaptation must ensure that the limits for NO_x, particulate, HC and CO emission and exhaust opacity are reliably complied with.

Comfort/convenience


The demands relating to such aspects as engine response, quietness, smoothness and starting characteristics must also be taken into account.

Adaptation phases

The aim of adaptation is to ensure that the objectives outlined above are achieved as fully as possible, i.e. that the best possible compromise is reached between competing demands. This involves adaptation of engine and fuel-injection hardware components as well as

Fig. 1

- 2) Criteria:
 - Full-load response
 - Emissions
 - Fuel consumption
- 3) Additional criterion:
 - Dynamic adaptation
- 4) Other criteria:
 - Starting characteristics
 - Smoothness, etc.

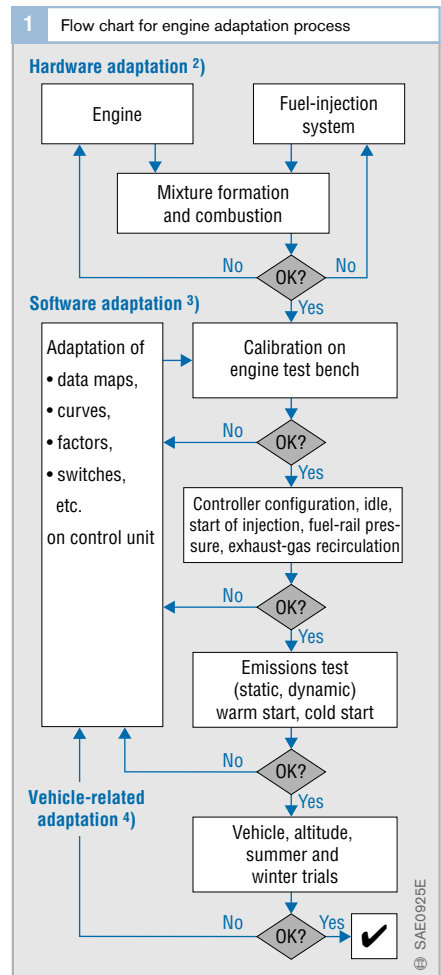

software functions performed by the engine-management module.

As with car engines, the phases of hardware, software and vehicle-related adaptation can be distinguished (Fig. 1).

Hardware adaptation

Hardware adaptation involves making modifications to all significant “components” of the engine and fuel-injection system. Significant engine-hardware components include the combustion chamber, the turbocharger, the air-intake system (e.g. swirl-imparting com-

ponents) and, if necessary, the exhaust-recirculation system. Significant components of the fuel-injection system are the injection pump, the high-pressure fuel lines if applicable, and the injectors. Hardware adaptation is carried out on the engine test bench.

Software adaptation

Once the hardware adaptation is complete, the control-unit software is configured accordingly. Stored in the software are the relationships between a vast number of engine and fuel-injection parameters (for examples, see Fig. 2). This work too is carried out on the engine test bench. An application control unit, which – as with the adaptation of car engines – is linked to a PC with operator software, provides access to the software to be adapted.

The following tasks are performed in the course of software adaptation:

- Calibration of the basic engine-data maps under static operating conditions
- Control function configuration
- Calibration of compensation data maps
- Optimisation of engine-data maps under dynamic conditions

First of all, adjustments to the system-specific parameters – such as start of injection, injection pressure, exhaust-gas recirculation, charge-air pressure and, if applicable, pre- and post-injection – are carried out under static operating conditions on the engine test bench. The test results are assessed with reference to the target criteria (emission levels, fuel consumption, etc.). Based on those results, the appropriate parameter values, data curves and data maps are then calculated and programmed (Fig. 3 overleaf). Because of the ever increasing number of such parameters, automation of parameter configuration is a continuing aim.

Following adaptation of the basic data maps, the effect of such variables as ambient temperature, atmospheric pressure, engine-coolant temperature and fuel temperature on

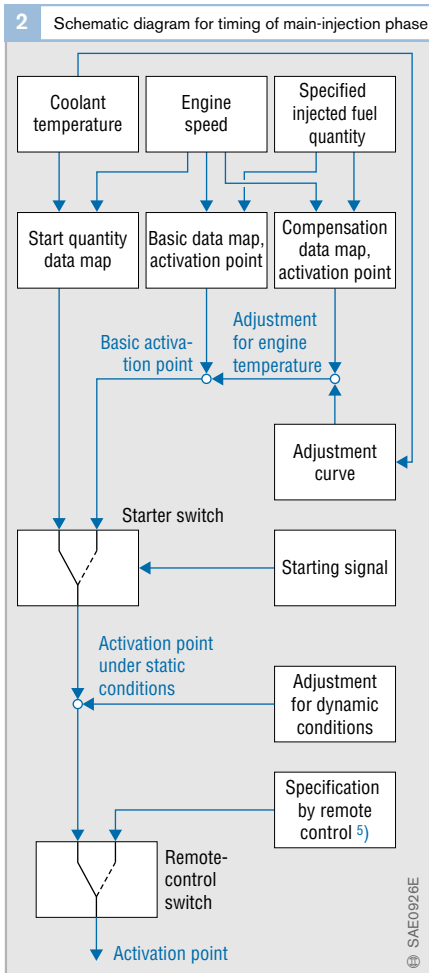


Fig. 2

⁵⁾ Specification of set values in order to bypass data maps during calibration

the major parameters is factored into so-called compensation data maps. In addition, existing control functions are adapted (e.g. fuel-rail pressure control for common-rail injection systems, charge-air pressure control). The data established under static operating conditions is finally optimized under dynamic conditions.

Vehicle-related adaptation

The process of vehicle-related adaptation involves modifying the basic design of the engine arrived at on the test bench to the specifics of the vehicle in which it is to be used, and testing conformity with requirements under as wide a range as possible of real operating and ambient conditions.

The adaptation/testing of the basic functions such as idle-speed control, engine response and starting characteristics is essentially performed in the same way as for cars, though the assessment criteria may differ according to the particular type of application. When adapting an engine for use in a bus, for example, more emphasis is placed on comfort aspects or low noise output, whereas a truck engine for long-distance operation would be designed more for reliable and economical transportation of heavy loads.

Examples of adaptation

Idle-speed control


When adapting the idle-speed control function for a commercial-vehicle engine, major emphasis is generally placed on good load response and minimal undershoot. This ensures good pulling away and manoeuvring capabilities even when carrying heavy loads.

The behavior of the drivetrain as a controlled system depends heavily on temperature and transmission ratio. For that reason the engine-management module has multiple parameter sets for idle-speed control. When defining those parameters, changes in the drivetrain response over its service life must also be taken into account.

Power take-off (PTO) drives

Many commercial vehicles have PTO drives that are used to drive cranes, lifting platforms, pumps, etc. These often require the diesel engine to run at a virtually constant, higher operating speed that is unaffected by load. This can be governed by the EDC system using the “intermediate-speed control” function. Once again, the control function parameters can be adapted to the requirements of the driven machine.

3 Data maps for start of injection and smoke limitation

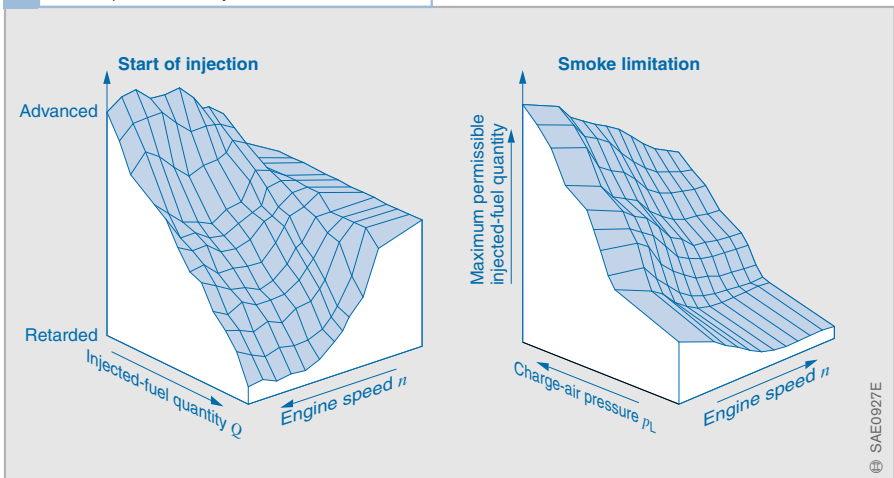

Engine response characteristics

In the process of adaptation, engine response characteristics, i.e. the way in which accelerator-pedal position is translated into injected-fuel quantity and engine torque output, are to a large extent infinitely variable through control-unit configuration.

It ultimately depends on the application as to whether an “RQ characteristic⁶⁾” or “RQV characteristic⁷⁾” engine response is programmed, or a mixture of the two.

Communication

The EDC control unit on a commercial vehicle is normally part of a network of multiple electronic control units. The exchange of data between vehicle, transmission, brake and engine control units takes place via an electronic data bus (usually a CAN). Correct interaction between the various control units involved cannot be fully tested and optimized until they are installed in the vehicle, as the process of basic configuration on the engine test bench usually involves only the engine-management module on its own.

A typical example of the interaction between two vehicle control units is the process of changing gear with an automatic transmission. The transmission control unit sends a request via the data bus for a reduction in injection quantity at the optimum point in the gear-shifting operation. The engine control unit then makes the requested reduction – without input from the driver – thus enabling the transmission control unit to disengage the current gear. If necessary, the transmission control unit may request an increase in engine speed at the appropriate point to facilitate engagement of the new gear. Once the operation is complete, control over the injected fuel quantity is passed back to the driver.

Electromagnetic compatibility

The large number of electronic vehicle systems and the wide use of other electronic communications equipment (e.g. radio telephones, two-way radios, GPS navigation systems) in commercial vehicles make it necessary to optimize the Electromagnetic Compatibility (EMC) of the engine-management module and all its connecting leads in terms both of immunity to external interference and of emission of interference signals. Of course, a large proportion of this optimization work is carried out during the development of the control units and sensors concerned. Since, however, the dimensioning (e.g. length of cable runs, type of shielding) and routing of the wiring looms in the actual vehicle has a major influence on immunity to and creation of interference, testing and, if necessary, optimization of the complete vehicle inside an EMC room is absolutely essential.

⁶⁾ Control function for minimum and maximum speed or maximum speed only

⁷⁾ Variable-speed or incremental control function

Fault diagnosis

The diagnostic capabilities demanded of commercial-vehicle systems are also very extensive. Reliable diagnosis of faults ensures maximum possible vehicle availability.

The engine control unit constantly checks that the signals from all connected sensors and actuators are within the specified limits and also tests for loose contacts, short circuits to ground or to battery voltage, and for plausibility with other signals. The signal range limits and plausibility criteria must be defined by the application developer. As with car engines, those limits must on the one hand be sufficiently broad to ensure that extreme conditions (e.g. hot or cold weather, high altitudes) do not produce false diagnoses, and on the other, sufficiently narrow to provide adequate sensitivity to real faults. In addition, fault response procedures must be defined which specify whether and in what way the engine may continue to be operated if a specific fault is detected. Finally, detected faults have to be stored in a fault memory in order that service technicians can quickly locate and remedy the problem.

- 1 Intake air
- 2 Filter
- 3 Cold-water inlet
- 4 Hot-water inlet
- 5 Fuel
- 6 Coolant
- 7 Heater
- 8 Quick-change system
- 9 Transfer modules for supply fluids
- 10 Engine control unit (EDC)
- 11 Intercooler
- 12 Fuel-injection system
- 13 Engine
- 14 Control and sensor signals
- 15 Catalytic converter
- 16 Power supply
- 17 Measuring-data interface
- 18 Electric dynamometer
- 19 Accelerator positioner
- 20 Test-bench computer
- 21 Indexing system (rapid synchronized measured-data acquisition)
- 22 Exhaust-gas analyzing equipment (e.g. analyzers for gaseous emissions, opacimeter, Fourier Transformed Infra-Red (FTIR) spectroscope, mass spectrometer, particle counter)
- 23 Dilution tunnel
- 24 Dilution air
- 25 Mixing section
- 26 Volume meter
- 27 Fan
- 28 Particle sampling system
- 29 CVS bag system
- 30 Changeover valve

▶ Engine test bench

A fuel-injection system is tested on an engine test bench as part of its development process. Engine test benches are designed to allow easy access to the various parts of the engine.

By conditioning the supply fluids such as intake air, fuel and engine coolant, (i.e. controlling their temperature and/or pressure) reproducible results can be obtained.


In addition to measurements under static operating conditions, dynamic tests with rapid load and engine-speed changes are increasingly demanded. For such purposes there are test benches with electric dynamometers (18). They can not only retard but also drive the test vehicle (e.g. in order to simulate overrun when traveling downhill). Using appropriate simula-

tion software, the statutory emission control tests can then be run on the test bench rather than on a vehicle tester with the engine in situ.

The test-bench computer (20) is responsible for controlling and monitoring the engine and the testing equipment. It also takes care of data recording and storage. With the aid of automation software, calibration operations (e.g. data-map measurements) can be carried out very efficiently.

Using a suitable quick-change system (8), the pallets with the engines to be tested can be changed over within about twenty minutes. This increases test-bench capacity utilization.

▼ Basic layout of an engine test bench

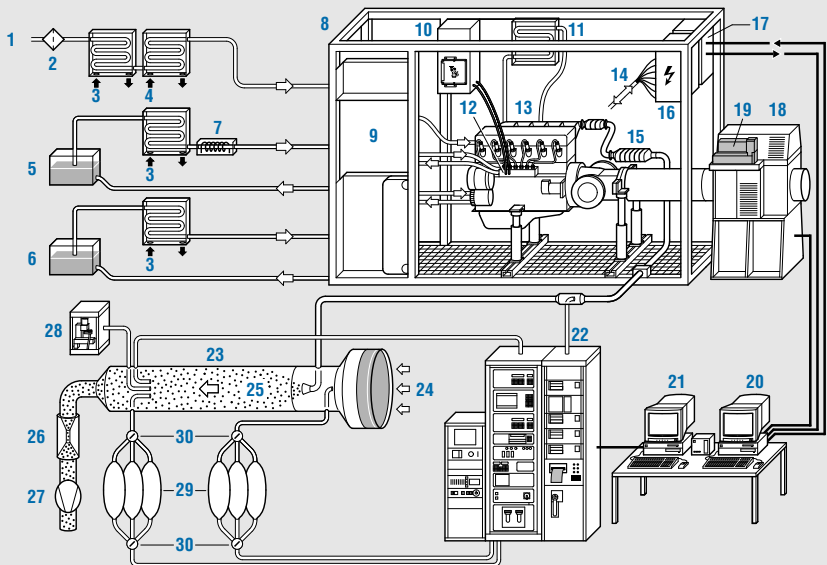

Calibration tools

The traditional calibration tools (for car and commercial-vehicle applications) include

- The “transparent” engine (usually a single-cylinder engine which has small windows and mirrors that allow the combustion process to be observed)
- The engine test bench
- The EMC room and
- A wide variety of special devices such as microphones for measuring sound levels or strain gauges for measuring mechanical stress

Computer simulation of hardware and software components is also becoming increasingly important. A large part of the adaptation work, however, is carried out using PC-based calibration tools. Such programs allow

developers to modify the engine-management software. One such calibration tool is the INCA (Integrated Calibration and Acquisition System) program, comprising a number of different tools. It is made up of the following components:

- The *Core System* incorporates all measurement and adjustment functions.
- The *Offline Tools (standard specification)* comprise the software for analysis of measured data and management of adjustment data, and the programming tool for the Flash EPROM.


The use and function of the calibration tools can be illustrated by the description below of a typical calibration process.

1 Hardware for use with INCA calibration tool



Fig. 1

- a *Thermo-Scan*
Interface module for temperature sensors
- b *Dual-Scan*
Interface module for analog signals and temperature sensors
- c *Lambda Meter*
Interface module for broadband oxygen sensor
- d *Baro-Scan*
Testing module for pressures
- e *AD-Scan*
Interface module for analog signals
- f *CAN-link card*
- g *KIC 2*
Calibration module for diagnostic interface

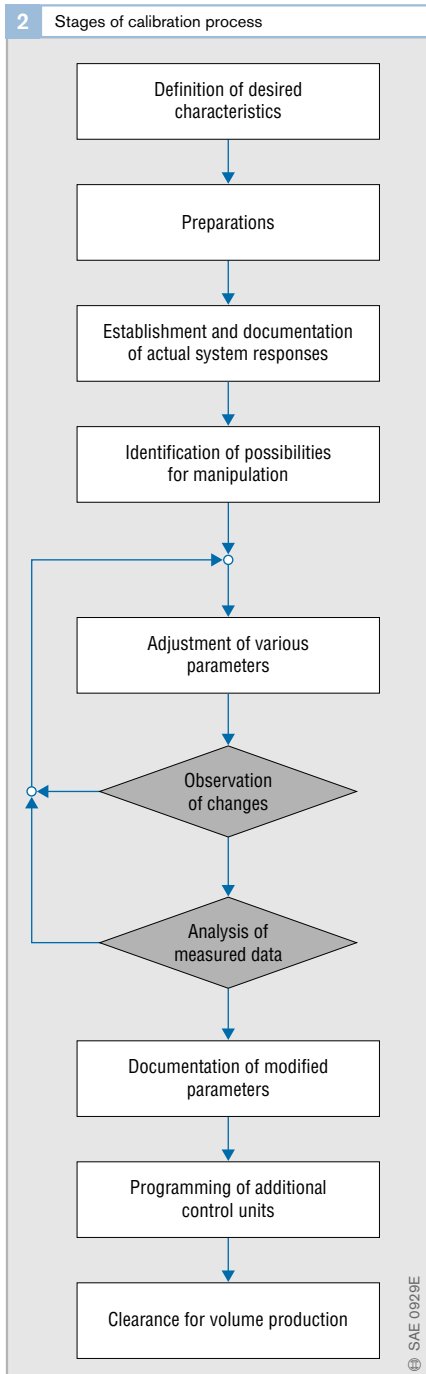

Software calibration process

Defining the desired characteristics

The desired characteristics (e.g. dynamic response, noise output, exhaust composition) are defined by the engine manufacturer and the (exhaust emissions) legislation. The aim of calibration is to alter the characteristics of the engine so that those requirements are met. This necessitates testing on the engine test bench and in the vehicle.

Preparations

Special electronic engine control units are used for calibration. Compared with the control units used on the production models, they allow the alteration of parameters that are fixed for normal operation. An important aspect of the preparations is choosing and setting up the appropriate hardware and/or software interface.

Additional measuring equipment (e.g. temperature sensors, flow meters) enables the recording of other physical variables for special tests.

Establishing and documenting the actual system responses

The recording of specific measured data is carried out using the INCA core system. The information concerned can be displayed on the screen and analyzed in the form of numerical values or graphs.

The measured data can not only be viewed after the measurements have been taken but while measurement is still in progress. In that way, the response of the engine to changes (e.g. in the exhaust-gas recirculation rate) can be investigated. The data can also be recorded for subsequent analysis of transient processes (e.g. engine starting).

Identifying possibilities for manipulation

With the help of the control-unit software documentation (data framework) it is possible to identify which parameters are best suited to altering system behavior in the manner desired.

Alteration of selected parameters

The parameters stored in the control-unit software can be displayed as numerical values (in tables) or as graphs (curves) on the PC and altered. Each time an alteration is made, the system response is observed.

All parameters can be altered while the engine is running so that the effects are immediately observable and measurable.

In the case of short-lived or transient processes (e.g. engine starting) it is effectively impossible to alter the parameters while the process is in progress. In such cases, therefore, the process has to be recorded during the course of a test, the measured data saved in a file and then the parameters that are to be altered identified by analyzing the recorded data.

Further tests are performed in order to evaluate the success of the adjustments made or to learn more about the process.

Analyzing measured data

Analysis and documentation of the measured data is performed with the aid of the offline tool MDA (Measured Data Analyzer). This stage of the calibration process involves comparing and documenting the system behavior before and after alteration of parameters. Such documentation encompasses improvements as well as problems and malfunctions.

Documentation is important because several people will be involved in the process of engine optimization at different times.

Documenting the modified parameters


The changes to the parameters are also compared and documented. This is done with the offline tool ADM (Application Data Manager), sometimes also called CDM (Calibration Data Manager).

The calibration data obtained by various technicians is compared and merged into a single data record.

Programming additional control units

The new parameter settings arrived at can also be used on other engine control units for further calibration. This necessitates reprogramming of the Flash EPROMs of those control units. This is carried out using the INCA core system tool PROF (Programming of Flash EPROM).

Depending on the extent of the calibration and the design innovations, multiple looping of the steps described above may take place.

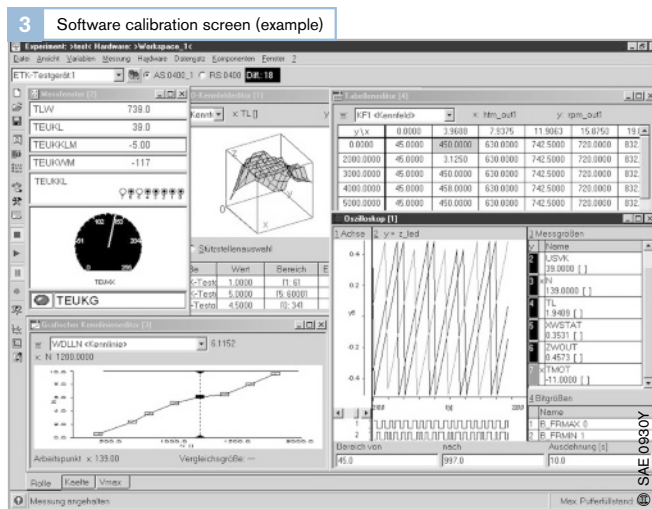

Electronic Control Unit (ECU)

Digital technology furnishes an extensive array of options for open and closed-loop control of automotive electronic systems. A large number of parameters can be included in the process to support optimal operation of various systems. After receiving the electric signals transmitted by the sensors, the control unit processes these data in order to generate control signals for the actuators. The control program, the “software”, is stored in a special memory and implemented by a microcontroller.

The control unit and its components are referred to as “hardware”. The EDC control unit contains all of the algorithms for open and closed-loop control needed to govern the engine-management processes.

Operating conditions

The ECU is subjected to very high demands with respect to

- extreme ambient temperatures (during normal operation from -40°C to $+60\dots+125^{\circ}\text{C}$),
- violent temperature fluctuations,
- resistance to the effects of such materials as oil and fuel, etc.,
- surrounding dampness, and
- mechanical stresses such as engine vibrations.

The ECU must continue to perform flawlessly during starts with a weak battery (cold starts, etc.) as well as at high charge voltages (surge in onboard electrical system).

Other requirements arise from the need for EMC (Electromagnetic Compatibility). The standards of electromagnetic interference immunity and the limitations on emission of high-frequency interference signals are extremely strict.

Design and construction

The pcb (printed-circuit board) with the electronic components (Fig. 1) is installed in a metal case, and connected to the sensors, actuators, and power supply through a multipole plug-in connector (4). The high-power driver stages (6) for the direct triggering of the actuators are integrated in the ECU case in such a manner that excellent heat dissipation to the case is ensured.

When the ECU is mounted directly on the engine, an integrated heat sink is used to dissipate the heat from the ECU case to the fuel which permanently flushes the ECU. This ECU cooler is only used on commercial vehicles. Compact, engine-mounted hybrid-technology ECUs are available for even higher levels of temperature loading.

The majority of the electronic components use SMD technology (Surface-Mounted Device), so that a particularly space-saving and weight-saving design can be used. Conventional wiring is only applied at some of the power-electronics components and at the plug-in connections.

Data processing

Input signals

In their role as peripheral components, the actuators and the sensors represent the interface between the vehicle and the ECU in its role as the processing unit. The electrical signals from the sensors travel through the wiring harness and the plug to reach the control unit. These signals can be of the following type:

Analog input signals

Within a given range, analog input signals can assume practically any voltage value. Examples of physical quantities which are available as analog measured values are intake-air mass, battery voltage, intake-manifold and boost pressure, coolant and intake-air temperature. An Analog/Digital Converter (ADC) within the ECU’s microcontroller

transforms the signal data in the digital form required by the microcontroller's central processing unit. The maximum resolution of these analog signals is 5 mV. This translates into roughly 1,000 incremental graduations based on an overall monitoring range of 0...5 V.

Digital input signals

Digital input signals only have two states. They are either "high" or "low" (logical 1 and logical 0 respectively). Examples of digital input signals are on/off switching signals, or digital sensor signals such as the rotational-speed pulses from a Hall generator or a magnetoresistive sensor. Such signals are processed directly by the microcontroller.

Pulse-shaped input signals

The pulse-shaped signals from inductive sensors containing information on rotational speed and reference mark are conditioned in their own ECU stage. Here, spurious pulses are suppressed and the pulse-shaped signals converted into digital rectangular signals.

Signal conditioning

Protective circuitry is used to limit the input signals to a permissible maximum voltage. By applying filtering techniques, the superimposed interference signals are to a great extent removed from the useful signal which, if necessary, is then amplified to the permissible input-signal level for the microcontroller (0...5 V).

Signal conditioning can take place completely or partially in the sensor depending upon the sensor's level of integration.

Signal processing

The control unit is the switching center governing all of the functions and sequences regulated by the engine-management system. The closed and open-loop control functions are executed in the microcontroller. The input signals from sensors and interfaces linking other systems (e.g., CAN bus) serve as the input parameters and are subjected to a further plausibility check in the computer. The ECU program supports generation of the output signals used to control the actuators.

1 Design of an ECU for a common-rail system with piezo inline injector

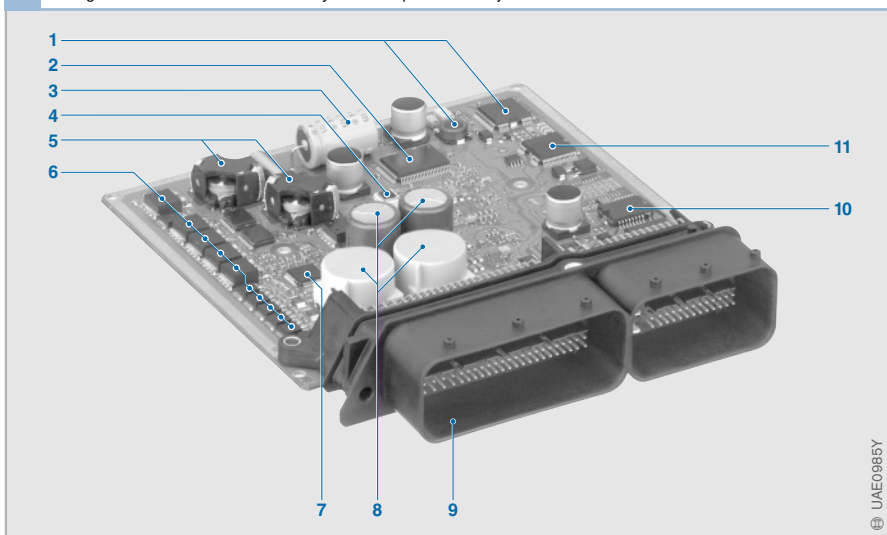


Fig. 1

- 1 Switched-mode power supply with voltage stabilization
- 2 Flash-EPROM
- 3 Battery backup capacitor (for high-voltage generation)
- 4 Atmospheric-pressure sensor
- 5 High-voltage power supply
- 6 High-power driver stages
- 7 ASIC for driver-stage triggering
- 8 High-voltage store (high-voltage charge carrier)
- 9 Connector
- 10 Bridge driver stage
- 11 Multiple switching driver stage

Further components (e.g. of microcontroller) are mounted on the underside.

Microcontroller

The microcontroller is the ECU's central component (Fig. 2) and controls its operative sequence. Apart from the CPU (Central Processing Unit), the microcontroller contains not only the input and output channels, but also timer units, RAMs, ROMs, serial interfaces, and further peripheral assemblies, all of which are integrated on a single microchip. Quartz-controlled timing is used for the microcontroller.

Program and data memory


In order to carry out the computations, the microcontroller needs a program – the “software”. This is in the form of binary numerical values arranged in data records and stored in a program memory. These binary values are accessed by the CPU which interprets them as commands which it implements one after the other (refer also to the Chapter “Electronic open and closed-loop control”).

This program is stored in a Read-Only Memory (ROM, EPROM, or Flash-EPROM) which also contains variant-specific data (individual data, characteristic curves, and maps). This is non-variable data which cannot be changed during vehicle operation. It is used to regulate the program's open and closed-loop control processes.

The program memory can be integrated in the microcontroller and, depending upon the particular application, expanded by the addition of a separate component (e.g., by an external EPROM or a Flash-EPROM).

ROM

Program memories can be in the form of a ROM (Read Only Memory). This is a memory whose contents have been defined permanently during manufacture and thereafter remain unalterable. The ROM installed in the microcontroller only has a restricted memory capacity, which means that an additional ROM is required in case of complicated applications.

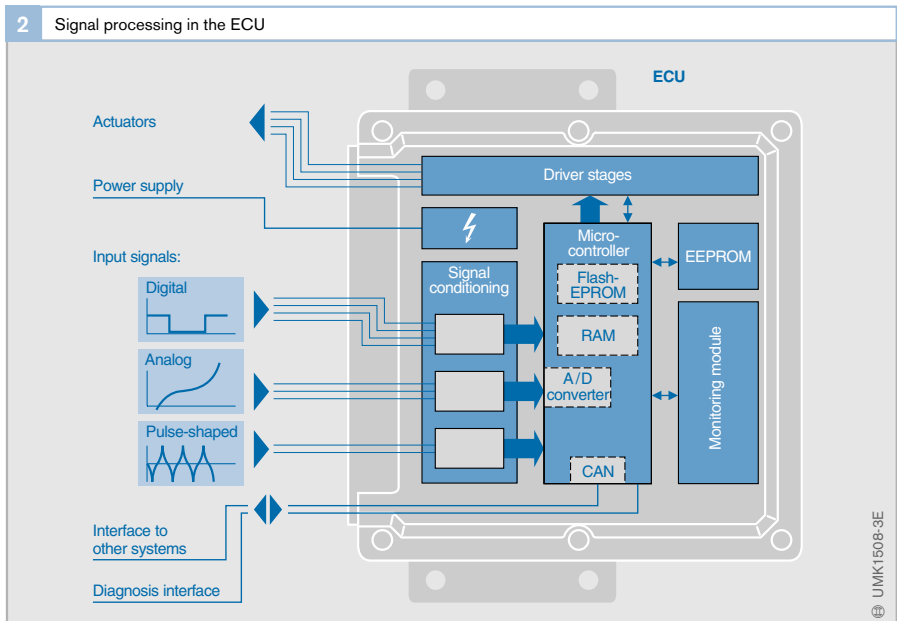

EPROM

The data on an EPROM (Erasable Programmable ROM) can be erased by subjecting the device to UV light. Fresh data can then be entered using a programming unit.

The EPROM is usually in the form of a separate component, and is accessed by the CPU through the Address/Data-Bus.

Flash-EPROM (FEPRM)

The Flash-EPROM is electrically erasable so that it becomes possible to reprogram the ECU in the service workshops without having to open it. In the process, the ECU is connected to the reprogramming unit through a serial interface.

If the microcontroller is also equipped with a ROM, this contains the programming routines for the Flash programming. Flash-EPROMs are available which, together with the microcontroller, are integrated on a single microchip (as from EDC16).

Its decisive advantages have helped the Flash-EPROM to largely supersede the conventional EPROM.

Variable-data or main memory

Such a read/write memory is needed in order to store variable data (variables), such as, for example, arithmetic values and signal values.

RAM

Instantaneous values are stored in the RAM (Random Access Memory) read/write memory. If complex applications are involved, the memory capacity of the RAM incorporated in the microcontroller is insufficient so that an additional RAM module becomes necessary. It is connected to the ECU through the Address/Data-Bus.

When the ECU is switched off by turning the "ignition" key, the RAM loses its complete stock of data (volatile memory).

EEPROM (also known as the E²PROM)

As stated above, the RAM loses its information immediately its power supply is removed (e.g. when the "ignition switch" is turned off). Data which must be retained, for instance the codes for the vehicle immobilizer and the fault-store data, must therefore be stored in a non-erasable (non-volatile) memory. The EEPROM is an electrically erasable EPROM in which (in contrast to the Flash-EPROM) every single memory location can be erased individually. It has been designed for a large number of writing cycles, which means that the EEPROM can be used as a non-volatile read/write memory.

ASIC

The ever-increasing complexity of ECU functions means that the computing powers of the standard microcontrollers available on the market no longer suffice. The solution here is to use so-called ASIC modules (Application Specific Integrated Circuit). These ICs (Integrated Circuits) are designed and produced in accordance with data from the ECU development departments and, as well as being equipped with an extra RAM and inputs and outputs, for instance, they can also generate and transmit PWM signals (see "PWM signals" below).

Monitoring module

The ECU is provided with a monitoring module. Using a "Question and Answer" cycle, the microcontroller and the monitoring module supervise each other, and as soon as a fault is detected one of them triggers appropriate back-up functions independent of the other.

Output signals

With its output signals, the microcontroller triggers driver stages which are usually powerful enough to operate the actuators directly. It is also possible for specific driver stage to trigger relays for particularly large power consumers (e.g., engine fans).

The driver stages are proof against shorts to ground or battery voltage, as well as against destruction due to electrical or thermal overload. Such malfunctions, together with open-circuit lines or sensor faults are identified by the driver-stage IC as an error and reported to the microcontroller.

Switching signals

These are used to switch the actuators on and off (for instance, for the engine fan).

PWM signals

Digital output signals can be in the form of PWM (Pulse-Width Modulated) signals. These are constant-frequency rectangular signals with variable on-times (Fig. 3), which can be used to move various actuators into any operating positions (e.g., exhaust-gas recirculation valve, fan, heater elements, charge-pressure actuator).

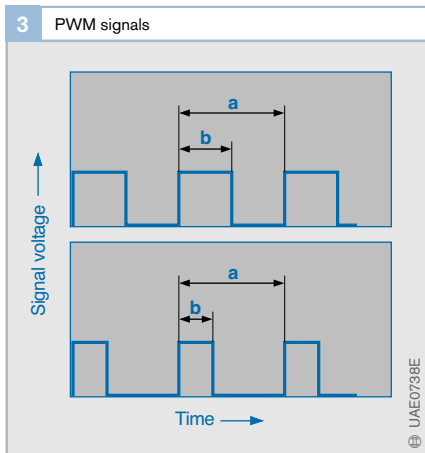


Fig. 3
a Fixed frequency
b Variable on-time

Communication within the ECU

In order to be able to support the microcontroller in its work, the peripheral components must communicate with it. This takes place using an address/data bus which, for instance, the microcomputer uses to issue the RAM address whose contents are to be accessed. The data bus is then used to transmit the relevant data. For former automotive applications, an 8-bit structure sufficed.

This meant that the data bus comprised 8 lines which together could transmit 256 values simultaneously. The 16-bit address bus commonly used with such systems can access 65,536 addresses. Presently, more complex systems demand 16 bits, or even 32 bits, for the data bus. In order to save on pins at the components, the data and address buses can be combined in a multiplex system, i.e., addresses and data are dispatched through the same lines but offset from each other with respect to time.

Serial interfaces with only a single data line are used for data which need not be transmitted so quickly (e.g. data from the fault storage).

EoL programming

The extensive variety of vehicle variants with differing control programs and data records, makes it imperative to have a system which reduces the number of ECU types needed by a given manufacturer. To this end, the Flash EPROM's complete memory area can be programmed at the end of vehicle production with the program and the variant-specific data record (EoL, End-of-Line programming). A further possibility is to have a number of data variants available (e.g., gearbox variants), which can then be selected by special coding at the end of the line (EoL). This coding is stored in an EEPROM.

▶ Very severe demands are made on the ECU

Basically, the ECU in the vehicle functions the same as a conventional PC. Data is entered from which output signals are calculated. The heart of the ECU is the printed-circuit board (pcb) with microcontroller using high-precision microelectronic techniques. The automotive ECU though must fulfill a number of other requirements.

Real-time compatibility

Systems for the engine and for road/traffic safety demand very rapid response of the control, and the ECU must therefore be "real-time compatible". This means that the control's reaction must keep pace with the actual physical process being controlled. It must be certain that a real-time system responds within a fixed period of time to the demands made upon it. This necessitates appropriate computer architecture and very high computer power.

Integrated design and construction

The equipment's weight and the installation space it requires inside the vehicle are becoming increasingly decisive. The following technologies, and others, are used to make the ECU as small and light as possible:

- **Multilayer:** The printed-circuit conductors are between 0.035 and 0.07 mm thick and are "stacked" on top of each other in layers.
- **SMD components** are very small and flat and have no wire connections through holes in the pcb. They are soldered or glued to the pcb or hybrid substrate, hence SMD (**S**urface **M**ounted **D**evelopments).
- **ASIC:** Specifically designed integrated component (**A**pplication-**S**pecific **I**ntegrated **C**ircuit) which can combine a large number of different functions.

Operational reliability

Very high levels of resistance to failure are provided by integrated diagnosis and redun-

dant mathematical processes (additional processes, usually running in parallel on other program paths).

Environmental influences

Notwithstanding the wide range of environmental influences to which it is subjected, the ECU must always operate reliably.

- **Temperature:** Depending upon the area of application, the ECUs installed in vehicles must perform faultlessly during continual operation at temperatures between -40°C and $+60\dots 125^{\circ}\text{C}$. In fact, due to the heat radiated from the components, the temperature at some areas of the substrate is considerably higher. The temperature change involved in starting at cold temperatures and then running up to hot operating temperatures is particularly severe.
- **EMC:** The vehicle's electronics have to go through severe electromagnetic compatibility testing. That is, the ECU must remain completely unaffected by electromagnetic disturbances emanating from such sources as the ignition, or radiated by radio transmitters and mobile telephones. Conversely, the ECU itself must not negatively affect other electronic equipment.
- **Resistance to vibration:** ECUs which are mounted on the engine must be able to withstand vibrations of up to 30 g (that is, 30 times the acceleration due to gravity).
- **Sealing and resistance to operating mediums:** Depending upon installation position, the ECU must withstand damp, chemicals (e.g. oils), and salt fog.

The above factors and other requirements mean that the Bosch development engineers are continually faced by new challenges.

Sensors

Sensors register operating states (e.g. engine speed) and setpoint/desired values (e.g. accelerator-pedal position). They convert physical quantities (e.g. pressure) or chemical quantities (e.g. exhaust-gas concentration) into electric signals.

Automotive applications

Sensors and actuators represent the interfaces between the ECUs, as the processing units, and the vehicle with its complex drive, braking, chassis, and bodywork functions (for instance, the Engine Management, the Electronic Stability Program ESP, and the air conditioner). As a rule, a matching circuit in the sensor converts the signals so that they can be processed by the ECU.

The field of mechatronics, in which mechanical, electronic, and data-processing components are interlinked and cooperate closely with each other, is rapidly gaining in importance in the field of sensor engineering. These components are integrated in modules (e.g. in the crankshaft CSWS (Composite Seal with Sensor) module complete with rpm sensor).

Since their output signals directly affect not only the engine's power output, torque, and emissions, but also vehicle handling and safety, sensors, although they are becoming smaller and smaller, must also fulfill demands that they be faster and more precise. These stipulations can be complied with thanks to mechatronics.

Depending upon the level of integration, signal conditioning, analog/digital conversion, and self-calibration functions can all be integrated in the sensor (Fig. 1), and in future a small microcomputer for further signal processing will be added. The advantages are as follows:

- Lower levels of computing power are needed in the ECU
- A uniform, flexible, and bus-compatible interface becomes possible for all sensors
- Direct multiple use of a given sensor through the data bus
- Registration of even smaller measured quantities
- Simple sensor calibration

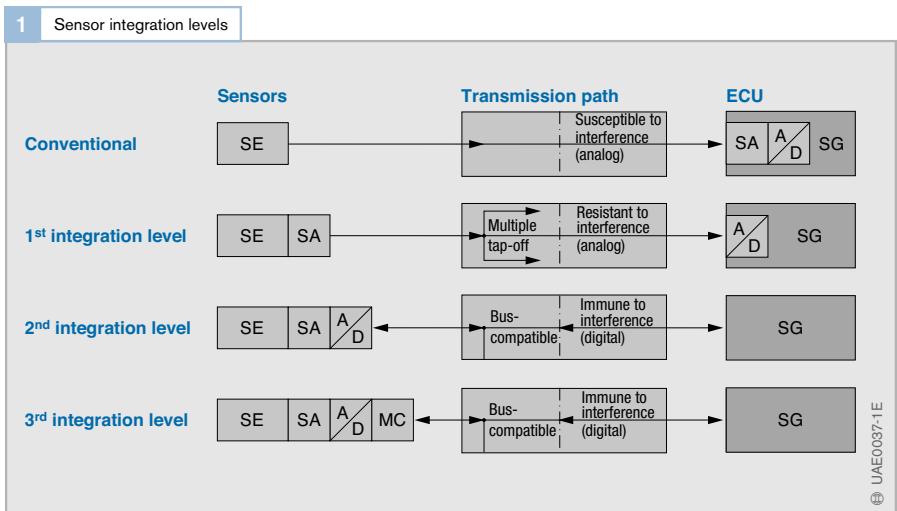


Fig. 1
 SE Sensor(s)
 SA Analog signal conditioning
 A/D Analog-digital converter
 SG Digital ECU
 MC Microcomputer (evaluation electronics)

Temperature sensors

Applications

Engine-temperature sensor

This is installed in the coolant circuit (Fig. 1). The engine management uses its signal when calculating the engine temperature (measuring range $-40\dots+130^{\circ}\text{C}$).

Air-temperature sensor

This sensor is installed in the air-intake tract. Together with the signal from the boost-pressure sensor, its signal is applied in calculating the intake-air mass. Apart from this, desired values for the various control loops (e.g. EGR, boost-pressure control) can be adapted to the air temperature (measuring range $-40\dots+120^{\circ}\text{C}$).

Engine-oil temperature sensor

The signal from this sensor is used in calculating the service interval (measuring range $-40\dots+170^{\circ}\text{C}$).

Fuel-temperature sensor

Is incorporated in the low-pressure stage of the diesel fuel circuit. The fuel temperature is used in calculating the precise injected fuel quantity (measuring range $-40\dots+120^{\circ}\text{C}$).

Exhaust-gas temperature sensor

This sensor is mounted on the exhaust system at points which are particularly critical regarding temperature. It is applied in the closed-loop control of the systems used for exhaust-gas treatment. A platinum measuring resistor is usually used (measuring range $-40\dots+1,000^{\circ}\text{C}$).

Design and operating concept

Depending upon the particular application, a wide variety of temperature sensor designs are available. A temperature-dependent semiconductor measuring resistor is fitted inside a housing. This resistor is usually of the NTC (Negative Temperature Coefficient, Fig. 2) type. Less often a PTC (Positive Temperature Coefficient) type is used. With NTC, there is a sharp drop in resistance when the temperature rises, and with PTC there is a sharp increase.

The measuring resistor is part of a voltage-divider circuit to which 5 V is applied. The voltage measured across the measuring resistor is therefore temperature-dependent. It is inputted through an analog to digital (A/D) converter and is a measure of the temperature at the sensor. A characteristic curve is stored in the engine-management ECU which allocates a specific temperature to every resistance or output-voltage.

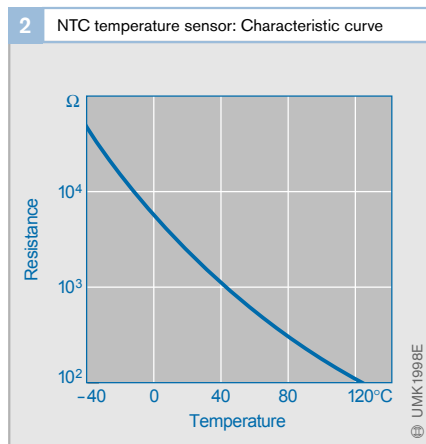
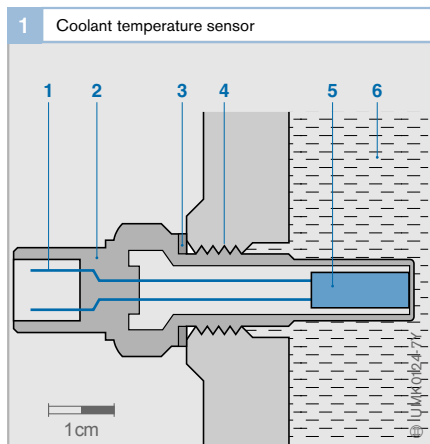


Fig. 1

- 1 Electrical connections
- 2 Housing
- 3 Gasket
- 4 Thread
- 5 Measuring resistor
- 6 Coolant

Micromechanical pressure sensors

Fig. 1

- 1 Diaphragm
- 2 Silicon chip
- 3 Reference vacuum
- 4 Glass (Pyrex)
- 5 Bridge circuit
- p Measured pressure
- U_0 Supply voltage
- U_M Measured voltage
- R_1 Deformation resistor (compressed)
- R_2 Deformation resistor (extended)

Application

Manifold-pressure or boost-pressure sensor

This sensor measures the absolute pressure in the intake manifold between the supercharger and the engine (typically 250 kPa or 2.5 bar) and compares it with a reference vacuum, not with the ambient pressure. This enables the air mass to be precisely defined, and the boost pressure exactly controlled in accordance with engine requirements.

Atmospheric-pressure sensor

This sensor is also known as an ambient-pressure sensor and is incorporated in the ECU or fitted in the engine compartment. Its signal is used for the altitude-dependent correction of the setpoint values for the control loops. For instance, for the exhaust-gas recirculation (EGR) and for the boost-pressure control. This enables the differing densities of the surrounding air to be taken into account. The atmospheric-pressure sensor measures absolute pressure (60...115 kPa or 0.6...1.15 bar).

Oil and fuel-pressure sensor

Oil-pressure sensors are installed in the oil filter and measure the oil's absolute pressure. This information is needed so that engine loading can be determined as needed for the Service Display. The pressure range here is 50...1,000 kPa or 0.5...10.0 bar. Due to its high resistance to media, the measuring element can also be used for pressure measurement in the fuel supply's low-pressure stage. It is installed on or in the fuel filter. Its signal serves for the monitoring of the fuel-filter contamination (measuring range: 20... 400 kPa or 0.2...4 bar).




Version with the reference vacuum on the component side

Design and construction

The measuring element is at the heart of the micromechanical pressure sensor. It is com-

Fig. 2

- 1, 3 Electrical connections with glass-enclosed lead-in
- 2 Reference vacuum
- 4 Measuring element (chip) with evaluation electronics
- 5 Glass base
- 6 Cap
- 7 Input for measured pressure p

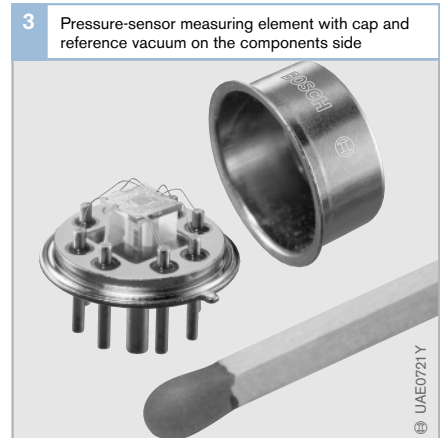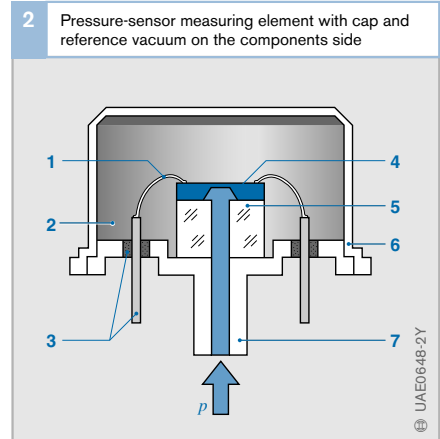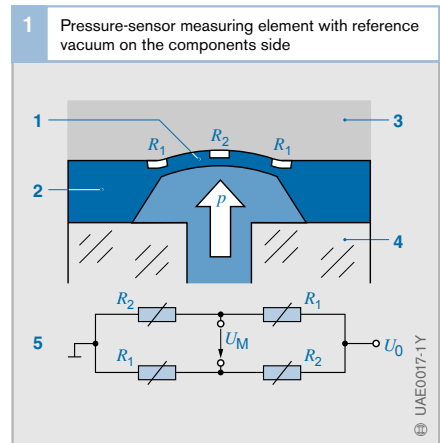

prised of a silicon chip (Fig. 1, 2) in which a thin diaphragm has been etched micromechanically (1). Four deformation resistors (R_1, R_2) are diffused on the diaphragm. Their electrical resistance changes when mechanical force is applied. The measuring element is surrounded on the component side by a cap which at the same time encloses the reference vacuum (Figs. 2 and 3). The pressure-sensor case can also incorporate an integral *temperature sensor* (Fig. 4, 1) whose signals can be evaluated independently. This means that at any point a single sensor case suffices to measure temperature and pressure.

Method of operation

The sensor's diaphragm deforms more or less ($10 \dots 1,000 \mu\text{m}$) according to the pressure being measured. The four deformation resistors on the diaphragm change their electrical resistances as a function of the mechanical stress resulting from the applied pressure (piezoresistive effect).

The four measuring resistors are arranged on the silicon chip so that when diaphragm deformation takes place, the resistance of two of them increases and that of the other two decreases. These deformation resistors form a Wheatstone bridge (Fig. 1, 5), and a change in their resistances leads to a change in the ratio of the voltages across them.

This leads to a change in the measurement voltage U_M . This unamplified voltage is therefore a measure of the pressure applied to the diaphragm.

The measurement voltage is higher with a bridge circuit than would be the case when using an individual resistor. The Wheatstone bridge circuit thus permits a higher sensor sensitivity.

The component side of the sensor to which pressure is not supplied is subjected to a reference vacuum (Fig. 2, 2) so that it measures the absolute pressure.

The signal-conditioning electronics circuitry is integrated on the chip. Its assignment is to amplify the bridge voltage, compensate for

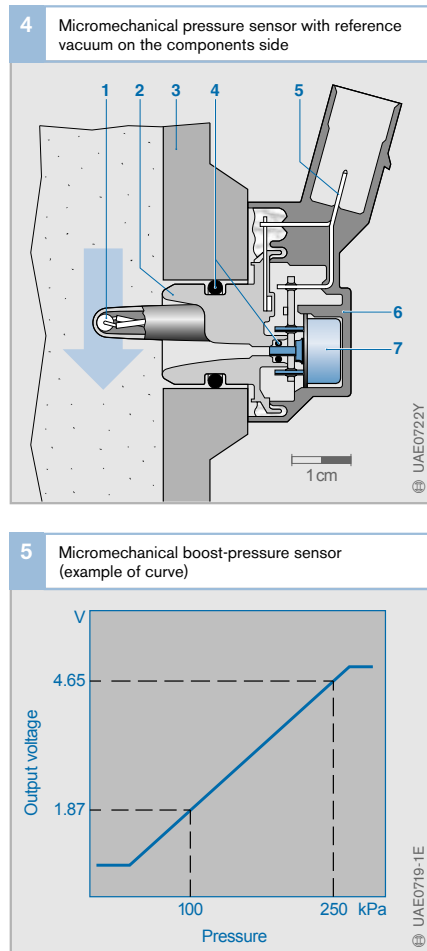


Fig. 4

- 1 Temperature sensor (NTC)
- 2 Lower section of case
- 3 Manifold wall
- 4 Seal rings
- 5 Electrical terminal (plug)
- 6 Case cover
- 7 Measuring element

temperature influences, and linearise the pressure curve. The output voltage is between $0 \dots 5 \text{ V}$ and is connected through electrical terminals (Fig. 4, 5) to the engine-management ECU which uses this output voltage in calculating the pressure (Fig. 5).

Version with reference vacuum in special chamber

Design and construction

The *manifold or boost-pressure sensor* version with the reference vacuum in a special chamber (Figs. 6 and 7) is easier to install than the version with the reference vacuum on the

components side of the sensor element. Similar to the pressure sensor with cap and reference vacuum on the components side of the sensor element, the sensor element here is formed from a silicon chip with four etched deformation resistors in a bridge circuit. It is attached to a glass base. In contrast to the sensor with the reference vacuum on the components side, there is no passage in the glass base through which the measured pressure can be applied to the sensor element. Instead, pressure is applied to the silicon chip from the side on which the evaluation elec-

tronics is situated. This means that a special gel must be used at this side of the sensor to protect it against environmental influences (Fig. 8, 1). The reference vacuum is enclosed in the chamber between the silicon chip (6) and the glass base (3). The complete measuring element is mounted on a ceramic hybrid (4) which incorporates the soldering surfaces for electrical contacting inside the sensor.

A *temperature sensor* can also be incorporated in the pressure-sensor case. It protrudes into the air flow, and can therefore respond to temperature changes with a minimum of delay (Fig. 6, 4).

Operating concept

The operating concept, and with it the signal conditioning and signal amplification together with the characteristic curve, corresponds to that used in the pressure sensor with cap and reference vacuum on the sensor's structure side. The only difference is that the measuring element's diaphragm is deformed in the opposite direction and therefore the deformation resistors are "bent" in the other direction.

Fig. 6

- 1 Manifold wall
- 2 Case
- 3 Seal ring
- 4 Temperature sensor (NTC)
- 5 Electrical connection (socket)
- 6 Case cover
- 7 Measuring element


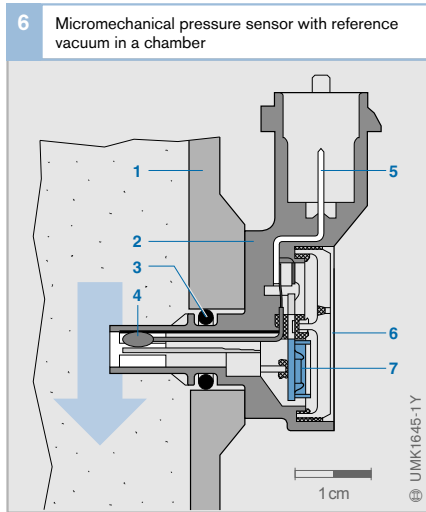


Fig. 8

- 1 Protective gel
- 2 Gel frame
- 3 Glass base
- 4 Ceramic hybrid
- 5 Chamber with reference volume
- 6 Measuring element (chip) with evaluation electronics
- 7 Bonded connection
- p Measured pressure



8 Measuring element of pressure sensor with reference vacuum in a chamber

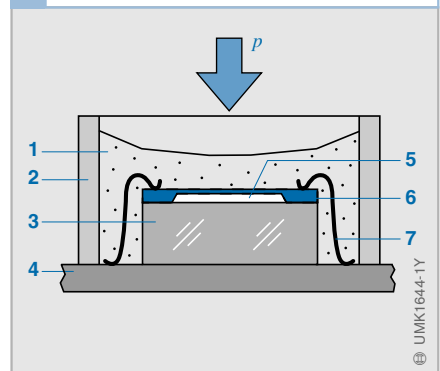

High-pressure sensors

Application

In automotive applications, high-pressure sensors are used for measuring the pressures of fuels and brake fluids.

Diesel rail-pressure sensor

In the diesel engine, the rail-pressure sensor measures the pressure in the fuel rail of the Common Rail accumulator-type injection system. Maximum operating (nominal) pressure p_{\max} is 160 MPa (1,600 bar). The fuel pressure is regulated in a control loop, and remains practically constant independent of load and engine speed. Any deviations from the setpoint pressure are compensated for by a pressure control valve.

Gasoline rail-pressure sensor

As its name implies, this sensor measures the pressure in the fuel rail of the DI Motronic with gasoline direct injection. Pressure is a function of load and engine speed and is 5...12 MPa (50...120 bar), and is used as an actual (measured) value in the closed-loop rail-pressure control. The rpm and load-dependent setpoint value is stored in a map and is adjusted at the rail by a pressure control valve.

Brake-fluid pressure sensor

Installed in the hydraulic modulator of such driving-safety systems as ESP, this high-pressure sensor is used to measure the brake-fluid pressure which is usually 25 MPa (250 bar). Maximum pressure p_{\max} can climb to as much as 35 MPa (350 bar). Pressure measurement and monitoring is triggered by the ECU which also evaluates the return signals.

Design and operating concept

The heart of the sensor is a steel diaphragm onto which deformation resistors have been vapor-deposited in the form of a bridge circuit (Fig. 1, 3). The sensor's measuring range is a function of diaphragm thickness

(thicker diaphragms for higher pressures, thinner diaphragms for lower pressures). When the pressure is applied via the pressure connection (4) to one of the diaphragm faces, the resistances of the bridge resistors change due to diaphragm deformation (approx. 20 μm at 1,500 bar).

The 0...80 mV output voltage generated by the bridge is conducted to an evaluation circuit (2) which amplifies it to 0...5 V. This is used as the input to the ECU which refers to a stored characteristic curve in calculating the pressure (Fig. 2).


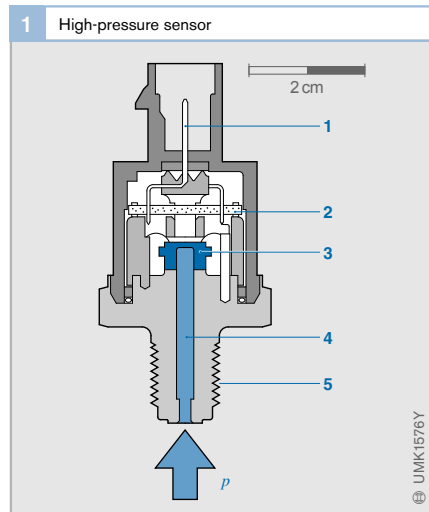


Fig. 1

- 1 Electrical connection (socket)
- 2 Evaluation circuit
- 3 Steel diaphragm with deformation resistors
- 4 Pressure connection
- 5 Mounting thread

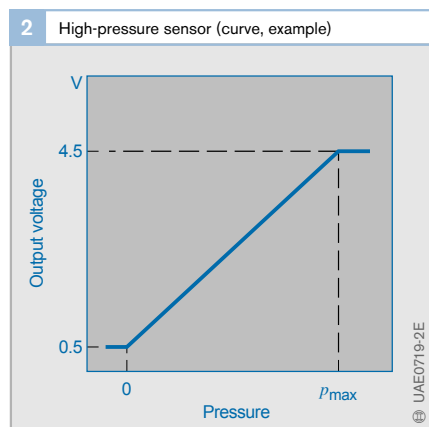

Inductive engine-speed sensors

Applications


Such engine-speed sensors are used for measuring:

- Engine rpm
- Crankshaft position (for information on the position of the engine pistons)

The rotational speed is calculated from the sensor's signal frequency. The output signal from the rotational-speed sensor is one of the most important quantities in electronic engine management.

Design and operating concept

The sensor is mounted directly opposite a ferromagnetic trigger wheel (Fig. 1, 7) from which it is separated by a narrow air gap. It has a soft-iron core (pole pin) (4), which is enclosed by the solenoid winding (5). The pole pin is also connected to a permanent magnet (1), and a magnetic field extends through the pole pin and into the trigger wheel. The level of the magnetic flux through the winding depends upon whether the sensor is opposite a trigger-wheel tooth or gap. Whereas the magnet's stray flux is concentrated by a tooth and leads to an increase in the working flux through the winding, it is weakened by a gap. When the trigger wheel rotates therefore, this causes a fluctuation of the flux which in turn generates a sinusoidal voltage in the solenoid winding which is pro-

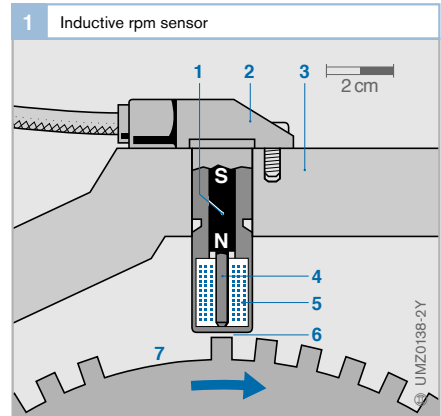

portional to the rate of change of the flux (Fig. 2). The amplitude of the AC voltage increases strongly along with increasing trigger-wheel speed (several mV...>100 V). At least about 30 rpm are needed to generate an adequate signal level.

The number of teeth on the trigger wheel depends upon the particular application. On solenoid-valve-controlled engine-management systems for instance, a 60-pitch trigger wheel is normally used, although 2 teeth are omitted (7) so that the trigger wheel has $60 - 2 = 58$ teeth. The very large tooth gap is allocated to a defined crankshaft position and serves as a reference mark for synchronizing the ECU.

There is another version of the trigger wheel which has one tooth per engine cylinder. In the case of a 4-cylinder engine, therefore, the trigger wheel has 4 teeth, and 4 pulses are generated per revolution.

The geometries of the trigger-wheel teeth and the pole pin must be matched to each other. The evaluation-electronics circuitry in the ECU converts the sinusoidal voltage, which is characterized by strongly varying amplitudes, into a constant-amplitude square-wave voltage for evaluation in the ECU microcontroller.

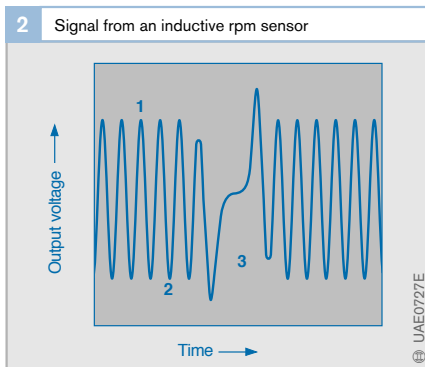


Fig. 1

- 1 Permanent magnet
- 2 Sensor housing
- 3 Engine block
- 4 Pole pin
- 5 Solenoid winding
- 6 Air gap
- 7 Trigger wheel with reference-mark gap

Fig. 2

- 1 Tooth
- 2 Tooth gap
- 3 Reference mark

Rotational-speed (rpm) sensors and incremental angle-of-rotation sensors

Application

The above sensors are installed in distributor-type diesel injection pumps with solenoid-valve control. Their signals are used for:

- The measurement of the injection pump's speed
- Determining the instantaneous angular position of pump and camshaft
- Measurement of the instantaneous setting of the timing device

The pump speed at a given instant is one of the input variables to the distributor pump's ECU which uses it to calculate the triggering time for the high-pressure solenoid valve, and, if necessary, for the timing-device solenoid valve.

The triggering time for the high-pressure solenoid valve must be calculated in order to inject the appropriate fuel quantity for the particular operating conditions. The cam plate's instantaneous angular setting defines the triggering point for the high-pressure solenoid valve. Only when triggering takes place at exactly the right cam-plate angle, can it be guaranteed that the opening and closing points for the high-pressure solenoid valve are correct for the particular cam lift. Precise triggering defines the correct start-of-injection point and the correct injected fuel quantity.

The correct timing-device setting as needed for timing-device control is ascertained by comparing the signals from the camshaft rpm sensor with those of the angle-of-rotation sensor.

Design and operating concept

The rpm sensor, or the angle-of-rotation sensor, scans a toothed pulse disc with 120 teeth which is attached to the distributor pump's driveshaft. There are tooth gaps, the number of which correspond to the number of engine cylinders, evenly spaced around the disc's circumference. A double differential magnetoresistive sensor is used.

Magnetoresistors are magnetically controllable semiconductor resistors, and similar in design to Hall-effect sensors. The double differential sensor has four resistors connected to form a full bridge circuit.

The sensor has a permanent magnet, and the magnet's pole face opposite the toothed pulse disc is homogenized by a thin ferromagnetic wafer on which are mounted the four magnetoresistors, separated from each other by half a tooth gap. This means that alternately there are two magnetoresistors opposite tooth gaps and two opposite teeth (Fig. 1). The magnetoresistors for automotive applications are designed for operation in temperatures of $\leq 170^{\circ}\text{C}$ ($\leq 200^{\circ}\text{C}$ briefly).

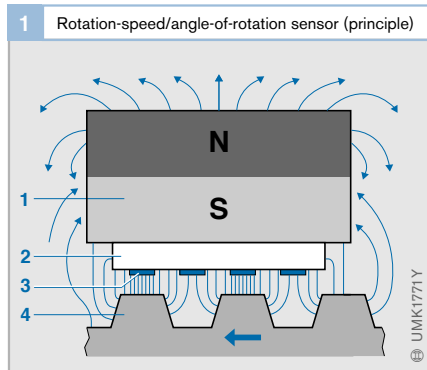


Fig. 1

- 1 Magnet
- 2 Homogenized wafer (Fe)
- 3 Magnetoresistor
- 4 Toothed pulse disc

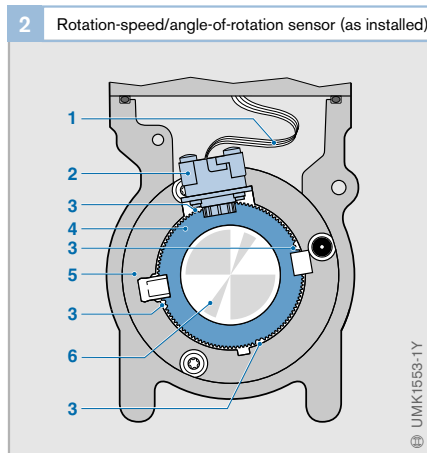


Fig. 2

- 1 Flexible conductive foil
- 2 Rotation-speed (rpm)/angle-of-rotation sensor
- 3 Tooth gap
- 4 Toothed pulse wheel (trigger wheel)
- 5 Rotatable mounting
- 6 Driveshaft

Hall-effect phase sensors

Application

The engine's camshaft rotates at half the crankshaft speed. Taking a given piston on its way to TDC, the camshaft's rotational position is an indication as to whether the piston is in the compression or exhaust stroke. The phase sensor on the camshaft provides the ECU with this information.

Design and operating concept

Hall-effect rod sensors

As the name implies, such sensors (Fig. 2a) make use of the Hall effect. A ferromagnetic trigger wheel (with teeth, segments, or perforated rotor, 7) rotates with the camshaft. The Hall-effect IC is located between the trigger wheel and a permanent magnet (5) which generates a magnetic field strength perpendicular to the Hall element.

If one of the trigger-wheel teeth (Z) now passes the current-carrying rod-sensor element (semiconductor wafer), it changes the magnetic field strength perpendicular to the Hall element. This causes the electrons, which are driven by a longitudinal voltage across the element to be deflected perpendicularly to the direction of current (Fig. 1, angle α).

This results in a voltage signal (Hall voltage) which is in the millivolt range, and which is independent of the relative speed between sensor and trigger wheel. The evaluation electronics integrated in the sensor's Hall IC conditions the signal and outputs it in the form of a rectangular-pulse signal (Fig. 2b "High"/"Low").

Differential Hall-effect rod sensors

Rod sensors operating as per the differential principle are provided with two Hall elements. These elements are offset from each other either radially or axially (Fig. 3, S1 and S2), and generate an output signal which is proportional to the difference in magnetic flux at the element measuring points. A two-track perforated plate (Fig. 3a) or a two-track

trigger wheel (Fig. 3b) are needed in order to generate the opposing signals in the Hall elements (Fig. 4) as needed for this measurement.


Such sensors are used when particularly severe demands are made on accuracy. Further advantages are their relatively wide air-gap range and good temperature-compensation characteristics.

Fig. 1
 I Wafer current
 I_H Hall current
 I_V Supply current
 U_H Hall voltage
 U_R Longitudinal voltage
 B Magnetic induction
 α Deflection of the electrons by the magnetic field

Fig. 2
 a Positioning of sensor and single-track trigger wheel
 b Output signal characteristic U_A

1 Electrical connection (plug)
 2 Sensor housing
 3 Engine block
 4 Seal ring
 5 Permanent magnet
 6 Hall-IC
 7 Trigger wheel with tooth/segment (Z) and gap (L)

a Air gap
 φ Angle of rotation

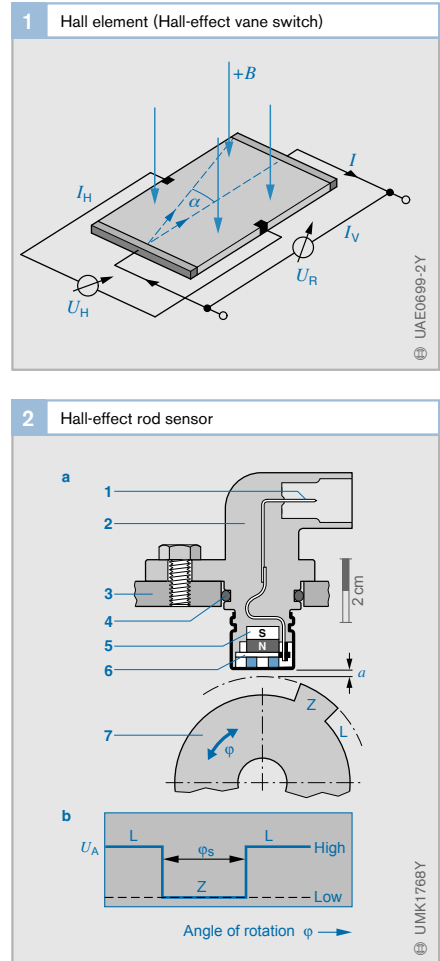

© UAE0699-2Y

© UMK1768Y

3 Differential Hall-effect rod sensors

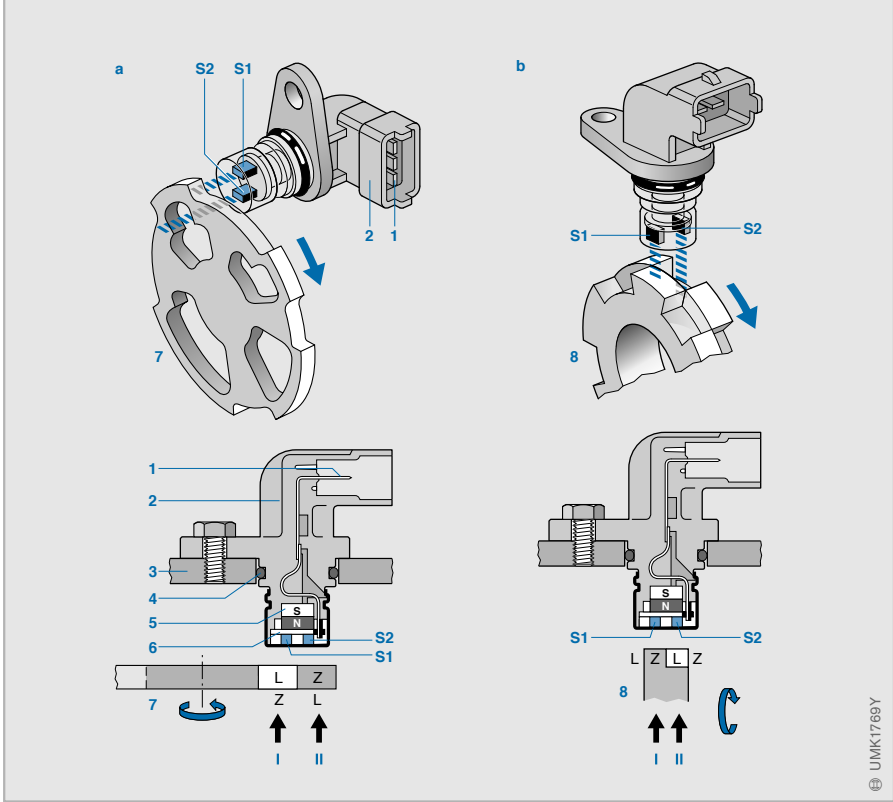


Fig. 3
 a Axial tap-off (perforated plate)
 b Radial tap-off (two-track trigger wheel)

1 Electrical connection (plug)
 2 Sensor housing
 3 Engine block
 4 Seal ring
 5 Permanent magnet
 6 Differential Hall-IC with Hall elements S1 and S2
 7 Perforated plate
 8 Two-track trigger wheel

I Track 1
 II Track 2

4 Characteristic curve of the output signal U_A from a differential Hall-effect rod sensor

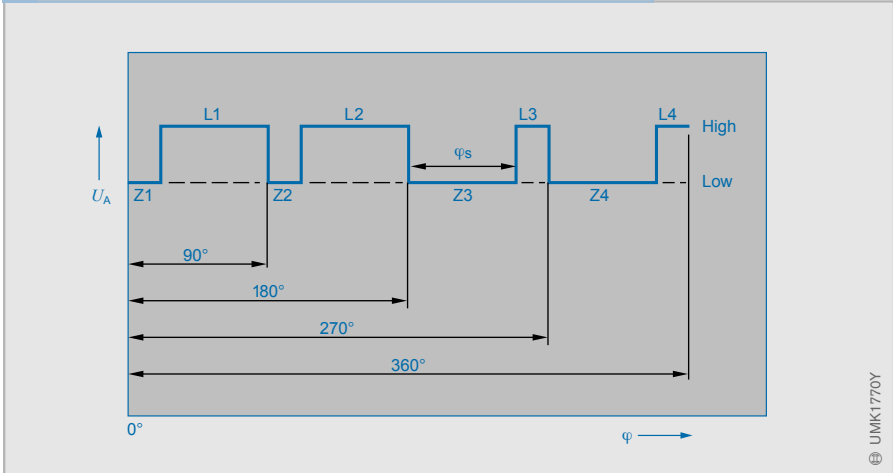


Fig. 4
 Output signal "Low": Material (Z) in front of S1, gap (L) in front of S2
 Output signal "High": Gap (L) in front of S1, material (Z) in front of S2
 φ_s Signal width

Accelerator-pedal sensors

Application

In conventional engine-management systems, the driver transmits his/her wishes for acceleration, constant speed, or lower speed, to the engine by using the accelerator pedal to intervene mechanically at the throttle plate (gasoline engine) or at the injection pump (diesel engine). Intervention is transmitted from the accelerator pedal to the throttle plate or injection pump by means of a Bowden cable or linkage.

On today's electronic engine-management systems, the Bowden cable and/or linkage have been superseded, and the driver's accelerator-pedal inputs are transmitted to the ECU by an

accelerator-pedal sensor which registers the accelerator-pedal travel, or the pedal's angular setting, and sends this to the engine ECU in the form of an electric signal. This system is also known as "drive-by-wire".

The accelerator-pedal module (Figs. 2b, 2c) is available as an alternative to the individual accelerator-pedal sensor (Fig. 2a). These modules are ready-to-install units comprising accelerator pedal and sensor, and make adjustments on the vehicle a thing of the past.

Design and operating concept

Potentiometer-type accelerator-pedal sensor

The heart of this sensor is the potentiometer across which a voltage is developed which is a function of the accelerator-pedal setting. In the ECU, a programmed characteristic curve is applied in order to calculate the accelerator-pedal travel, or its angular setting, from this voltage.

A second (redundant) sensor is incorporated for diagnosis purposes and for use in case of malfunctions. It is a component part of the monitoring system. One version of the accelerator-pedal sensor operates with a second potentiometer. The voltage across this potentiometer is always half of that across the first potentiometer. This provides two independent signals which are used for troubleshooting (Fig. 1). Instead of the second potentiometer, another version uses a low-idle switch which provides a signal for the ECU when the accelerator pedal is in the idle position.

Fig. 1

- 1 Potentiometer 1 (master potentiometer)
- 2 Potentiometer 2 (50% of voltage)


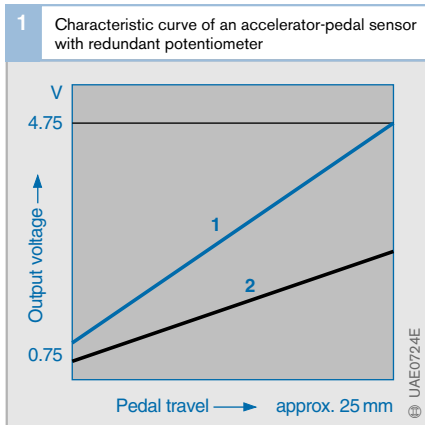


Fig. 2

- a Individual accelerator-pedal sensor
- b Top-mounted accelerator-pedal module
- c Bottom-mounted accelerator-pedal module FMP1
- 1 Sensor
- 2 Vehicle-specific pedal
- 3 Pedal bracket

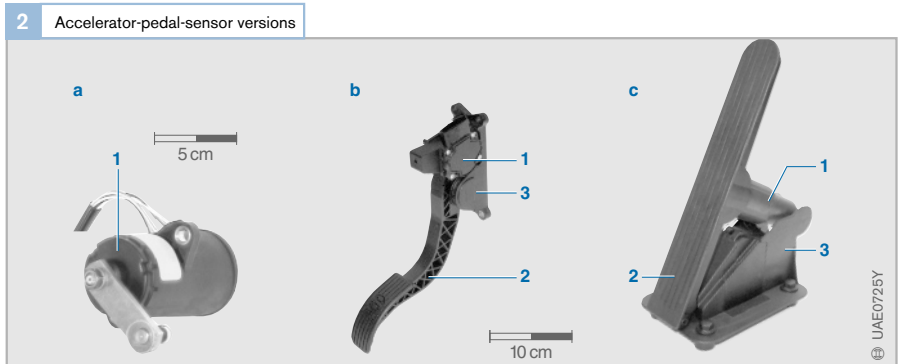

tion. For automatic transmission vehicles, a further switch can be incorporated for a kick-down signal.

Hall-effect angle-of-rotation sensors

The ARS1 (Angle of Rotation Sensor) is based on the movable-magnet principle. It has a measuring range of approx. 90° (Figs. 3 and 4).

A semicircular permanent-magnet disc rotor (Fig. 4, 1) generates a magnetic flux which is returned back to the rotor via a pole shoe (2), magnetically soft conductive elements (3) and shaft (6). In the process, the amount of flux which is returned through the conductive elements is a function of the rotor's angle of rotation φ . There is a Hall-effect sensor (5) located in the magnetic path of each conductive element, so that it is possible to generate a practically linear characteristic curve throughout the measuring range.

The ARS2 is a simpler design without magnetically soft conductive elements. Here, a magnet rotates around the Hall-effect sensor. The path it takes describes a circular arc. Since only a small section of the resulting sinusoidal characteristic curve features good linearity, the Hall-effect sensor is located slightly outside the center of the arc. This causes the curve to deviate from its sinusoidal form so that the curve's linear section is increased to more than 180° .

Mechanically, this sensor is highly suitable for installation in an accelerator-pedal module (Fig. 5).

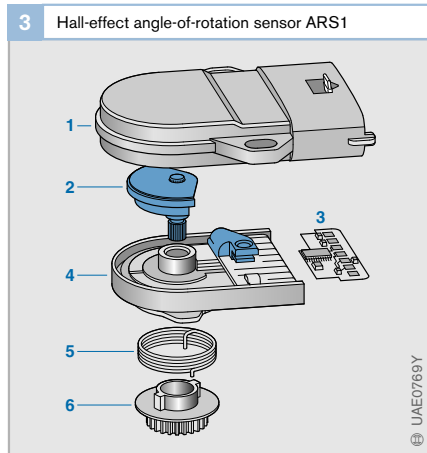


Fig. 3

- 1 Housing cover
- 2 Rotor (permanent magnet)
- 3 Evaluation electronics with Hall-effect sensor
- 4 Housing base
- 5 Return spring
- 6 Coupling element (e.g. gear)

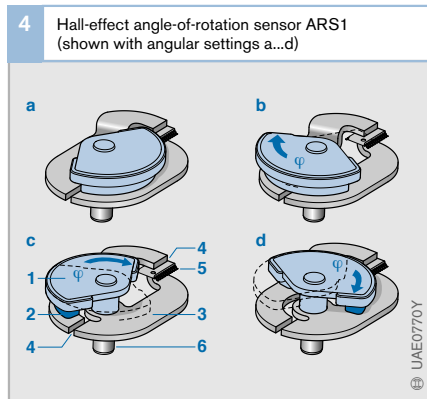


Fig. 4

- 1 Rotor (permanent magnet)
 - 2 Pole shoe
 - 3 Conductive element
 - 4 Air gap
 - 5 Hall-effect sensor
 - 6 Shaft (magnetically soft)
- φ Angle of rotation

5 Hall-effect angle-of-rotation sensor ARS 2

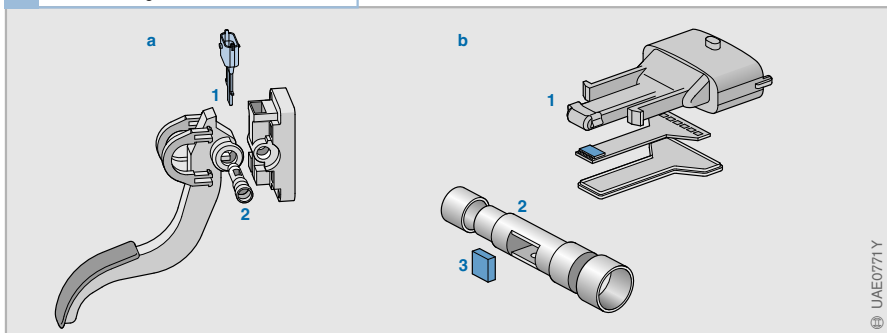


Fig. 5

- a Installation in the accelerator-pedal module
 - b Components
- 1 Hall-effect sensor
 - 2 Pedal shaft
 - 3 Magnet

Hot-film air-mass meter HFM5

Application

For optimal combustion as needed to comply with the emission regulations imposed by legislation, it is imperative that precisely the necessary air mass is inducted, irrespective of the engine's operating state.

To this end, part of the total air flow which is actually inducted through the air filter or the measuring tube is measured by a hot-film air-mass meter. Measurement is very precise and takes into account the pulsations and reverse flows caused by the opening and closing of the engine's intake and exhaust valves. Intake-air temperature changes have no effect upon measuring accuracy.

Design and construction

The housing of the HFM5 Hot-Film Air-Mass Meter (Fig. 1, 5) projects into a measuring tube (2) which, depending upon the engine's air-mass requirements, can have a variety of diameters (for 370...970 kg/h).

This tube is installed in the intake tract downstream from the air filter. Plug-in versions are also available which are installed inside the air filter.

The most important components in the sensor are the sensor element (4), in the air intake (8), and the integrated evaluation electronics (3). The partial air flow as required for measurement flows across this sensor element.

Vapor-deposition is used to apply the sensor-element components to a semiconductor substrate, and the evaluation-electronics (hybrid circuit) components to a ceramic substrate. This principle permits very compact design. The evaluation electronics are connected to the ECU through the plug-in connection (1). The partial-flow measuring tube (6) is shaped so that the air flows past the sensor element smoothly (without whirl effects) and back into the measuring tube via the air outlet (7). This method ensures efficient sensor operation even in case of extreme pulsation, and in addition to forward flow, reverse flows are also detected (Fig. 2).

Operating concept


The hot-film air-mass meter is a "thermal sensor" and operates according to the following principle:

A micromechanical sensor diaphragm (Fig. 3, 5) on the sensor element (3) is heated by a centrally mounted heater resistor and held at a constant temperature. The temperature drops sharply on each side of this controlled heating zone (4).

The temperature distribution on the diaphragm is registered by two temperature-dependent resistors which are mounted upstream and downstream of the heater resistor so as to be symmetrical to it (measuring points M_1, M_2). Without the flow of incoming air, the temperature characteristic (1) is the same on each side of the heating zone ($T_1 = T_2$).

Fig. 1

- 1 Electrical plug-in connection
- 2 Measuring tube or air-filter housing wall
- 3 Evaluation electronics (hybrid circuit)
- 4 Sensor element
- 5 Sensor housing
- 6 Partial-flow measuring tube
- 7 Air outlet for the partial air flow Q_M
- 8 Intake for partial air flow Q_M

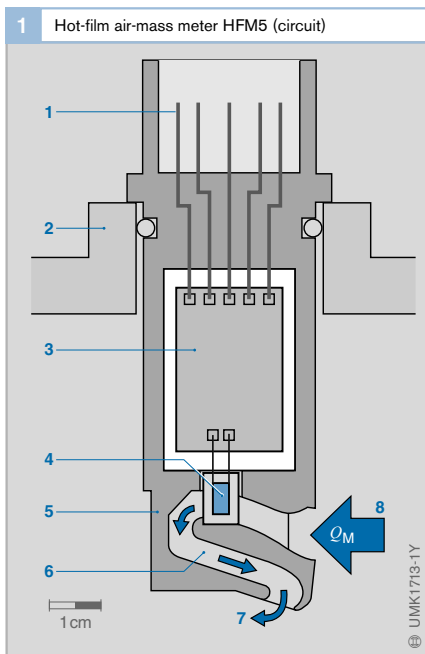

As soon as air flows over the sensor element, the uniform temperature distribution at the diaphragm changes (2). On the intake side, the temperature characteristic is steeper since the incoming air flowing past this area cools it off. Initially, on the opposite side (the side nearest to the engine), the sensor element cools off. The air heated by the heater element then heats up the sensor element. The change in temperature differential (ΔT) leads to a temperature differential between the measuring points M_1 and M_2 .

The heat dissipated to the air, and therefore the temperature characteristic at the sensor element is a function of the air mass flow. Independent of the absolute temperature of the air flowing past, the temperature differential is a measure of the air mass flow. Apart from this, the temperature differential is directional, which means that the air-mass meter not only registers the mass of the incoming air but also its direction.

Due to its very thin micromechanical diaphragm, the sensor has a highly dynamic response (<15 ms), a point which is of particular importance when the incoming air is pulsating heavily.

The evaluation electronics (hybrid circuit) integrated in the sensor convert the resistance differential at the measuring points M_1 and M_2 into an analog signal of 0...5 V which is suitable for processing by the ECU. Using the sensor characteristic (Fig. 2) programmed into the ECU, the measured voltage is converted into a value representing the air mass flow [kg/h].

The shape of the characteristic curve is such that the diagnosis facility incorporated in the ECU can detect such malfunctions as an open-circuit line. A temperature sensor for auxiliary functions can also be integrated in the HFM5. It is located on the sensor element upstream of the heated zone.

It is not required for measuring the air mass. For applications on specific vehicles, supplementary functions such as improved separation of water and contamination are provided for (inner measuring tube and protective grid).

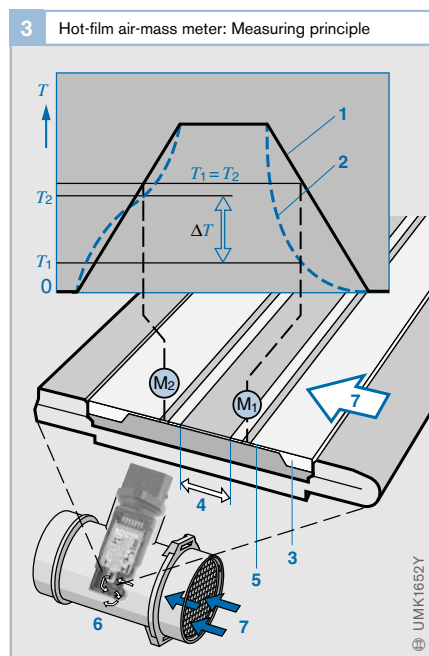
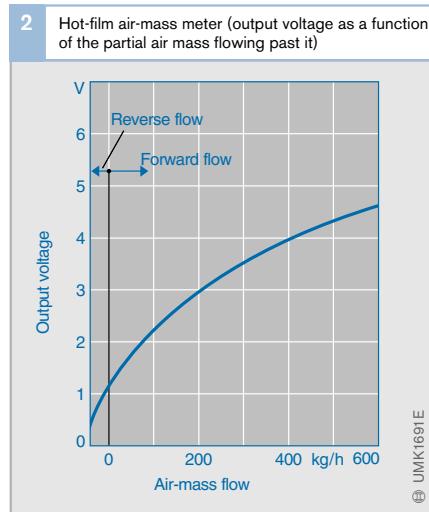


Fig. 3

- 1 Temperature profile without air flow across sensor element
- 2 Temperature profile with air flow across sensor element
- 3 Sensor element
- 4 Heated zone
- 5 Sensor diaphragm
- 6 Measuring tube with air-mass meter
- 7 Intake-air flow

M_1, M_2 Measuring points

T_1, T_2 Temperature values at the measuring points M_1 and M_2

ΔT Temperature differential

LSU4 planar broad-band Lambda oxygen sensor

Application

As its name implies, the broad-band Lambda oxygen sensor is used across a very extensive range to determine the oxygen concentration in the exhaust gas. The figures provided by the sensor are an indication of the air-fuel (A/F) ratio in the engine's combustion chamber. The excess-air factor λ is used when defining the A/F ratio. Broad-band Lambda sensors make precise measurements not only at the stoichiometric point $\lambda = 1$, but also in the lean range ($\lambda > 1$) and in the rich range ($\lambda < 1$). In combination with electronic closed-loop control circuitry, these sensors generate an unmistakable, continuous electrical signal (Fig. 2) in the range from $0.7 < \lambda < \infty$ (= air with 21% O₂).

These characteristics enable the broad-band Lambda sensor to be used not only in gasoline-engine-management systems with two-step control ($\lambda = 1$), but also in control concepts with rich and lean air-fuel (A/F) mixtures. This type of Lambda sensor is therefore also suitable for the Lambda closed-loop control used with lean-burn concepts on gasoline engines, as well as for diesel engines, gaseous-fuel engines and gas-powered central heaters

and water heaters (this wide range of applications led to the designation LSU: Lambda Sensor Universal (taken from the German), in other words Universal Lambda Sensor).

The sensor protrudes into the exhaust pipe and detects the flow of exhaust-gas flow from all cylinders.

In a number of systems, several Lambda sensors are installed for even greater accuracy. Here, for instance, they are fitted in the individual exhaust tracts of V-engines.

Design and construction


The LSU4 broad-band Lambda sensor (Fig. 3) is a planar dual-cell limit-current sensor. It features a zirconium-dioxide/ceramic (ZrO₂) measuring cell (Fig. 1), which is the combination of a Nernst concentration cell (sensor cell which functions in the same way as a two-step Lambda sensor) and an oxygen-pump cell for transporting the oxygen ions.

The oxygen pump cell (Fig. 1, 8) is so arranged with respect to the Nernst concentration cell (7) that there is a 10...50 μm diffusion gap (6) The gap is connected to the exhaust gas through a gas-access passage (10). The porous diffusion barrier (11) serves to limit the inflow of oxygen molecules from the exhaust gas.

Fig. 1

- 1 Exhaust gas
- 2 Exhaust pipe
- 3 Heater
- 4 Control electronics
- 5 Reference cell with reference-air passage
- 6 Diffusion gap
- 7 Nernst concentration cell
- 8 Oxygen-pump cell with pump electrode
- 9 Porous protective layer
- 10 Gas-access passage
- 11 Porous diffusion barrier

- I_P Pump current
 U_P Pump voltage
 U_H Heater voltage
 U_{Ref} Reference voltage (450 mV, corresponds to $\lambda = 1$)
 U_S Sensor voltage

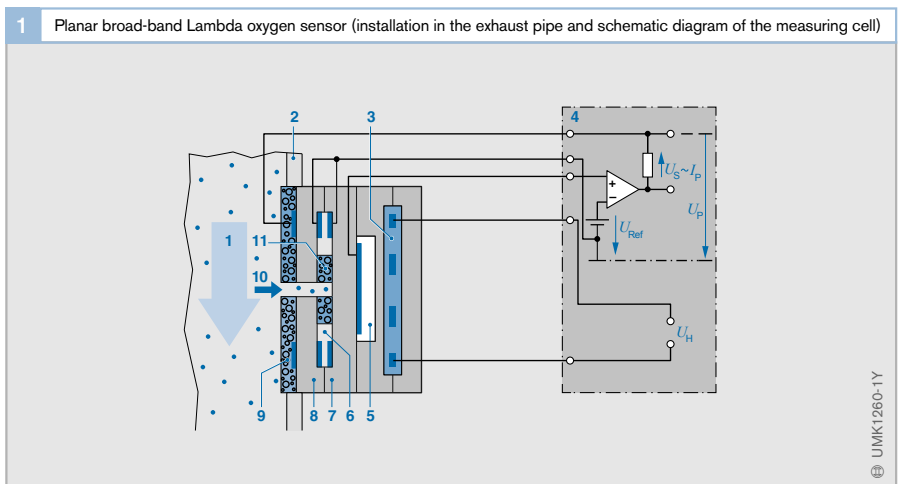

On the one side, the Nernst concentration cell is connected to the atmosphere by a reference-air passage (5), on the other it is connected to the exhaust gas in the diffusion gap.

The sensor must have heated up to at least 600...800°C before it generates a usable signal. It is provided with an integral heater (3), so that the required temperature is reached quickly.


Method of operation

The exhaust gas enters the actual measuring chamber (diffusion gap) of the Nernst concentration cell through the pump cell's gas-access passage. In order that the excess-air factor λ can be adjusted in the diffusion gap, the Nernst concentration cell compares the gas in the diffusion gap with that in the reference-air passage.

The complete process proceeds as follows:

By applying the pump voltage U_P across the pump cell's platinum electrodes, oxygen from the exhaust gas can be pumped into or out of the diffusion gap. With the help of the Nernst concentration cell, an electronic circuit in the ECU controls the voltage (U_P) across the pump cell in order that the composition of the gas in the diffusion gap remains constant at $\lambda = 1$. If the exhaust gas is lean,

the pump cell pumps the oxygen to the outside (positive pump current). On the other hand, if it is rich, due to the decomposition of CO_2 and H_2O at the exhaust-gas electrode the oxygen is pumped from the surrounding exhaust gas and into the diffusion gap (negative pump current). Oxygen transport is unnecessary at $\lambda = 1$ and pump current is zero. The pump current is proportional to the exhaust-gas oxygen concentration and is this a non-linear measure for the excess-air factor λ (Fig. 2).

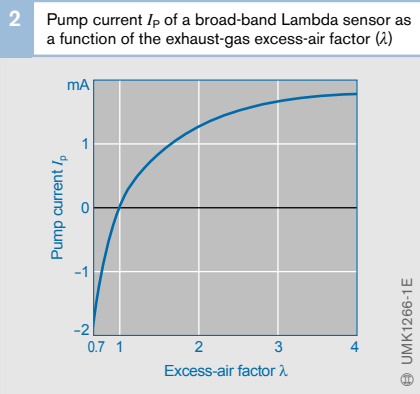

3 LSU4 planar broad-band Lambda oxygen sensor (view and section)

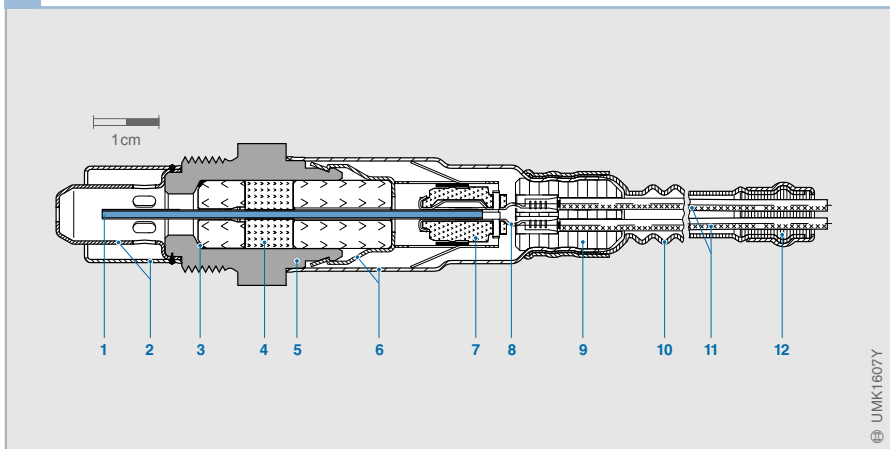


Fig. 3

- 1 Measuring cell (combination of Nernst concentration cell and oxygen-pump cell)
- 2 Double protective tube
- 3 Seal ring
- 4 Seal packing
- 5 Sensor housing
- 6 Protective sleeve
- 7 Contact holder
- 8 Contact clip
- 9 PTFE sleeve (Teflon)
- 10 PTFE shaped sleeve
- 11 Five connecting leads
- 12 Seal ring

Half-differential short-circuiting-ring sensors

Application

These sensors are also known as HDK (taken from the German) sensors, and are applied as position sensors for travel or angle. They are wear-free, as well as being very precise, and very robust, and are used as:

- Rack-travel sensors (RWG) for measuring the control-rack setting on in-line diesel injection pumps, and as
- Angle-of-rotation sensors in the injected-fuel-quantity actuators of diesel distributor pumps

Design and operating concept

These sensors (Figs. 1 and 2) are comprised of a laminated soft-iron core on each limb of which are wound a measuring coil and a reference coil.

Alternating magnetic fields are generated when the alternating current from the ECU flows through these coils. The copper rings surrounding the limbs of the soft-iron cores screen the cores, though, against the effects of the magnetic fields. Whereas the reference short-circuiting rings are fixed in position, the measuring short-circuiting rings are attached to the control rack or control-collar shaft (in-line pumps and distributor pumps respectively), with which they are free to move (control-rack travel s , or adjustment angle φ).

When the measuring short-circuiting ring moves along with the control rack or control-collar shaft, the magnetic flux changes and, since the ECU maintains the current constant (load-independent current), the voltage across the coil also changes.

The ratio of the output voltage U_A to the reference voltage U_{Ref} (Fig. 3) is calculated by an evaluation circuit. This ratio is proportional to the deflection of the measuring short-circuiting ring, and is processed by the ECU. Bending the reference short-circuiting ring adjusts the gradient of the characteristic curve, and the basic position of the measuring short-circuiting ring defines the zero position.

Fig. 1

- 1 Measuring coil
- 2 Measuring short-circuiting ring
- 3 Soft-iron core
- 4 Control-collar shaft
- 5 Reference coil
- 6 Reference short-circuiting ring

φ_{max} Adjustment-angle range for the control-collar shaft
 φ Measured angle

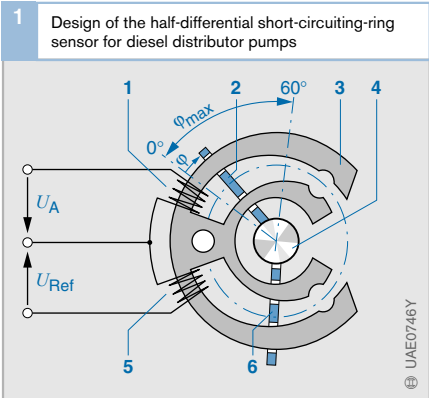


Fig. 2

- 1 Soft-iron core
 - 2 Reference coil
 - 3 Reference short-circuiting ring
 - 4 Control rack
 - 5 Measuring coil
 - 6 Measuring short-circuiting ring
- s Control-rack travel


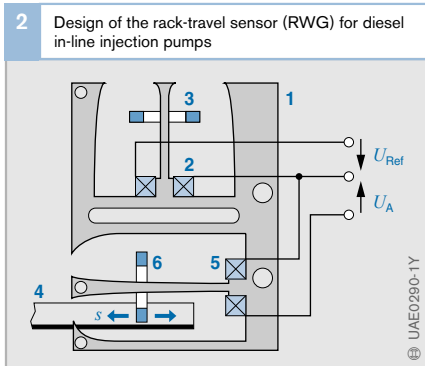


Fig. 3

U_A Output voltage
 U_{Ref} Reference voltage

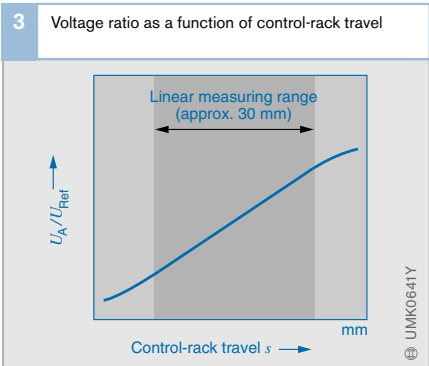

Fuel-level sensor

Application

It is the job of the fuel-level sensor to register the level of the fuel in the tank and send the appropriate signal to the ECU or to the display device in the vehicle's instrument panel. Together with the electric fuel pump and the fuel filter, it is part of the in-tank unit. These are installed in the fuel tank (gasoline or diesel fuel) and provide for an efficient supply of clean fuel to the engine (Fig. 1).

Design and construction

The fuel-level sensor (Fig. 2) is comprised of a potentiometer with wiper arm (wiper spring), printed conductors (twin-contact), resistor board (pcb), and electrical connections. The complete sensor unit is encapsulated and sealed against fuel. The float (fuel-resistant Nitrophenyl) is attached to one end of the wiper lever, the other end of which is fixed to the rotatable potentiometer shaft (and therefore also to the wiper spring). Depending upon the particular version, the float can be either fixed in position on the lever, or it can be free to rotate). The layout of the resistor board (pcb) and the shape of the float lever and float are matched to the particular fuel-tank design.

Operating concept

The potentiometer's wiper spring is fixed to the float lever by a pin. Special wipers (contact rivets) provide the contact between the wiper spring and the potentiometer resistance tracks, and when the fuel level changes the wipers move along these tracks and generate a voltage ratio which is proportional to the float's angle of rotation. End stops limit the rotation range of 100° for maximum and minimum levels as well as preventing noise.

Operating voltage is 5...13 V.

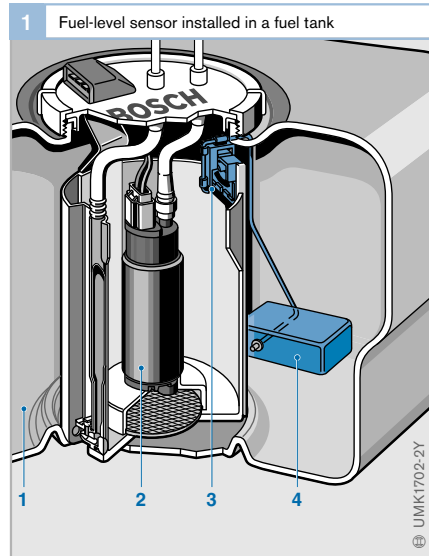


Fig. 1

- 1 Fuel tank
- 2 Electric fuel pump
- 3 Fuel-level sensor
- 4 Float

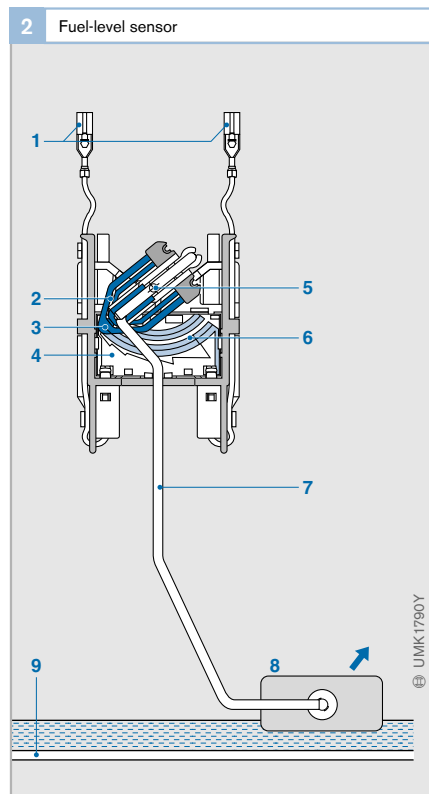


Fig. 2

- 1 Electrical connections
- 2 Wiper spring
- 3 Contact rivet
- 4 Resistor board
- 5 Bearing pin
- 6 Twin contact
- 7 Float lever
- 8 Float
- 9 Fuel-tank floor

Fault diagnostics

The rise in the sheer amount of electronics in the automobile, the use of software to control the vehicle, and the increased complexity of modern fuel-injection systems place high demands on the diagnostic concept, monitoring during vehicle operation (on-board diagnosis), and workshop diagnostics (Fig. 1). The workshop diagnostics is based on a guided troubleshooting procedure that links the many possibilities of on-board and offboard test procedures and test equipment. As emission-control legislation becomes more and more stringent and continuous monitoring is now called for, lawmakers have now acknowledged on-board diagnosis as an aid to monitoring exhaust-gas emissions, and have produced manufacturer-independent standardization. This additional system is termed the *on-board diagnostic system*.


Monitoring during vehicle operation (on-board diagnosis)

Overview

ECU-integrated diagnostics belong to the basic scope of electronic engine-management systems. Besides a self-test of the control unit, input and output signals, and control-unit intercommunication are monitored.

On-board diagnosis of an electronic system is the capability of a control unit to interpret and perform self-monitoring using “software intelligence”, i.e. detect, store, and diagnostically interpret errors and faults. On-board diagnosis runs without the use of any additional equipment.

Monitoring algorithms check input and output signals during vehicle operation, and check the entire system and all its functions for malfunctions and disturbances. Any errors or faults detected are stored in the control-unit fault memory. Stored fault information can be read out via a serial interface.

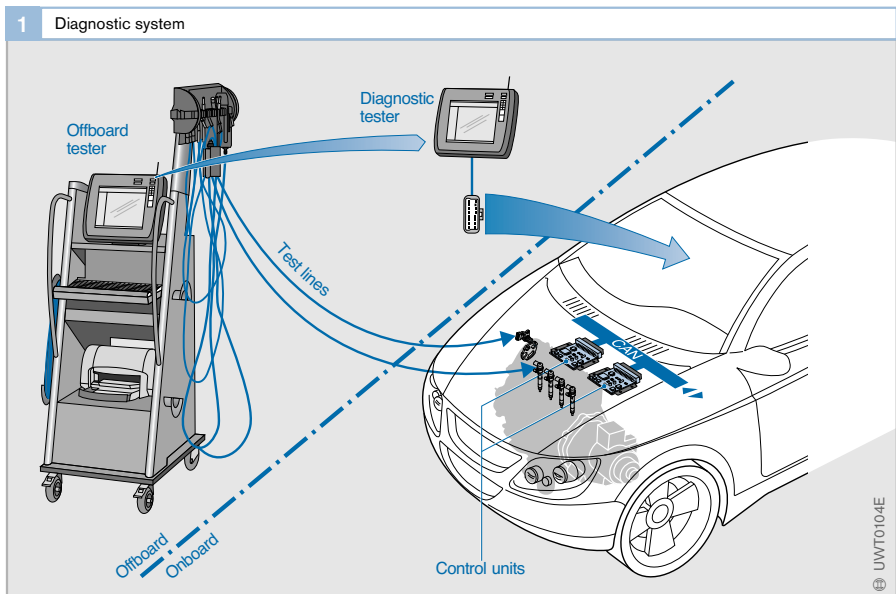

Input-signal monitoring


Sensors, plug connectors, and connecting lines (signal path) to the control unit (Fig. 2) are monitored by evaluating the input signal. This monitoring strategy is capable of detecting sensor errors, short-circuits in the battery-power circuit U_{Batt} and vehicle-ground circuit, and line breaks. The following methods are applied:

- Monitoring sensor supply voltage (if applicable).
- Monitoring detected values for permissible value ranges (e.g. 0.5...4.5 V).
- If additional information is available, a plausibility check is conducted using the detected value (e.g. comparison of crankshaft speed and camshaft speed).
- Critical sensors (e.g. pedal-travel sensor) are fitted in redundant configuration, which means that their signals can be directly compared with each other.

Output-signal monitoring

Actuators triggered by a control unit via output stages (Fig. 2) are monitored. The monitoring functions detects line breaks and short-circuits in addition to actuator faults. The following methods are applied:

- Monitoring an output signal by the output stage. The electric circuit is monitored for short-circuits to battery voltage U_{Batt} , to vehicle ground, and for open circuit.
- Impacts on the system by the actuator are detected directly or indirectly by a function or plausibility monitor. System actuators, e.g. exhaust-gas recirculation valves, throttle valves, or swirl flaps, are monitored indirectly via closed-control loops (e.g. continuous control variance), and also partly by means of position sensors (e.g. position of turbine geometry in the exhaust-gas turbocharger).

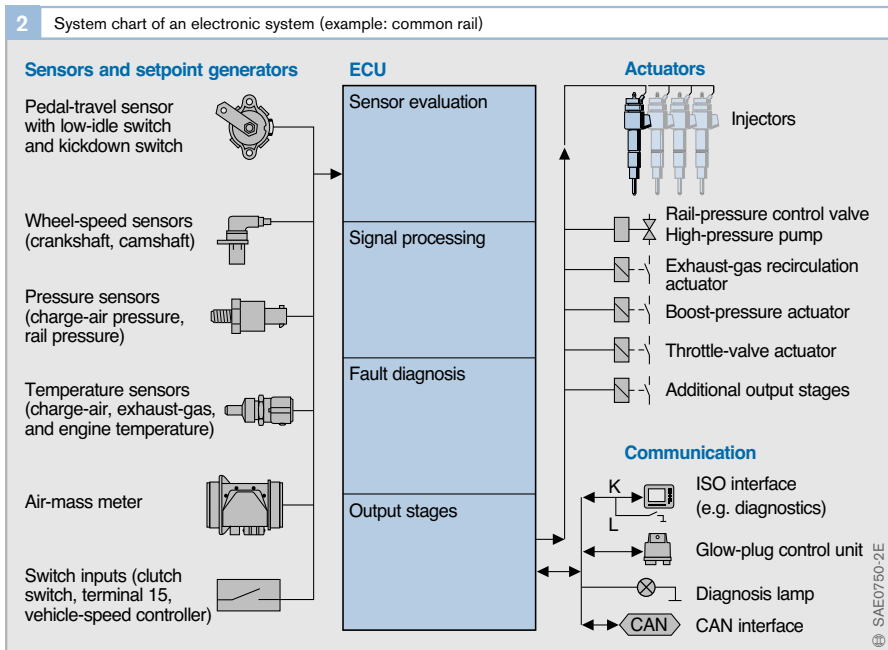

Monitoring internal ECU functions

Monitoring functions are implemented in control-unit hardware (e.g. “intelligent” output-stage modules) and software to ensure that the control unit functions correctly at all times. The monitoring functions check each of the control-unit components (e.g. micro-controller, flash EPROM, RAM).

Many tests are conducted immediately after startup. Other monitoring functions are performed during normal operation and repeated at regular intervals in order to detect component failure during operation. Test runs that require intensive CPU capacity, or that cannot be performed during vehicle operation for other reasons, are conducted in after-run more when the engine is switched off. This method ensures that the other functions are not interfered with. In the common-rail system for diesel engines, functions such as the injector switchoff paths are tested during engine runup or after-run. With a spark-ignition engine, functions such as the flash EPROM are tested in engine after-run.

Monitoring ECU communication

As a rule, communication with other ECUs takes place over the CAN bus (Controller Area Network). The CAN protocol contains control mechanisms to detect malfunctions. As a result, transmission errors are even detectable at CAN-module level. A number of other checks are also performed in the ECU. Since the majority of CAN messages are sent at regular intervals by the individual control units, the failure of a CAN controller in a control unit is detectable by testing at regular intervals. In addition, when redundant information is available in the ECU, the received signals are checked in the same way as all input signals.

Error handling

Error detection

A signal path is categorized as finally defective if an error occurs over a definite period of time. Until the defect is categorized, the system uses the last valid value detected. When the defect is categorized, a standby function is triggered (e.g. engine-temperature substitute value $T = 90^{\circ}\text{C}$).

Most errors can be rectified or detected as intact during vehicle operation, provided the signal path remains intact for a definite period of time.

Fault storage

Each fault is stored as a fault code in the non-volatile area of the data memory. The fault code also describes the fault type (e.g. short-circuit, line break, plausibility, value range exceeded). Each fault-code input is accompanied by additional information, e.g. the operating and environmental conditions (freeze frame) at the time of fault occurrence (e.g. engine speed, engine temperature).

Limp-home function

If a fault is detected, limp-home strategies can be triggered in addition to substitute values (e.g. engine output power or speed limited).

These strategies help to:

- Maintain driving safety
- Avoid consequential damage
- Minimize exhaust-gas emissions

On-board diagnosis system for passenger cars and light-duty trucks

The engine system and its components must be constantly monitored in order to comply with exhaust-gas emission limits specified by law in everyday driving situations. For this reason, regulations have come into force to monitor exhaust-gas systems and components, e.g. in California. This has standardized and expanded manufacturer-specific on-board diagnosis with respect to the monitoring of emission-related components and systems.

Legislation

OBD I (CARB)

1988 marked the coming into force of OBD I in California, that is, the first stage of CARB legislation (California Air Resources Board). The first OBD stage makes the following requirements:

- Monitoring emission-related electrical components (short-circuits, line breaks) and storage of faults in the control-unit fault memory.
- A Malfunction Indicator Lamp (MIL) that alerts the driver to the malfunction.
- The defective component must be displayed by means of on-board equipment (e.g. blink code using a diagnosis lamp).

OBD II (CARB)

The second stage of the diagnosis legislation (OBD II) came into force in California in 1994. OBD II became mandatory for diesel-engine cars with effect from 1996. In addition to the scope of OBD I, system functionality was now monitored (e.g. plausibility check of sensor signals).

OBD II stipulates that all emission-related systems and components must be monitored if they cause an increase in toxic exhaust-gas emissions in the event of a malfunction (by exceeding the OBD limits). Moreover, all components must be monitored if they are

used to monitor emission-related components or if they can affect the diagnosis results.

Normally, the diagnostic functions for all components and systems under surveillance must run at least once during the exhaust-gas test cycle (e.g. FTP 75). A further stipulation is that all diagnostic functions must run with sufficient frequency during daily driving mode. For many monitoring functions, the law defines a monitoring frequency (In Use Monitor Performance Ratio) in daily operation starting model year 2005.

Since the introduction of OBD II, the law has been revised in several stages (updates). The last update came into force in model year 2004. Further updates have been announced.

OBD (EPA)

Since 1994 the laws of the EPA (Environmental Protection Agency) have been in force in the remaining U.S. states. The scope of these diagnostics comply for the most part with the CARB legislation (OBD II).

The OBD regulations for CARB and EPA apply to all passenger cars with up to 12 seats and to light-duty trucks weighing up to 14,000 lbs (6.35 t).

EOBD (EU)

The OBD attuned to European conditions is termed EOBD and is based on the EPA-OBD.

EOBD has been valid for all passenger cars and light-duty trucks equipped with gasoline engines and weighing up to 3.5 t with up to 9 seats since January 2000. Since January 2003 the EOBD also applies to passenger cars and light-duty trucks with diesel engines.

Other countries

A number of other countries have already adopted or are planning to adopt EU or US-OBd legislation.

Requirements of the OBD system

The ECU must use suitable measures to monitor all on-board systems and components whose malfunction may cause a deterioration in exhaust-gas test specifications stipulated by law. The Malfunction Indicator Lamp (MIL) must alert the driver to a malfunction if the malfunction could cause an overshoot in OBD emission limits.

Emission limits

The U.S. OBD II (CARB and EPA) prescribes thresholds that are defined relative to emission limits. Accordingly, there are different permissible OBD emission limits for the various exhaust-gas categories that are applied during vehicle certification (e.g. TIER, LEV, ULEV). Absolute limits apply in Europe (Table 1).

Malfunction Indicator Lamp (MIL)

The Malfunction Indicator Lamp (MIL) alerts the driver that a component has malfunctioned. When a malfunction is detected, CARB and EPA stipulate that the MIL must light up no later than after two driving cycles of its occurrence. Within the scope of EOBD, the MIL must light up no later than in the third driving cycle with a detected malfunction.

If the malfunction disappears (e.g. loose contact), the malfunction remains entered in the fault memory for 40 trips (warmup cycles). The MIL goes out after three fault-free driving cycles.

Communication with scan tool

OBD legislation prescribes standardization of the fault-memory information and access to the information (connector, communication interface) compliant with ISO 15031 and the corresponding SAE standards (Society of Automotive Engineers). This permits the read-out of the fault memory using standardized, commercially available testers (scan tools, see Fig. 1).

Depending on their scope of application, various communication protocols are used throughout the world: The most important are:

- ISO 9141-2 for European passenger cars.
- SAEJ 1850 for U.S. passenger cars.
- ISO 14230-4 (KWP 2000) for European passenger cars and commercial vehicles.
- SAEJ 1708 for U.S. commercial vehicles.

These serial interfaces operate at a bit rate (baud rate) of 5 to 10k baud. They are designed as a single-wire interface with a common wire for both transmission and reception, or as a two-wire interface with a separate *data line* (K-line) and *initiate line* (L-line). Several electronic control units (such as Motronic, ESP, or EDC, and transmission-shift control, etc.) can be combined on one diagnosis connector.

Communication between the tester and ECU is set up in three phases:

- Initiate the ECU.
- Detect and generate baud rate.
- Read key bytes which identify the transmission protocol.

| 1 OBD limits for passenger cars and light-duty trucks | | | | |
|---|---|---|--|---|
| | Otto passenger cars | | Diesel passenger cars | |
| CARB | – Relative emission limits – Mostly 1.5 times the limit of a specific exhaust-gas category | | – Relative emission limits – Mostly 1.5 times the limit of a specific exhaust-gas category | |
| EPA | – Relative emission limits – Mostly 1.5 times the limit of a specific exhaust-gas category | | – Relative emission limits (U.S. Federal) – Mostly 1.5 times the limit of a specific exhaust-gas category | |
| EOBD | 2000 CO: 3.2 g/km HC: 0.4 g/km NO _x : 0.6 g/km | 2005 (draft) CO: 1.9 g/km HC: 0.3 g/km NO _x : 0.53 g/km | 2003 CO: 3.2 g/km HC: 0.4 g/km NO _x : 1.2 g/km PM: 0.18 g/km | 2005 (draft) CO: 3.2 g/km HC: 0.4 g/km NO _x : 1.2 g/km PM: 0.18 g/km |

Table 1

Evaluation is performed subsequently.

The following functions are possible:

- Identify the ECU
- Read the fault memory
- Erase the fault memory
- Read the actual values

In future, the CAN bus (ISO 15765-4) will be used increasingly to handle communication between ECUs and the tester. Starting 2008 diagnostics will only be permitted over this interface in the U.S.A.




To make it easier to read out the ECU fault-memory information, a standardized diagnosis socket will be fitted at an easily accessible place in every car (easy to reach from the driver's seat). The socket is used to connect the scan tool (Fig. 2).

Reading the fault information

Any workshop can use the scan tool to read out emission-relevant fault information from the ECU (Fig. 3). In this way, workshops not franchised to a particular manufacturer are also able to carry out repairs. Manufacturers are obliged to make the required tools and information available (on the internet) in return for a reasonable payment, to allow this.

Vehicle recall

If vehicles fail to comply with OBD requirements by law, the authorities may demand the vehicle manufacturer to start a recall at his own cost.

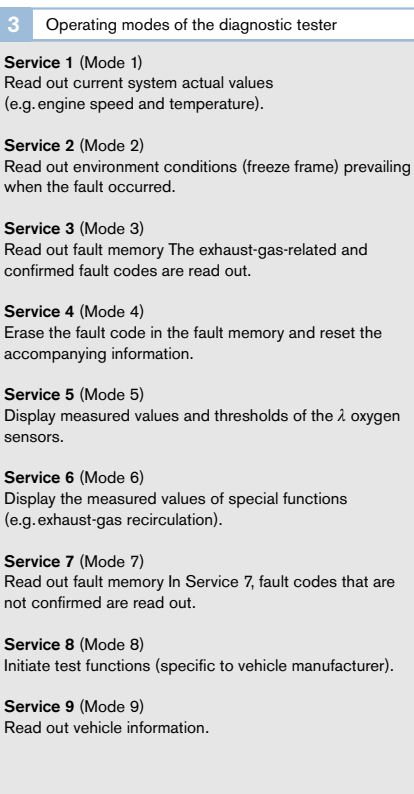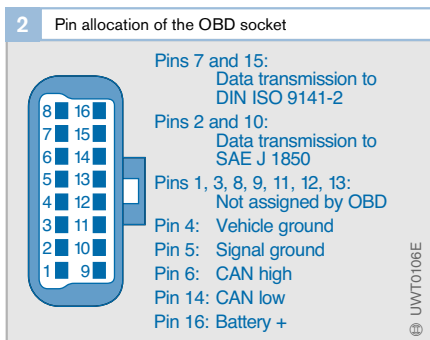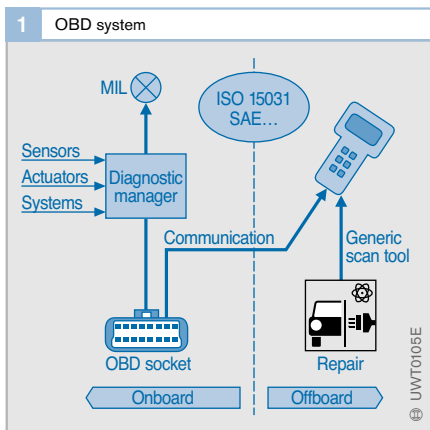

Functional requirements

Overview

Just as for on-board diagnosis, all ECU input and output signals, as well as the components themselves, must be monitored.

Legislation demands the monitoring of electrical functions (short-circuit, line breaks), a plausibility check for sensors, and a function monitoring for actuators.

The pollutant concentration expected as the result of a component failure (empirical values), and the monitoring mode partly required by law determine the type of diagnostics. A simple functional test (black/white test) only checks system or component operability (e.g. swirl flap opens and closes). The extensive functional test provides more detailed information about system operability. As a result, the limits of adaption must be monitored when monitoring adaptive fuel-injection functions (e.g. zero delivery calibration for a diesel engine, lambda adaption for a gasoline engine).

Diagnostic complexity has constantly increased as emission-control legislation has evolved.

Switchon conditions

Diagnostic capabilities only run if the switchon conditions are satisfied.

This includes, for instance:

- Torque thresholds
- Engine-temperature thresholds
- Engine-speed thresholds or limits

Inhibit conditions

Diagnostic capabilities and engine functions cannot always operate simultaneously.

There are inhibit conditions that prohibit the performance of certain functions. In the diesel system, the Hot-Film Air-Mass Meter (HFM) can only be monitored satisfactorily when the exhaust-gas recirculation valve is closed. For instance, tank ventilation (evaporative-emissions control system) in a gasoline system cannot function when catalytic-converter diagnosis is in operation.

Temporary disabling of diagnostic functions

Diagnostic capabilities may only be disabled under certain conditions in order to prevent false diagnosis. Examples include:

- Height too large.
- Low ambient temperature at engine switchon.
- Low battery voltage.

Readiness code

When the fault memory is checked, it is important to know that the diagnostic capabilities ran at least once. This can be checked by reading out the readiness code over the diagnostic interface. After erasing the fault memory in service, the readiness codes must be reset after checking the functions.

Diagnostic System Management (DSM)

The diagnostic capabilities for all components and systems checked must normally run in driving mode, but at least once during the exhaust-gas test cycle (e.g. FTP 75, NEDC). Diagnostic System Management (DSM) can change the sequence for running the diagnostic capabilities dynamically, depending on driving conditions.

The DSM comprises the following three components (Fig. 4):

Diagnosis Fault Path Management (DFPM)

The primary role of DFPM is to store fault states that are detected in the system. In addition to faults, it also stores other information, such as environmental conditions (freeze frame).


Diagnostic Function SCHEDuler (DSCHED)

DSCHED is responsible for coordinating assigned engine capabilities (MF) and diagnostic capabilities (DF). It obtains information from DVAL and DFPM to carry this out. In addition, it reports functions that require release by DSCHED to perform their readiness, after which the current system state is checked.

Diagnosis VALidator (DVAL)

The DVAL (only installed in gasoline systems to date) uses current fault-memory entries and additionally stored information to decide for each detected fault whether it is the actual cause, or a consequence of the fault. As a result, validation provides stored information to the diagnostic tester for use in reading out the fault memory.

In this way, diagnostic capabilities can be released in any sequence. All released diagnoses and their results are evaluated subsequently.

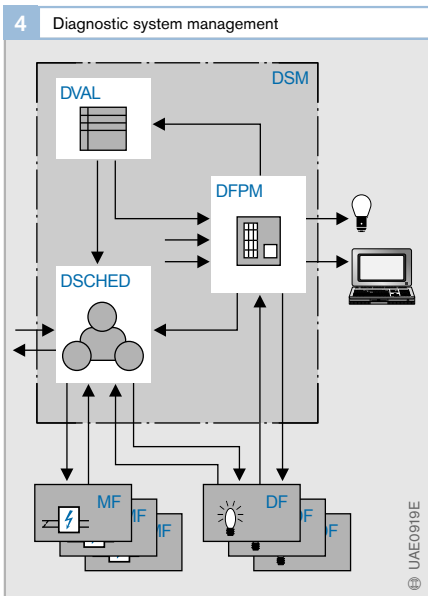

OBD functions

Overview

Whereas EOBD only contains detailed monitoring specifications for individual components, the requirements in CARB OBD II are much more detailed. The list below shows the current state of CARB requirements for gasoline-engined and diesel-engined passenger cars. Requirements that are also described in detail in the EOBD legislation are marked by (E):

- Catalytic converter (E), heated catalytic converter
- Combustion (ignition) misfire (E, for diesel system not for EOBD)
- Evaporation reduction system (fuel-tank leak diagnosis, only for gasoline system)
- Secondary-air injection
- Fuel system
- Lambda oxygen sensors (E)
- Exhaust-gas recirculation
- Crankcase ventilation
- Engine cooling system
- Cold-start emission reduction system (presently only for gasoline system)
- Air conditioner (components)
- Variable valve timing (presently only in use with gasoline systems)
- Direct ozone reduction system (presently only in use with gasoline systems)
- Particulate filter (particulate filter, only for diesel system) (E)
- Comprehensive components (E)
- Other emission-related components/systems (E)

“Other emission-related components/systems” refer to components and systems not mentioned in this last and that may exceed OBD emission limits, or block other diagnostic functions if they malfunction.

Catalytic converter diagnosis

In the diesel system, carbon monoxide (CO) and unburned hydrocarbons (HC) are oxidized in the oxidation-type catalytic converter. Work is ongoing on diagnostic capabilities for monitoring the operation of oxidation-type catalytic converters relating to temperature and differential pressure. One approach focuses on active secondary injection (intrusive operation). Here, heat is generated in the oxidation-type catalytic converter by an exothermic HC reaction. The temperature is measured and compared with calculated model values. These are used to derive the functionality of the catalytic converter.

Equally, work is ongoing on monitoring functions for the storage and regeneration capabilities of NO_x accumulator-type catalytic converters that will also be installed in the diesel system in future. The monitoring functions run based on loading and regeneration models, and the measured regeneration duration. This requires the use of lambda or NO_x sensors.

Combustion-miss detection

Incorrect fuel injection or loss of compression result in impaired combustion, and thus to changes in emission values. The misfire detector evaluates the time expired (segment time) from one combustion cycle to the next for each cylinder. This time is derived from the speed-sensor signal. A segment time that is longer than for the other cylinders indicates a misfire or loss of compression.

In the diesel system, diagnosis of combustion misses is only required and performed when the engine is at idle speed.

Fuel system diagnosis

In the common-rail system, a fuel-system diagnosis includes the electrical monitoring of injectors and rail-pressure control (high-pressure control). In the Unit Injector System, it also includes monitoring of the injector switching time. Special functions of the fuel-injection system that increase injected-fuel-quantity precision are also monitored.

Examples of this include zero-fuel-quantity calibration, quantity-mean-value adaptation, and the ASMOD observer function (air-system model observer). The two last functions use information from the lambda oxygen sensor as input signals. From the models, they calculate fluctuations between setpoint and actual quantities.

Lambda-oxygen-sensor diagnosis

Modern diesel systems are fitted with broadband oxygen sensors. They require a different diagnostic procedure than two-stage sensors since their settings may deviate from $\lambda = 1$. They are monitored electrically (short-circuit, line interruption) and for plausibility. The heater element of the sensor heater is tested electrically and for permanent governor deviation.

Exhaust-gas recirculation system diagnosis

In the exhaust-gas recirculation system, the EGR valve and – if fitted – the exhaust-gas cooler are monitored.

The exhaust-gas recirculation valve is monitored for its electrical and functional operability. Functional monitoring is performed by air-mass regulators and position controllers. They check for permanent control variances.

If the exhaust-gas recirculation system has a cooler fitted, its function must also be monitored, i.e. an additional temperature measurement takes place downstream of the cooler. The temperature measured is compared with a setpoint value calculated from a model. If a fault occurs, it is detected by measuring the deviation between setpoint and actual values.

Crankcase ventilation diagnosis

Faults in crankcase ventilation are detected by the air-mass sensor, depending on the system. The legislation requires no monitoring if the crankcase ventilation has a “rugged” design.

On-board diagnosis system for heavy-duty trucks

In Europe and the U.S.A., there exist draft laws that have not yet been adopted; they are based closely on legislation for passenger cars.

Legislation

In the EU, there are plans to introduce new type approvals in October 2005 (coinciding with Euro 4 emission-control legislation). With effect from October 2006 an OBD system will become obligatory for every commercial vehicle. In the U.S.A., the draft of the Californian CARB provides for the introduction of an OBD system for Model Year (MY) 2007. It is probable that EPA (U.S. Federal) will also follow with a draft in 2004 for subsequent introduction in MY 2007. Besides that, there are initiatives to promote worldwide harmonization (World Wide Harmonized (WWH) OBD). However, this is not expected until 2012. Japan is planning to introduce an OBD system in 2005.

EOBD for trucks and buses > 3.5 t

European OBD legislation provides for a two-stage introduction. Stage 1 (2005) requires monitoring:

- of the fuel-injection system for closed electrical circuit and total failure.
- of emission-related engine components or systems for compliance with OBD emission limits (Table 1).
- of the exhaust-gas treatment system for major functional faults (e.g. damaged catalytic converter, urea deficit in the SCR system).

Stage 2 (2008) requires:

- Monitoring of the exhaust-gas treatment system for emission limits.
- The OBD emission limits must be adapted to the prevailing state of the art (availability of exhaust-gas sensors).

Protocols for scan-tool communication over CAN have been approved using either ISO 15765 or SAEJ1939.

CARB OBD for HD trucks > 14,000 lb. (6.35t)

The present draft law is very close to passenger-car legislation in its function requirements, and also provides for a two-stage introduction:

- MY 2007: Monitoring for functional faults.
- MY 2010: Monitoring for OBD emission limits (Table 1).

The main changes compared with present passenger-car legislation are as follows:

- Erasing the OBD fault memory by scan tool is no longer possible. This is only possible by self-healing (e.g. after repair).
- SAEJ1939 has also been approved as an alternative to CAN diagnostic communication to ISO 15765 (as for passenger cars).

| 1 OBD emission limits for heavy-duty trucks (draft) | | |
|---|---|---|
| CARB | 2007 | 2010 |
| | - Functional check no limits | - Relative limit - 1.5 times the value of each exhaust-gas category - Exception: catalytic converter, factor 1.75 |
| EPA | - to be defined | - to be defined |
| EU | 2005 | 2008 |
| | - Absolute limit NO _x : 7.0 g/kWh PM: 0.1 g/kWh - Functional check for exhaust-gas treatment system | - Absolute limit NO _x : 7.0 g/kWh PM: 0.1 g/kWh - Subject to review by EU Commission |

Table 1

▶ Global service

“Once you have driven an automobile, you will soon realize that there is something unbelievably tiresome about horses (...). But you do require a conscientious mechanic for the automobile (...).”

Robert Bosch wrote these words to his friend Paul Reusch in 1906. In those days, it was indeed the case that breakdowns could be repaired on the road or at home by an employed chauffeur or mechanic. However, with the growing number of motorists driving their own cars after the First World War, the need for workshops offering repair services in-

creased rapidly. In the 1920s Robert Bosch started to systematically create a nationwide customer-service organization. In 1926 all the repair centers were uniformly named “Bosch Service” and the name was registered as a trademark.

Today’s Bosch Service agencies retain the same name. They are equipped with the latest electronic equipment in order to meet the demands of 21st-century automotive technology and the quality expectations of the customers.

1 A repair shop in 1925 (photo: Bosch)



2 A Bosch car service workshop in the 21st century carried out with the very latest electronic testing equipment



Service technology

More than 30,000 garages/workshops around the world are equipped with workshop technology, i.e., test technology and workshop software from Bosch. Workshop technology is becoming increasingly important as it provides guidance and assistance in all matters relating to diagnosis and troubleshooting.

Workshop business

Trends

Many factors influence workshop business. Current trends are, for example:

- The proportion of diesel passenger cars is rising
- Longer service intervals and longer service lives of automotive parts mean that vehicles are being checked into workshops less frequently
- Workshop capacity utilization in the overall market will continue to decline in the next few years

- The amount of electronic components in vehicles is increasing – vehicles are becoming “mobile computers”
- Internetworking of electronic systems is increasing, diagnostic and repair work covers systems which are installed and networked in the entire vehicle
- Only the use of the latest test technology, computers and diagnostic software will safeguard business in the future

Consequences

Requirements

Workshops must adapt to the trends in order to be able to offer their services successfully on the market in the future. The consequences can be derived directly from the trends:

- Professional fault diagnosis is the key to professional repairs
- Technical information is becoming the crucial requirement for vehicle repairs
- Rapid availability of comprehensive technical information safeguards profitability



- The need for workshop personnel to be properly qualified is increasing dramatically
- Investment by workshops in diagnosis, technical information and training is essential

Measurement and test technology

The crucial step for workshops to take is to invest in the right test technology, diagnostic software, technical information, and technical training in order to receive the best possible support and assistance for all the jobs and tasks in the workshop process.

Workshop processes

The essential tasks which come up in the workshop can be portrayed in processes. Two distinct subprocesses are used for handling all tasks in the service and repair fields. The first subprocess covers the predominantly operations- and organization-based activity of *job-order acceptance*, while the second subprocess covers the predominantly technically based work steps of *service and repair implementation*.

Job-order acceptance

When a vehicle arrives in the workshop, the job-order acceptance system’s database furnishes immediate access to all available information on the vehicle. The moment the vehicle enters the shop, the system offers access to the vehicle’s entire service history, including all service and repairs that it has received in the past. Furthermore, this sequence involves the completion of all tasks relating to the customer’s request, its basic feasibility, scheduling of completion dates, provision of resources, parts and working materials and equipment, and an initial examination of the task and extent of work involved. Depending on the process objective, all subfunctions of the ESI[tronic] product are used within the framework of the *service acceptance* process.

Service and repair implementation

Here, the jobs defined within the framework of the job-order acceptance are carried out. If it is not possible to complete the task in a single process cycle, appropriate repeat loops must be provided until the process result which is aimed for is achieved. Depending on the process objective, all subfunctions of the ESI[tronic] product are used within the framework of the service and repair implementation process.

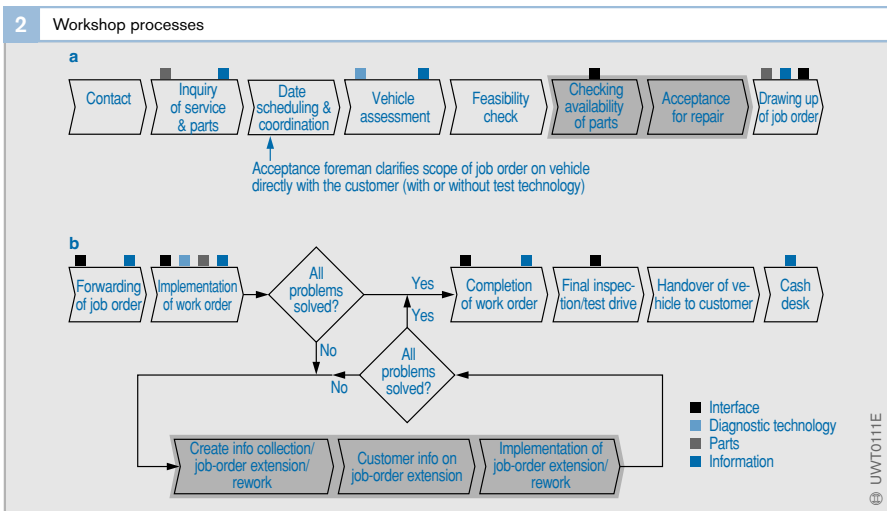


Fig. 2
 a Job-order acceptance
 b Service and repair implementation

Electronic Service Information (ESI[tronic])

System functions for supporting the workshop process

ESI[tronic] is a modular software product for the automotive-engineering trade. The individual modules contain the following information:

- Technical information on spare parts and automotive equipment
- Exploded views and parts lists for spare parts and assemblies
- Technical data and setting values
- Flat rate units and times for work on the vehicle
- Vehicle diagnosis and vehicle-system diagnosis
- Troubleshooting instructions for different vehicle systems
- Repair instructions for vehicle components, e.g., diesel power units
- Electronic circuit diagrams
- Maintenance schedules and diagrams
- Test and setting values for assemblies
- Data for costing maintenance, repair and service work

Application

The chief users of ESI[tronic] are motor garages/workshops, assembly repairers and the automotive-parts wholesale trade. They use the technical information for the following purposes:

- Motor garages/workshops: mainly for diagnosis, service and repair of vehicle systems

- Assembly repairers: mainly for testing, adjusting and repair of assemblies
- Automotive-parts wholesale trade: mainly for parts information

Garages/workshops and assembly repairers use this parts information in addition to diagnosis, repair and service information. Product interfaces enable ESI[tronic] to network with other (particularly commercial) software in the workshop environment and the automotive-parts wholesale trade in order, for instance, to exchange data with the accounting merchandise information system.

Benefit to the user of ESI[tronic]

The benefit of using ESI[tronic] lies in the fact that the system furnishes a large amount of information which is needed to conduct and safeguard the business of motor garages/workshops. This is made possible by the broadly conceived and modular ESI[tronic] product program. The information is offered on one interface with a standardized system for all vehicle marques.

Comprehensive vehicle coverage is important for workshop business in that the necessary information is always to hand. This is guaranteed by ESI[tronic] because country-specific vehicle databases and information on new vehicles are incorporated in the product planning. Regular updating of the software offers the best opportunity of keeping abreast of technical developments in the automotive industry.

Vehicle system analysis (FSA)

Vehicle system analysis (FSA) from Bosch offers a simple solution to complex vehicle diagnosis. The causes of a problem can be swiftly located thanks to diagnosis interfaces and fault memories in the on-board electronics of modern motor vehicles. The *component checking* facility of FSA developed by Bosch is very useful in swiftly locating a fault: The FSA measurement technology and display can be adjusted to the relevant component.



This enables this component to be tested while it is still installed.

Measuring equipment

Workshop personnel can choose from various options for diagnosis and troubleshooting: the high-performance, portable KTS 650 system tester or the workshop-compatible KTS 520 and KTS 550 KTS modules in conjunction with a standard PC or laptop. The modules have an integrated multimeter, and KTS 550 and KTS 650 also have a 2-channel oscilloscope. For work applications on the vehicle, ESI[tronic] is installed in the KTS 650 or on a PC.

Example of the sequence in the workshop

The ESI[tronic] software package supports workshop personnel throughout the entire vehicle repair process. A diagnosis interface allows ESI[tronic] to communicate with the electronic systems within the vehicle, such as the engine control unit. Working at the PC, the user starts by selecting the SIS (Service Information System) utility to initiate diagnosis of on-board control units and access the engine control unit's fault storage.

The diagnosis tester provides the data needed for direct comparisons of specified results and current readings, without the need for supplementary entries. ESI[tronic] uses the results of the diagnosis as the basis for generating specific repair instructions. The system also provides displays with other information, such as component locations, exploded views of assemblies, diagrams showing the layouts of electrical, pneumatic and hydraulic systems, etc. Working at the PC, users can then proceed directly from the exploded views to the parts lists with part numbers to order the required replacement components. All service procedures and replacement components are recorded to support the billing process. After the final road test, the bill is produced simply by pressing a few keys. The system also provides a clear and concise printout with the results of the vehicle diagnosis. This offers the customer a full report detailing all of the service operations and materials that went into the vehicle's repair.

4 ESI[tronic] instructions for toothed-belt replacement

The screenshot displays the ESI[tronic] software interface for a 'Timing Belt' replacement. The main window is titled 'Timing Belt' and contains the following sections:

- Replacement Interval Guide:**
 - Volkswagen recommended: Check at the first 40,000 miles and then every 20,000 miles (unless it is necessary).
 - Replacement every 120,000 miles (tensioner pulley must also be replaced).
- Check For Engine Damage:**
 - CAUTION: This engine has been identified as an INTERFERENCE engine in which the possibility of valve-to-piston damage in the event of a timing belt failure is MOST LIKELY to occur.
 - A compression check of all cylinders should be performed before removing the cylinder head.
- Repair Times - hrs:**
 - Remove & install: 2,10
- Special Tools:**
 - 1 x M10 x 55 mm stud and nut.
- Special Precautions:**
 - Disconnect battery earth lead.
 - DO NOT turn crankshaft or camshaft when timing belt removed.
 - Remove spark plugs to ease turning engine.
 - Turn engine in several directions of rotation (unless otherwise stated).
 - DO NOT turn engine via camshaft or other apparatus.
 - Observe all tightening torques.
- Removal:**
 - 1. Raise and support front of vehicle.

The right side of the interface features a detailed diagram of the timing belt system, showing the belt's path around various pulleys (crankshaft, camshaft, and idler) and the location of the tensioner. The diagram is annotated with numbered callouts (1-12) and labels such as 'CA', 'T', 'C', 'S', 'R', 'L', 'M', 'N', 'O', 'P', 'Q', 'R', 'S', 'T', 'U', 'V', 'W', 'X', 'Y', 'Z', 'AA', 'AB', 'AC', 'AD', 'AE', 'AF', 'AG', 'AH', 'AI', 'AJ', 'AK', 'AL', 'AM', 'AN', 'AO', 'AP', 'AQ', 'AR', 'AS', 'AT', 'AU', 'AV', 'AW', 'AX', 'AY', 'AZ', 'BA', 'BB', 'BC', 'BD', 'BE', 'BF', 'BG', 'BH', 'BI', 'BJ', 'BK', 'BL', 'BM', 'BN', 'BO', 'BP', 'BQ', 'BR', 'BS', 'BT', 'BU', 'BV', 'BW', 'BX', 'BY', 'BZ', 'CA', 'CB', 'CC', 'CD', 'CE', 'CF', 'CG', 'CH', 'CI', 'CJ', 'CK', 'CL', 'CM', 'CN', 'CO', 'CP', 'CQ', 'CR', 'CS', 'CT', 'CU', 'CV', 'CW', 'CX', 'CY', 'CZ', 'DA', 'DB', 'DC', 'DD', 'DE', 'DF', 'DG', 'DH', 'DI', 'DJ', 'DK', 'DL', 'DM', 'DN', 'DO', 'DP', 'DQ', 'DR', 'DS', 'DT', 'DU', 'DV', 'DW', 'DX', 'DY', 'DZ', 'EA', 'EB', 'EC', 'ED', 'EE', 'EF', 'EG', 'EH', 'EI', 'EJ', 'EK', 'EL', 'EM', 'EN', 'EO', 'EP', 'EQ', 'ER', 'ES', 'ET', 'EU', 'EV', 'EW', 'EX', 'EY', 'EZ', 'FA', 'FB', 'FC', 'FD', 'FE', 'FF', 'FG', 'FH', 'FI', 'FJ', 'FK', 'FL', 'FM', 'FN', 'FO', 'FP', 'FQ', 'FR', 'FS', 'FT', 'FU', 'FV', 'FW', 'FX', 'FY', 'FZ', 'GA', 'GB', 'GC', 'GD', 'GE', 'GF', 'GG', 'GH', 'GI', 'GJ', 'GK', 'GL', 'GM', 'GN', 'GO', 'GP', 'GQ', 'GR', 'GS', 'GT', 'GU', 'GV', 'GW', 'GX', 'GY', 'GZ', 'HA', 'HB', 'HC', 'HD', 'HE', 'HF', 'HG', 'HH', 'HI', 'HJ', 'HK', 'HL', 'HM', 'HN', 'HO', 'HP', 'HQ', 'HR', 'HS', 'HT', 'HU', 'HV', 'HW', 'HX', 'HY', 'HZ', 'IA', 'IB', 'IC', 'ID', 'IE', 'IF', 'IG', 'IH', 'II', 'IJ', 'IK', 'IL', 'IM', 'IN', 'IO', 'IP', 'IQ', 'IR', 'IS', 'IT', 'IU', 'IV', 'IW', 'IX', 'IY', 'IZ', 'JA', 'JB', 'JC', 'JD', 'JE', 'JF', 'JG', 'JH', 'JI', 'JJ', 'JK', 'JL', 'JM', 'JN', 'JO', 'JP', 'JQ', 'JR', 'JS', 'JT', 'JU', 'JV', 'JW', 'JX', 'JY', 'JZ', 'KA', 'KB', 'KC', 'KD', 'KE', 'KF', 'KG', 'KH', 'KI', 'KJ', 'KK', 'KL', 'KM', 'KN', 'KO', 'KP', 'KQ', 'KR', 'KS', 'KT', 'KU', 'KV', 'KW', 'KX', 'KY', 'KZ', 'LA', 'LB', 'LC', 'LD', 'LE', 'LF', 'LG', 'LH', 'LI', 'LJ', 'LK', 'LL', 'LM', 'LN', 'LO', 'LP', 'LQ', 'LR', 'LS', 'LT', 'LU', 'LV', 'LW', 'LX', 'LY', 'LZ', 'MA', 'MB', 'MC', 'MD', 'ME', 'MF', 'MG', 'MH', 'MI', 'MJ', 'MK', 'ML', 'MM', 'MN', 'MO', 'MP', 'MQ', 'MR', 'MS', 'MT', 'MU', 'MV', 'MW', 'MX', 'MY', 'MZ', 'NA', 'NB', 'NC', 'ND', 'NE', 'NF', 'NG', 'NH', 'NI', 'NJ', 'NK', 'NL', 'NM', 'NN', 'NO', 'NP', 'NQ', 'NR', 'NS', 'NT', 'NU', 'NV', 'NW', 'NX', 'NY', 'NZ', 'OA', 'OB', 'OC', 'OD', 'OE', 'OF', 'OG', 'OH', 'OI', 'OJ', 'OK', 'OL', 'OM', 'ON', 'OO', 'OP', 'OQ', 'OR', 'OS', 'OT', 'OU', 'OV', 'OW', 'OX', 'OY', 'OZ', 'PA', 'PB', 'PC', 'PD', 'PE', 'PF', 'PG', 'PH', 'PI', 'PJ', 'PK', 'PL', 'PM', 'PN', 'PO', 'PP', 'PQ', 'PR', 'PS', 'PT', 'PU', 'PV', 'PW', 'PX', 'PY', 'PZ', 'QA', 'QB', 'QC', 'QD', 'QE', 'QF', 'QG', 'QH', 'QI', 'QJ', 'QK', 'QL', 'QM', 'QN', 'QO', 'QP', 'QQ', 'QR', 'QS', 'QT', 'QU', 'QV', 'QW', 'QX', 'QY', 'QZ', 'RA', 'RB', 'RC', 'RD', 'RE', 'RF', 'RG', 'RH', 'RI', 'RJ', 'RK', 'RL', 'RM', 'RN', 'RO', 'RP', 'RQ', 'RR', 'RS', 'RT', 'RU', 'RV', 'RW', 'RX', 'RY', 'RZ', 'SA', 'SB', 'SC', 'SD', 'SE', 'SF', 'SG', 'SH', 'SI', 'SJ', 'SK', 'SL', 'SM', 'SN', 'SO', 'SP', 'SQ', 'SR', 'SS', 'ST', 'SU', 'SV', 'SW', 'SX', 'SY', 'SZ', 'TA', 'TB', 'TC', 'TD', 'TE', 'TF', 'TG', 'TH', 'TI', 'TJ', 'TK', 'TL', 'TM', 'TN', 'TO', 'TP', 'TQ', 'TR', 'TS', 'TT', 'TU', 'TV', 'TW', 'TX', 'TY', 'TZ', 'UA', 'UB', 'UC', 'UD', 'UE', 'UF', 'UG', 'UH', 'UI', 'UJ', 'UK', 'UL', 'UM', 'UN', 'UO', 'UP', 'UQ', 'UR', 'US', 'UT', 'UU', 'UV', 'UW', 'UX', 'UY', 'UZ', 'VA', 'VB', 'VC', 'VD', 'VE', 'VF', 'VG', 'VH', 'VI', 'VJ', 'VK', 'VL', 'VM', 'VN', 'VO', 'VP', 'VQ', 'VR', 'VS', 'VT', 'VU', 'VV', 'VW', 'VX', 'VY', 'VZ', 'WA', 'WB', 'WC', 'WD', 'WE', 'WF', 'WG', 'WH', 'WI', 'WJ', 'WK', 'WL', 'WM', 'WN', 'WO', 'WP', 'WQ', 'WR', 'WS', 'WT', 'WU', 'WV', 'WW', 'WX', 'WY', 'WZ', 'XA', 'XB', 'XC', 'XD', 'XE', 'XF', 'XG', 'XH', 'XI', 'XJ', 'XK', 'XL', 'XM', 'XN', 'XO', 'XP', 'XQ', 'XR', 'XS', 'XT', 'XU', 'XV', 'XW', 'XX', 'XY', 'XZ', 'YA', 'YB', 'YC', 'YD', 'YE', 'YF', 'YG', 'YH', 'YI', 'YJ', 'YK', 'YL', 'YM', 'YN', 'YO', 'YP', 'YQ', 'YR', 'YS', 'YT', 'YU', 'YV', 'YW', 'YX', 'YY', 'YZ', 'ZA', 'ZB', 'ZC', 'ZD', 'ZE', 'ZF', 'ZG', 'ZH', 'ZI', 'ZJ', 'ZK', 'ZL', 'ZM', 'ZN', 'ZO', 'ZP', 'ZQ', 'ZR', 'ZS', 'ZT', 'ZU', 'ZV', 'ZW', 'ZX', 'ZY', 'ZZ'.

Diagnostics in the workshop

The function of this diagnosis is to identify the smallest, defective, replaceable unit quickly and reliably. The guided fault-finding procedure includes onboard information and offboard test procedures and testers. Support is provided by Electronic Service Information (ESI[tronic]). It contains instructions for further fault-finding for many possible problems (e.g. engine bucks) and faults (e.g. short-circuit in engine-temperature sensor).

Guided fault-finding

The main element is the guided fault-finding procedure. The workshop employee is guided by means of a symptom-dependent, event-controlled procedure – starting from the symptom (vehicle symptom or fault-memory entry). Onboard (fault-memory entry) and

offboard facilities (actuator diagnosis and onboard testers) are used.

Guided fault-finding, fault-memory read-outs, workshop diagnostic functions, and electrical communication with offboard testers take place using PC-based diagnostic testers. This may be a specific workshop tester from the vehicle manufacturer or a universal tester (e.g. KTS650 by Bosch).

Reading out fault-memory entries

Fault information (fault-memory entries) stored during vehicle operation are read out via a serial interface during vehicle service or repair in the customer-service workshop.

Fault entries are read out using a diagnostic tester. The workshop employee receives information about:

- Malfunctions (e.g. engine-temperature sensor)
- Fault codes (e.g. short-circuit to ground, implausible signal, static fault)
- Ambient conditions (measured values on fault storage, e.g. engine speed, engine temperature, etc.).

Once the fault information has been retrieved in the workshop and the fault corrected, the fault memory can be cleared again using the tester.

A suitable interface must be defined for communication between the control unit and the tester.

Actuator diagnostics

The control unit contains an actuator diagnostic routine in order to activate individual actuators at the customer-service workshop and test their functionality. This test mode is started using the diagnostic tester and only functions when the vehicle is at standstill below a specific engine speed, or when the engine is switched off. This allows an acoustic (e.g. valve clicking), visual (e.g. flap movement), or other type of inspection, e.g. measurement of electric signals, to test actuator function.

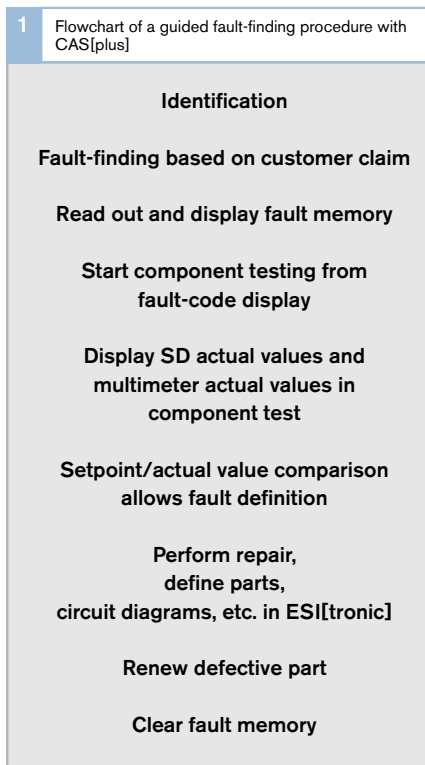


Fig. 1
The CAS[plus] system (Computer Aided Service) combines control-unit diagnosis with SIS fault-finding instructions for even more efficient fault-finding. The decisive values for diagnostics and repair then appear immediately on screen.

Workshop diagnostic functions

Faults that the on-board diagnosis fails to detect can be localized using support functions. These diagnostic functions are implemented in the engine control unit and are controlled by the diagnostic tester.

Workshop diagnostic functions run automatically, either after they are started by the diagnostic tester, or they report back to the diagnostic tester at the end of the test, or the diagnostic tester assumes runtime control, measured data acquisition, and data evaluation. The control unit then implements individual commands only.

Example

During a compression test, the fuel-injection system is switched off while the engine is turned by the starter motor. The engine ECU records the crankshaft speed pattern. The compression in each of the cylinders can be deduced from speed fluctuations, i.e. the difference between the lowest and highest revolutions, thus giving an indication of engine condition

Offboard tester

The diagnostic capabilities are expanded by using additional sensors, test equipment, and external evaluators. In the event of a fault detected in the workshop, offboard testers are adapted to the vehicle.

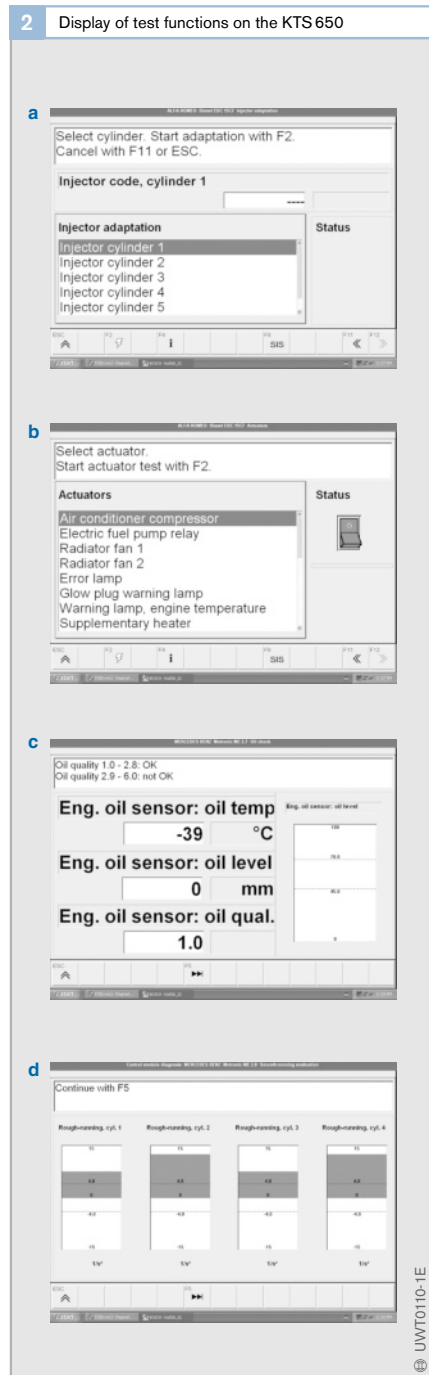


Fig. 2

- a Adapting an injector
- b Selecting an actuator test
- c Reading out engine-specific data
- d Evaluating smooth-running characteristics

Testing equipment

Effective testing of the system requires the use of special testing equipment. While earlier electronic systems could be tested with basic equipment such as a multimeter, ongoing advances have resulted in electronic systems that can only be diagnosed with complex testers.

The system testers in the KTS series are widely used by vehicle repairers. The KTS 650 (Fig. 1) offers a wide range of capabilities for use in the vehicle repairs, enhanced in particular by its graphical display of data such as test results. These system testers are also known as diagnosis testers.

Functions of the KTS 650

The KTS 650 offers a wide variety of functions which are selected by means of buttons and menus on the large display screen. The list below details the most important functions offered by the KTS 650.

Identification

The system automatically detects the connected ECU and reads actual values, fault memories and ECU-specific data.

Reading/erasing the fault memory

The fault information detected during vehicle operation by on-board diagnosis and stored in the fault memory can be read with the KTS 650 and displayed on screen in plain text.

Reading actual values

Current values which the engine control unit calculates can be read out as physical quantities (e.g. engine speed in rpm).

Actuator diagnostics

The electrical actuators (e.g., valves, relays) can be specifically triggered for function-testing purposes.



Engine test

The system tester initiates programmed test sequences in the engine control unit for checking the engine-management system or the engine (e.g., compression test).

Multimeter function

Electrical current, voltage and resistance can be tested in the same way as with a conventional multimeter.

Time graph display

The recorded measured values can be shown in graphic displays as signal curve similar to those available from an oscilloscope (e.g., Lambda-sensor voltage, signal voltage of hot-film air-mass sensor).

Additional information

Specific additional information relevant to the faults/components displayed can also be shown in conjunction with the Electronic Service Information (ESI[tronic]) (e.g., troubleshooting instructions, location of components in the engine compartment, test specifications, electrical circuit diagrams).

Printout

All data (e.g., list of actual values or document for the customer) can be printed out on standard PC printers.

Programming

The software of the engine control unit can be coded with the KTS650 (e.g., automatic or manual transmission).

The extent to which the capabilities of the KTS 650 can be utilized in the workshop depends on the system to be tested. Not all ECUs support its full range of functions.

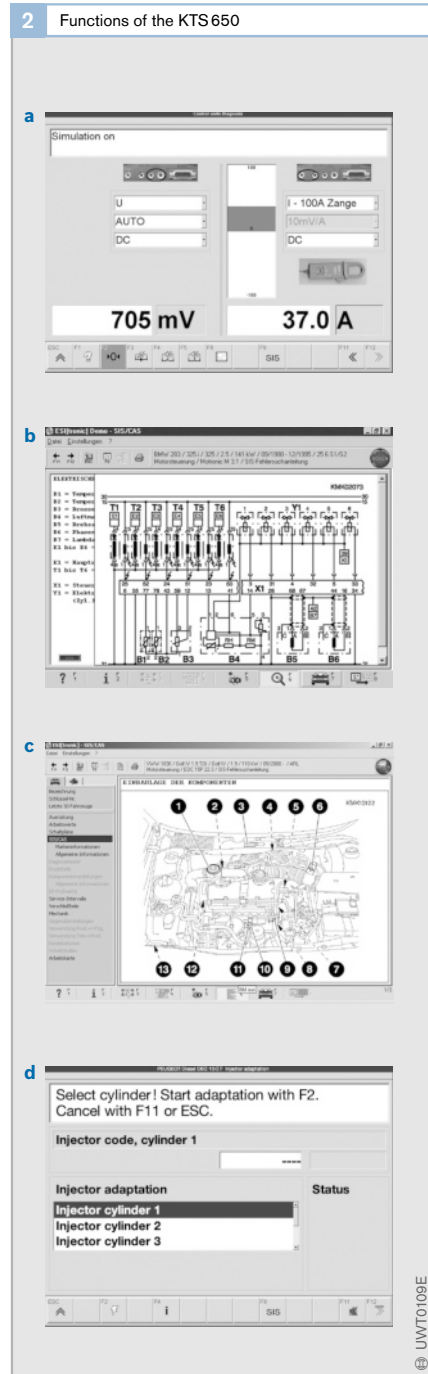


Fig. 2

- a Multimeter function
- b Graphical display of a terminal diagram
- c Display of location of components in engine compartment
- d Function selection

Fuel-injection pump test benches

Accurately tested and precisely adjusted fuel-injection pumps and governor mechanisms are key components for obtaining optimized performance and fuel economy from diesel engines. They are also crucial in ensuring compliance with increasingly strict exhaust-gas emission regulations. The fuel-injection pump test bench (Fig. 1) is a vital tool for meeting these requirements.

The main specifications governing both test bench and test procedures are defined by ISO standards; particularly demanding are the specifications for rigidity and geometrical consistency in the drive unit (5).

As time progresses, so do the levels of peak pressure that fuel-injection pumps are expected to generate. This development is reflected in higher performance demands and power requirements for pump test benches. Powerful electric drive units, a large flyweight and precise control of rotational speed guarantee stability at all engine speeds. This stability is an essential requirement for

repeatable, mutually comparable measurements and test results.

Flow measurement methods

An important test procedure is to measure the fuel pumped each time the plunger moves through its stroke. For this test, the fuel-injection pump is clamped on the test bench support (1), with its drive side connected to the test bench drive coupling. Testing proceeds with a standardized calibrating oil at a precisely monitored and controlled temperature. A special, precision-calibrated nozzle-and-holder assembly (3) is connected to each pump barrel. This strategy ensures mutually comparable measurements for each test. Two test methods are available.

Glass gauge method (MGT)

The test bench features an assembly with two glass gauges (Fig. 2, 5). A range of gages with various capacities are available for each cylinder. This layout can be used to test fuel-injection pumps for engines of up to 12 cylinders.

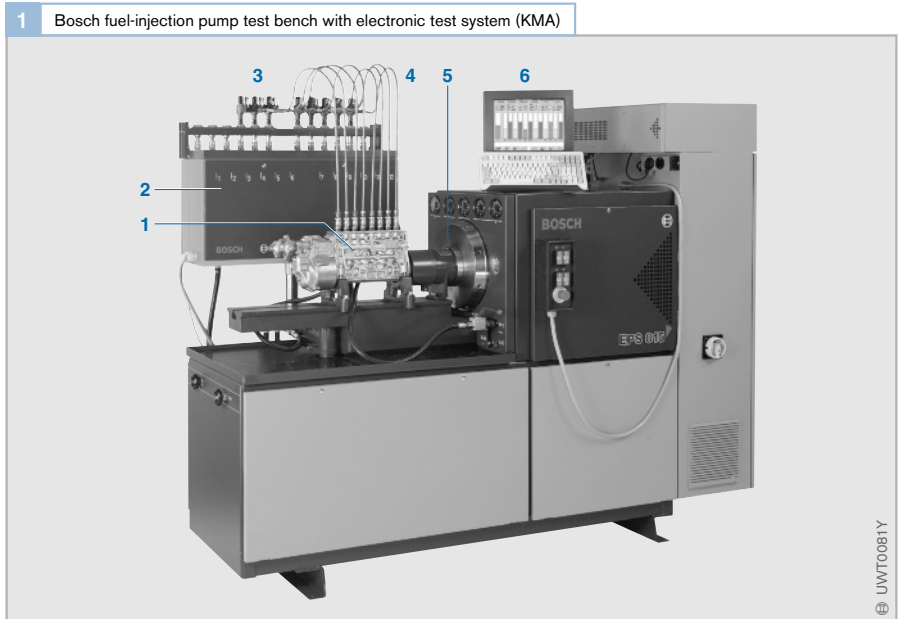


Fig. 1

- 1 Fuel-injection pump on test bench
- 2 Quantity test system (KMW)
- 3 Test nozzle-and-holder assembly
- 4 High-pressure test line
- 5 Electric drive unit
- 6 Control, display and processing unit


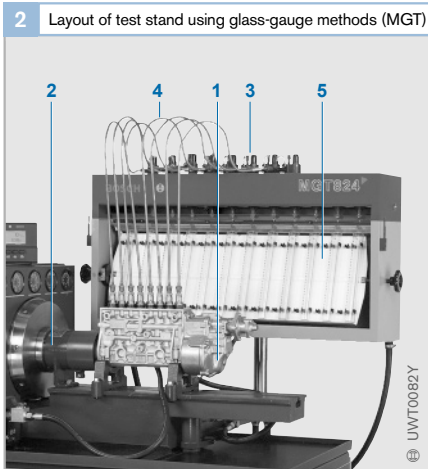


Fig. 2

- 1 Fuel-injection pump
- 2 Electric drive unit
- 3 Test nozzle-and-holder assembly
- 4 High-pressure test line
- 5 Glass gages

Fig. 3

- 1 Return line to calibrating oil tank
- 2 Gear pump
- 3 LED
- 4 Photocell
- 5 Window
- 6 Plunger
- 7 Amplifier with electronic control circuitry
- 8 Electric motor
- 9 Pulse counter
- 10 Test nozzle-and-holder assembly
- 11 Monitor (PC)

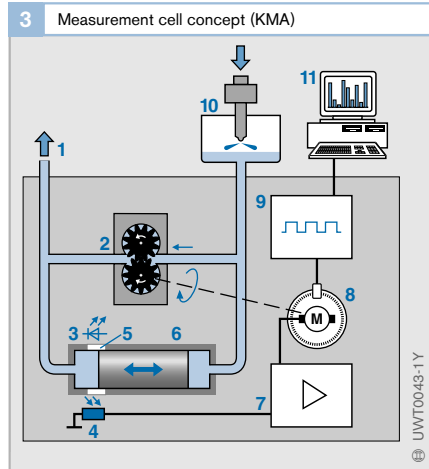

In the first stage, the discharged calibrating flows past the glass gages to return directly to the oil tank. As soon as the fuel-injection pump reaches the rotational speed indicated in the test specifications, a slide valve opens, allowing the calibrating oil from the fuel-injection pump to flow to the glass gages. Supply to the glass containers is then interrupted when the pump has executed the preset number of strokes.

The fuel quantity delivered to each cylinder in cm^3 can now be read from each of the glass gages. The standard test period is 1,000 strokes, making it easy to interpret the numerical result in mm^3 per stroke of delivered fuel. The test results are compared with the setpoint values and entered in the test record.

Electronic flow measurement system (KMA)

This system replaces the glass gauges with a control, display and processor unit (Fig. 1, 6). While this unit is usually mounted on the test bench, it can also be installed on a cart next to the test bench.

This test relies on continuous measuring the delivery capacity (Fig. 3). A control plunger (6) is installed in parallel with the input and output sides of a gear pump (2). When the pump's delivery quantity equals the quantity of calibrating oil emerging from the test nozzle (10), the plunger remains in its center posi-

tion. If the flow of calibrating oil is greater, the plunger moves to the left – if the flow of calibrating oil is lower, the plunger moves to the right. This plunger motion controls the amount of light traveling from an LED (3) to a photocell (4). The electronic control circuitry (7) records this deviation and responds by varying the pump's rotational speed until its delivery rate again corresponds to the quantity of fluid emerging from the test nozzle. The control plunger then returns to its center position. The pump speed can be varied to measure delivery quantity with extreme precision.

Two of these measurement cells are present on the test bench. The computer connects all of the test cylinders to the two measurement cells in groups of two, proceeding sequentially from one group to the next (multiplex operation). The main features of this test method are:

- Highly precise and reproducible test results
- Clear test results with digital display and graphic presentation in the form of bar graphs
- Test record for documentation
- Supports adjustments to compensate for variations in cooling and/or temperature

Testing in-line fuel-injection pumps

The test program for fuel-injection pumps involves operations that are carried out with the pump fitted to the engine in the vehicle (system fault diagnosis) as well as those performed on the pump in isolation on a test bench or in the workshop. This latter category involves

- Testing the fuel-injection pump on the pump test bench and making any necessary adjustments
- Repairing the fuel-injection pump/governor and subsequently resetting them on the pump test bench

In the case of in-line fuel-injection pumps, a distinction has to be made between those with mechanical governors and those which are electronically controlled. In either case, the pump and its governor/control system are tested in combination, as both components must be matched to each other.

The large number and variety of in-line fuel-injection pump designs necessitates variations in the procedures for testing and adjustment. The examples given below can, therefore, only provide an idea of the full extent of workshop technology.

Adjustments made on the test bench

The adjustments made on the test bench comprise

- Start of delivery and cam offset for each individual pump unit
- Delivery quantity setting and equalization between pump units
- Adjustment of the governor mounted on the pump
- Harmonization of pump and governor/control system (overall system adjustment)

For every different pump type and size, separate testing and repair instructions and specifications are provided which are specifically prepared for use with Bosch pump test benches.

The pump and governor are connected to the engine lube-oil circuit. The oil inlet connection is on the fuel-injection pump's camshaft housing or the pump housing.

For each testing sequence on the test bench, the fuel-injection pump and governor must be topped up with lube oil.

Testing delivery quantity

The fuel-injection pump test bench can measure the delivery quantity for each individual cylinder (using a calibrated tube apparatus or computer operating and display terminal, see "Fuel-injection pump test benches"). The individual delivery quantity figures obtained over a range of different settings must be within defined tolerance limits. Excessive divergence of individual delivery quantity figures would result in uneven running of the engine. If any of the delivery quantity figures are outside the specified tolerances, the pump barrel(s) concerned must be readjusted. There are different procedures for this depending on the pump model.

Governor/control system adjustment

Governor

Testing of mechanical governors involves an extensive range of adjustments. A dial gauge is used to check the control-rack travel at defined speeds and control-lever positions on the fuel-injection pump test bench. The test results must match the specified figures. If there are excessive discrepancies, the governor characteristics must be reset. There are a number of ways of doing this, such as changing the spring characteristics by altering spring tension, or by fitting new springs.

Electronic control system

If the fuel-injection pump is electronically controlled, it has an electromechanical actuator that is operated by an electronic control unit instead of a directly mounted governor. That actuator moves the control rack and thus controls the injected fuel quantity. Otherwise, there is no difference in the mechanical operation of the fuel-injection pump.

During the tests, the control rack is held at a specific position. The control-rack travel must be calibrated to match the voltage signal of the rack-travel sensor. This done by adjusting the rack-travel sensor until its signal voltage matches the specified signal level for the set control-rack travel.

In the case of control-sleeve in-line fuel-injection pumps, the start-of-delivery solenoid is not connected for this test in order to be able to obtain a defined start of delivery.

Adjustments with the pump in situ

The pump's start of delivery setting has a major influence on the engine's performance and exhaust-gas emission characteristics. The start of delivery is set, firstly, by correct adjustment of the pump itself, and secondly, by correct synchronization of the pump's camshaft with the engine's timing system. For this reason, correct mounting of the injection pump on the engine is extremely important. The start of delivery must therefore be tested with the pump mounted on the engine in order to ensure that it is correctly fitted.

There are a number of different ways in which this can be done depending on the pump model. The description that follows is for a Type RSF governor.

On the governor's flyweight mount, there is a tooth-shaped timing mark (Fig. 1). In the governor housing, there is a threaded socket which is normally closed off by a screw cap. When the piston that is used for calibration (usually no. 1 cylinder) is in the start-of-delivery position, the timing mark is exactly in line with the center of the threaded socket. This "spy hole" in the governor housing is part of a sliding flange.

Fitting the fuel-injection pump

Locking the camshaft

The fuel-injection pump leaves the factory with its camshaft locked (Fig. 1a) and is mounted on the engine when the engine's crankshaft is set at a defined position. The pump lock is then removed. This tried and tested method is economical and is adopted increasingly widely.

Start-of-delivery timing mark

Synchronizing the fuel-injection pump with the engine is performed with the aid of the start-of-delivery timing marks, which have to be brought into alignment. Those marks are to be found on the engine as well as on the fuel-injection pump (Fig. 2 overleaf). There are several methods of determining the start of delivery depending on the pump type.

Normally, the adjustments are based on the engine's compression stroke for cylinder no. 1 but other methods may be adopted for reasons related to specific engine designs. The engine manufacturer's instructions must therefore always be observed. On most diesel engines, the start-of-delivery timing mark is on the flywheel, the crankshaft pulley or the vibration damper. The vibration damper is generally mounted on the crankshaft in the position normally occupied by the V-belt pulley, and the pulley then bolted to the vibration damper. The complete assembly then looks rather like a thick V-belt pulley with a small flywheel.

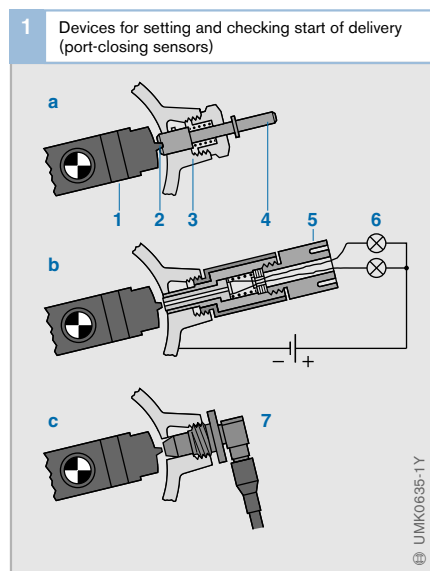


Fig. 1

Illustration shows Type RSF governor; other types have a sliding flange

- a Locked in position by locking pin
- b Testing with an optical sensor (indicator-lamp sensor)
- c Testing with an inductive sensor (governor signal method)

- 1 Governor flyweight mount
- 2 Timing mark
- 3 Governor housing
- 4 Locking pin
- 5 Optical sensor
- 6 Indicator lamp
- 7 Inductive speed sensor

Checking static start of delivery

Checking with indicator-lamp sensor

The tooth-shaped timing mark can be located with the aid of an optical sensor, the indicator-lamp sensor (Fig. 1b), which is screwed into the socket in governor housing. When it is opposite the sensor, the two indicator lamps on the sensor light up. The start of delivery in degrees of crankshaft rotation can then be read off from the flywheel timing marks, for example.

High-pressure overflow method

The start-of-delivery tester is connected to the pressure outlet of the relevant pump barrel (Fig. 3). The other pressure outlets are closed off. The pressurized fuel flows through the open inlet passage of the pump barrel and exits, initially as a jet, into the observation vessel (3). As the engine crankshaft rotates, the pump plunger moves towards its top dead center position. When it reaches the start-of-delivery position, the pump plunger closes off the barrel's inlet passage. The injection jet entering the observation vessel thus dwindles and the fuel flow is reduced to a drip. The start of delivery in degrees of crank shaft rotation is read off from the timing marks.

Checking dynamic start of delivery

Checking with inductive sensor

An inductive sensor that is screwed into the socket in the governor housing (Fig. 1c) supplies an electrical signal every time the governor timing mark passes when the engine is running. A second inductive sensor supplies a signal when the engine is at top dead center (Fig. 4). The engine analyzer, to which the two inductive sensors are connected, uses those signals to calculate the start of delivery and the engine speed.

Checking with a piezoelectric sensor and a stroboscopic timing light

A piezoelectric sensor is fixed to the high-pressure delivery line for the cylinder on which adjustment is to be based. As soon as the fuel-injection pump delivers fuel to that cylinder, the high-pressure delivery line expands slightly and the piezoelectric sensor transmits an electrical signal. This signal is received by an engine analyzer which uses it to control the flashing of a stroboscopic timing light. The timing light is pointed at the timing marks on the engine. When illuminated by the flashing timing light, the flywheel timing marks appear to be stationary. The angular value in degrees of crankshaft rotation can then be read off for start of delivery.

2 Timing marks on the engine used for setting the fuel-injection pump

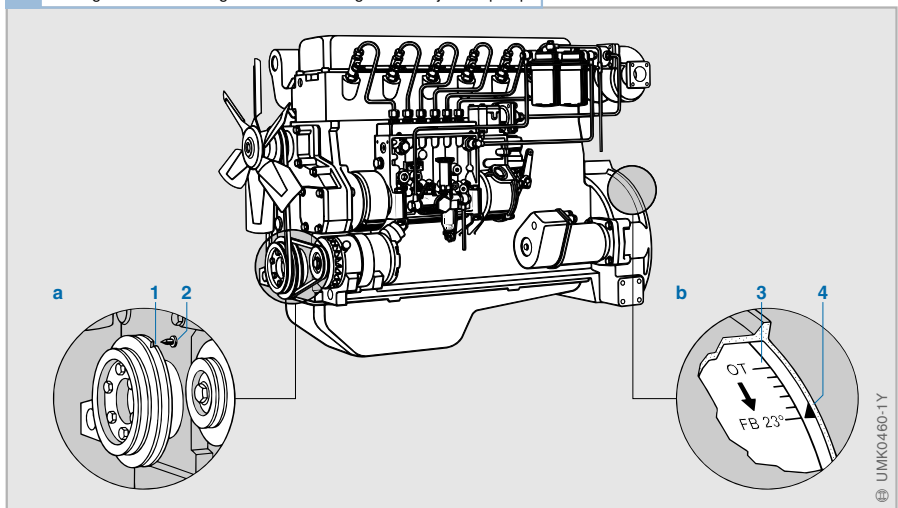


Fig. 2

a V-belt pulley timing marks

b Flywheel timing marks

1 Notch in V-belt pulley

2 Marker point on cylinder block

3 Graduated scale on flywheel

4 Timing mark on crankcase

Venting

Air bubbles in the fuel impair the proper operation of the fuel-injection pump or disable it entirely. Therefore, if the system has been temporarily out of use it should be carefully vented before being operated again. There is generally a vent screw on the fuel-injection pump overflow or the fuel filter for this purpose.

Lubrication

Fuel-injection pumps and governors are normally connected to the engine lube-oil circuit as the fuel-injection pump then requires no maintenance.

Before being used for the first time, the fuel-injection pump and the governor must be filled with the same type of oil that is used in the engine. In the case of fuel-injection pumps that are not directly connected to the engine lube-oil circuit, the pump is filled through the filler cap after removing the vent flap or filter. The oil level check takes place at the same time as the regular engine oil changes and is performed by removing the oil check plug on the governor. Excess oil (from leak fuel) is then drained off or the level topped up if required. Whenever the fuel-injection pump is removed or the engine overhauled,

the oil must be changed. Fuel-injection pumps and governors with separate oil systems have their own dipsticks for checking the oil level.

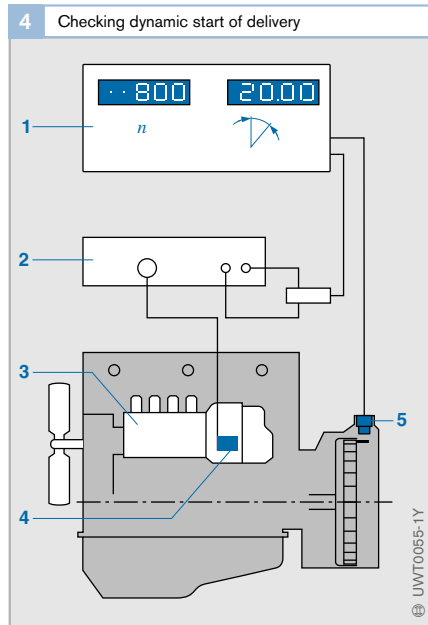


Fig. 4
Schematic diagram of in-line fuel-injection pump and governor using port-closing sensor system

- 1 Engine analyzer
- 2 Adaptor
- 3 In-line fuel-injection pump and governor
- 4 Inductive speed sensor (port-closing sensor)
- 5 Inductive speed sensor (TDC sensor)

3 Schematic diagram of start-of-delivery calibrating unit (high-pressure overflow method)

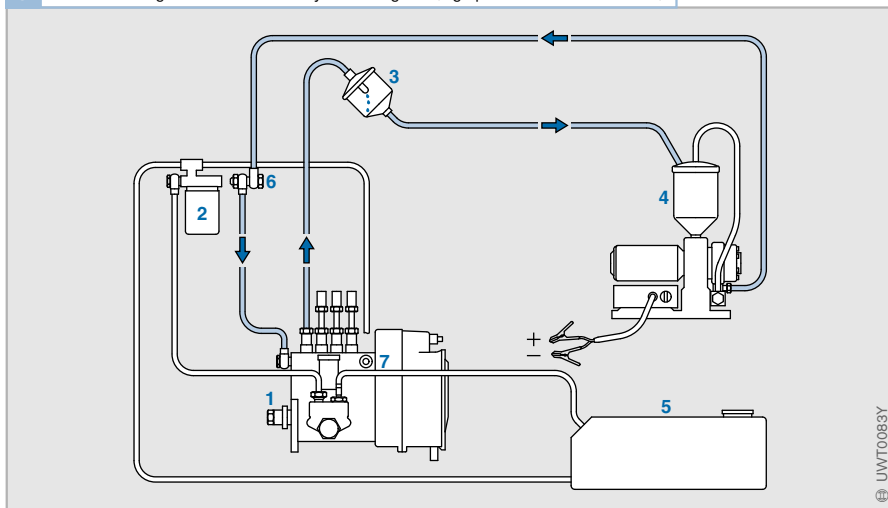


Fig. 3
1 Fuel-injection pump
2 Fuel filter
3 Observation vessel
4 Start-of-delivery calibrating unit
5 Fuel tank
6 Oversize banjo bolt and nut
7 Screw cap

Testing helix and port-controlled distributor injection pumps

Good engine performance, high fuel economy and low emissions depend on correct adjustment of the helix and port-controlled distributor injection pump. This is why compliance with official specifications is absolutely essential during testing and adjustment operations on fuel-injection pumps.

One important parameter is the start of delivery (in service bay), which is checked with the pump installed. Other tests are conducted on the test bench (in test area). In this case, the pump must be removed from the vehicle and mounted on the test bench. Before the pump is removed, the engine crankshaft should be rotated until the reference cylinder is at TDC. The reference cylinder is usually cylinder No. 1. This step eases subsequent assembly procedures.

Test bench measurements


The test procedures described here are suitable for use on helix and port-controlled axial-piston distributor pumps with electronic and mechanical control, but not with solenoid-controlled distributor injection pumps.

Test bench operations fall into two categories:

- Basic adjustment and
- Testing

The results obtained from the pump test are entered in the test record, which also lists all the individual test procedures. This document also lists all specified minimum and maximum results. The test readings must lie within the range defined by these two extremes.

A number of supplementary, special-purpose test steps are needed to assess all the different helix and port-controlled axial-piston distributor pumps; detailed descriptions of every contingency, however, extend beyond the bounds of this chapter.

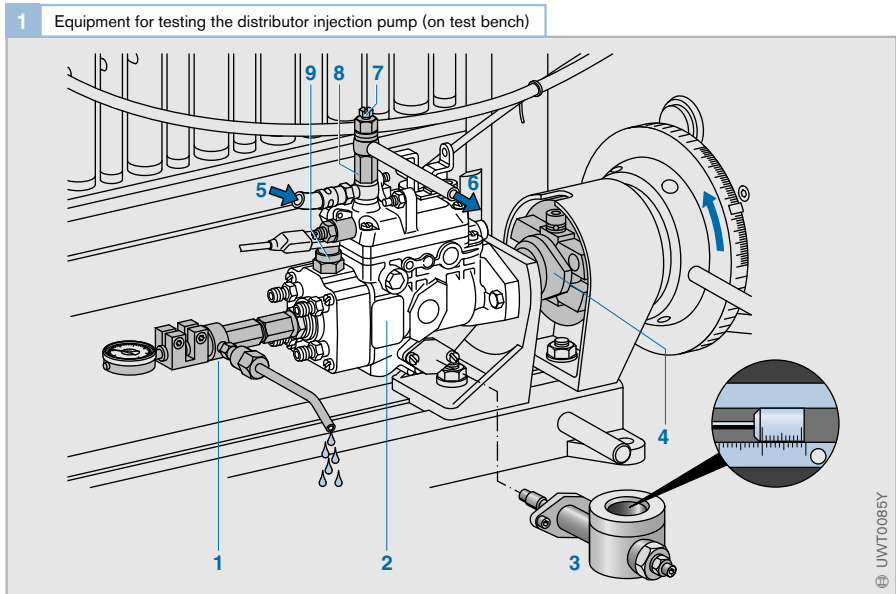

Basic adjustments

The first step is to adjust the distributor injection pump to the correct basic settings. This entails measuring the following parameters under defined operating conditions.

LPC adjustment

This procedure assesses the distributor plunger lift between Bottom Dead Center (BDC) and the start of delivery. The pump must be connected to the test-bench fuel supply line for this test. The technician unscrews the 6-point bolt from the central plug fitting and then installs a test assembly with drain tube and gauge in its place (Fig. 1, 1).

The gauge probe rests against the distributor plunger, allowing it to measure lift. Now the technician turns the pump's input shaft (4) by hand until the needle on the gauge stops moving. The control plunger is now at Top Dead Center (TDC).

A supply pressure of roughly 0.5 bar propels the calibrating oil into the plunger chamber behind the distributor plunger (5). For this test, the solenoid-operated shutoff valve (ELAB) (9) is kept energized to maintain it in its open position. The calibrating oil thus flows from the plunger chamber to the test assembly before emerging from the drain hose.

Now the technician manually rotates the input shaft in its normal direction of rotation. The calibrating oil ceases to flow into the plunger chamber once its inlet passage closes. The oil remaining in the chamber continues to emerge from the drain hose. This point in the distributor plunger's travel marks the start of delivery.

The lift travel between Bottom Dead Center (BDC) and the start of delivery indicated by the gauge can now be compared with the setpoint value. If the reading is outside the tolerance range, it will be necessary to dismantle the pump and replace the cam mechanism between cam disk and plunger.

Supply-pump pressure

As it affects the timing device, the pressure of the supply pump (internal pressure) must also be tested. For this procedure, the overflow restrictor (7) is unscrewed and an adapter with a connection to the pressure gauge (8) is installed. Now the overflow restrictor is installed in an adapter provided in the test assembly. This makes it possible to test the pump's internal chamber pressure upstream of the restrictor.

A plug pressed into the pressure-control valve controls the tension on its spring to determine the pump's internal pressure. Now the technician continues pressing the plug into the valve until the pressure reading corresponds to the setpoint value.

Timing device travel

The technician removes the cover from the timing device to gain access for installing a travel tester with a vernier scale (3). This scale makes it possible to record travel in the timing device as a function of rotational speed; the results can then be compared with the setpoint values. If the measured timing device travel does not correspond with the setpoint values, shims must be installed under the timing spring to correct its initial spring tension.

Adjusting the basic delivery quantity

During this procedure the fuel-injection pump's delivery quantity is adjusted at a constant rotational speed for each of the following four conditions:

- Idle (no-load)
- Full-load
- Full-load governor regulation and
- Starting

Delivery quantities are monitored using the MGT or KMA attachment on the fuel-injection pump test bench (refer to section on "Fuel-injection pump test benches").

First, with the control lever's full-load stop adjusted to the correct position, the full-load governor screw in the pump cover is adjusted to obtain the correct full-load delivery quan-

tity at a defined engine speed. Here, the governor adjusting screw must be turned back to prevent the full-load stop from reducing delivery quantity.

The next step is to measure the delivery quantity with the control lever against the idle-speed stop screw. The idle-speed stop screw must be adjusted to ensure that the monitored delivery quantity is as specified.

The governor screw is adjusted at high rotational speed. The measured delivery quantity must correspond to the specified full-load delivery quantity.

The governor test also allows verification of the governor's intervention speed. The governor should respond to the specified rpm threshold by first reducing and then finally interrupting the fuel flow. The breakaway speed is set using the governor speed screw.

There are no simple ways to adjust the delivery quantity for starting. The test conditions are a rotational speed of 100 rpm and the control lever against its full-load shutoff stop. If the measured delivery quantity is below a specified level, reliable starting cannot be guaranteed.

Testing

Once the basic adjustment settings have been completed, the technician can proceed to assess the pump's operation under various conditions. As during the basic adjustment procedure, testing focuses on

- Supply-pump pressure
- Timing device travel
- Delivery quantity curve

The pump operates under various specific conditions for this test series, which also includes a supplementary procedure.

Overflow quantity

The vane-type supply pump delivers more fuel than the nozzles can inject. The excess calibrating oil must flow through the overflow restriction valve and back to the oil tank. It is the volume of this return flow that is measured in this procedure. A hose is connected to the overflow restriction valve;

depending on the selected test procedure.

The other end is then placed in a glass gauge in the MGT assembly, or installed on a special connection on the KMA unit. The overflow quantity from a 10-second test period is then converted to a delivery quantity in liters per hour.

If the test results fail to reach the setpoint values, this indicates wear in the vane-type supply pump, an incorrect overflow valve or internal leakage.

Dynamic testing of start of delivery

A diesel engine tester (such as the Bosch ETD019.00) allows precise adjustment of the distributor injection pump's delivery timing on the engine. This unit registers the start of delivery along with the timing adjustments that occur at various engine speeds with no need to disconnect any high-pressure delivery lines.

Testing with piezo-electric sensor and stroboscopic timing light

The piezo-electric sensor (Fig. 2, 4) is clamped onto the high-pressure delivery line leading to the reference cylinder. Here, it is important to ensure that the sensor is mounted on a straight and clean section of tubing with no bends; the sensor should also be positioned as close as possible to the fuel-injection pump.

The start of delivery triggers pulses in the fuel-injection line. These generate an electric signal in the piezo-electric sensor. The signal controls the light pulses generated by the timing light (5). The timing light is now aimed at the engine's flywheel. Each time the pump starts delivery to the reference cylinder, the timing light flashes, lighting up the TDC mark on the flywheel. This allows correlation of timing to flywheel position. The flashes occur only when delivery to the reference cylinder starts, producing a static image. The degree markings (6) on the crankshaft or flywheel show the crankshaft position relative to the start of delivery.

Engine speed is also indicated on the diesel engine tester.

Setting start of delivery

If the results of this start-of-delivery test deviate from the test specifications, it will be necessary to change the fuel-injection pump's angle relative to the engine.

The first step is to switch off the engine. Then the technician rotates the crankshaft until the reference cylinder's piston is at the point at which delivery should start. The crankshaft features a reference mark for this operation; the mark should be aligned with the corresponding mark on the bellhousing. The technician now unscrews the 6-point screw from the central plug screw. As for basic adjustment process on the test bench, the technician now installs a dial-gauge assembly in the opening. This is used to observe distributor plunger travel while the crankshaft is being turned. As the crankshaft is turned counter to its normal direction of rotation (or in the normal direction on some engines), the plunger retracts in the pump. The technician should stop turning the crankshaft once the needle on the gauge stops moving. The plunger is now at bottom dead center. Now the dial gauge is reset to zero. The crankshaft is then rotated in its normal direction of rotation as far as the TDC mark. The dial gauge now indicates the travel executed by the distributor plunger on its way from its bottom

dead center position to the TDC mark on the reference cylinder. It is vital to comply with the precise specification figure for this travel contained in the fuel-injection pump's datasheet. If the dial gauge reading is not within the specification, it will be necessary to loosen the attachment bolt on the pump flange, turn the pump housing and repeat the test. It is important to ensure that the cold-start accelerator is not active during this procedure.

Measuring the idle speed

The idle speed is monitored with the engine heated to its normal operating temperature, and in a no-load state, using the engine tester. The idle speed can be adjusted using the idle-speed stop screw.

2 Checking start of delivery with piezo-electric sensor and timing light

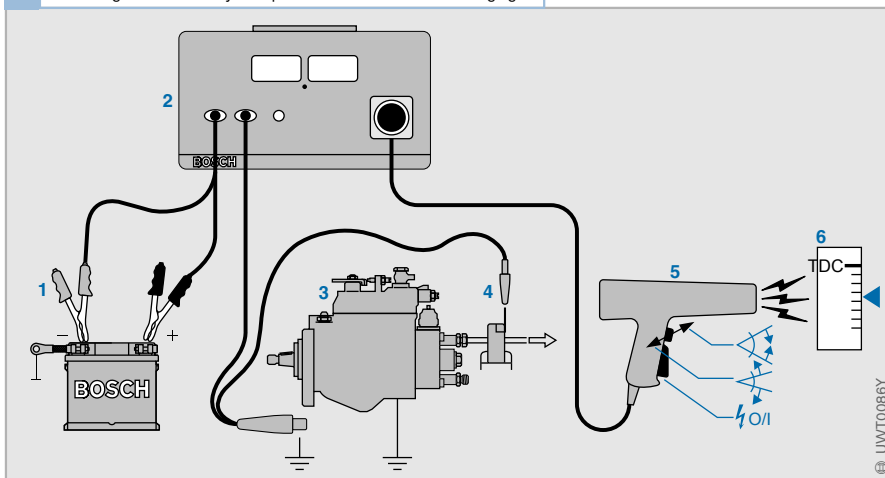


Fig. 2

- 1 Battery
- 2 Diesel tester
- 3 Distributor injection pump
- 4 Piezo-electric sensor
- 5 Stroboscopic timing light
- 6 Angle and TDC marks

Keep your hands away from the nozzle jet.

Spray from the nozzle stings and penetrates the skin.

There is a risk of blood poisoning.

Wear safety goggles.

Nozzle tests

The nozzle-and-holder assembly consists of the nozzle and the holder. The holder includes all of the required filters, springs and connections.

The nozzle affects the diesel engine's output, fuel economy, exhaust-gas composition and operating refinement. This is why the nozzle test is so important.

An important tool for assessing nozzle performance is the nozzle tester.

Nozzle tester

The nozzle tester is basically a manually operated fuel-injection pump (Fig. 1). For testing, a high-pressure delivery line (4) is used to connect the nozzle-and-holder assembly (3) to the tester. The calibrating oil is contained in a tank (5). The required pressure is generated using the hand lever (8). The pressure gage (6) indicates the pressure of the calibrating oil; a valve (7) can be used to disconnect it from the high-pressure circuit for specific test procedures.

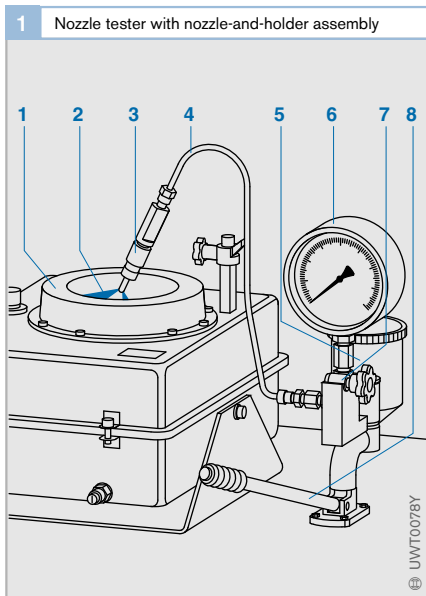


Fig. 1

- 1 Suction equipment
- 2 Injection jet
- 3 Nozzle-and-holder assembly
- 4 High-pressure test line
- 5 Calibrating oil tank with filter
- 6 Pressure gage
- 7 Valve
- 8 Hand lever

The EPS100 (0684200704) nozzle tester is specified for testing nozzles of Sizes P, R, S and T. It conforms to the standards defined in ISO 8984. The prescribed calibrating oil is defined in ISO standard 4113. A calibration case containing all the components is required to calibrate inspect the nozzle tester.

This equipment provides the basic conditions for reproducible, mutually compatible test results.

Test methods

Ultrasonic cleaning is recommended for the complete nozzle-and-holder assemblies once they have been removed from the engine. Cleaning is mandatory on nozzles when they are submitted for warranty claims.

Important: Nozzles are high-precision components. Careful attention to cleanliness is vital for ensuring correct operation.

The next step is to inspect the assembly to determine whether any parts of the nozzle or holder show signs of mechanical or thermal wear. If signs or wear are present, it will be necessary to replace the nozzle or nozzle-and-holder assembly.

The assessment of the nozzle's condition proceeds in four test steps, with some variation depending on whether the nozzles are pintle or hole-type units.

Chatter test

The chatter test provides information on the smoothness of action of the needle. During injection, the needle oscillates back and forth to generate a typical chatter. This motion ensures efficient dispersion of the fuel particles.

The pressure gage should be disconnected for this test (close valve).

Pintle nozzle

The lever on the nozzle tester is operated at a rate of one to two strokes per second. The pressure of the calibrating oil rises, ultimately climbing beyond the nozzle's opening pressure. During the subsequent discharge, the nozzle should produce an audible chatter; if it fails to do so, it should be replaced.

When installing a new nozzle in its holder, always observe the official torque specifications, even on hole-type nozzles.

Hole-type nozzle

The hand lever is pumped at high speed. This produces a hum or whistling sound, depending on the nozzle type. No chatter will be present in some ranges. Evaluation of chatter is difficult with hole-type nozzles. This is why the chatter test is no longer assigned any particular significance as an assessment tool for hole-type nozzles.

Spray pattern test

High pressures are generated during this test. Always wear safety goggles.

The hand lever is subjected to slow and even pressure to produce a consistent discharge plume. The spray pattern can now be evaluated. It provides information on the condition of the injection orifices. The prescribed response to an unsatisfactory spray pattern is to replace the nozzle or nozzle-and-holder assembly.

The pressure gage should also be switched off for this test.

Pintle nozzle

The spray should emerge from the entire periphery of the injection orifice as even tapered plume. There should be no concentration on one side (except with flatted pintle nozzles).

Hole-type nozzle

An even tapered plume should emerge from each injection orifice. The number of individual plumes should correspond to the number of orifices in the nozzle.

Checking the opening pressure

Once the line pressure rises above the opening pressure, the valve needle lifts from its seat to expose the injection orifice(s). The specified opening pressure is vital for correct operation of the overall fuel-injection system.

The pressure gage must be switched back on for this test (valve open).

Pintle nozzle and hole-type nozzle with single-spring nozzle holder

The operator slowly presses the lever downward, continuing until the gage needle indicates the highest available pressure. At this point, the valve opens and the nozzle starts to discharge fuel. Pressure specifications can be found in the “nozzles and nozzle-holder components” catalog.

Opening pressures can be corrected by replacing the adjustment shim installed against the compression spring in the nozzle holder. This entails extracting the nozzle from the nozzle holder. If the opening pressure is too low, a thicker shim should be installed; the response to excessive opening pressures is to install a thinner shim.

Hole-type nozzle with two-spring nozzle holder

This test method can only be used to determine the initial opening pressure on two-spring nozzle-and-holder assemblies.

There is no provision for shim replacement on some nozzle-and-holder assemblies. The only available response with these units is to replace the entire assembly.

Leak test

The pressure is set to 20 bar above the opening pressure. After 10 seconds, formation of a droplet at the injection orifice is acceptable, provided that the droplet does not fall.

The prescribed response to an unsuccessful leak test is to replace the nozzle or nozzle-and-holder assembly.

Exhaust-gas emissions

Increasing energy consumption, which is mainly covered by the energy contained in fossil fuels, have made air quality a critical issue. The quality of the air we breathe depends on a wide range of factors. In addition to emissions from industry, homes, and power plants, the exhaust gas generated by motor vehicles also plays a significant role. In developed countries, this accounts for about 20% of total emissions.

Overview

The statutory limits restricting pollutant emissions from motor vehicles have been progressively tightened in recent years. In order to achieve compliance with these limits, vehicles have been equipped with supplementary emissions-control systems.

Combustion of the air/fuel mixture

A basic rule that applies to all internal-combustion engines is that absolutely complete combustion does not occur inside the engine's cylinders. This rule remains valid even when the combustion mixture contains excess air. Less efficient combustion leads to an increase in levels of toxic components containing carbon in the exhaust gas. In addition to a high percentage of nontoxic elements, the internal-combustion engine's gas also contains byproducts which – at least when present in high concentrations – represent potential sources of environmental damage. These are classified as pollutants.

Positive crankcase ventilation

Additional emissions stem from the engine's crankcase ventilation system. Combustion gases travel along the cylinder walls and into the crankcase. From there, they are returned to the intake manifold for renewed combustion within the engine.

Since nothing more than pure air is compressed in the diesel's compression stroke, diesel engines generate only negligible amounts of these bypass emissions. The gases that make their way into the crankcase contain

only about 10% as much pollution as the bypass gases in a gasoline engine. Despite this fact, closed crankcase-ventilation systems are now mandatory on diesel engines.


Evaporative emissions

Additional emissions can escape from vehicles powered by gasoline engines when volatile components in the fuel evaporate and emerge from the fuel tank, regardless of whether the vehicle is moving or parked. These emissions consist primarily of hydrocarbons. To prevent these gases from evaporating directly to the atmosphere, vehicles must be equipped with an evaporative-emissions control system designed to store them for subsequent combustion in the engine.

Evaporative emissions from diesels are not a major concern, as diesel fuel possesses virtually no high-volatility components.

Major components

Assuming the presence of sufficient oxygen, ideal, complete combustion of pure fuel would be possible in the following chemical reaction:



The absence of ideal conditions for combustion combines with the composition of the fuel itself to produce a certain number of toxic components in addition to the primary combustion products water (H₂O) and carbon dioxide (CO₂) (Fig. 1).

Water (H₂O)

During combustion, the water chemically bound within the fuel is transformed into water vapor, most of which condenses when it cools. This is the source of the exhaust plume visible on cold days. The proportion of water in the exhaust gas is dependent on the operating point in diesel engines.

Carbon dioxide (CO₂)

In complete combustion, the hydrocarbons in the fuel’s chemical bonds are transformed to carbon dioxide (CO₂). Its proportion is also dependent on the operating point. Here again, the proportion depends on the engine operating conditions. The amount of converted carbon dioxide in the exhaust gas is directly proportional to fuel consumption. Thus the only way to reduce carbon-dioxide emissions when using standard fuels is to reduce fuel consumption.

Carbon dioxide is a natural component of atmospheric air, and the CO₂ contained in automotive exhaust gases is not classified as a pollutant. However, it is one of the sub-

stances responsible for the greenhouse effect and the global climate change that this causes. In the period since 1920, atmospheric CO₂ has risen continuously, from roughly 300 ppm to approx. 450 ppm in the year 2001. This renders efforts to reduce carbon-dioxide emissions and fuel consumption more important than ever.

Nitrogen (N₂)

Nitrogen is the primary constituent (78%) of the air drawn in by the engine. Although it is not directly involved in the combustion process, it is the largest single component within the exhaust gas, at approximately 69...75%.

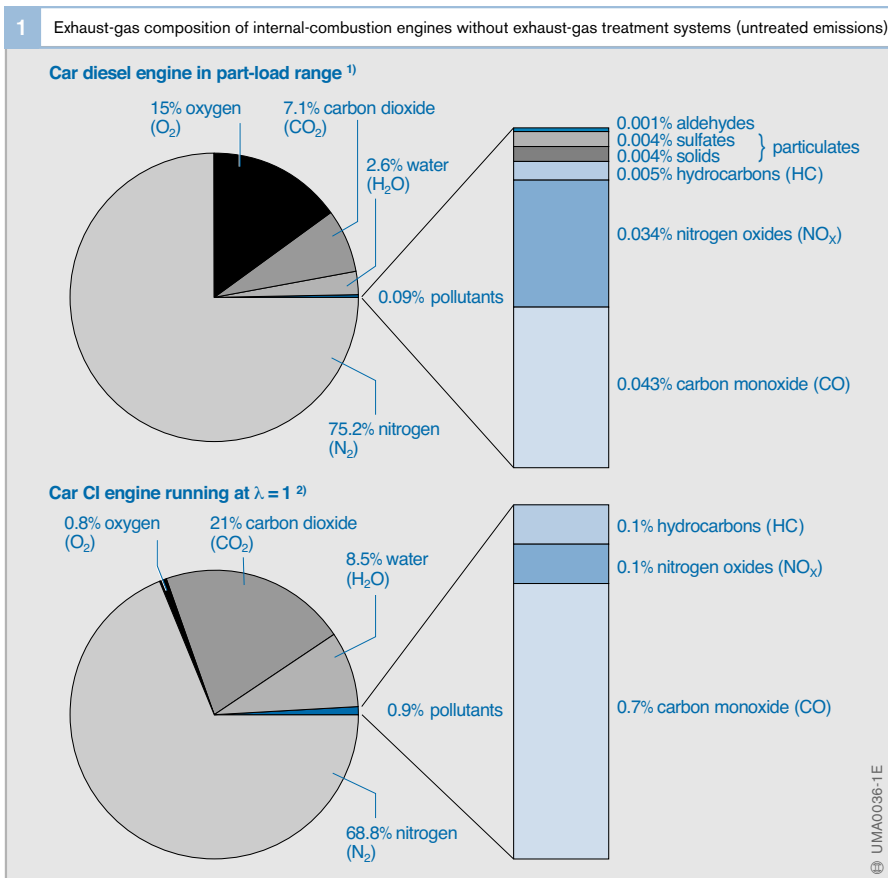


Fig. 1
Figures in percent by weight

The concentrations of exhaust-gas components, especially pollutants, may vary. Among other factors, they depend on the engine operating conditions and the ambient conditions (e.g. air humidity).

- 1) NO_x and particulate emissions can be reduced by more than 90% by the use of NO_x storage catalytic converters and particulate filters.
- 2) Catalytic converters, which are standard equipment today, can reduce pollutant emissions by up to 99%.

Combustion byproducts

During combustion, the air-fuel mixture generates a number of byproducts. The most significant of these combustion byproducts are:

- Carbon monoxide (CO)
- Hydrocarbons (HC), and
- Nitrogen oxides (NO_x)

Engine modifications and exhaust-gas treatment can reduce the amount of pollutants produced.

Since they always operate with excess air, diesel engines inherently produce much smaller amounts of CO and HC than gasoline engines. The main emphasis is therefore on NO_x and particulate emissions. Both of these types of emissions can be reduced by more than 90% by using modern NO_x storage catalytic converters and particulate filters.

Carbon monoxide (CO)

Carbon monoxide results from incomplete combustion in rich air/fuel mixtures due to an air deficiency.

Although carbon monoxide is also produced during operation with excess air, the concentrations are minimal, and stem from brief periods of rich operation or inconsistencies within the air/fuel mixture. Fuel droplets that fail to vaporize form pockets of rich mixture that do not combust completely.

Carbon monoxide is an odorless and tasteless gas. In humans, it inhibits the ability of the blood to absorb oxygen, thus leading to asphyxiation.

Hydrocarbons (HC)

Hydrocarbons, or HC, is a generic designation for the entire range of chemical compounds uniting hydrogen H with carbons C. HC emissions are the result of inadequate oxygen being present to support complete combustion of the air/fuel mixture. The combustion process also produces new hydrocarbon compounds not initially present in the original fuel (by separating extended molecular chains, etc.).

Aliphatic hydrocarbons (alkanes, alkenes, alkynes and their cyclical derivatives) are virtually odorless. Cyclic aromatic hydrocarbons (such as benzol, toluol and polycyclic hydrocarbons) emit a discernible odor.

Some hydrocarbons are considered to be carcinogenic in long-term exposure. Partially oxidized hydrocarbons (aldehydes, ketones, etc.) emit an unpleasant odor. The chemical products that result when these substances are exposed to sunlight are also considered to act as carcinogens under extended exposure to specified concentrations.

Nitrogen oxides (NO_x)

Nitrogen oxides, or oxides of nitrogen, is the generic term embracing chemical compounds consisting of nitrogen and oxygen. They result from secondary reactions that occur in all combustion processes where air containing nitrogen is burned. The primary forms that occur in the exhaust gases of internal-combustion engines are nitrogen oxide (NO) and nitrogen dioxide (NO₂), with dinitrogen monoxide (N₂O) also present in minute concentrations.

Nitrogen oxide (NO) is colorless and odorless. In atmospheric air, it is gradually converted to nitrogen dioxide (NO₂). Pure NO₂ is a poisonous, reddish-brown gas with a penetrating odor. NO₂ can induce irritation of the mucous membranes when present in the concentrations found in highly-polluted air.

Nitrous oxides contribute to forest damage (acid rain) and also act in combination with hydrocarbons to generate photochemical smog.

Sulfur dioxide (SO₂)

Sulfurous compounds in exhaust gases – primarily sulfur dioxide – are produced by the sulfates contained in fuels. A relatively small proportion of these pollutant emissions stem from motor vehicles. These emissions are not restricted by official emission limits.

It is not possible to use a catalytic converter to convert sulfur dioxide. Sulfur forms deposits within catalytic converters, reacting with the active chemical layer and inhibiting the catalytic converter's ability to remove other pollutants from the exhaust gases. While sulfur contamination can be reversed in the NO_x storage catalytic converters used for emissions control with direct-injection gasoline engines, this process requires a considerable amount of energy, and consequently negate the fuel-economy benefits achieved by direct injection.

The earlier limits on sulfur concentrations within fuel of 500 ppm (parts per million, 1,000 ppm = 0.1%), valid until the end of 1999, have now been tightened by EU legislation. The new limits, valid from 2000 onward, are 150 ppm for gasoline and 350 ppm for diesel fuels. A further reduction to 50 ppm for both types of fuel is slated for 2005. In practice, however, sulfur-free fuel will be introduced sooner. Gasoline and diesel fuel with a sulfur content of ≤ 10 ppm will already be available throughout Germany in 2003 (throughout the EU by 2005).

Particulates

The problem of particulate emissions is primarily associated with diesel engines. Levels of particulate emissions from gasoline engines with multipoint injection systems are negligible.

Particulates result from incomplete combustion. While exhaust-gas composition varies as a function of the combustion process and engine operating condition, these particulates basically consist of hydrocarbon chains (soot) with an extremely extended specific surface ratio. Uncombusted and partly combusted hydrocarbons form deposits on the soot, where they are joined by aldehydes, with their penetrating odor. Aerosol components (minutely dispersed solids or fluids in gases) and sulfates bond to the soot. The sulfates result from the sulfur content in the fuel. Consequently, these pollutants do not occur if sulfur-free fuel is used.

▶ Greenhouse effect

Shortwave solar radiation penetrates the earth's atmosphere and continues to the ground, where it is absorbed. This process promotes warming in the ground, which then radiates long-wave heat, or infrared energy. A portion of this radiation is reflected by the atmosphere, causing the earth to warm.

Without this natural greenhouse effect the earth would be an inhospitable planet with an average temperature of -18°C . Greenhouse gases within the atmosphere (water vapor, carbon dioxide, methane, ozone, dinitrogen oxide, aerosols and particulate mist) raise average temperatures to approximately $+15^\circ\text{C}$. Water vapor, in particular, retains substantial amounts of heat.

Carbon dioxide has risen substantially since the dawn of the industrial age more than 100 years ago. The primary source of this increase has been the combustion of coal and petroleum products. In this process, the carbon bound in the fuels is released in the form of carbon dioxide.

The processes that influence the greenhouse effect within the earth's atmosphere are extremely complex. While some scientists maintain that anthropogenic (of human origin) emissions are the primary source of climate change, this theory is challenged by other experts, who believe that the warming of the earth's atmosphere is being caused by increased solar activity.

There is, however, a large degree of unanimity in calling for reductions in energy use to lower carbon-dioxide emissions and combat the greenhouse effect.

Emission-control legislation

The state of California assumed a pioneering role in efforts to restrict toxic emissions emanating from motor vehicles. This development arises from the fact that the geography of large cities like Los Angeles prevents wind from dispersing exhaust gases, causing a blanket of fog that smothers the city. The resulting smog not only has damaging impacts on the health of city dwellers, but also impairs visibility severely.

Overview

California introduced the first emission-control legislation for gasoline in the 1960s. These regulations became progressively more stringent in the ensuing years. Meanwhile all industrialized countries have introduced emission-control laws which define limits for gasoline and diesel engines, as well as the test procedures employed to confirm compliance.


The most important legal restrictions on exhaust-gas emissions are (Fig. 1):

- CARB legislation (California Air Resources Board)
- EPA legislation (Environmental Protection Agency), U.S.A.
- EU legislation (European Union)
- Japanese legislation

Classifications

Countries with legal limits on motor-vehicle emissions divide vehicles into various classes:

- Passenger cars: Emission testing is conducted on a chassis dynamometer.
- Light-duty trucks: Depending on national legislation, the top limit for gross weight rating is 3.5...6.35 t. Testing is conducted on a chassis dynamometer (as for passenger cars).
- Heavy-duty trucks: Gross weight rating over 3.5...6.35 t. The test is conducted on an engine test bench. No provision is made for vehicle testing.
- Off-highway (e.g. construction, agricultural, and forestry vehicles): Tested on an engine test bench, as for heavy-duty trucks.

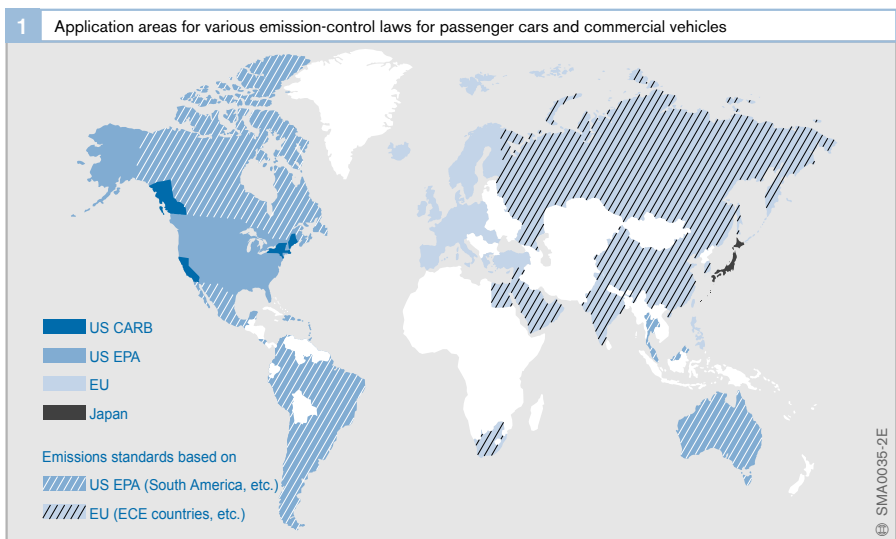

Test procedures

Japan and the European Union have followed the lead of the United States by defining test procedures for certifying compliance with emission limits. These procedures have been adopted in modified or unrevised form by other countries.

Legal requirements prescribe any of three different tests, depending on vehicle class and test objective:

- Type Approval (TA) to obtain General Certification
- Random testing of vehicles from serial production conducted by the approval authorities (Conformity of Production)
- In-field monitoring for testing certain exhaust-gas components in vehicle operation

Type approval

Type approvals are a precondition for granting General Certification for an engine or vehicle type. This process entails proving compliance with stipulated emission limits in defined test cycles. Different countries have defined individual test cycles and emission limits.

Test cycles

Dynamic test cycles are specified for passenger cars and light-duty trucks. The country-specific differences between the two procedures are rooted in their respective origins:

- Test cycles designed to mirror conditions recorded in actual highway operation, e.g. Federal Test Procedure (FTP) test cycle in the U.S.A.
- Synthetically generated test cycles consisting of phases at constant cruising speed and acceleration rates, e.g. Modified New European Driving Cycle (MNEDC) in Europe.

The mass of toxic emissions from each vehicle is determined by operating it in conformity with speed cycles precisely defined for the test cycle. During the test cycle, the exhaust gases are collected for subsequent analysis to determine the pollutant mass emitted during the driving cycle.

For heavy-duty trucks, steady-state exhaust-gas tests (e.g. 13-stage test in the EU), or dynamic tests (e.g. Transient Cycle in the U.S.A.) are carried out on the engine test bench.

All the test cycles are depicted at the end of this section.

Testing serial-production vehicles

Testing serial-production vehicles is usually conducted by the vehicle manufacturer as part of quality control that accompanies the production process. The same test procedures and limits are generally applied as for type approval. The registration authorities may demand confirmation testing as often as necessary. EU and ECE directives (Economic Commission for Europe) take account of production tolerances by carrying out random testing on minimum 3 to maximum 32 vehicles. The most stringent requirements are encountered in the U.S.A., and particularly in California, where the authorities require what is essentially comprehensive and total quality monitoring.

In-field monitoring

Random emission-control tests are conducted in driving mode on vehicles whose running performance and age are within specific limits. The emission-control test procedure is simplified compared with type-approving testing.

CARB legislation (passenger cars/LDT)

CARB, or California Air Resources Board emission limits for passenger cars and Light-Duty Trucks (LDT) are defined in standards specifying exhaust-gas emissions:

- LEV I
- LEV II (Low Emission Vehicle)

The LEV I standard applies to passenger cars and light-duty trucks with a gross weight rating up to 6,000 lb. manufactured in model years 1994 through 2003. Starting model year 2004 the LEV II standard has applied to all new vehicles with a gross weight rating up to 14,000 lb.

Phase-in

Following introduction of the LEV II standard, at least 25% of new vehicle registrations must be certified to this standard. The phase-in rule stipulates that an additional 25% of vehicles must then conform to the LEV II standard in each consecutive year.

As of 2007 all new vehicle registrations must then be certified according to the LEV II standard.

Emission limits

The CARB regulations define limits on:


- Carbon monoxide (CO)
- Nitrogen oxides (NO_x)
- Non-Methane Organic Gases (NMOG)
- Formaldehyde (LEV II only)
- Particulate emissions (diesel engines: LEV I and LEV II; gasoline-engines: LEV II only)

Actual emission levels are determined using the FTP 75 (Federal Test Procedure) driving cycle. Limits are defined in relation to distance and specified in grams per mile.

Within the period 2001 through 2004 the SFTP (Supplement Federal Test Procedure) standard was introduced together with other test cycles. There are also further limits that require compliance in addition to FTP emission limits.

Fig. 1

- 1) For Tier 1, the NMHC limit applies instead of the NMOG limit (NMHC: Non-Methane Hydrocarbons).
- 2) Limit in each case for "full useful life" (10 years/ 100,000 miles for LEV I or 120,000 miles for LEV II).
- 3) Limit value in each case for "intermediate useful life" (5 years/ 50,000 miles).
- 4) Only limits for "full useful life" (see the section on "Long-term compliance")

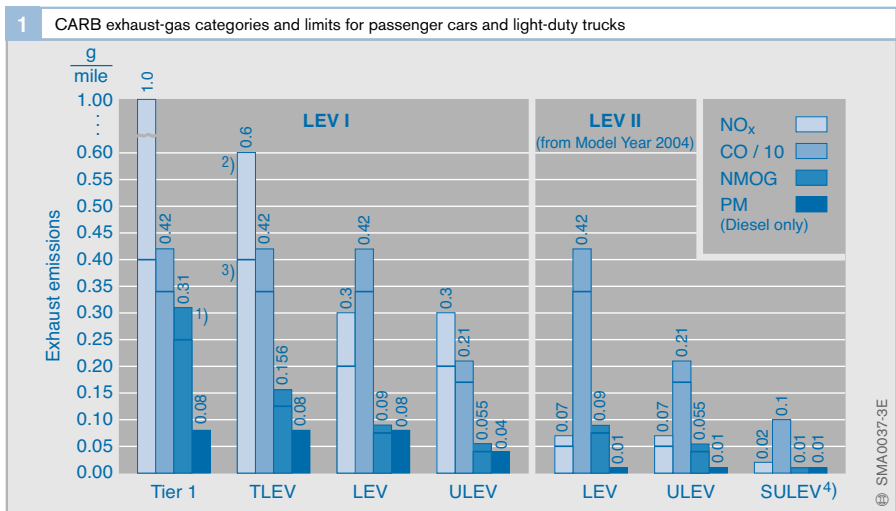

Exhaust-gas categories

Automotive manufacturers are at liberty to deploy a variety of vehicle concepts within the permitted limits, providing they maintain a fleet average (see the section on “Fleet averages”). The concepts are allocated to the following exhaust-gas categories, depending on their emission values for NMOG, CO, NO_x, and particulate emissions (Fig. 1):

- Tier 1 (LEVI only)
- TLEV (Transitional Low-Emission Vehicle; LEVI only)
- LEV (Low-Emission Vehicle), applicable to both exhaust and evaporative emissions
- ULEV (Ultra-Low-Emission Vehicle)
- SULEV (Super Ultra-Low-Emission Vehicle)

In addition to the categories of LEVI and LEVII, two categories define zero-emission and partial zero-emission vehicles:

- ZEV (Zero-Emission Vehicle), vehicles without exhaust-gas or evaporative emissions

- PZEV (Partial ZEV), which is basically SULEV, but with more stringent limits on evaporative emissions and stricter long-term performance criteria

Since 2004 the LEVII exhaust-gas emission standard has been in force. The categories comprising Tier 1 and TLEV are phased out, and in their place, SULEV is added with much lower emission limits. The LEV and ULEV categories remain in place. The CO and NMOG limits from LEV I remain unchanged, but the NO_x limit is substantially lower for LEV II. The LEV II standard also includes new, supplementary limits governing formaldehyde.

Long-term compliance

To obtain approval for each vehicle model (type approval), the manufacturer must prove compliance with the official emission limits for pollutants. Compliance means that the limits may not be exceeded for the following mileages or periods of useful life:

- 50,000 miles or 5 years (“intermediate useful life”)
- 100,000 miles (LEV I)/120,000 miles (LEV II) or 10 years (“full useful life”)


Manufacturers also have the option of certifying vehicles for 150,000 miles using the same limits that apply to 120,000 miles.

The manufacturer then receives a bonus when the NMOG fleet average is defined (see the section entitled “Fleet averages”).

The relevant figures for the PZEV emission-limit category are 150,000 miles or 15 years (“full useful life”).

For this type of approval test, the manufacturer must furnish two vehicle fleets from serial production:

- One fleet in which each vehicle must cover 4,000 miles before testing.
- One fleet for endurance testing, in which deterioration factors for individual components are defined.

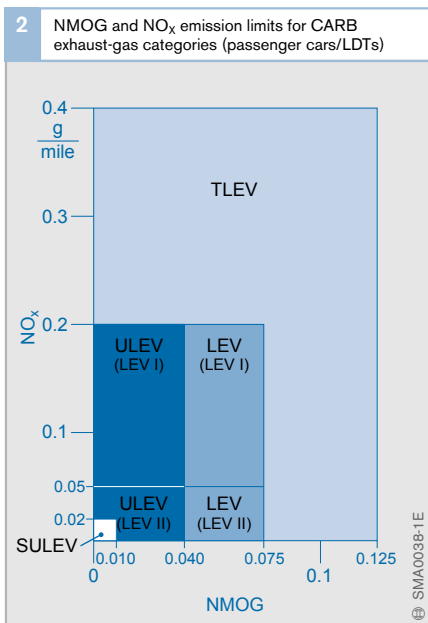

Endurance testing entails subjecting the vehicles to specific driving cycles over distances of 50,000 and 100,000/120,000 miles. Exhaust-gas emissions are tested at intervals of 5,000 miles. Service inspections and maintenance are restricted to the standard prescribed distances.

Countries that base their regulations on the U.S. test cycles allow application of defined deterioration factors to simplify the certification process.

Fleet averages (NMOG)

Each vehicle manufacturer must ensure that exhaust-gas emissions for its total vehicle fleet do not exceed a specified average. NMOG emissions serve as the reference category for assessing compliance with these averages. The fleet average is calculated from the average figures produced by all of the manufacturer's vehicles that comply with NMOG limits and are sold within one year. Different fleet averages apply to passenger cars and light-duty trucks.

The compliance limits for the NMOG fleet average are lowered in each subsequent year (Fig. 3). To meet the lower limits, manufacturers must produce progressively cleaner vehicles in the more stringent emissions categories in each consecutive year.

The fleet averages apply irrespective of LEVI or LEV II standards.

Fleet consumption


U.S. legislation specifies the average amount of fuel an automotive manufacturer's vehicle fleet may consume per mile. The prescribed CAFE value (Corporate Average Fuel Economy) currently (2004) stands at 27.5 mpg. This corresponds to 8.55 liters per 100 kilometers in metric terms. At the present time it is not planned to reduce this limit.

The value for light-duty trucks is 20.7 miles per gallon or 11.4 liters per 100 kilometers. From 2005 to 2007 fuel economy will be raised each year by 0.6 mpg. There are no regulations for heavy-duty trucks.

At the end of each year the average fuel economy for each manufacturer is calculated based on the numbers of vehicles sold. The manufacturer must remit a penalty fee of \$5.50 per vehicle for each 0.1 mpg its fleet exceeds the target. Buyers will also have to pay a gas-guzzler tax on vehicles with especially high fuel consumption. Here, the limit is 22.5 miles per gallon (corresponding to 10.45 liters per 100 kilometers in metric terms).

These penalties are intended to spur development of vehicles offering greater fuel economy.

The FTP 75 test cycle and the highway cycle are applied to measure fuel economy (see the section entitled "U.S. test cycles").

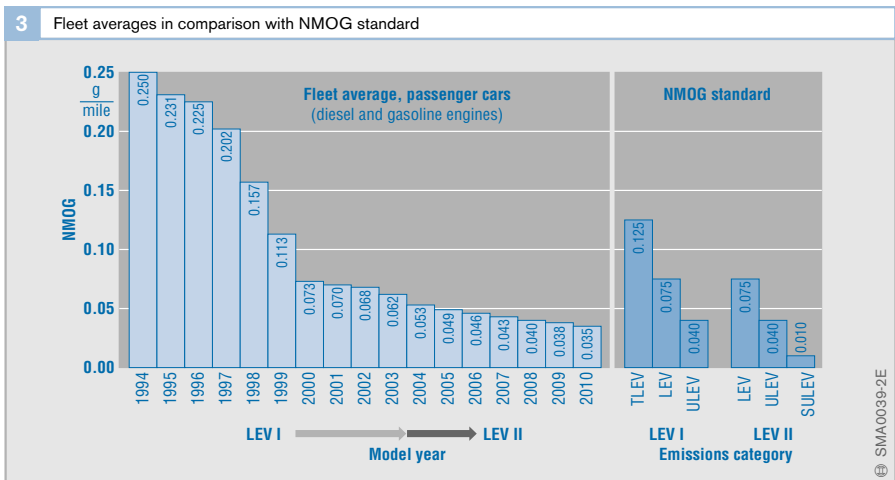

Zero-emission vehicles

Starting 2003 10% of new vehicle registrations will have to meet the requirements of the ZEV (Zero-Emission Vehicle) exhaust-gas category. These vehicles may emit no exhaust gas or evaporative emissions in operation. This category mainly refers to electric cars.

A 10% percentage may partly be covered by vehicles of the PZEV (Partial Zero-Emission Vehicles) exhaust-gas category. These vehicles are not zero-emission, but they emit very few pollutants. They are weighted using a factor of 0.2 to 1, depending on the emission-limit standard. The minimum weighting factor of 0.2 is granted when the following demands are met:

- SULEV certification indicating long-term compliance extending over 150,000 miles or 15 years.
- Warranty coverage extending over 150,000 miles or 15 years on all emission-related components.
- No evaporative emissions from the fuel system (0 EVAP (Zero Evaporation)), achieved by extensive encapsulation of the tank and fuel system.

Special regulations apply to hybrid vehicles combining diesel engines and electric motors. These vehicles can also contribute to achieving compliance with the 10% limit.

In-field monitoring

Unscheduled testing

Random emission testing is conducted on in-use vehicles using the FTP 75 test cycle and an evaporation test. Only vehicles with mileages of less than 50,000 or 75,000 miles (varies according to the certification status of the individual vehicle model) are selected for testing.

Vehicle monitoring by the manufacturer

Official reporting of claims and damage to specific emissions-related components and systems has been mandatory for vehicle manufacturers since model year 1990. The reporting obligation remains in force for a period of 5 or 10 years, or 50,000 or 100,000 miles, depending on the warranty period applying to the component or assembly.

Reporting is divided into three stages with an incremental amount of detail:

- Emissions Warranty Information Report (EWIR)
- Field Information Report (FIR)
- Emission Information Report (EIR)

Information concerning:

- problem reports
- malfunction statistics
- defect analysis
- impacts on emissions

is then forwarded to the environment-protection authorities. The authorities use the FIR as the basis for issuing mandatory recall orders to the manufacturer.

EPA legislation (passenger cars/LDT)

EPA (Environment Protection Agency) legislation applies to all of the Federal states where the more stringent CARB stipulations from California are not in force. CARB regulations have already been adopted by some states, such as Maine, Massachusetts, and New York.

EPA regulations in force since 2004 conform to the Tier 2 standard.

Emission limits

EPA legislation define emission limits for the following pollutants:

- Carbon monoxide (CO)
- Nitrogen oxides (NO_x)
- Non-Methane Organic Gases (NMOG)
- Formaldehyde (HCHO)
- Particulates


Pollutant emissions are determined using the FTP 75 driving cycle. Limits are defined in relation to distance and specified in grams per mile.

The SFTP (Supplemental Federal Test Procedure) standard, comprising further test cycles, has been in force since 2002. The applicable limits require compliance in addition to FTP emission limits.

Since the introduction of Tier 2 standards, vehicles with diesel and spark-ignition engines have been subject to an identical exhaust-gas emission standards.

Exhaust-gas categories

Tier 2 (Fig. 1) classifies limits for passenger cars in 10 bins (emission standards) and 11 bins for heavy-duty trucks. After 2007 bins 9 through 11 will be phased out.

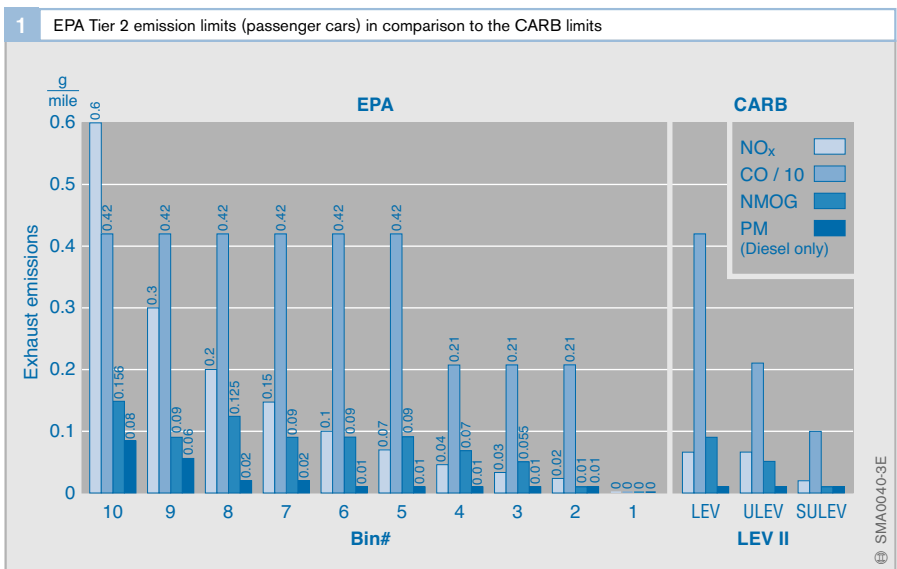

The transition to Tier 2 have produced the following changes:

- Introduction of fleet averages for NO_x.
- Formaldehydes (HCHO) are subject to a separate pollutant category.
- Passenger cars and light-duty trucks with a GWR up to 6,000 lb. (2.72 metric tons) will be combined in a single vehicle class.
- MDPV (Medium-Duty Passenger Vehicle) forms a separate vehicle category; previously assigned to HDV (Heavy-Duty Vehicles).
- “Full useful life” is extended to 120,000 miles (192,000 kilometers).

Phase-in

At least 25% of all new passenger-car and LLDT (Light Light-Duty Trucks) registrations are required to conform to Tier 2 standards when they take effect in 2004. The phase-in rule stipulates that an additional 25% of vehicles are then required to conform to Tier 2 standards in every following year. All vehicles are required to conform to Tier 2 standards by 2007. For the HLDT/MDPV category, the phase-in period ends 2009.

Fleet averages

NO_x emissions are used to determine fleet averages for individual manufacturers under EPA legislation. CARB regulations, however, are based on NMOG emissions.

Fleet fuel economy

The regulations defining average fleet fuel consumption in the 49 states are the same as those applied in California. Here again, the limit applicable to passenger cars is 27.5 miles per gallon (8.55 liters per 100 kilometers).

Beyond this figure, manufacturers are required to pay a penalty tax. The purchaser also pays a penalty tax on vehicles that consume more than 22.5 miles per gallon.

In-field monitoring

Unscheduled testing

In analogy to CARB legislation, the EPA regulations require random exhaust-gas emission testing based on the FTP 75 test cycles for in-use vehicles. Testing is conducted on low-mileage (10,000 miles, roughly one year old), and higher mileage vehicles (50,000 miles, and at least one vehicle per test group with 75,000/90,000 miles, approx. 4 years old). The number of vehicles tested varies according to the number sold.

Vehicle monitoring by the manufacturer

For vehicles after model year 1972, the manufacturer is obliged to make an official report concerning damage to specific emission-related components or systems if at least 25 identical emission-related parts in a model year are defective. The reporting obligation ends five years after the end of the model year. The report comprises a description of damage to the defective component, presentation of the impacts on exhaust-gas emissions, and suitable corrective action by the manufacturer. The environment-protection authorities use this report as the basis for deciding whether to issue recall orders to the manufacturer.

EU legislation (passenger cars/LDT)

The regulations contained in European Union directives are defined by the EU Commission. Emission-control legislation for passenger cars/light-duty trucks is Directive 70/220/EEC from 1970. For the first time it defined exhaust-gas emission limits, and the provisions have been updated ever since.

The emission limits for passenger cars and Light-Duty Trucks (LDT) are contained in the following exhaust-gas emission standards:

- Euro 1 (as from 1 July 1992)
- Euro 2 (as from 1 January 1996)
- Euro 3 (as from 1 January 2000)
- Euro 4 (as from 1 January 2005)

A new exhaust-gas emission standard is generally introduced in two stages. In the first stage, compliance with the newly defined emission limits is required for vehicle models subject to new Type Approvals (TA). In the second stage – usually one year later – every new registration must comply with the new

limits (First Registration (FR)). The authorities can also inspect serial-production vehicles to verify compliance with emission limits (Conformity of Production (COP)).


EU directives allow tax incentives for vehicles that comply with upcoming exhaust-gas emission standards before they actually become law. Depending on a vehicle's emission standard, there are a number of different motor-vehicle tax rates in Germany.

Emission limits

The EU standards define limits for the following pollutants:

- Carbon monoxide (CO)
- Hydrocarbons (HC)
- Nitrogen oxides (NO_x)
- Particulates, although these limits are initially restricted to diesel vehicles

The limits for hydrocarbons and nitrogen oxides for the Euro 1 and Euro 2 stages are combined into an aggregate value (HC+NO_x). Since Euro 3, there has been a special restriction for NO_x emissions in addition to the aggregate value.

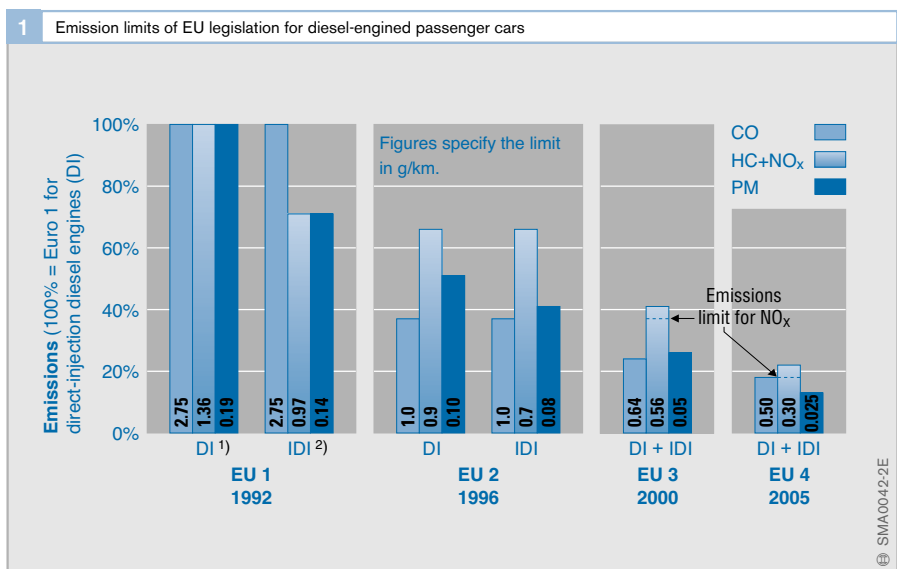

The limits are defined based on mileage and are specified in grams per kilometer (g/km) (Fig. 1). Since EU 3, emissions are measured on a chassis dynamometer using the MNEDC (Modified New European Driving Cycle).

The limits are different for vehicles with diesel or gasoline engines. In future, they will merge (probably by Euro 5).

The limits for the LDT category are not uniform. There are three classes (1 to 3) into which LDTs are subdivided, depending on the vehicle reference weight (unladen weight + 100 kg). The limits for Class 1 are the same as for cars.

Type approval

While type-approval testing basically corresponds to U.S. procedures, deviations are found in the following areas: Measurements of the pollutants HC, CO, NO_x are supplemented by particulate and exhaust-gas opacity measurements on diesel vehicles. Test vehicles absolve an initial run-in period of 3,000 kilometers before testing. Deterioration factors used to assess test results are defined in the legislation for every pollutant component; manufacturers are also allowed to present documentation confirming lower factors obtained during specified endurance testing over 80,000 km (100,000 km starting with EU 4).

Compliance with the specified limits must be maintained over a distance of 80,000 km (Euro 3), or 100,000 km (Euro 4), or after 5 years.

Type tests

There are six different type tests for type approval. Of those, the Type I test and the Type V test apply to diesel-engined vehicles.

The Type I test evaluates exhaust-gas emissions after cold-starting. Exhaust-gas opacity is also assessed on vehicles with diesel engines.

The Type V test assesses the long-term durability of the emission-reducing equipment. It may involve a specific test sequence, or it may be subjected to deterioration factors specified by the legislation.

CO₂ emissions

There are no legal emission limits for CO₂. However, the vehicle manufacturers (Association des Constructeurs Européen d'Automobiles (ACEA)(Association of European Automobile Manufacturers) have pledged to uphold a voluntary program. The objective is to achieve CO₂ emissions of max. 140 g/km for passenger cars by 2008 – this is equivalent to a fuel consumption of 5.8 l/100 km.

In Germany, vehicles with specially low CO₂ emissions (so-called 5-liter and 3-liter cars) will be tax-exempt until the end of 2005.

In-field monitoring

EU legislation also calls for conformity-verification testing on in-use vehicles as part of the Type I test cycle. The minimum number of vehicles of a vehicle type under test is three, while the maximum number varies according to the test procedure.

Vehicles under test must meet the following criteria:

- Mileages vary from 15,000 km to 80,000 km, and vehicle age from 6 months to 5 years (Euro 3). In Euro 4, the mileage specified ranges from 15,000 km to 100,000 km.
- Regular service inspections were carried out as specified by the manufacturer.
- The vehicle must show no indications of non-standard use (e.g. manipulation, major repairs, etc.).

If emissions from an individual vehicle fail substantially to comply with the standards, the source of the high emissions must be determined. If more than one vehicle displays excessive emissions in random testing, no matter what the reason, the results of the random test must be classified as negative. If there are various reasons, the test schedule

may be extended, providing the maximum sample size is not reached.

If the type-approval authorities detect that a vehicle type fails to meet the criteria, the vehicle manufacturer must devise suitable action to eliminate the defect. The action catalog must be applicable to all vehicles with the same defect. If necessary, a recall action must be started.

Periodic emissions inspections (AU)

In Germany, all passenger cars and light-duty trucks are required to undergo emissions inspection (AU) three years after their first registration, and then every two years. For gasoline-engined vehicles, the main focus is on CO levels, while for diesel vehicles, the opacity test is the main criterion.

Since the introduction of on-board diagnosis, the exhaust-gas test also tests whether the OBD system is functioning correctly to ensure monitoring of exhaust-gas-related components and systems in use.

Japanese legislation (passenger cars/LDTs)

The permitted emission values are also subject to gradual stages of severity in Japan. For 2005 it was decided to introduce a further stage of severity for emission limits.

Vehicles with a gross weight rating up to 2.5 t (starting 2005: 3.5 t) are divided into three categories: passenger cars (up to 10 seats), LDV (Light-Duty Vehicle) up to 1.7 t, and MDV (Medium-Duty Vehicle) up to 2.5 t (starting 2005: 3.5 t). Slightly higher limits for NO_x and particulates apply to the MDV category compared with the other two vehicle classes.

Fig. 1

- 1) For vehicles with an unladen weight up to 1,265 kg
- 2) For vehicles with an unladen weight over 1,265 kg
- 3) Limit for vehicles up to 1,265 kg
- 4) Limit for vehicles over 1,265 kg

Emission limits


Japanese legislation specifies limits for the following emissions (Fig. 1):

- Carbon monoxide (CO)
- Nitrogen oxides (NO_x)
- Hydrocarbons (HC)
- Particulates (diesel vehicles only)
- Smoke (diesel vehicles only)

Pollutant emissions are measured in the 10·15-Mode Test (see the section entitled “Japanese test cycle for passenger cars and LDTs”). A modified 10·15 Mode Test, including a cold start to be introduced in 2005, is under discussion.

Fleet fuel economy

In Japan, measures for reducing the CO₂ emissions of cars are planned. One proposal plans to fix the average fuel economy (CAFE value) for the entire passenger-car fleet. The proposal foresees a gradual phase-in of emission limits by vehicle weight.

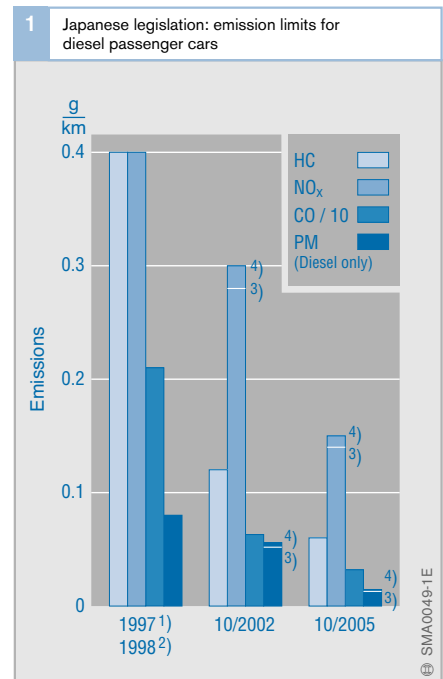

U.S. legislation (heavy-duty trucks)

Heavy-duty trucks are defined in EPA legislation as vehicles with a gross weight rating over 8,500 or 10,000 lb. (equivalent to 3.9 and 4.6 t), depending on vehicle type.

In California, all vehicles over 14,000 lb. (equivalent to 6.4 t) are classified as heavy-duty trucks. To a great extent, Californian legislation is identical to parts of EPA legislation. However, there is an additional program for city buses.

Emission limits

The U.S. standards for diesel engines define limits for:

- Hydrocarbons (HC)
- NMHCs in some cases
- Carbon monoxide (CO)
- Nitrogen oxides (NO_x)
- Particulate
- Exhaust-gas opacity

The permissible limits are related to engine power output and specified in g/kW. The emissions are measured on the engine test bench during the dynamic test cycle with cold

starting sequence (HDTC, Heavy-Duty Transient Cycle); the exhaust-gas opacity is measured using the Federal Smoke Test.

New, more stringent regulations apply to vehicles starting model year 2004, with significantly reduced NO_x emission limits. Non-methane hydrocarbons and nitrogen oxides are grouped together in one aggregate (NMHC + NO_x). CO and particulate emission limits remain at the same level as model year 1998.

Another very drastic tightening of emission restrictions comes into force in model year 2007. The NO_x and particulate emission limits will then be 10 times lower than previous levels. This is probably not achievable without the use of emission-control systems (e.g. NO_x catalytic converters and particulate filters).

A gradual phase-in will take place for NO_x and NMHC emission limits between model years 2007 and 2010.

To help compliance with severe particulate limits, the maximum permitted sulfur content in diesel fuel will be reduced from 500 ppm at present to 15 ppm from mid-2006.

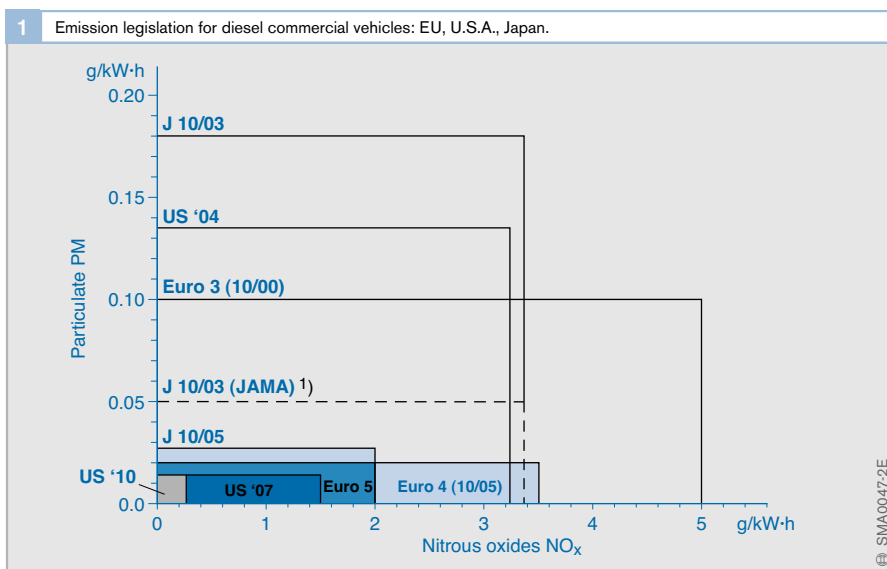


Fig. 1

1) Voluntary obligation of Japanese Association of Automotive Manufacturers (JAMA): one engine type per manufacturer

For heavy-duty trucks – in contrast with cars and LDTs – there are no limits specified for average fleet emissions and fleet consumption.

Consent Decree

In 1998 a legal agreement was reached between EPA, CARB, and a number of engine manufacturers. It provides for sanctions against manufacturers if they make illegal modifications to engines to achieve optimized consumption in the highway cycle, resulting in higher NO_x emissions. The “Consent Decree” specifies that the applicable emission limits must also undercut the steady-state European 13-stage test in addition to the dynamic test cycle. Furthermore, emissions are not allowed to exceed the limits for model year 2004 by more than 25%, regardless of driving mode within a specified engine-speed/torque range (“not-to-exceed” zone).

These additional tests are applicable to all diesel commercial vehicles starting model year 2007. However, emissions in the not-to-exceed zone may be up to 50% above the emission limits.

Long-term compliance

Compliance with emission limits must be demonstrated over a defined mileage or period of time. Three weight classes are defined with long-term compliance requirements that gradually become more severe:

- Light-duty trucks from 8,500 lb. (EPA) or 14,000 lb. (CARB) to 19,500 lb.
- Medium-duty trucks from 19,500 lb. to 33,000 lb.
- Heavy-duty trucks over 33,000 lb.

In the case of heavy-duty trucks starting model year 2004, long-term emission-limit compliance over a period of 13 years or 435,000 miles must be documented.

EU legislation (heavy-duty trucks)

In Europe, all vehicles with a permissible gross weight of over 3.5 t, or capable of transporting more than 9 persons, are classified as heavy-duty trucks. The emission-limit regulations are set down in Directive 88/77/EEC, which is subject to continuous updating.

As for cars and light-duty trucks, new emission limits for heavy-duty trucks are introduced in two stages. New engine designs must meet the new emission limits during type approval. One year later, compliance with the new limits will be a condition for awarding a general vehicle approval. The legislator can inspect Conformity of Production (COP) by taking engines out of serial production and testing them for compliance with the new emission limits.

Emission limits

For commercial-vehicle diesel engines, the Euro standards define emission limits for hydrocarbons (HC and NMHCs), carbon monoxide (CO), nitrogen oxides (NO_x), particulates, and exhaust-gas opacity. The permissible limits are related to engine power output and specified in g/kW.

The Euro 3 emission limit level has applied to all new engine type approvals since October 2000 and also to all production vehicles since October 2001. Emissions are measured during the 13-stage European Steady-State Cycle (ESC), and exhaust-gas opacity in the supplementary European Load Response (ELR) test. Diesel engines that are fitted with “advanced systems” for emissions control (e.g. NO_x catalytic converter or particulate filter) must also be tested in the dynamic European Transient Cycle (ETC). The European test cycles are conducted with the engine running at normal operating temperature.

In the case of small engines, i.e. engines with a capacity of less than 0.75 liter per cylinder and a rated speed of over 3000 rpm, slightly higher particulate emission levels are permitted than for large engines. There are separate emission limits for the ETC – for example, particulate limits are approximately 50% higher than specified for the ESC because of the soot-emission peaks expected under dynamic operating conditions.

In October 2005 the emission limit level Euro 4 enters into force initially for new type approvals, and for serial production one year later. All emission limits are significantly lower than specified by Euro 3, but the biggest increase in severity applies to particulates, for which the limits have been reduced by approximately 80%. The following changes will also apply after introduction of Euro 4:

- The dynamic exhaust-gas emission test (ETC) will be obligatory – in addition to ESC and ELR – for all diesel engines.
- The continued functioning of emissions-related components must be documented for the entire service life of the vehicle.

The EU 5 level of emission limits will be introduced in October 2008 for all new engine approvals, and one year later for all new serial-production vehicles. Only the NO_x emission limits will be more severe compared to Euro 4.

Very low-emission vehicles

The EU Directives allow for tax incentives for early compliance with the limits specified by a particular phase of the EU standards, and for EEVs (Enhanced Environmentally Friendly Vehicles).

Voluntary emission limits are defined for the EEV category for the ESC, ETC, and ELR emission-limit tests. The NO_x and particulate emission limits comply with the Euro 5 ESC emission limits. The standards for HC, NMHC, CO, and exhaust gas opacity are stricter than for Euro 5.

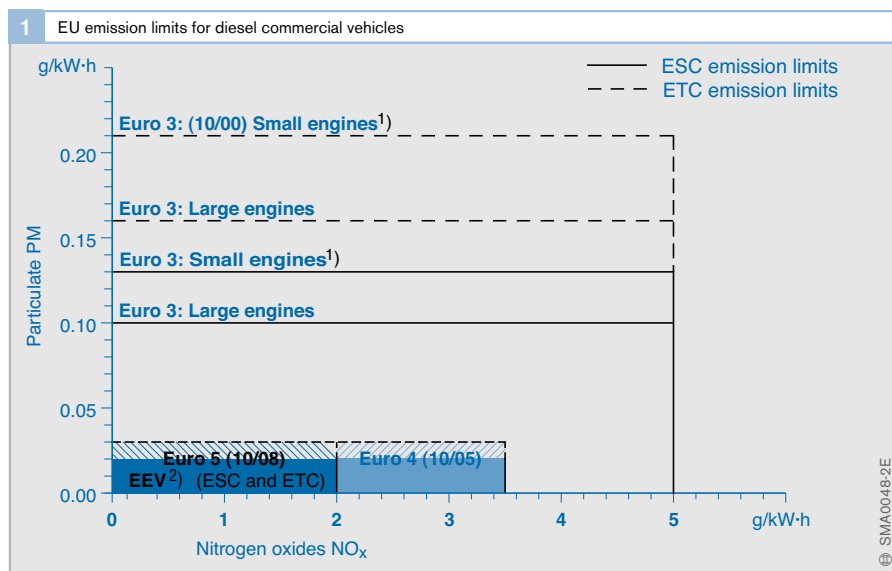


Fig. 1

- ¹⁾ $V_{\text{cyl}} \leq 0.75 \text{ l}$,
 $n_{\text{rated}} \geq 3,000 \text{ rpm}$
- ²⁾ Enhanced Environmentally Friendly Vehicle (voluntary limits)

Japanese legislation (heavy-duty trucks)

In Japan, vehicles with a permissible gross weight of over 2.5 t (from 2005: 3.5 t), or capable of transporting more than 10 persons are classified as heavy-duty trucks.

Emission limits

The “New Short-Term Regulation” has been in force since October 2003. It specifies limits for HC, NO_x, CO, particulates, and exhaust-gas opacity. Emission levels are measured by the fixed Japanese 13-stage test (hot test), and exhaust-gas opacity by the Japanese smoke test. Long-term compliance for emission limits must be documented over a distance of 80,000 to 650,000 km (depending on the permitted vehicle weight).

The “New Long-Term Regulation” comes into force in October 2005. Compared with 2003, the emission limits are halved, and particulate limits are even cut by 75%.

A dynamic Japanese test cycle will also be introduced for this limit stage.

Regional programs

In addition to the nationwide regulations for new vehicles, there are also regional requirements for the overall vehicle population aimed at reducing existing emission levels by replacing or upgrading old diesel vehicles.

Since 2003 the “Vehicle NO_x Law” has been in force for vehicles with a permitted vehicle weight over 3,500 kg, for example in the greater Tokyo region. The regulation stipulates that 8 to 12 years after first vehicle registration, the NO_x and particulate limits must comply with the prevailing emission limit levels (e.g. the 1998 limits starting 2003). The same principle also applies to particulate emissions. Here, the regulation will already apply 7 years after first vehicle registration.

Ozone and smog

Exposure to the sun's radiation splits nitrogen-dioxide molecules (NO₂). The products are nitrogen oxide (NO) and atomic oxygen (O), which combine with the ambient air's atomic oxygen (O₂) to form ozone (O₃). Ozone formation is also promoted by volatile organic compounds. This is why higher ozone levels must be anticipated on hot, windless summer days when high levels of air pollution are present.

In normal concentrations, ozone is essential for human life. However, in higher concentrations, it leads to coughing, irritation of the throat and sinuses, and burning eyes. It adversely affects lung function, reducing performance potential.

There is no direct contact or mutual movement between the ozone formed in this way at ground level, and the stratospheric ozone that reduces the amount of ultraviolet radiation penetrating the earth's atmosphere.

Smog is not limited to the summer. It can also occur in winter in response to atmospheric layer inversions and low wind speeds. The temperature inversion in the air layers prevents the heavier, colder air containing the higher pollutant concentrations from rising and dispersing.

Smog leads to irritation of the mucous membranes, eyes, and respiratory system. It can also impair visibility. This last factor explains the origin of the term smog, which is a contraction of “smoke” and “fog”.

U.S. test cycles for passenger cars and LDTs

FTP 75 test cycle

The FTP 75 test cycle (Federal Test Procedure) consists of speed cycles that were actually recorded in commuter traffic in Los Angeles (Fig. 1a).

This test is also in force in some countries of South America besides the U.S.A. (including California).

Preconditioning

The vehicle is subjected to an ambient temperature of 20...30°C in a climatic chamber for a period of 12 hours.

Collecting pollutants

The vehicle is started and driven on the specific speed cycle. The emitted pollutants are collected in separate bags during various phases.

Phase ct (cold transient):

Collection of exhaust gas during the cold test phase.

Phase s (stabilized):

Start of stabilized phase 505 seconds after start. The exhaust gas is collected without interrupting the driving cycle. At the end of Phase s, after a total of 1,365 seconds, the engine is switched off for a period of 600 seconds.

Phase ht (hot transient):

The engine is restarted for the hot test. The speed cycle is identical to the cold transient phase (Phase ct).

Analysis

The bag samples from the first two phases are analyzed during the pause before the hot test. This is because samples may not remain in the bags for longer than 20 minutes.

The sample exhaust gases contained in the third bag are also analyzed on completion of the driving cycle. The total result includes emissions from the three phases rated at different weightings.

The pollutant masses of Phases ct and s are aggregated and assigned to the total distance of these two phases. The result is then weighted at a factor of 0.43.

The same process is applied to the aggregated pollutant masses from Phases ht and s, related to the total distance of these two phases, and weighted at a factor of 0.57. The test result for the individual pollutants (HC, CO, and NO_x) is obtained from the sum of the two previous results.

The emissions are specified as the pollutant emission per mile.

SFTP schedules

Test according to the SFTP standard (Supplemental Federal Test Procedure) were phased in from 2001 to 2004. These are composed of the following driving cycles:

- FTP 75 cycle
- SC03 cycle (Fig. 1b)
- US06 cycle (Fig. 1c)

The extended tests are intended to examine the following additional driving conditions:

- Aggressive driving
- Radical changes in vehicle speed
- Engine start and acceleration from standing start
- Operation with frequent minor variations in speed
- Periods with vehicle parked
- Operation with air conditioner on

After preconditioning, the SC03 and US06 cycles proceed through the FTP 75 ct phase without exhaust-gas collection. Other preconditioning procedures may also be used.

The SC03 cycle is carried out at a temperature of 35°C and 40% relative humidity (vehicles with air conditioning only). The individual driving cycles are weighted as follows:


- Vehicles with air conditioning:
35% FTP 75 + 37% SC03 + 28% US06
- Vehicles without air conditioning:
72% FTP 75 + 28% US06

The SFTP and FTP 75 test cycles must be successfully completed on an individual basis.

Test cycles for determining fleet averages

Each vehicle manufacturer is required to provide data on fleet averages. Manufacturers that fail to comply with the emission limits are required to pay penalties.

Fuel consumption is determined from the exhaust-gas emissions produced during two test cycles: the FTP 75 test cycle (weighted at 55%) and the highway test cycle (weighted at 45%). An unmeasured highway test cycle (Fig. 1b) is conducted once after preconditioning (vehicle allowed to stand with engine off for 12 hours at 20...30°C). The exhaust-gas emissions from a second test run are then collected. The CO₂ emissions are used to calculate fuel consumption.

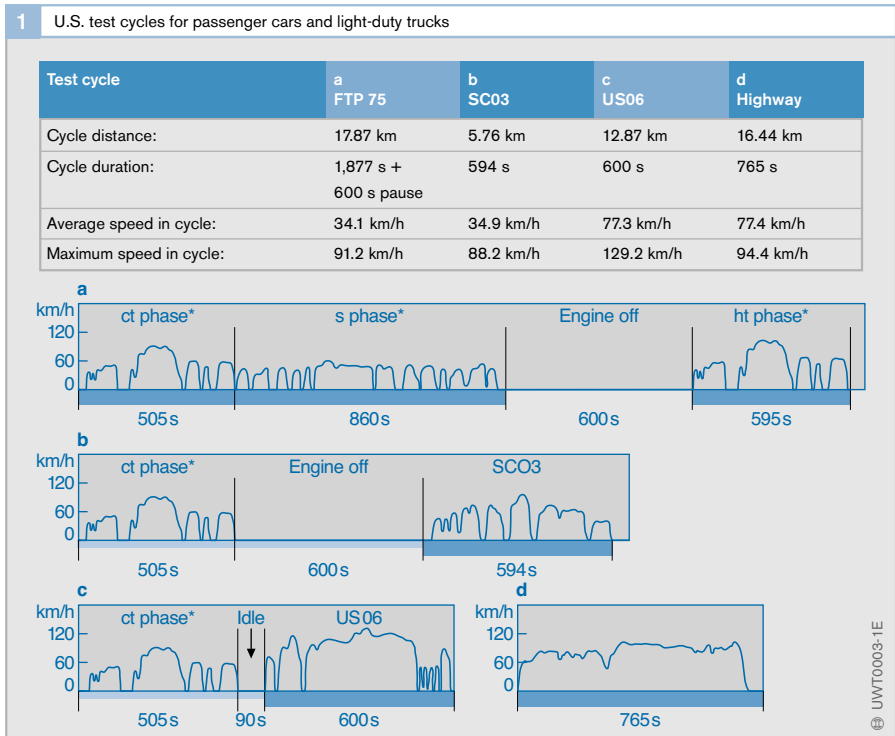

European test cycle for passenger cars and LDTs

MNEDC

The Modified New European Driving Cycle (MNEDC) has been in force since Euro 3. Contrary to the New European Driving Cycle (Euro 2), that only starts 40 seconds after the vehicle has started, the MNEDC also includes a cold-start phase.

Preconditioning

The vehicle is allowed to start at an ambient temperature of 20...30°C for a minimum period of 6 hours.

Collecting pollutants

The exhaust gas is collected in bags during two phases:

- Urban Driving Cycle (UDC) at a maximum of 50 km/h
- Extra-urban cycle at speeds up to 120 km/h

Analysis



The pollutant mass measured by analyzing the bag contents is referred to the distance covered.

Japanese test cycle for passenger cars and LDTs

The 10 · 15-mode test cycle (Fig. 2) is conducted once with a hot start. This test cycle simulates characteristic driving behavior in Tokyo. Top speed is lower than in the European test cycle due to the higher traffic density in Japan. This generally results in lower driving speeds.

The preconditioning procedure for the hot test includes the prescribed exhaust-gas test at idle. The procedure is as follows: After the vehicle is allowed to warm up for approximately 15 minutes at 60 km/h, the concentrations of HC, CO, and CO₂ are measured in the exhaust pipe at idle. The 10 · 15-mode hot test commences after a second warm-up phase, consisting of 5 minutes at 60 km/h.

The pollutants are defined relative to distance, and are indicated in grams per kilometer.

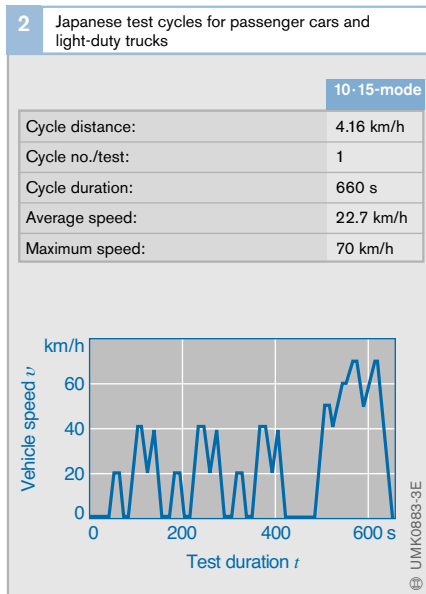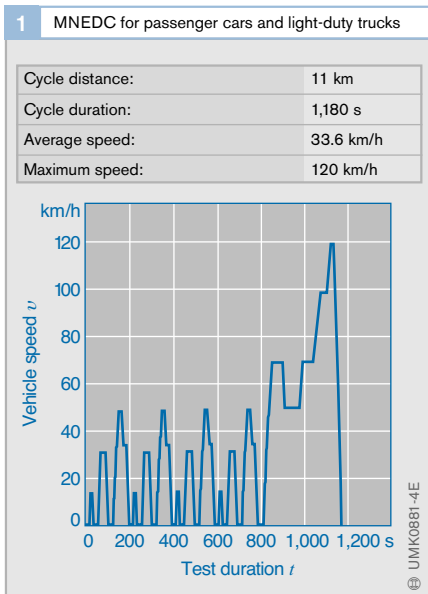

Test cycles for heavy-duty trucks



For heavy-duty trucks, all test cycles are run on the engine test bench. For nonstationary test cycles, the exhaust gases are collected and analyzed using the CVS method (cf. the section entitled “Measuring procedures”), while untreated exhaust gases are measured in the steady-state test cycles. Emissions are specified in g/kWh.

Europe

For vehicles over 3.5 t permitted vehicle weight and more than 9 seats, the new

13-stage test, the European Steady-State Cycle (ESC), has been in force in Europe since the introduction of Euro 3 (October 2000).

The test procedure specifies measurements in 13 steady-state operating states calculated from the engine full-load curve. The emissions measured at each operating point are weighted according to certain factors. This also applies to power output (Fig. 1). The test results are obtained for each pollutant by calculating the total of the weighted emissions divided by the total of the weighted power output.

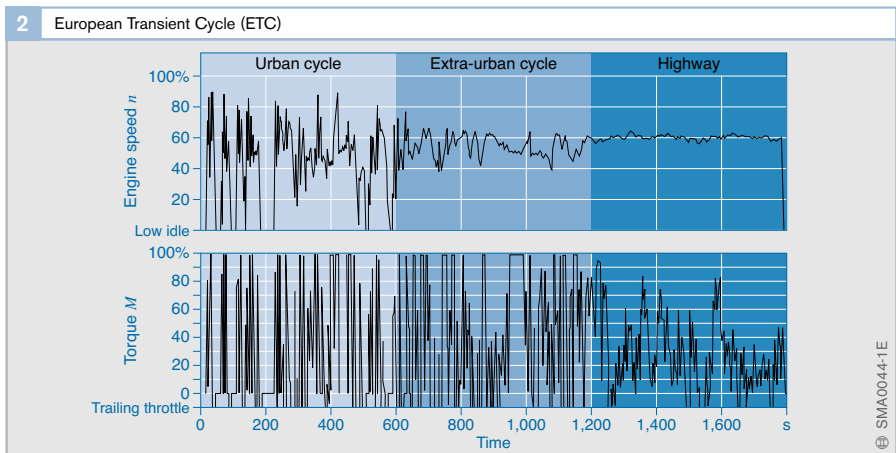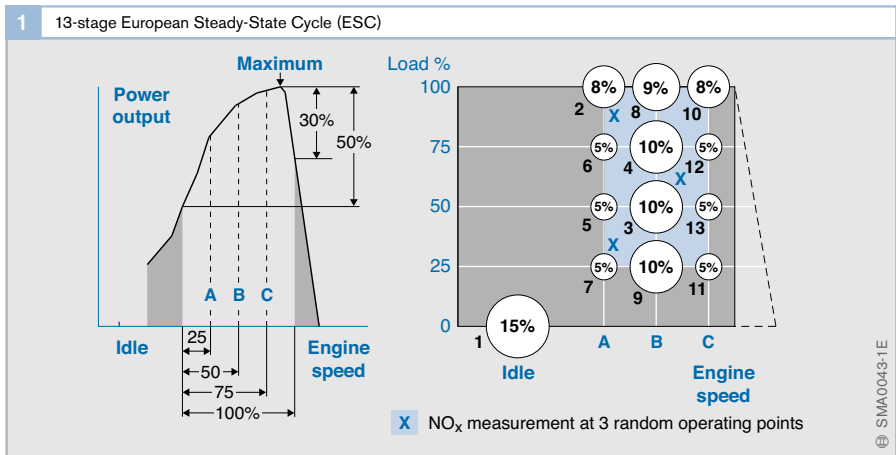

For certification, an additional three NO_x measurements can be taken over the tested range. The NO_x emissions may not vary by a significant degree from the levels measured at the adjacent operating points. The aim of the additional measurements is to prevent any modification of engines specifically for testing purposes.

As well as Euro 3, the ETC (European Transient Cycle, Fig. 2) was also introduced to determine gaseous emissions and particulate, and the ELR (European Load Response) test to measure exhaust-gas opacity. Under the Euro 3 standards, the ETC applies only to commercial vehicles with “advanced” emission-control equipment (particulate filters, NO_x catalytic converters); starting with Euro 4 (October 2005), it will be obligatory for all vehicles.

The test cycle is derived from realistic road-driving patterns and is subdivided into three sections: an urban section, an extra-urban section, and a highway section. The length of the test is 30 minutes, and the periods of time for which engine speeds and torque levels must be maintained are specified in seconds.

All European test cycles are performed with the engine running at normal operating temperature.

Japan

Pollutant emissions are measured using the Japanese 13-stage steady-state test (hot test). The engine operating points, their sequence, and weighting are different from those defined by the European 13-stage test, however. Compared with the ESC; the test focuses on lower engine speeds and loads.

A dynamic Japanese test cycle that comes into force in 2005 will also be introduced for this limit stage.

U.S.A.

Since 1987 engines for heavy-duty trucks have been tested on an engine test bench according to a steady-state test cycle (Transient Cycle), including a cold-start sequence (Fig. 3). The test cycle is basically equivalent to operating an engine under realistic road-traffic conditions. It includes significantly more idle sections than the European ETC.

An additional test, the Federal Smoke Cycle, tests exhaust-gas opacity under dynamic and quasi steady-state conditions.

Starting with model year 2007, U.S. emission limits must also comply with the European 13-stage test (ESC). Furthermore, emissions in the not-to-exceed zone (i.e. with any driving mode within a specified engine speed/torque range) may be max. 50% above the emission limits.

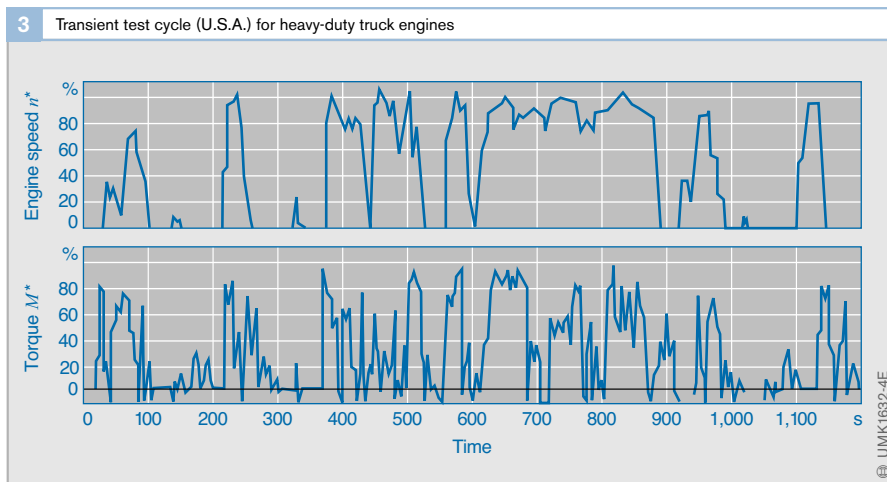


Fig. 3

The standardized engine speed n^* and the standardized torque M^* are specified by law.

Exhaust-gas measuring techniques

Exhaust-gas test for type approval


During type-approval testing to obtain General Certification for passenger cars and light-duty trucks, the exhaust-gas test is conducted with the vehicle mounted on a chassis dynamometer. The test differs from exhaust-gas tests that are conducted using workshop measuring devices for in-field monitoring.

For the type approval of heavy-duty trucks, exhaust-gas tests are carried out on engine test benches.

The prescribed test cycles on the chassis dynamometer stipulate that practical on-road driving mode must be simulated as closely as possible. Testing on a chassis dynamometer offers many advantages compared with on-road testing:

- The results are easy to reproduce since the ambient conditions are constant.
- The tests are comparable since a specified speed/time profile is driven irrespective of traffic flow.
- The required measuring instruments are set up in a stationary environment.

Fig. 1
 1 Cooling fan
 2 Driver display monitor
 3 "Rolling road" with dynamometer
 4 Air-sample bag
 5 Exhaust-gas bag
 6 Extraction
 7 Filter
 8 Pump
 9 Heated prefilter and pump
 10 Dilution air
 11 Dilution tunnel
 12 Heat exchanger
 13 Heated pipe
 14 Gas analyzers
 15 Measuring filter
 16 Quadruple venturi tubes
 17 Flow meter
 18 Gas meter
 19 CVS blower
 20 PC with monitor

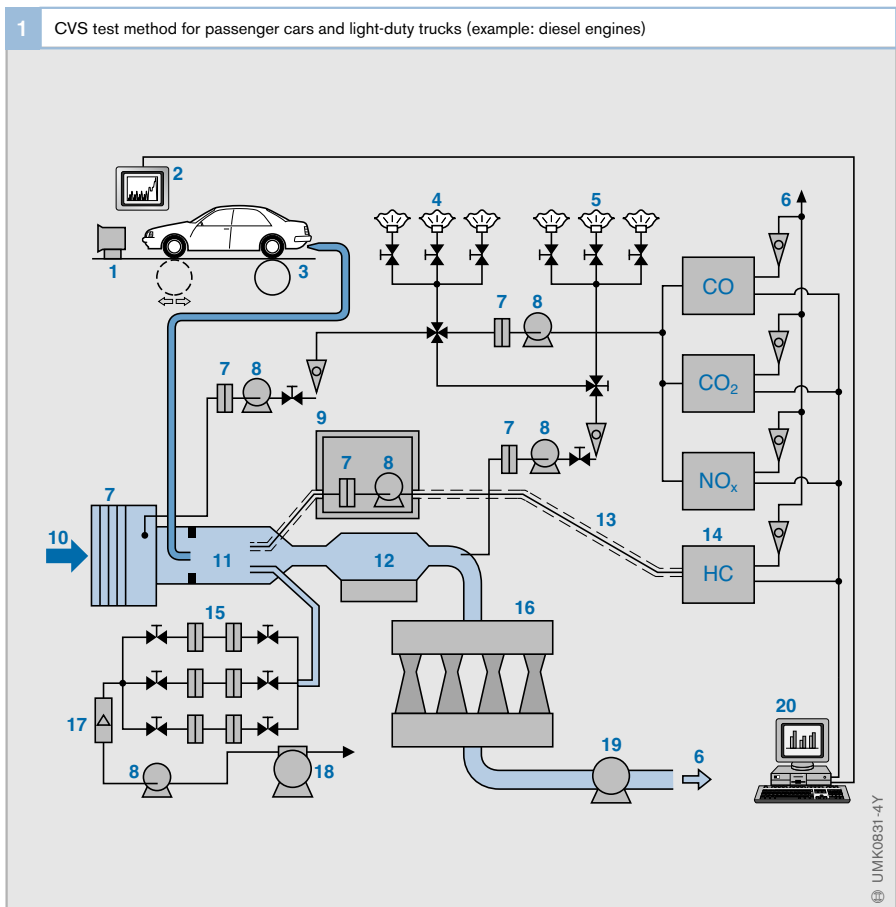

Besides type-approval testing, exhaust-gas measurements on the chassis dynamometer are conducted during the development of engine components.

Test setup

The test vehicle is placed on a chassis dynamometer with its drive wheels on the rollers (Fig. 1, 3). The test cycle is repeated by a driver. During this cycle, the required and current vehicle speeds are displayed on a driver monitor. In some cases, an automated driving system replaces the driver to increase the reproducibility of test results by driving the test cycle with extreme precision.

This means that the forces acting on the vehicle, i.e. the vehicle's moments of inertia, rolling resistance, and aerodynamic drag, must be simulated so that the test cycle on the test bench reproduces emissions comparable to those obtained during an on-road test. For this purpose, asynchronous machines, direct-current machines, or even electrodynamic retarders on older test benches, generate a suitable speed-dependent load that acts on the rollers for the vehicle to overcome. More modern machines use electric flywheel simulation to reproduce this inertia. Older test benches use real flywheels of different sizes attached by rapid couplings to the rollers to simulate vehicle mass. A blower mounted a short distance in front of the vehicle provides the necessary engine cooling.

The test-vehicle exhaust pipe is generally a gas-tight attachment to the exhaust-gas collection system – the dilution system is described below. A proportion of the diluted exhaust gas is collected there. At the end of the test cycle, the gas is analyzed for pollutants limited by law (hydrocarbons, nitrogen oxides, and carbon monoxide), and carbon dioxide (to determine fuel consumption).

In addition, and for development purposes, part of the exhaust gas flow can be extracted continuously from sampling points along the vehicle's exhaust-gas system or dilution system to analyze pollutant concentrations.

The complete sampling system, including the exhaust-gas measuring instrument for hydrocarbons, is heated to 190°C to avoid any condensation of hydrocarbons that boil at high temperatures.

There is also a dilution tunnel with high internal flow turbulence, and a particulate filter whose loading is analyzed to determine particulate emissions.

CVS dilution procedure

The most commonly used method of collecting exhaust gases emitted from an engine is the Constant Volume Sampling (CVS) method. It was introduced for the first time in the U.S.A. in 1972 for passenger cars and light-duty trucks. In the meantime it has been updated in several stages. The CVS method is used in other countries, such as Japan. It has also been in use in Europe since 1982.

During the dilution process, exhaust gas is mixed with air, then part of this mixture is collected in bags. The exhaust gas is only analyzed at the end of the test. Dilution avoids condensation of water vapor contained in the exhaust gases and also prevents the loss of gas components that are dissolvable in water. Dilution also avoids secondary reactions in the collected exhaust gas, and simulates actual dilution conditions in the atmosphere.

Principle of the CVS method

Exhaust gas emitted by the test vehicle is diluted with ambient air (10) at an average ratio of 1:5...1:10, and extracted using a special pump setup (7, 8). This ensures that the total volumetric flow, comprising exhaust gas and dilution air, remains constant. The admixture of dilution air is therefore dependent on the momentary exhaust-gas volumetric flow. A sample is continuously extracted from the diluted exhaust-gas flow and is collected in one or more (5) exhaust-gas sample bags. Filling the sample bags generally corresponds to the phases in which the test cycles are divided (e.g. the ht phase in the FTP 75-test cycle).

As the exhaust-gas sample bags are filled, a sample of dilution air is taken and collected in one or more (4) air-sample bags in order to measure the pollutant concentration in the dilution air.

The sampling volumetric flow is constant during the bag-filling phase. The pollutant concentration in the exhaust-gas sample bags at the end of the test cycle corresponds to the average value of the concentrations in the diluted exhaust gas for the sample-bag filling period. The pollutant masses emitted during the test are calculated from these concentrations and from the total air/exhaust gas mixture conveyed from the volume – taking into account the pollutants contained in the dilution air.

Dilution systems

There are two alternative methods to obtain a constant volumetric flow of diluted exhaust gas:

- Positive Displacement Pump (PDP) method: A rotary-piston blower (Roots blower) is used.
- Critical Flow Venturi (CFV) method: A venturi tube and a standard blower are used in the critical state.

Advances in the CVS method

Diluting the exhaust gas causes a reduction in pollutant concentrations as a factor of dilution. As pollutant emissions have dropped significantly in the past few years due to the growing severity of emission limits, the concentrations of some pollutants (in particular hydrogen compounds) in the diluted exhaust gas are equivalent to concentrations in diluted air in certain test phases (or are even lower). This poses a problem from the measuring-process aspect, as the difference between the two values is crucial for measuring exhaust-gas emissions. A further challenge is presented by the precision of analyzers used to measure small concentrations of pollutants.

To confront these problems, more recent CVS dilution systems apply the following measures:

- Reduce dilution: This requires precautions to avoid the condensation of water, e.g. by heating parts of the dilution system.
- Reduce and stabilize pollutant concentrations in the dilution air, e.g. by using activated charcoal filters.
- Optimize the measuring instruments (including dilution systems), e.g. by selecting or preconditioning the materials used and system setups; by using modified electronic components.
- Optimize processes, e.g. by applying special purge procedures.

Bag Mini Diluter

As an alternative to advances in CVS technology described above, a new type of dilution system was developed in the U.S.A.: the Bag Mini Diluter (BMD). Here, part of the exhaust-gas flow is diluted at a constant ratio with dried, heated zero gas (e.g. cleaned air). During the test, part of the diluted exhaust-gas flow that is proportional to the exhaust-gas volumetric flow is filled in (exhaust-gas) sample bags and analyzed at the end of the driving test. Diluting the exhaust gas with a pollution-free zero gas dispenses with air-sample bag analysis followed by taking the difference between the exhaust-gas and air-sample bag concentrations. However, a more complex procedure is required than for the CVS method, e.g. one requirement is to determine the (undiluted) exhaust-gas volumetric flow and the proportional sample-bag filling.

Testing commercial vehicles

The transient test method for testing emissions from diesel engines in heavy-duty trucks over 8,500 lb. (U.S.) or 3.5 t (Europe) is performed on dynamic engine test benches and also uses the CVS test method. This test came into force in the U.S.A. starting model year 1986 and is slated for 2005 in Europe. However, the size of the engines demands a test setup with a substantially higher throughput in order to keep to the same dilution ratios as for cars and light-duty trucks. Double dilution (by means of a secondary tunnel) permitted by law helps to minimize equipment costs.

Under critical conditions, the volumetric flow rate of diluted exhaust gas is controllable, either using a calibrated Roots blower, or venturi tubes.

Exhaust-gas measuring devices

Emission-control legislation in the EU, the U.S.A., and Japan defines standard test procedures for emission-limit pollutants in order to measure the pollutant concentrations in exhaust-gas and air-sample bags:

- Measurement of CO and CO₂ concentrations with Non-Dispersive InfraRed (NDIR) analyzers.
- Measurement of NO_x concentrations (aggregate of NO and NO₂) using Chemi-Luminescence Detectors (CLD).
- Measurement of total hydrocarbon concentrations (THC) using Flame Ionization Detectors (FID).
- Gravimetric measurement of particulate emissions.

NDIR analyzer

The NDIR (Non-Dispersive InfraRed) analyzer uses the property of certain gases to absorb infrared radiation within a narrow characteristic wavelength band. The absorbed radiation is converted into vibrational and rotational energy of the absorbing molecules.

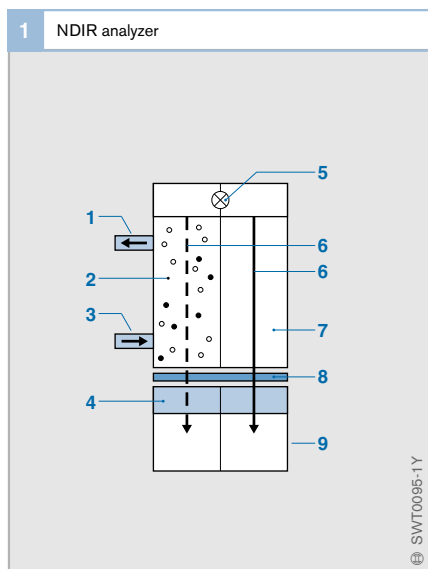


Fig. 1

- 1 Gas outlet
- 2 Absorption cell
- 3 Test-gas inlet
- 4 Optical filter
- 5 Infrared light source
- 6 Infrared radiation
- 7 Reference chopper
- 8 Rotating chopper
- 9 Detector

In the NDIR analyzer, the analysis gas flows through the absorption cell (vessel) (Fig. 1, 2) where it is exposed to infrared radiation. The gas absorbs radiation energy within the characteristic wavelength band of the pollutant, whereby the radiation energy is proportional to the concentration of the pollutant under analysis. A reference cell (7) arranged in parallel to the absorption cell is filled with an inert gas (e.g. nitrogen (N_2)).

The detector (9) is located at the opposite end of the cell to the infrared light source and measures the residual energy from infrared radiation in the measurement and reference cells. The detector comprises two chambers connected by a membrane and containing samples of the gas components under analysis. The reference-cell radiation characteristic for this component is absorbed in one chamber. The other absorbs radiation from the test-gas vessel. The difference between the radiation received and the radiation absorbed in the two detector chambers results in a pressure difference, and thus a deflection in the membrane between the measuring and reference detectors. This deflection is a measure of the pollutant concentration in the test-gas vessel.

A rotating chopper (8) interrupts infrared radiation cyclically, causing an alternating deflection of the membrane, and thus a modulation of the sensor signal.

NDIR analyzers have a strong cross-sensitivity¹⁾ to water vapor in the test gas since H_2O molecules absorb infrared radiation across a broad wavelength band. This is the reason why NDIR analyzers are positioned downstream of a test-gas treatment system (e.g. a gas cooler) to dry the exhaust gas when they are used to make measurements on undiluted exhaust gas.

Chemiluminescence Detector (CLD)

Due to its measuring principle, the CLD is limited to determining NO concentrations. Before measuring the aggregate of NO_2 and NO concentrations, the test gas is first routed to a converter that reduces NO_2 into NO .

The test gas is mixed with ozone in a reaction chamber (Fig. 2) to determine the nitrogen monoxide concentration (NO). The nitrogen monoxide contained in the test gas oxidizes in this environment to form NO_2 ; some of the molecules produced are in a state of excitation. When these molecules return to their basic state, energy is released in the form of light (chemiluminescence).

1) The absorption of infrared radiation within a particular wavelength band is possible not only with the gas component measured, but also with water vapor.

Fig. 2

- 1 Reaction chamber
- 2 Ozone inlet
- 3 Test-gas inlet
- 4 Gas discharge
- 5 Filter
- 6 Detector


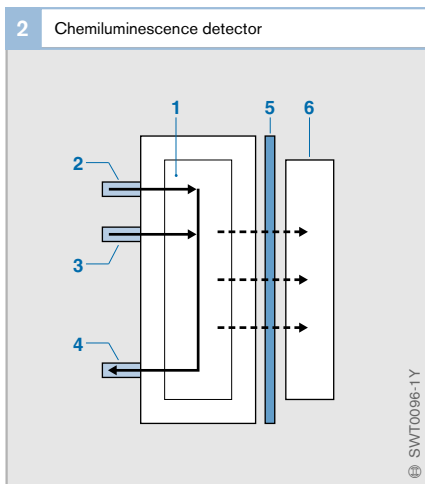


Fig. 3

- 1 Gas discharge
- 2 Collector electrode
- 3 Amplifier
- 4 Combustion air
- 5 Test-gas inlet
- 6 Combustion gas (H_2/He)
- 7 Burner

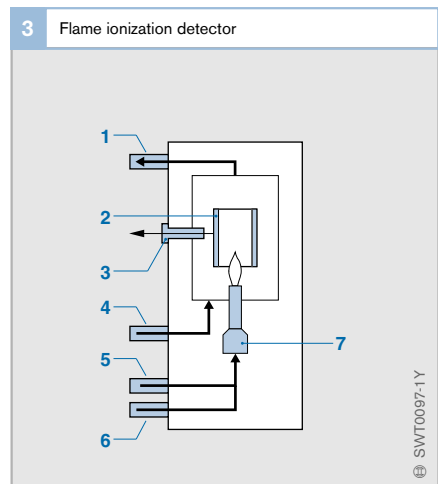

A detector, e.g. a photomultiplier, measures the emitted luminous energy; under specific conditions, it is proportional to the nitrogen-monoxide concentration in the test gas.

Flame Ionization Detector (FID)

The hydrocarbons present in the test gas are burned off in a hydrogen flame (Fig. 3). This forms carbon radicals; some of the radicals are ionized temporarily. The radicals are discharged at a collector electrode; the current produced is measured and is proportional to the number of carbon atoms in the test gas.

Measuring particulate emission

A gravimetric process is a process specified by law to measure particulate emissions during type-approval testing.

Gravimetric process (particulate filter process)

Part of the diluted exhaust gas is sampled from the dilution tunnel during the driving test and then channelled through particulate filters. The quantity of particulate emissions is calculated from the increase in weight of the (conditioned) particulate filter, taking into account volumetric flow. The gravimetric process has the following disadvantages:

- Relatively high detection limit, only reducible to a limited extent by using intensive instrument resources (e.g. to optimize tunnel geometry).
- It is not possible to measure particulate emissions continuously.
- The process requires numerous resources since the particulate filter requires conditioning to minimize environmental influences.
- Only particulate mass is measured; however, it is not possible to determine the chemical composition of the particulate or particle size.

Due to the disadvantages discussed above, as well as the drastic reduction in limits for particulate emissions anticipated in future, the lawmakers are considering replacing the gravimetric process, or supplementing it in order to determine particle-size distribution or particle quantity. However, an alternative process has not yet been found.

The measuring instruments that show particulate-size distribution in exhaust gas include the following:

- Scanning Mobility Particle Sizer (SMPS)
- Electrical Low Pressure Impactor (ELPI)
- Photo-Acoustic Soot Sensor (PASS)

Exhaust-gas measurement in engine development

For development purposes, many test benches also include the continuous measurement of pollutant concentrations in the vehicle exhaust-gas system or dilution system. The reason is to capture data on emission-limit components, as well as other components not subject to legislation. Other test procedures than those mentioned are required for this, e.g.:

- GC FID and Cutter FID to measure methane concentrations (CH_4).
- Paramagnetic method to measure oxygen concentrations (O_2).
- Opacity measurement to determine particulate emissions.

Other analyses can be conducted using multi-component analyzers:

- Mass spectroscopy
- FTIR (Fourier Transform InfraRed) spectroscopy
- IR laser spectroscopy

GC FID and Cutter FID

There are two equally common methods to measure methane concentration in the test gas. Each method consists of the combination of a CH₄-separating element and a flame ionization detector. Either a gas-chromatography column (GC FID), or a heated catalytic converter, oxidizes the non-CH₄ hydrocarbons (cutter FID) in order to separate methane. Unlike the cutter FID, the GC FID can only determine CH₄ concentration discontinuously (typical interval between two measurements: 30...45 seconds).

ParaMagnetic Detector (PMD)

There are different designs of paramagnetic detectors (dependent on the manufacturer). The measuring principle is based on inhomogenous magnetic fields that exert forces on molecules with paramagnetic properties (such as oxygen), causing the molecules to move. The movement is proportional to the concentration of molecules in the test gas and is sensed by a special detector.

Opacity measurement


An opacity meter (opacimeter) is used in development and in diesel smoke-emission testing in the workshop during exhaust-gas testing (see the section entitled "Emissions testing (opacity measurement)").

The smoke-emission test equipment (Fig. 1) used in development extracts a specified quantity of diesel exhaust gas (e.g. 0.1 or 1 l) through a strip of filter paper. As a requirement for the high-precision reproducibility of results, the volume extracted is recorded for every test sequence and converted to the standardized quantity. The system also takes account of pressure and temperature impacts, as well as dead volume between the exhaust-gas sample probe and the filter paper.

The blackened filter paper is analyzed optoelectronically using a reflective photometer. The results are generally indicated as the Bosch smoke number or mass concentration (mg/m³).

Fig. 1

- 1 Filter paper
- 2 Gas penetration
- 3 Reflective photometer
- 4 Paper transport
- 5 Volume measuring device
- 6 Purge-air switchover valves
- 7 Pump

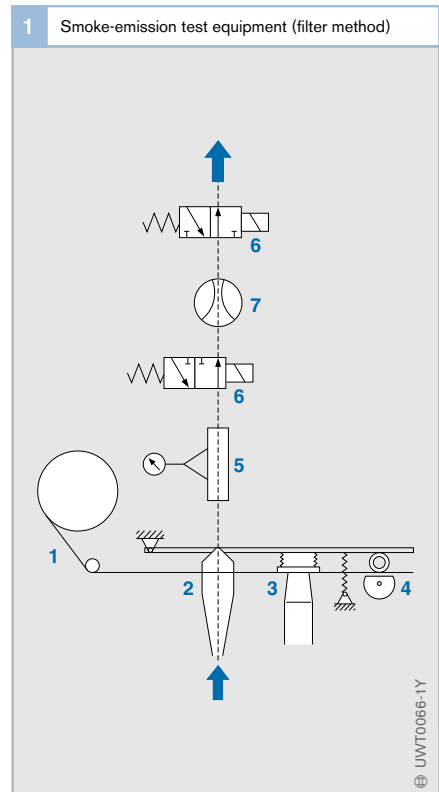

Emissions testing (opacity measurement)

The procedure for emissions testing in the workshop comprises the following steps for a diesel-engined vehicle:

- Identifying the vehicle.
- Visually inspecting the exhaust-gas system.
- Testing engine speed and temperature.
- Detecting the average idle speed.
- Detecting the average breakaway speed.
- Opacity measurement: Initiating at least three accelerator bursts (unrestricted acceleration) to determine exhaust-gas opacity. If opacity figures are below the limit, and all three measured values are within a bandwidth of $< 0.5 \text{ m}^{-1}$, the vehicle passes the emissions test.

With effect from 2005 Germany also stipulates an on-board diagnosis as part of the emissions test.

Opacity meter (absorption method)

During unrestricted acceleration, a certain amount of exhaust gas is taken from the vehicle's exhaust pipe (without vacuum assistance), using an exhaust-gas sampling probe and a hose leading to the measuring chamber. This method avoids impacts arising from exhaust-gas backpressure and its fluctuations on test results, since pressure and temperature are controlled (Hartridge tester).

In the measuring chamber, a light beam passes through the diesel exhaust gas. Attenuation of the light is measured photoelectrically and displayed as a percentage opacity T or absorption coefficient k . High precision and good reproducibility of test results are dependent on a specific measuring-chamber length and keeping the inspection windows free from soot.

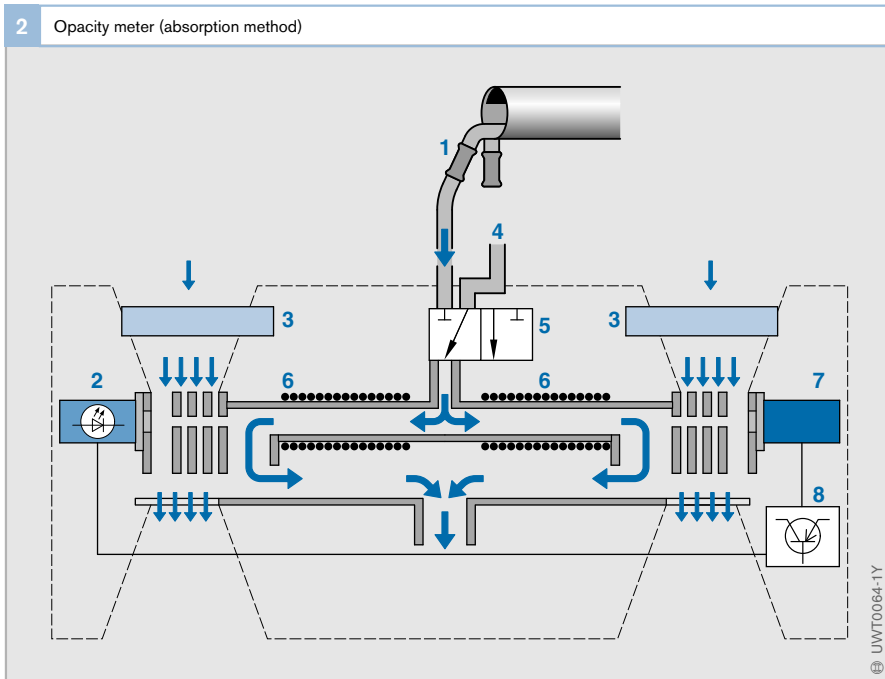


Fig. 2

- 1 Exhaust-gas sample probe
- 2 LED
- 3 Fan
- 4 Purge air
- 5 Calibrating valve
- 6 Heater
- 7 Receiver
- 8 Evaluation electronics and display



- absorption method 359
- accelerator-pedal sensors 288
- ACK check 259
- ACK field 258
- activation 108
- activation sequence 108, 112
- active-surge damping 236
- actuator diagnostics 312
- actuator diagnostics 314
- actuator triggering 250
- actuators 221, 252
- adaptation phases 260, 264
- adaptation to differing ambient conditions 262
- additive system 212
- additives 39
- addressing and message filtering 257
- adjustments 319, 323
- advanced secondary injection 68, 192
- advanced start of injection 63, 187
- agricultural machinery construction 14
- air conditioner 255
- air mass 60, 184
- air/fuel mixture 328
- air/fuel ratio curve 61, 185
- air-conditioner diagnosis 305
- air-filter 58
- air-filter medium 57
- air-flow system 179
- air-fuel ratio 292
- air-intake module 58
- air-temperature sensor 279
- α -methyl naphthalene 35
- alternative fuels 41
- alternator control 255
- altitude compensation 237
- ammonia 204
- analog input signals 272
- angle of rotation sensor 289
- antifoaming agents 39
- application-related adaptation 260, 264
- arbitration field 258
- ARD 236
- ASIC 275
- atmospheric-pressure sensor 280
- AU 342
- auto-ignition principle 242
- automotive applications 278
- auxiliary coolant heating 252
- average delivery adaption 238, 246
- axial-piston distributor pumps 73
- axial-piston pumps 225
- B** 100 42
- B 7 42
- BaCO₃ 201
- bag mini diluter 355
- barium carbonate 201
- basic delivery quantity 323
- BDC 21
- begin of injection period 242
- biodiesel 41
- biodiesel standard 42
- biomass-to-liquified 44
- bioparaffins 43
- BIP control 242
- BIP detection 242
- bit-by-bit arbitration 257
- bitstuffing 259
- blind-hole geometry 159
- blind-hole nozzle 157
- blowby gas 199
- boiling range 35
- boost-pressure control 253
- boost-pressure sensor 280
- Bosch, Robert 8
- bottom dead center 21
- brake-fluid pressure sensor 149, 283
- broad-band lambda oxygen sensor 293
- broad-band lambda sensor 292
- BtL 44
- bus arbitration 257
- bus configuration 256
- bypass 85
- calibration tools 269
- calorific values 38
- cam-controlled fuel-injection systems 66, 190
- CAN message format 258
- CAN 255
- CARB exhaust-gas categories 334
- CARB legislation 334
- carbon dioxide 329
- carbon monoxid 181, 330
- carbon-deposit index 37
- catalyst volume 219
- catalytic burner 218
- catalytic converter diagnosis 304

- catalytic-converter temperature 219
- catalyzed diesel particulate filter 212
- cavitation 171
- CCRS 112
- CDPF 212
- centrifugal supercharger 55
- centrifugal turbo-compressor 48
- ceramic particulate filter 210
- cetane 35
- cetane improvers 39
- cetane index 35
- cetane number 35
- chatter test 326
- chemiluminescence detector 356
- CLD 356
- cleanliness quality 129
- cleanliness requirements 129
- closed-circuit ventilation system 199
- closed-loop control 91, 248
- CN 35
- CO 181, 330
- CO₂ 329
- CO₂ emission 341
- Coal-to-Liquid 44
- cold-flow properties 36
- combustion byproducts 330
- combustion chamber 156
- combustion chambers 30
- combustion pressure limits 27
- combustion process 179 f.
- combustion temperature 181
- combustion-miss detection 304
- comfort/convenience 264
- commercial vehicles 355
- commercial-vehicle turbocharger 48
- common rail 148, 156
- common-rail diesel fuel-injection 123, 127
- common-rail fuel-injection system 114, 115
- common-rail piezo in-line injector 139
- common-rail system 79, 91, 114, 120 f., 125, 128, 142, 191, 228, 229
- communication 262, 267, 276
- competition trucks 243
- comprehensive components 305
- compressed sealing cone 168
- compression 18, 143
- compression ratio 18
- compression stroke 17
- compression volume 18
- conical tip 158
- connections 162
- consent decree 344
- constant volume sampling 353
- constant-pressure turbocharging 49
- content-based addressing 256
- continuously regenerating trap 213
- control and regulation 118
- control field 258
- control function 261
- control of injected fuel-quantity
 - compensation 236
- control unit configuration 118
- controlled two-stage turbocharging 53
- Controller Area Network 255
- control-sleeve in-line fuel-injection pumps 73
- conventional diesel combustion 183
- conventional preheating system 173
- coolant temperature sensor 279
- corrosion inhibitors 39
- CR 156
- crankcase ventilation diagnosis 304
- crankcase ventilation system 199
- crankshaft position 284
- CRC field 258 f.
- CRS 228, 229
- cruise control 235
- CtL 44
- cubic capacity 19
- current regulator 230
- current-controlled rate shaping 112
- cutter FID 358
- CVS 353
- CVS dilution procedure 353
- CVS method 354
- CVS test method 352
- cylinder charge 46, 180
- cylinder-charge control systems 46
- cylinder head 99
- cylinder shutoff 237
- cylindrical blind hole 157
- data exchange** 254
- data field 258
- data processing 230, 272
- dead volume 71, 195
- deep-bed filters 210
- defoamants 39
- delivery module 207

- delivery rate 144
- delivery stroke 102, 104
- density 36
- desulfating 202
- detecting errors 259
- detergent additives 39
- detrimental volume 69, 193
- DFPM 302
- DI 70
- diagnosis applications 256
- diagnosis fault path management 302
- diagnosis function 253
- diagnosis tester 308
- diagnosis VALidator 303
- diagnostic functions SCHEDuler 303
- diagnostic system 296
- diagnostic system management 302
- diagnostic tester 301
- diagnostics in the workshop 312
- diaphragm 290
- diesel aircraft engines 87
- diesel commercial vehicles 343, 345
- diesel engine 12, 16
- diesel exchange filter 80
- diesel fuel 34
- diesel fuel filter 79, 81
- diesel fuel heater 24
- diesel fuel injection 8, 60, 178, 184
- diesel fuel-injection system 72, 95, 97
- diesel oxidation catalyst 214, 218
- diesel particulate filter 210
- diesel rail-pressure sensor 149, 283
- Diesel, Rudolf 2, 3
- Diesel's patent 3
- diesel-fuel additives 39
- diesel truck 6
- differential hall-effect rod sensors 286, 287
- differential-pressure sensor 214
- digital input signals 273
- dilution systems 354
- dimethyl ether 45
- direct injection 5, 30
- direct-injection engine 30, 70 f., 162, 194
- disabling of diagnostic functions 302
- discrete cylinder systems 90
- discrete injection pumps 90
- distributor injection pumps 73, 322
- distributor tube 86
- divided combustion chamber 31
- DME 45
- DOC 214
- dosing module 207
- dosing strategy 208
- dosing tube 207
- DPF 210
- DPF system control functions 214
- drive mode 234
- drive recorder 243
- droplet spectrum 199
- droplet 185
- DSCHEd 303
- DSM 302
- durability 264
- DVAL 303
- dynamic start of delivery 320 f.
- dynamic supercharging 55
- dynamic testing of start of delivery 324
- E2PROM 275
- ECM 156
- ECU 272, 273, 277
- ECU cooler 86
- EDC 220, 231
- EDC variants 232
- EEPROM 275
- effective efficiency 22
- efficiency 22
- efficiency index 22
- efficiency of cycle factor 22
- EGR 196, 253, 263
- EGR control 196
- electric booster 53
- electric fuel pump 82
- electric motor 83
- electric shutoff valve 88
- electrochemical machining 156
- electrohydraulic shutoff device 89
- electromagnetic compatibility 267
- electronic control system 318
- electronic control unit 221, 272
- electronic diesel control 115, 220, 231
- electronic flow measurement system 317
- electronic immobilizer 254
- electronic service information 310
- electronics 141, 222
- emission limits 300, 338, 340, 342 ff., 346
- emission-control laws 332

- emission-control legislation 332
- emissions 62, 159, 186, 218
- emissions testing 359
- end cover 83
- end of frame 258
- end of injection 132
- end-of-line programming 276
- engine 284
- engine adaptation process 264
- engine-brake function 237
- engine characteristic data 15
- engine control 115
- engine cooling system diagnosis 305
- engine efficiency 20
- engine-management sequence 250 f.
- engine-oil temperature sensor 279
- engine parameters 249
- engine power 188
- engine power output 188
- engine response characteristics 267
- engine specific fuel consumption 188
- engine speed 181, 188
- engine speed limits 28
- engine's rated speed 19
- engines with indirect injection 70, 71, 194
- engine-temperature sensor 279
- engine test 315
- engine test bench 268
- engine test-bench monitor 262
- EOBD 306
- EoL programming 276
- EPA legislation 338
- EPROM 275
- erasable programmable ROM 275
- error detection 298
- error handling 298
- ESC 350
- ESI 310
- ETC 350
- EU legislation 340, 344
- europaean test cycle 349
- europaean transient cycle 350
- evaporative emissions 328
- examples of adaptation 263
- excess-air factor 60, 184, 292
- exhaust gas 293
- exhaust closes 21
- exhaust open 21
- exhaust stroke 17
- exhaust-gas categories 335, 338
- exhaust-gas cooling 197
- exhaust-gas emissions 328
- exhaust-gas management 200
- exhaust-gas measurement 357
- exhaust-gas measuring devices 355
- exhaust-gas measuring techniques 352
- exhaust-gas recirculation 196, 253, 263
- exhaust-gas recirculation system
 - diagnosis 304
- exhaust-gas temperature controller 215
- exhaust-gas temperature limits 28
- exhaust-gas temperature sensor 279
- exhaust-gas temperature 216, 217
- exhaust-gas test 352
- exhaust-gas treatment 200
- exhaust-gas turbine 48
- exhaust-gas turbocharger 47
- exhaust-gas turbocharging 180
- external torque demands 250
- external torque intervention 255
- FAEE 41
- FAME 41, 42
- fan triggering 253
- fatty acid ethyl ester 41
- fatty acid methyl ester 41
- fault diagnosis 267
- fault diagnostics 296
- fault information 301
- fault storage 298
- FC 21
- feed ratio 206
- FEPROM 275
- FID 357
- filter 162
- filter design 57
- filter media 81
- filter medium 57
- filtration limit 36
- first diesel car 7
- first diesel engines 4
- first vehicle diesel engines 5
- Fischer-Tropsch diesel 44
- Fischer-Tropsch products 44
- fitting the fuel-injection pump 319
- fixed limitation 235
- fixed-installation engines 12
- flame ionization detector 356, 257

- flap 56
- flash point 36
- flash-EPROM 275
- flatted-pintle nozzle 155
- fleet averages 336, 339, 348
- fleet consumption 336
- fleet fuel economy 339, 342
- flow improvers 39
- flow measurement methods 316
- FO 21
- FOBD 299
- four-cylinder diesel engine 16
- four-stroke cycle 17
- four-stroke diesel engine 17
- frame check 259
- FSA 310
- fuel 34, 182
- fuel consumption 33, 182, 194, 264
- fuel conversion factor 22
- fuel cooler 86
- fuel delivery 143
- fuel density 64
- fuel filter 80
- fuel filtering 125
- fuel heating 23
- fuel injection 117, 118
- fuel lines 79
- fuel mass 60, 64, 184, 188
- fuel parameters 38
- fuel pressure 148
- fuel rail 148
- fuel supply 91, 120, 125,
- fuel supply system 78
- fuel system diagnosis 304
- fuel tank 79, 295
- fuel volume 64, 188
- fuel-consumption signal 254
- fuel-delivery control 117
- fuel-injection control 232
- fuel-injection parameters 62
- fuel-injection process 233
- fuel-injection pump 9
- fuel-injection pump test benches 316
- fuel-injection system 29, 124, 152, 179
- fuel-injection technology 113, 153
- fuel-injection volume 27
- fuel-level sensor 295
- fuel-pressure sensor 280
- fuel-quantity maps 133
- fuel-supply pump 79, 82
- fuel-temperature sensor 279
- full load 25
- full-load smoke limitation 246 f.
- gasoline rail-pressure sensor 149, 283
- Gas-to-Liquid** 44
- GC FID 358
- gear presupply pump 146
- gear pump 84, 120, 147
- gear-type fuel pump 84
- glass gauge method 316
- global service 307
- glow control 173, 175
- glow control unit 177, 254
- glow element 174
- glow plug 24, 173
- glow-plug surface temperature 177
- governor 11, 318
- governor/control system adjustment 318
- grading criteria 34
- gravimetric process 357
- greenhouse effect 331
- GtL 44
- guided fault-finding 312
- H2S** 203
- half-differential short-circuiting-ring sensors 294
- hall element 286
- hall-effect angle-of-rotation sensors 289
- hall-effect phase sensors 286
- hall-effect rod sensors 286
- hall-effect vane switch 286
- hardware adaptation 260, 265
- HC 181, 330
- heat shield 159
- heat shielding 155
- heating function 175
- heating temperature 175
- heavy goods vehicles 14
- heavy-duty insert fittings 168
- heavy-duty trucks 343, 344, 350
- helical-vane supercharger 54
- helix and port-controlled axial-piston distributor pumps 224
- HFM5 290
- high-frequency reciprocating rig 37
- high-precision technology 161
- high-pressure 116

- high-pressure accumulator 148
- high-pressure components 128
- high-pressure connection fittings 168
- high-pressure control 120
- high-pressure delivery lines 169 f.
- high-pressure EGR 196, 197
- high-pressure fitting 169
- high-pressure lines 168
- high-pressure overflow method 320 f.
- high-pressure pumps 142
- high-pressure sensors 149, 283
- high-pressure side 116
- high-pressure solenoid valve 107
- high-pressure system 115
- history 2
- history of diesel fuel injection 77, 109
- holding-current phase 134
- hole-type nozzle 156, 327
- homogeneous combustion process 183
- hot-film air-mass meter 290
- hydraulic coupler 138
- hydraulic damping 105
- hydrocarbons 181, 330
- hydrogen sulfide 203
- hydrolysis 205

- IC 21
- identification 314
- IDI 70, 152, 154
- idle 25
- idle-speed control 234, 263, 266
- ignition stroke 17
- incremental angle/time signal 241
- incremental angle-of-rotation sensors 285
- indicator-lamp sensor 320
- indirect injection 31, 152
- indirect injection engines 154
- individual injection pumps 74
- induction stroke 17, 102
- inductive engine-speed sensors 284
- inductive rpm sensor 284
- inductive sensor 320
- in-field monitoring 333, 337, 339 f.
- injected fuel quantity 26, 64, 188
- injected-fuel-quantity limit 237
- injection 102, 103
- injection adaptation 24
- injection direction 71, 195
- injection duration 64, 188
- injection functions 68, 192
- injection nozzles 152
- injection pattern 66 f., 69, 190, 191, 193
- injection pressure 70, 194
- injection-pressure curve 66, 190
- injection-quantity program 137
- injector 130
- injector delivery compensation 238 f.
- injector design 195
- injector variants 132
- inlet closes 21
- inlet opens 21
- in-line fuel-injection pump 72, 223
- in-line piston pump 147
- input-signal monitoring 297
- intake air filters 57
- intake manifold 55
- intake-duct switch-off 56, 252
- intercooling 47
- inter-frame space 259
- intermediate-speed control 235
- internal compression 54
- internal torque demands 250
- international organization for standardization 259
- in-time fuel-injection pumps 241
- intrinsic safety 105
- IO 21
- isentropic compression 20
- isentropic expansion 20
- ISO 259
- isobaric heat propagation 20
- isochoric heat dissipation 20
- isochoric heat propagation 20
- IWZ 241

- japanese legislation 342, 346
- japanese test cycle 349
- job-order acceptance 309

- KMA** 317

- lambda (λ) 60, 184, 292
- lambda closed-loop control 244
- lambda levels 61, 185
- lambda oxygen sensor 214
- lambda-based EGR control 245
- lambda-based exhaust-gas recirculation system 247

- lambda-oxygen-sensor diagnosis 304
- leak test 327
- light commercial vehicles cars 13
- limp-home function 298
- linear bus topology 255
- locking the camshaft 319
- long-term compliance 335, 344
- lower part-load range 25
- low-pressure EGR 196, 197
- low-pressure pressure-control valve 86
- low-pressure stage 115
- low-voltage preheating system 175
- LRR 236
- lube oil 147
- lubrication 321
- lubricity 36
- lubricity enhancers 39

- M** System 32
- magnet 107
- main filter 80
- main injection 102, 104
- malfunction indicator lamp 300
- manifold or boost-pressure sensor 281
- manifold-pressure sensor 280
- MAR 236
- marine diesel engine 14
- maximum-rpm control 234
- measurement and test technology 309
- measurement cell concept 317
- measuring element 280
- measuring equipment 311
- measuring the idle speed 325
- mechanical efficiency 22
- message format 258
- metering unit 145
- method of operation 16
- MGT 316
- micro-blind-hole nozzle 158
- microcontroller 274
- micromechanical pressure sensors 280 f.
- MIL 300
- minimizing emissions 178
- mixture distribution 60, 184
- MNEDC 349
- mobile communications applications 256
- modified new european driving cycle 349
- monitoring 215, 259, 296, 298
- monitoring algorithms 296
- monitoring module 275
- mufflers 58
- multi-fuel engines 15
- multimeter function 315
- multiplex applications 256
- multistage turbocharging 53

- N₂** 329
- NDIR analyzer 355
- needle lift 133
- needle lift curve 166
- needle-motion sensors 167, 240
- needle-motion sensor signal 167
- needle-seat geometry 159
- (NH₂)₂CO 204
- NH₃ 204
- nitrogen 329
- nitrogen oxides 181, 201, 330
- NMOG 336
- no load 25
- NO 201
- NO₂ 201
- Non-Dispersive InfraRed 355
- non-steady-state operation 26
- NO_x 181, 330
- NO_x emission 205
- NO_x emission minimizing concept 198
- NO_x removal and conversion 202
- NO_x storage 201
- NO_x storage catalyst 201
- nozzle 71, 155, 160
- nozzle assembly designs 195
- nozzle cones 157 f., 195
- nozzle design 160
- nozzle development 160
- nozzle geometry 159
- nozzle holder 71, 162
- nozzle tests 326
- nozzle-and-holder assemblies 163
- nozzle-and-holder assembly designs 195
- nozzle-needle camper 165
- nozzle-needle damping 105
- nozzle-retaining nut 162
- NSC 201
- NTC temperature sensor 279
- number of engine cylinders 188

- OBD** 299, 306
- OBD emission limits 306

- OBD functions 303
- OBD limits 300
- OBD system 300
- offboard tester 313
- off-highway vehicles 243
- oil-pressure sensors 280
- on-board diagnosis 306
- on-board diagnosis system 299
- opacity measurement 358 f.
- opacity meter 359
- opening phase 134
- open-loop control 248
- operating concept 221
- operating conditions 27, 272
- operating cycle 17
- operating statuses 23
- optimization objectives 264
- output signals 276
- output torque 19
- output-signal monitoring 297
- overall contamination 38
- overflow quantity 324
- overflow valve 88
- overpressure valve 85
- overrun 26
- oxidation-type catalytic converter 212
- oxidizing 213
- ozone and smog 346

- p**aper air filter 59
- ParaMagnetic Detector 358
- parameters 271
- part load 25
- particle mass 218
- particle-analysis system 129
- particulate filter 212
- particulate filter process 357
- particulate filtration 80
- particulate-filter diagnosis 305
- particulates 331
- periodic emissions inspections 342
- perpendicular connection fittings 169
- perpendicular fitting 169
- phase-in 334, 339
- pickup-current phase 134
- piezoelectric effect 140
- piezoelectric field strength 140
- piezoelectric sensor 320, 324
- piezo-inline injector 136, 139

- pintle 154
- pintle nozzle 154, 326 f.
- planar broad-band lambda oxygen sensor 292
- PMD 358
- pollutant emissions 181, 264
- port-controlled axial-piston distributor injection pump 73
- positive crankcase ventilation 199, 328
- positive-displacement supercharger 53
- potential hydraulic power 117
- potentiometer-type accelerator-pedal sensor 288
- power 249
- power curve 19
- power output 19, 249
- power take-off drives 266
- precombustion chamber system 31
- precombustion-chamber engine 4
- pre-filter for presupply pump 81
- preheating curves 175
- preheating phases 173
- preheating system 172, 173
- pre-injection 68, 102, 105, 192
- pressure chamber 156
- pressure channel 162
- pressure compensation 245
- pressure control 116
- pressure generation 66, 116
- pressure limits 28
- pressure-charging controller 263
- pressure-control valve 86, 144, 150
- pressure-relief valve 151
- pressure-sensor 280
- pressure-wave correction 238
- prestroke 102
- presupply 125
- program and data memory 274
- program-map variants 132
- progress of combustion 60, 184
- propulsion torque 250
- PTO 266
- pulse turbocharging 49
- pulse-shaped input signals 273
- pump current 293
- pump element 83
- pump plunger 144
- p-V chart 20
- PWM signals 276

- racetrack trucks 243
 - rack-travel sensor 294
 - radial-piston distributor injection pump 74
 - radial-piston distributor pumps 74, 225
 - radial-piston pump 143, 145, 146
 - railway locomotives 14
 - RAM 275
 - random access memory 275
 - rape oil 43
 - rape oil methyl ester 41
 - rate-of-discharge curve 66 f., 159, 190
 - readiness code 302
 - reading actual values 314
 - reading out fault-memory entries 312
 - reading/erasing the fault memory 314
 - read-only memory 274
 - real process 20
 - real-time applications 256
 - recharging the step-up chopper 134
 - reciprocating-piston supercharger 54
 - reduced emissions 176
 - reference fuels 35
 - reference vacuum 280 f.
 - regeneration 211
 - regeneration measures 215
 - regeneration strategy 215
 - regional programs 346
 - remote frame 259
 - repellent effect 81
 - required fuel mass 64
 - requirements for diesel fuels 34
 - residual stroke 104
 - retarded secondary injection 68, 192
 - retarded start of injection 63, 187
 - RME 41
 - roller-cell pump 83
 - ROM 274
 - roots supercharger 54 f.
 - rotational-speed 285
 - rotational-speed/angle-of rotation sensor 241
 - rotation-speed/angle-of-rotation sensor 285
 - rounded tip 157
 - rpm 285
- sac-less nozzles 158
- SAE 259
- safety functions 262
- scan tool 300
- SCR 204
- SCR process 204
- sealing cone 168
- secondary injection 71
- seiliger process 20
- selective catalytic reduction 204
- SEM 129
- sensor 278
- sensor integration levels 278
- sensor monitoring 305
- sensors and setpoint generators 221
- separating vanes 85
- sequence in the workshop 311
- sequential supercharging 53
- serial data transmission 255
- service and repair implementation 309
- service technology 308
- servo valve 137
- setting start of delivery 325
- SFTP schedules 347
- sheathed-element glow plug 174, 176
- ships 14
- short-circuiting-ring sensor 294
- shutoff 242
- signal conditioning 273
- signal processing 273, 274
- single stage electric fuel pump 83
- sintered metal 210
- size of injection 29
- smoke limit 27
- smoke-emission test equipment 358
- smooth-running control 236, 263
- SO2 330
- SOC 21
- society of automotive engineers 259
- software adaptation 261, 265
- software calibration process 270
- solenoid valve 107, 112
- solenoid-valve injector 130, 131, 134
- solenoid-valve-controlled distributor injection pumps 74
- soot 182
- soot and nitrogen-oxide emissions 194
- soot oxidation temperature 212
- specific emission of unburned hydrocarbon 65, 189
- specific fuel consumption 65, 189
- specific nitrogen oxide emission 65, 189

- specific soot emission 65, 189
- spray-hole geometries 158, 159
- spray pattern test 327
- spray shapes 159
- SRC 236
- stages in the calibration 261
- stages of calibration process 270
- standard nozzle holder 163 f.
- standard pintle nozzle 154
- standardization 259
- start of combustion 21
- start of delivery 63, 187
- start of injection 62, 131, 186
- start quantity 234
- start-assist systems 24, 172
- starter control 254
- starting 23
- start-of-delivery calibrating unit 321
- start-of-delivery timing mark 319
- start-of-injection control 240
- static start of delivery 320
- steady-state operation 26
- stepped nozzle holders 165
- stoichiometric ratio 60, 184
- stroboscopic timing light 320, 324
- structural design 219
- substitute functions 253
- suction side 117
- suction throttling orifice 85
- sulfur content 37, 203
- sulfur dioxide 330
- supercharger pressure 55
- superchargers 47
- supercharging 53
- supplementary valves 88
- supply-pump pressure 323
- swept volume 18
- swirl flaps 56
- swirl-chamber system 32
- switching signals 276
- switchoff 134
- switchon conditions 302
- synfuels 44
- synthetic fuels 44
- system chart 297
- system diagram 94, 96, 122, 126
- system modules 221
- system overview 220
- tandem pump 85
- TDC 21, 186
- temperature sensor 214, 279, 282
- temperatures of glow plugs 174
- test bench 318
- test bench measurements 322
- test cycles 333, 350
- test functions 313
- test procedures 333
- testing delivery quantity 318
- testing equipment 314
- testing in-line fuel-injection pumps 318
- testing serial-production vehicles 333
- thermal efficiency 22
- thermal sensor 290
- thermal-protection sleeve 155
- thermolysis 205
- 13-stage European steady-state Cycle 350
- throttling bore 85
- throttling pintle nozzle 154
- time graph display 315
- timing characteristics 69, 193
- timing device travel 323
- timing marks 320
- timing of main-injection phase 265
- top dead center 21, 186
- torque 19, 182, 249, 264
- torque control 249
- torque curve 19, 52
- torque-controlled diesel injection 251
- torque-controlled EDC systems 249
- transition between operating statuses 26
- transmission ratio 144
- triggering phases 135
- triggering sequences 139
- turbocharged engine 52
- turbochargers 47
- turbocharging 47
- two-actuator system 117
- two-spring nozzle holder 163, 166
- two-stage turbocharging 53
- type approval 333, 341, 352
- type designation codes 162
- UI** 156
- UIS 75, 92, 98, 226 f.
- undamped lift 105
- undesirable combustion 247
- undivided combustion chamber 30

- union nut 168
- unit injector 98, 100 f., 106, 156
- unit injector system 75, 92, 98, 226, 227
- unit pump 110, 111
- unit pump system 75, 92, 110, 227
- UPS 75, 92, 110, 227
- urea 204
- U.S. legislation 343
- U.S. test cycles 347, 348

- v**alve 107
 - valve spring 162
 - valve timing 18
 - valve-timing diagram 18
 - vane-type pump 85
 - variable limitation 235
 - variable valve timing 198
 - variable-data or main memory 275
 - variable-sleeve-turbine turbocharger 51
 - variable-turbine-geometry turbocharger 50
- vco 158
- vegetable oils 41
- vegetable-oil hydrogenation 43
- vehicle recall 301
- vehicle system analysis 310

- vehicle-related adaptation 261, 266
- vehicle-specific calibration 260
- vehicle-speed controller 235
- vehicle-speed limiter 235
- venting 321
- very low-emission vehicles 345
- viscosity 36
- volumetric efficiency 47
- volumetric flow rate 155
- VST 51
- VTG 50

- w**all-flow filters 210
- wastegate 49
- wastegate turbocharger 49
- water drain 81
- water in diesel fuel 38
- water separation 80
- water separator 81
- workshop business 308
- workshop diagnostic functions 313
- workshop processes 309

- z**ero delivery calibration 238
- zero-emission vehicles 337
- ZME 145