

# Computational intelligence in management of ATM networks

## A survey of current state of research

Y. A. Sekercioğlu, A. Pitsillides, A. Vasilakos

**Abstract** Designing effective control strategies for asynchronous transfer mode (ATM) networks is known to be difficult because of the complexity of the structure of networks, nature of the services supported, and variety of dynamic parameters involved. Additionally, the uncertainties involved in identification of the network parameters cause analytical modeling of ATM networks to be almost impossible. This renders the application of classical control system design methods (which rely on the availability of these models) to the problem even harder. Consequently, a number of researchers are looking at alternative non-analytical control system design and modeling techniques that have the ability to cope with these difficulties to devise effective, robust ATM network management schemes. Those schemes employ artificial neural networks, fuzzy systems and design methods based on evolutionary computation. In this survey, the current state of ATM network management research employing these techniques as reported in the technical literature is summarized. The salient features of the methods employed are reviewed.

**Keywords** Computational intelligence, ATM networks, Fuzzy systems, Neural networks, Evolutionary computation

## 1

### Introduction

Asynchronous transfer mode (ATM) based networks are designed to be scalable, high-bandwidth, manageable, and have the flexibility of supporting various classes of multimedia traffic with varying bit rates and quality of service (QoS) requirements. Thus, they have the potential to create a unified communications infrastructure that can transport services with widely different demands on the network (such services include real-time video and voice with no tolerance to delays, but some tolerance to loss, and

data with some tolerance to delay, but no tolerance to loss).

An important difficulty of exploiting the potential of ATM optimally is the management and control complexity of the scheme itself (the basic concept is simple). Since ATM simultaneously attempts to support voice, data and video applications which all have differing performance and QoS requirements, optimal utilization of the network resources requires complex, nonlinear, distributed control structures. In order to achieve its potential, ATM networks will need to accommodate several interacting control mechanisms, such as call admission control, flow and congestion control, input rate regulation, routing, bandwidth allocation, queue scheduling, and buffer management.

The complexity of the ATM networks and multidimensionality of the control problems dictate that traffic control in ATM networks be structured. The control structure is most likely to be implemented in a multilevel architecture which partitions the solution into different levels of control with varying temporal decomposition in network, call, and cell levels (Fig. 1).

Due to the complex nature of the above mentioned control issues, some researchers are looking for solutions by application of computational intelligence (CI) techniques to design intelligent control systems to various aspects of ATM network management, often supplementing the existing control techniques [43]. Their motivation arises from the reported success of those techniques in various previously unsolvable or difficult control problems in many diverse fields.

The focus of this paper is CI applications in ATM network control. It seeks to update, merge and (inevitably) summarize the previous reviews of the literature [17–19].

## 2

### Computational intelligence

Computational intelligence (CI) [7, 8, 32] is an area of fundamental and applied research involving numerical information processing (in contrast to the symbolic information processing techniques of artificial intelligence (AI)). Nowadays, CI research is very active and consequently its applications are appearing in some end user products.

The definition of CI can be given indirectly by observing the exhibited properties of a system that employs CI components [8].

A system is *computationally intelligent* when it: deals only with numerical (low-level) data, has a pattern

---

Y. A. Sekercioğlu (✉)  
Centre for Telecommunications and Information Engineering,  
Monash University,  
Victoria 3800, Australia

A. Pitsillides  
Department of Computer Science,  
University of Cyprus,  
Cyprus

A. Vasilakos  
Computer Science Institute,  
Foundation for Research and Technology (CSI-FORTH),  
Greece

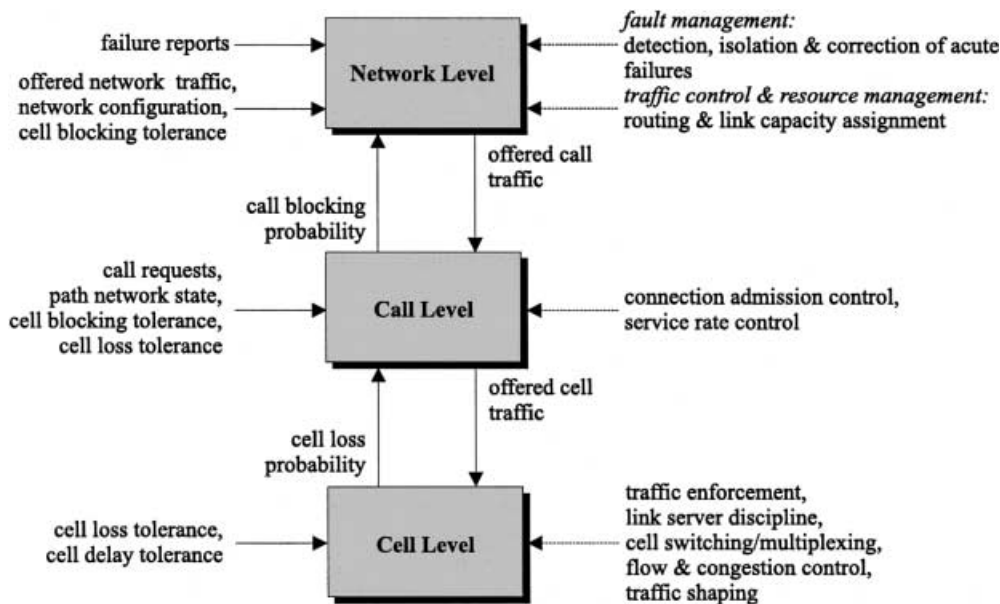


Fig. 1. Multilevel traffic control in ATM networks

recognition component, and does not use knowledge in the AI sense; and additionally, when it (begins to) exhibit

- computational adaptivity;
- computational fault tolerance;
- speed approaching human-like turnaround;
- error rates that approximate human performance.

The major building blocks of CI are artificial neural networks, fuzzy logic, and evolutionary computation.

### 3 Applications of CI techniques in management of ATM networks

A possible implementation of multilevel ATM control architecture partitions the control domains into network, call and cell levels of varying temporal decomposition (Fig. 1) [33, Chapter 2] [30]. Time constants involved are: in the cell level in the order of microseconds; in the call level in the order of seconds to minutes; and in the network level minutes to hours.

This paper attempts to classify the research work on ATM network control methods along this partitioning and, presents an overview of the reported research which employs fuzzy logic, artificial neural networks and evolutionary computation.

### 4 Network level control

The main objective of network level control in an ATM network is to enable the completion of the maximum possible number of successful B-ISDN service calls [57]. The network attempts to achieve this objective by implementing two main control functions at the network level: fault management and resource management.

#### 4.1 Fault management

Fault management is concerned with the detection, isolation, and correction of acute failures that interrupt the availability of network resources. Besides acute failures,

some failures may appear intermittently, or malfunctions may gradually degrade the network performance while network resources remain available (for example, corruption of virtual path identifier (VPI)/virtual channel identifier (VCI) translation tables may cause misrouting for certain connections). It is the role of fault management to continually monitor the network facilities to detect degradations in performance caused by such conditions, and respond with appropriate actions in order to minimize the effect on offered services [14]. This responsibility is implemented as part of the operations and management (OAM) in ATM networks.

In the area of fault management in communication networks, including ATM networks, reported research on applications of CI is very limited in scope. Applications of AI in network management have been surveyed and reported by Smith and Fry [46].

#### 4.2 Traffic control and resource management

In the absence of faults and malfunctions, efficient utilization of network resources is maintained by the traffic control and resource management functions which involve routing and link capacity assignment. At the network level, route selection and link capacity assignment to virtual paths are performed by using information related to offered call traffic and tolerated call blocking probability.

First major function at the network level control in ATM networks is route selection. In B-ISDN networks, links have to be described in terms of multiple metrics, including QoS and policy constraints, which makes routing with multiple requirements a difficult problem to solve (see [2] for an example).

A number of researchers have proposed fuzzy logic and artificial neural network based schemes for the route selection in ATM networks, such as Aboelela and Douligeris's [2] study of fuzzy logic based route selection, and Park and Lee's [34, 35] work on optimized routing using recurrent ANNs.

Second major function of network level control in ATM networks is the optimal allocation of bandwidth to virtual paths [14, 37]. Effective implementation of this function is very important for a number of reasons:

- By reserving capacity in anticipation of the virtual channels which will belong to a virtual path, the processing effort required to establish individual virtual channels can be minimized.
- Virtual paths may be used as a means of logically separating traffic types having different QoS requirements while allowing virtual channels to be statistically multiplexed.
- Virtual paths allow groups of virtual channels to be managed and policed more easily.
- Dynamic routing control at virtual path level should lead to designing effective network reconfiguration mechanisms.
- Effective allocation of bandwidth to virtual paths would lead to a more efficient and effective network.

Bandwidth allocation to virtual paths is a typical multi-objective optimization problem. The application of combination of evolutionary programming with fuzzy logic could be very beneficial for this type of problems. Heuristic methods exploiting these benefits have been proposed to reach near-optimal solutions [36, 55, 56]. In the study presented in [56] the researchers have used evolutionary-fuzzy prediction in inter domain routing of broadband network connections with QoS requirements in the case of an integrated ATM and SDH networking infrastructure. In their method, a subset-interactive autoregressive model is used to predict link utilization levels, based on experience from both static traffic observations as well as dynamic knowledge, acquired during the network's operation. Based on these, the shadow cost of allowing the connection through each feasible path is calculated, which is then used to select the "best" path. The shadow cost is calculated in such a way as to lead the network to states which exhibit the lowest expected blocking probabilities in regard to information about user's demand – thus aiming to match network state with demand at all times.

Also, early results of a study for VP bandwidth allocation using evolutionary programming techniques has been published by Pitsillides et al. [37].

## 5

### Call level control

In an ATM network, the main control tasks performed at the call level is connection admission control (CAC) and service rate allocated to each virtual path connections. Most of the studies reported in the literature have focused on solving the CAC problem.

#### 5.1

##### Connection admission

Connection admission control (CAC) is defined as a set of actions, performed at connection set-up phase, to determine whether or not the virtual path (VP) or virtual channel (VC) requesting the connection can be accepted. The decision is based on the connection's anticipated

traffic characteristics, the requested QoS, and the current state of the network. The anticipated traffic characteristics of the connection are determined by a source traffic descriptor, and the user terminal declares these source traffic descriptor values to the network when the connection set up is requested. If the request is accepted, network resources are implicitly allocated to the connection.

To attain high utilization of VPs while meeting their QoS requirements, CAC must determine whether to accept a new VC by considering its anticipated traffic characteristics, the QoS requirements of existing VCs, the availability of the network resources, and current utilization of the links. There are many demanding problems waiting to be solved for the development of an effective CAC algorithm, especially

- The statistical behavior of several sources of different types multiplexed on an ATM link is difficult to predict. Therefore, deciding how to allocate resources for multiple QoS requirements is hard to solve.
- Developing accurate analytical models to evaluate QoS services could be very difficult.

Application of CI techniques appears to be appropriate, and not surprisingly, several researchers have attempted to solve the problem by using ANNs and fuzzy logic control techniques. Especially, learning and generalization capabilities of ANNs make them suitable for solving the CAC problem quite successfully.

Hiramatsu is one of the earliest researchers who have realized the potential of ANNs for solving ATM CAC problem [20] and has also published his work on training techniques for ANN applications in ATM [21]. Similarly, Ramalho and Scharf [44] have used an ANN based method for learning the behavior of the traffic in an ATM link. Park and Lee [34, 35] also have published their work on adaptive call admission control using feedforward ANNs.

Some other researchers concentrated on fuzzy logic based solutions. Uehara and Hirota [54] have proposed a method based on estimation of the possibility distribution of cell loss ratio (CLR). These researchers have used fuzzy inference for the estimation of CLR of new connections. The mechanism operates this way: Each call request is placed into a transmission rate class depending on its declared parameters. Then, by using the number of active connections for each class, a CLR estimation is made by the fuzzy inference engine. If the estimate exceeds the required CLR, the connection request is rejected. The fuzzy sets representing the values of the fuzzy numbers of the rule base are shaped by a learning mechanism and observed CLR data which gives the scheme its adaptation capability.

An accurate model of traffic source requesting a connection is very important for estimating its future behavior. If the behavior of the traffic source can be predicted precisely, connections can be admitted to the network with tighter safety margins, leading to maximizing the resource utilization and consequently increasing the revenue. Scheffer and Kunicki have studied methods for accurate modeling of voice and video sources by applying of fuzzy logic techniques, and based on these models, for prediction of their behavior [45, 48, 49]. They

have proposed a CAC scheme which uses a fuzzy logic based traffic prediction algorithm [47].

Early results of a study whose aim is the application of CI techniques to ATM CAC problem and development of a simulation testbed has been published by Czezowski [15].

## 6

### Cell level control

In an ATM network, cell level controls involve flow and congestion control, enforcement of agreed traffic parameters, cell servicing discipline, traffic shaping and control algorithms for cell switching and multiplexing. Some of these issues have been studied quite extensively (such as traffic enforcement and congestion control), while others virtually ignored by the CI research community.

#### 6.1

##### Usage parameter control

Usage parameter control (UPC), or in other words, traffic enforcement or policing, is a very important function in ATM networks. Its task is to ensure that traffic sources stay within the limits of the negotiated traffic parameters which are declared during the call setup phase. Traffic enforcement functions are performed by the network provider at the virtual circuit or virtual path level and corrective measures are taken if a traffic source does not stay within the declared limits. The measures could be as drastic as blocking the traffic source or could be less severe such as selectively discarding the violating cells or tagging violating cells that could be discarded in downstream nodes if necessary.

The ideal UPC mechanism should have these desirable characteristics: accurate detection of any traffic situation violating the negotiated values, and separating those connections from the ones that stay within the negotiated limits; fast response to violations; implementation simplicity and cost effectiveness. Designing a UPC mechanism encompassing these features could be a daunting task. For example, well studied mechanisms such as leaky bucket and window mechanisms cannot achieve the ideal UPC characteristics but only provide a trade-off between the above requirements.

Catania et al. [11–13] and Ascia et al. [1] have proposed a UPC mechanism based on fuzzy logic control which displays characteristics close to ideal UPC, and have also implemented the algorithm as a VLSI chip. The mechanism they propose ensures that a bursty source conforms to its agreed average cell rate. It is a window based control mechanism. It allows short term fluctuations of the source cell rate around a negotiated average value, as long as the source respects this value over the long term, and at the same time it is capable of recognizing a violation immediately. The maximum number of cells which are considered to be non-violating in a fixed period is dynamically updated by a set of fuzzy inference rules. The set of rules is shaped to guarantee transparency to a compliant source by assigning a credit value of allowable cells which is higher than the negotiated value agreed at call set up phase. This credit value represents the number of cells that the source can send during a particular transmit window. If a source has a high flow of traffic, the UPC intervenes to enforce a

reduction of the bit rate of the source. To do so, it reduces the assigned credit to lower the allowable cell rate threshold and identifies any cells that exceed this threshold as violating cells.

The parameters describing the behavior of the source consist of the average number of cell arrivals per window since the start of the connection, the number of cell arrivals in the last transmit window, and current value of the maximum allowable cells that can be transmitted. By using these three parameters, the fuzzy UPC mechanism determines the value of the threshold to be used in the next transmission window.

A UPC mechanism particularly designed for policing voice sources has been proposed by Ndousse [31]. Since voice cells are characterized by a high degree of burstiness, utilization of a classical control approach faces difficulties. Ndousse proposes an intelligent implementation of the leaky bucket cell rate control mechanism which yields a lower cell drop rate than the leaky bucket algorithm under similar circumstances.

The fuzzy leaky bucket is implemented as a two-level fuzzy logic controller (FLC) by connecting three fuzzy associative memories (FAMs) [26, pp. 299–338]. In the first level, there are two FAMs, each taking two input variables and generating an output variable which is supplied to the second level FAM. The output of the FLC determines the number of special tokens in the token buffer in the next sampling interval. These special tokens are used to tag the violating cells. Therefore, depending on the availability of the network resources, violating cells are not discarded straight away, but can have a chance of transmission. The FLC dynamically determines the number of special tokens allocated in the token buffer by monitoring the buffer occupancies and buffer growth rates in the token buffer and channel buffer allocated to the voice connection.

#### 6.2

##### Flow, congestion and rate control

It is generally accepted that the problem of network congestion control remains a critical issue and a high priority. One could argue that network congestion is a problem unlikely to disappear in the near future. Furthermore, congestion may become unmanageable unless effective, robust, and efficient methods for congestion control are developed. This assertion is based on the fact that despite the vast research efforts, spanning a few decades, and the large number of different control schemes proposed, there are still no universally acceptable congestion control solutions. As demand for multimedia (streaming) applications increases, it becomes increasingly important to ensure that these applications can co-exist with current applications.

In early stages of B-ISDN development, prevailing belief among the research community was, preventive (or, in other words open-loop) type congestion control at the edge is necessary due to the large bandwidth delay product, and would be sufficient for ATM networks. But, outcomes of subsequent studies have shown that, because of the variety of the traffic to be supported in B-ISDN networks, open-loop congestion and flow control is rendered to be ineffective in ATM networks. Today, the shift is

towards closed-loop congestion controls (within the network).

In ATM networks, depending on the nature of the traffic sources, the closed-loop congestion control issue can be approached in two ways:

- For *delay tolerant traffic*, which basically comprises of TCP/IP type traffic, switches can send feedback signals to the sources leading them to reduce the rate at which they release cells to the network. Then excess traffic is queued at the traffic source and consequently delayed.

The ATM Forum has introduced a service category, called available bit rate (ABR), in order to allocate bandwidth dynamically within an ATM network, while simultaneously minimizing the cell losses, and has selected a feedback control framework to achieve these aims [4]. The framework allows downstream nodes or intermediate ATM switches to periodically send information to the traffic sources relating to maximum cell rates that they can handle. The cell rate information is carried by a stream of resource management (RM) cells generated by the traffic sources and relayed back to the sources by the destination end systems. During their round-trip, while these cells pass through the switching nodes, the cell rate information contents of these cells are dynamically updated by these intermediate systems. For the calculation of rate, several algorithms have been proposed.

- On the other hand, since delay tolerance of *video/voice traffic* is very low, congestion control is performed by sending coding rate signals to these types of sources. In the presence of congestion, the sources can vary their coding rate, and so reduce the frequency of cells generated by using this feedback information. Lower coding rate inevitably reduces the image/sound quality at the receiver but network utilization and quality of offered service rate are maintained at higher levels by minimizing the cell losses and delays due to congestion.

Following paragraphs summarize the research utilizing CI techniques for implementation of congestion and rate control algorithms in ATM networks.

Tarraf and Habib [50] and Tarraf et al. [51, 53] have investigated extensively how ANNs can be used to solve many of the problems encountered in the development of coherent traffic control strategies in ATM networks. In [53] they present congestion control schemes for ATM networks. Also, they investigate a reinforcement-learning based neural network for congestion control in ATM networks [52]. Liu and Douligieris have published the results of a comparison study on the performance of static and adaptive feedback congestion controllers which uses ANNs [27].

Huang and Yan [23] use a recurrent neural network for the dynamic control of communication systems, particularly dynamic congestion control in ATM networks. Mehrvar and Le-Ngoc [29] apply a neural network scheme for congestion control in packet switch OBP satellite systems.

Cheng and Chang [9, 10] have devised a fuzzy control system which combines CAC and a feedback mechanism for controlling congestion. The mechanism sends back coding rate control signals to video sources, and congestion control signals to data sources. In this scheme, fuzzy

sets representing the linguistic values are selected by evolutionary techniques. The system has the ability to adjust the cell transmission rate of the video sources, and subsequently traffic density at the switches, it can still maintain QoS for the connections.

Pitsillides et al. [41, 42], have proposed the fuzzy explicit rate marking (FERM) algorithm, and analyzed its performance regarding fairness, responsiveness, resource utilization and cell loss in LAN and WAN environments. FERM operates on switching nodes and by periodically monitoring the buffer utilization and queue growth rate, determines a cell rate which is used to update the maximum cell rate information carried by the RM cells passing through the virtual connection.

Douligieris and Develekos [16] have studied a FLC which is based on the short term observation of the network status to predict the near future cell discarding behavior of the switching nodes. This prediction is then fed back to traffic shapers in the sources to minimize cell losses.

Jensen [24] has proposed a three-step FLC for controlling the transmission rate of sources to protect links against overload in the case of connections exceeding their negotiated traffic parameters. The scheme operates as follows: at the call admission stage a service dependent priority is assigned to each connection. This priority is kept as a fixed value for the whole life time of the connection. Also, in the switching node, a certain buffer capacity is allocated to the connection. The FLC generates the cell service rate control signals for each buffers. Input parameters of the FLC are: (a) allocated priority level; (b) current buffer occupancy level; (c) bandwidth utilization at the output link of the node; and (d) the difference between the effective bandwidth at which the source is transmitting the cells and the declared bandwidth negotiated during the call set up stage.

Hu and Petr [22] have studied an adaptive traffic controller based on Sugeno's self-tuning fuzzy control methods.

### 6.3 Cell switching and multiplexing

In an ATM network, cell queuing is required to alleviate congestion at switching nodes. Congestion occurs when multiple cells simultaneously attempt to access an output link in a switch. Cell queuing can be arranged either by placing buffers at input ports (called input queuing), or by placing cell buffers at the output ports (called output queuing). Output queuing yields better performance in terms of cell delay and throughput, but computationally more demanding to operate than input queuing. On the other hand, in input queuing, if the head-of-line blocking problem can be solved, comparable performance can be achieved. One way of solving this problem is to employ a mechanism called bypass queuing. When bypass queuing is used, a controller module schedules the cells in an optimal fashion to enhance the switch throughput. Additionally, cells can be dispatched optimally if they are assigned priorities, with higher priorities assigned to real-time traffic such as voice and video (due to rigid delay requirements) and lower priorities assigned to data traffic, by an intelligent scheduling mechanism.

Liu and Douligeris [28] have proposed a fuzzy scheduler to optimize the cell servicing sequences to reduce cell losses. In their mechanism, each traffic class in the switch has its own portion of the dedicated buffer and a fuzzy scheduling algorithm manages the server. Park and Lee [34, 35] have also worked on optimal scheduling and published their study on application of recurrent ANNs to this problem.

## 7

### Discussion and concluding remarks

Research on applications of CI in telecommunication systems, particularly in ATM networks, is being pursued by an active research community, and methods are being developed simultaneously. However, unlike consumer applications, there are no commercially deployed applications as yet. The reasons could be

- the lack of comprehensive performance comparisons between the best traditional techniques and the ones involving CI applications. The comparisons performed in the research studies usually have been undertaken in simplified networking scenarios, and testing on real hardware has not been undertaken yet except for some partial implementations such as in [1]. Before the applications of CI techniques to high speed communication networks become accepted, it will be necessary to place a greater emphasis on rigorously demonstrating the advantages to be gained, and that is an area we strongly recommend.
- the reluctance to adopt new technologies by telecommunications companies and equipment manufacturers. This issue is closely related to the lack of comprehensive performance studies mentioned above.

As a final note, we would strongly encourage a thorough study of an integrated control structure implementing a multilevel control strategy spanning network, call and cell levels. The integration can be achieved by appropriate design of each individual strategy in a new multilevel fuzzy logic structure, and/or the integration of existing, or separately designed strategies, with their integration achieved via a fuzzy logic based supervisor, taking care of the overall "goodness" of the network and handling any interactions among the control functions, at the same or different levels.

### References

1. Ascia G, Catania V, Ficili G, Palazzo S, Panno D (1997) A VLSI fuzzy expert system for real-time traffic control in ATM networks, *IEEE Trans Fuzzy Sys* 5(1): 20–31
2. Aboeela E, Douligeris C (1997) Routing in multimetric networks using a fuzzy link cost, In: Proceedings of the International Symposium on Computers & Communications ISCC'97, pp. 397–401, Alexandria, Egypt. IEEE Computer Society
3. Atlasis AF, Saltouros MP, Vasilakos A (1998) On the use of a stochastic learning algorithm to the ATM routing problem: a methodology, *Comp Commun* 21: 538–546
4. Traffic management specification version 4.0 (1996) Technical Report AF-TM-0056.000
5. Atlasis AF, Vasilakos A (1998) LB-SELA: rate-based access control for ATM networks, *Comp Networks ISDN Sys* 30: 963–980
6. Atlasis A, Vasilakos A, Loukas N (2000) The use of learning algorithms in ATM networks call admission control problem: a methodology, *Comp Networks*, pp. 341–353
7. Bezdek JC (1992) On the relationship between neural networks, pattern recognition and intelligence, *Int J Approx Reasoning* 6: 85–107
8. Bezdek JC (1994) What is computational intelligence? In: Zurada JM, Marks II RJ, Robinson CJ (eds), *Computational Intelligence Imitating Life*, pp. 1–12. IEEE Press
9. Chang C, Cheng R (1994) Traffic control in an ATM network using fuzzy set theory, In: Proceedings of the IEEE INFO-COM'94 Conference, pp. 1200–1207, Toronto, Canada. IEEE Communications Society
10. Cheng R-G, Chang C-J (1996) Design of a fuzzy traffic controller for ATM networks, *IEEE/ACM Trans Networking* 4(3): 460–469
11. Catania V, Ficili G, Palazzo S, Panno D. A fuzzy expert system for usage parameter control in ATM networks, In: ProcGlobecom95 [39], pp. 1338–1342
12. Catania V, Ficili G, Palazzo S, Panno D (1996) A comparative analysis of fuzzy versus conventional policing mechanisms for ATM networks, *IEEE/ACM Trans Networking* 4(3): 449–459
13. Catania V, Ficili G, Palazzo S, Panno D (1996) Using fuzzy logic in ATM source traffic control: lessons and perspectives, *IEEE Commun Magazine*, pp. 70–81
14. Chen TM, Liu SS (1994) Management and control functions in ATM switching systems, *IEEE Network*, pp. 27–40
15. Czezowski P (1998) Computational intelligence in ATM call admission control, In: Proceedings of the IEEE Ph.D. Students Conference (GRADCON'98), Winnipeg, Canada. IEEE
16. Douligeris C, Develekos G. A fuzzy logic approach to congestion control in ATM networks, In: ProcIcc95 [38], pp. 1969–1973
17. Douligeris C, Develekos G (1997) Neuro-fuzzy control in ATM networks, *IEEE Commun Magazine*, pp. 154–162
18. Ghosh S, Razouqi Q, Schumacher HJ, Celmins A (1998) A survey of recent advances in fuzzy logic in telecommunications networks and new challenges, *IEEE Trans Fuzzy Syst* 6(3): 443–447
19. Habib IW (1996) Applications of neurocomputing in traffic management of ATM networks, *Proc IEEE* 84(10): 1430–1441
20. Hiramatsu A (1990) ATM communications network control by neural networks, *IEEE Trans Neural Networks* 1(1): 122–130
21. Hiramatsu A (1995) Training techniques for neural network applications in ATM, *IEEE Commun Magazine* 33(10): 58, 63–67
22. Hu Q, Petr DW, Braun C. Self-tuning fuzzy traffic rate control for ATM networks, In: ProcIcc96 [40], pp. 424–428
23. Huang Y, Yan W (1996) Dynamic control of communication systems based on simple recurrent neural networks, In: Proceedings of the IEEE 1996 National Aerospace and Electronics Conference, vol 1, pp. 254–258. IEEE
24. Jensen D (1994) B-ISDN network management by a fuzzy logic controller, In: Proceedings of the IEEE Global Telecommunications Conference GLOBECOM'94, pp. 799–804. IEEE Communications Society
25. Kassotakis I, Markaki A, Vasilakos A (2000) A hybrid genetic approach for channel reuse in multi-access networks, *IEEE Journal on Selected Areas in Communications*
26. Kosko B (1992) *Neural Networks and Fuzzy Systems: a Dynamical Systems Approach to Machine Intelligence*. Prentice Hall, New Jersey
27. Liu Y-C, Douligeris C. Static vs. adaptive feedback congestion controller for ATM networks, In: ProcGlobecom95 [39]
28. Liu Y-C, Douligeris C. Nested threshold cell discarding with dedicated buffers and fuzzy scheduling, In: ProcIcc96 [40], pp. 429–433
29. Mehrvar HR, Le-Ngoc T. ANN approach for congestion control in packet switch OBP satellite, In: ProcIcc95 [38], pp. 810–814

30. Nordström E, Carlström J, Gällmo O, Asplund L (1995) Neural networks for adaptive traffic control in ATM networks, *IEEE Commun Magazine* 33(10): 43–49
31. Ndousse TD (1994) Fuzzy neural control of voice cells in ATM networks, *IEEE J Selected Areas Commun* 12(9): 1488–1494
32. Pedrycz W (1998) *Computational Intelligence An Introduction*. CRC Press, Boca Raton
33. Pitsillides A (1993) *Control Structures and Techniques for Broadband-ISDN Communication Systems*. PhD thesis, School of Electrical Engineering, Swinburne University of Technology, Melbourne, Australia
34. Park Y-K, Lee G (1995) Applications of neural networks in high-speed communication networks, *IEEE Commun Magazine* 33(10): 68–74
35. Park Y-K, Lee G (1995) Intelligent congestion control in ATM networks, In: *Proceedings of the 5th IEEE Computer Society Workshop on Future Trends of Distributed Computing Systems*, pp. 369–375. IEEE
36. Pitsillides A, Pattichis C, Stylianou G, Sekercioğlu A, Vasilakos A (2000) Bandwidth allocation for virtual paths (BAVP): investigation of the performance of classical constrained and genetic based optimization techniques, In: *Proceedings of the IEEE INFOCOM'00 Conference*, Tel Aviv, Israel. IEEE Communications Society
37. Pitsillides A, Pattichis C, Sekercioğlu YA, Vasilakos A (1997) Bandwidth allocation for virtual paths using evolutionary programming (EP-BAVP). In: *Proceedings of the International Conference on Telecommunications ICT'97*, pp. 1163–1168, Melbourne, Australia, Monash University
38. IEEE Communications Society (1995) *Proceedings of the 1995 IEEE International Conference on Communications ICC'95*, Washington, USA
39. IEEE Communications Society (1995) *Proceedings of the IEEE Global Telecommunications Conference GLOBECOM'95*, Singapore
40. IEEE Communications Society (1996) *Proceedings of the 1996 IEEE International Conference on Communications ICC'96*, Dallas, Texas, USA
41. Pitsillides A, Sekercioğlu YA, Ramamurthy G. Fuzzy Backward Congestion Notification (FBCN) congestion control in Asynchronous Transfer Mode (ATM), In: *ProcGlobecom95* [39], pp. 280–285
42. Pitsillides A, Sekercioğlu YA, Ramamurthy G (1997) Effective control of traffic flow in ATM networks using fuzzy logic based explicit rate marking (FERM), *IEEE J Selected Areas Commun* 15(2): 209–225
43. Pedrycz A, Vasilakos A (eds) (2000) *Computational Intelligence in Telecommunications Networks*. CRC Press, Boca Raton
44. Ramalho MF, Scharf E (1994) Fuzzy logic based techniques for connection admission control in ATM networks, In: *Proceedings of the 11th IEE Teletraffic Symposium*, pp. 12A/1–12A/8. IEE
45. Scheffer MF, Beneke JJP, Kunicki JS (1994) Fuzzy modelling and prediction of network traffic fluctuations, In: *Proceedings of COSIG'94*, South Africa
46. Smith JA, Fry M (1995) Artificial intelligence in network management, *Australian J Intel Infor Proc Syst Autumn*: 53–62
47. Scheffer MF, Kunicki JS (1996) Fuzzy adaptive traffic enforcement for ATM networks, In: *Proceedings of the 4th IEEE AFRICON Conference*, pp. 1047–1050. IEEE
48. Scheffer MF, Shaw IS (1993) VLSI hardware realization of self-learning recursive fuzzy model for dynamic systems, In: *Proceedings of IFAC 12th World Congress*, Sydney, Australia
49. Scheffer MF, Shaw IS (1994) Application using VLSI hardware realization of self-learning recursive fuzzy model, In: *Proceedings of SICICA'94*, Budapest, Hungary
50. Tarraf AA, Habib IW (1994) A novel neural network traffic enforcement mechanism for ATM networks, *IEEE J Selected Areas Commun* 12(6): 1088–1096
51. Tarraf AA, Habib IW, Saadawi TN (1995) Intelligent traffic control for ATM broadband networks, *IEEE Commun Magazine* 33(10): 76–82
52. Tarraf AA, Habib IW, Saadawi TN. Congestion control mechanism for ATM networks using neural networks, In: *ProcIcc95* [38], pp. 206–210
53. Tarraf AA, Habib IW, Saadawi TN (1995) Reinforcement learning-based neural network congestion controller, In: *Proceedings of the Military Communications Conference MILCOM'95*, vol 2, pp. 668–672. IEEE
54. Uehara K, Hirota K (1997) Fuzzy connection admission control for ATM networks based on possibility distribution of cell loss ratio, *IEEE J Selected Areas Commun* 15(2): 179–190
55. Vasilakos A, Anagnostakis K, Pitsillides A (1997) An evolutionary fuzzy algorithm for QoS and policy based inter-domain routing in heterogeneous ATM and SDH/SONET networks, In: *Proceedings of the 5th European Congress on Intelligent Techniques and Soft Computing EUFIT'97*, Aachen, Germany
56. Vasilakos A, Ricudis C, Anagnostakis K, Pedrycz W, Pitsillides A (1998) Evolutionary-fuzzy prediction for strategic QoS routing in broadband networks, In: *Proceedings of the IEEE World Congress on Computational Intelligence WCCI'98*, pp. 1488–1493, Anchorage, Alaska, USA
57. Yoneda S (1990) Broadband-ISDN ATM layer management: operations, administration, and maintenance considerations, *IEEE Network*, pp. 31–35