



Integrated optimization of electric vehicles charging location and allocation for valet charging service

Xiaoxiao Shen^{1,2} · Jun Lv³ · Shichang Du¹  · Yafei Deng¹ · Molin Liu¹ · Yulu Zhou¹

Accepted: 2 August 2023

© The Author(s), under exclusive licence to Springer Science+Business Media, LLC, part of Springer Nature 2023

Abstract

Since electric vehicles (EVs) have definite benefits over gasoline vehicles, the vehicle market could be dominated by EVs in the future. This paper focuses on the new valet charging service to send staffs to replace users for charging their EVs, which can largely reduce charging anxiety. In this study, the location of charging stations and the allocation of charging demands to charging stations are optimized simultaneously due to the interaction of these decisions. The queueing behavior at the charging station is incorporated into the model, and the average charging waiting time is derived. We construct a mixed integer nonlinear optimization model based on the characteristics of valet charge service and an infinite-source queuing model. The objective is to minimize a total cost of the construction of charging facilities and valet charge service launching (i.e., charging staffs' road service, round-trip time, and the charging waiting time). The planning problem for valet charging service in this paper contributes to the existing literature on self-charging way where the users of EVs drive at charging stations to recharge their EVs by themselves. An improved genetic algorithm is developed to obtain deployment and operation plans for large-scale instances constructed based a real case in Shanghai. The improved genetic algorithm shows high performance in convergence and solution quality, which provide the service providers an efficient decision support tool. Meaningful managerial insights are also provided, which can help the service provider make better cost-effective design of charging location and allocation plans. For example, the charging station location decisions are not as much as sensitive to critical variables (such as demand level, charging capacities, and the value of time) than the overall cost to those. This means that partial location decisions remain unchanged when the key parameters vary.

Keywords Electric vehicle · Valet charging service · Queueing system · Charging location and allocation · Improved genetic algorithm

Extended author information available on the last page of the article

Published online: 20 August 2023

1 Introduction

In recent years, the climate change and energy supply are two major issues facing the world. The 2022 State of the Global Climate report shows that the global average temperature in 2022 is 1.15 °C higher than the 1850–1900 average. Climate change has brought about harmful socio-economic and environmental impacts such as sea level rise, drought, food insecurity, refugee displacement. Carbon dioxide emissions from fossil fuels are the main driver of climate change. To achieve the goal of net-zero emissions by 2050, the International Energy Agency (IEA) sees electricity as a key element of a successful energy transition. The share of electricity in final energy consumption will rise from current 20 to 52% in 2050. The share of fossil fuels in the global energy mix will drop from current 80 to 60% in 2050. EVs as an alternative transportation solution play a huge role in achieving the net zero emission goal in 2050 (Varshosaz et al. 2019), as every 1% reduction in fuel consumption can reduce carbon dioxide emissions by nearly 7.5 million tons. In China, there is expected to be about 100 million EV owners in 2030. However, the experience of electric replenishment is still not as smooth as that of gasoline vehicles. At present, most EV users cannot be recharged timely with facing the charging troubles, such as no available charging piles and long charging waiting time (Sun et al. 2020).

In response to the charging issues, the government has strengthened the construction of charging infrastructure. By the end of June 2023, the cumulative number of charging infrastructure in China is 6.652 million units, a year-on-year increase of 69.8%. At the same time, EV companies are actively implementing many substantive solutions. For example, Tesla has established a super charging station (Huanqiu 2022), and a new service mode known as valet charging was first proposed by NIO Corporation (NIO), a worldwide manufacturer of intelligent EVs founded in 2014 and went public in the U.S. in 2018. The user can directly call the service on the specific mobile application, and the charging staff will drive the car from the user to the charging station and return it after it is fully charged (Nio 2023). By July 2022, the number of registered users of the application of NIO Power has exceeded 3 million, and NIO has provided a total of 821,350 valet charging services. The valet charging service will alleviate users' recharging anxiety, free up users' recharging time to focus on urgent matters, and promote to attracting new users of EVs.

From the perspective of overall operating costs, both tactical charging infrastructures planning and operational charging demands allocation are pivotal for launching valet charging services. The site of the charging station will determine the travel distance of the charging staffs, which will affect the allocation of demand, and vice versa. Besides, due to the limited charging capacities, charging waiting is inevitable. These pose challenges for the company to obtain efficient plans and motivate us to investigate the integrated optimization problem of EVs charging location and allocation for valet charging service. Therefore, two decisions on where to locate charging stations and how many charging demands at each node to be allocated to each station are optimized jointly. The charging

system is modeled as a queuing system to derive the average charging waiting time. The total cost, including the construction of charging facilities and valet charge service launching (i.e., charging staffs' road service, round-trip time, and the charging waiting time), is minimized.

1.1 Literature review

In the last few years, researchers and decision-makers in the transportation filed have paid close attention to the EV charging infrastructures planning problem (Zhang et al. 2015; Rogge et al. 2018; Kunith et al. 2017; Mirchandani et al. 2014; Rahman et al. 2016; Shen et al. 2019). The charging facility locating problem considers different optimization objectives from the viewpoints of EV users or charging service providers. Zhang et al. (2017) at the minimum comprehensive cost of land cost, construction cost and operation cost. Li et al. (2016a) minimize the overall cost of new charging stations and relocation within a finite planning horizon. From the perspective of users, Wu and Sioshansi (2017) consider the uncertainty of demand and establish a random traffic flow capture model. Zhu et al. (2016) comprehensively consider the user's travel cost and entering the charging station. He et al. (2015) assume that the EV driver determines the driving route and charging plan at the same time, so as to minimize the trip and charging time, while ensuring that the battery will not be depleted before the trip is completed. According to the characteristics of urban residents' travel behavior, Sun et al. (2020) aim at maximizing the coverage area of EV flow by charging stations. Using a two-layer simulated annealing algorithm, Ouyang and Xu (2022) deploy the optimal location for both fast and slow charging stations. They set the goal of maximizing covered traffic flows within a constrained budget, incorporating EV customers' partial charging habits and elastic demand.

A group of studies apply mathematical modelling approach and optimization theories to study the EV charging infrastructure planning problem (Kim and Kuby 2012, 2013; Huang et al. 2015; Chung and Kwon 2015; Chung and Kwon 2015; Zhang et al. 2017; Chen et al. 2016; Liu and Wang 2017; Asamer et al. 2016). Li et al. (2016b) combine the ideas of multi-path and multi-period to formulate the dynamical public charging stations locating problem. The proposed heuristic based on a genetic algorithm solves the formulated mixed-integer linear model. Tu et al. (2016) construct a location model with spatial-temporal demand coverage and propose a genetic algorithm to determine the electric taxi charging stations locations using real massive taxi GPS data. Guo et al. (2022) simultaneously optimize charging station location and routing problem for EVs and propose a three-phase hybrid heuristic algorithm to solve the problem. Bao and Xie (2021) study the charging station location problem allowing en-route charges as many times as needed for electric vehicles. They propose the branch-and-bound algorithm and the nested partitions algorithm to find the optimal set of locations. Aghalari et al. (2023) investigate EV location-routing decisions under climate and customer demand variability by proposing a progressive hedging-based heuristic algorithm. Wang et al. (2021) jointly

optimize the charging location and road capacity allocation considering path choice, departure time choice and en-route charging behavior. Faustino et al. (2023) introduce and determine charging zones to achieve high utilization rates for electric vehicles chargers. Unlike the traditional charging process, swapping the battery at the station takes less than 10 min, which is comparable to refueling a conventional vehicle. The location-routing issue for EV battery swapping stations is a topic of study for some researchers. For example, Mahoor et al. (2019), Yang et al. (2017a), Yang and Sun (2015), and Hof et al. (2017) all model the problem as a mixed-integer linear programming. They explore smart heuristics, such as adaptive large neighborhood search, four-phase sweep heuristic, and Tabu search, to solve optimization models for such problems. Moreover, there are studies focusing on the charging stations location planning (Li et al. 2016b; Brandstätter et al. 2017), assigning charging stations and distributing the fleet optimally (Li et al. 2016b; Hua et al. 2019) for shared EVs. The station-based carsharing mode is studied in Brandstätter et al. (2017), Li et al. (2016b), and Hua et al. (2019). The mode of free-floating carsharing is also studied by researchers. For instance, Roni et al. (2019) develop an integer programming model to simultaneously optimize the locations of charging stations and the allocation of SEVs to charging stations.

To capture the characteristic of charging demands' behaviors, literature such as Cavadas et al. (2015), Xi et al. (2013), Dong et al. (2014), and Cocca et al. (2019a) employ the simulation-based optimization approach to address the problem of EV charging infrastructure planning. Cavadas et al. (2015) address the issue of where to place EV charging stations in an urban scenario. To maximize satisfied demand within a set budget, a mixed-integer mathematical model is created that introduces demand transference with traveller activities. Cocca et al. (2019a) present a simulator driven by discrete events and based on millions of data to assess the location of charging stations for free-floating shared EVs. Data-driven approaches are also employed by Yang et al. (2017b), Li et al. (2017), Chen et al. (2017), Cocca et al. (2019b) to locate charging stations. Yang et al. (2017b), Li et al. (2017), and Chen et al. (2017) investigate the problem of locating and planning the size of electric taxi charging stations using actual taxi travel data. Cocca et al. (2019b) simultaneously determine the decisions of the locations of charging stations, whether or not customers were required to place rented SEVs back at the charging locations, and the quantity of chargers by proposing a data-driven optimization method. Kłos and Sierpiński (2023) develop a charging station siting method that uses a GIS-based approach to properly distribute charging stations throughout a given urban area considering the distances between charging stations. Li et al. (2023) use reinforcement learning to solve a three-layer model for EV charging station location and dynamic pricing. Lai and Li (2022) propose an economic equilibrium model for on-demand valet charging to investigate how the planning of the charging infrastructure and regulatory action will impact the market outcome.

1.2 Contributions

The following is a summary of the study's contributions. First, we consider a new service mode named the valet charging service for joint decisions of charging station location and charging demand allocation. Scholars have carried out few studies in EVs infrastructure planning based on the characteristics of valet charging service. The objectives, including the building cost of charging facilities, the road service cost, round-trip time, and the charging waiting time of the charging staff, are minimized all simultaneously. Second, a new modelling approach of EVs' charging system with the valet charging service is proposed based on an infinite-source queuing model. We also propose an improved genetic algorithm to resolve the joint optimisation problem rigorously. Third, the proposed model and algorithm are validated and applied with real data on valet charging service. New deployment plans of charging station location and charging demand allocation are provided for a real case with the valet charging service.

1.3 Paper organization

The remainder of the article is organized as follows. The EVs' charging station location and charging demand allocation problem is modeled based on the queuing theory in Sect. 2. In Sect. 3, an improved genetic algorithm is proposed and designed according to the features for the optimization problem. Numerical studies related to a real case are conducted to evaluate the effectiveness of the developed model and algorithm in Sect. 4. Finally, Sect. 5 concludes by presenting some findings.

2 Problem formulation

To formulate a tractable model without losing crucial problem features, we set a few key modeling assumptions before building the model. Some of them are carried over from earlier research, while others are specific to our model. First, within our transportation networks, we assume that there are only battery-powered automobiles and there is only one type of EV in the study, that is, all are pure EVs. This assumption has been recognized by the research community (see, for example, Bao and Xie 2021). Second, all EV charging users are valet charging service users to simplify modeling as adopted by Li et al. (2021) and Lai and Li (2022), which could help us to focus on exploring the impact of valet charging service on the charging station locations and allocations. Third, the shortest path from the electric vehicle at each demand node to each charging station candidate node in the network is assumed to be known, and a vehicle always selects the shortest transportation route (Bao and Xie 2021; Sun et al. 2020). Forth, it is assumed that the difference in land price at different nodes has an impact on the construction cost of charging facilities. This assumption brings our model closer to practical applications. Fifth, we overlook other potential operational costs, such

as charging fee, maintenance, electricity prices, and environmental impact. Our current model assumes that the service capacity of the charging staff is infinite, and there are no time window requirements for charging demand. If the variable electricity price is introduced, the model needs to output the time-accurate charging staff assignment and charging planning solutions that considers time-varying electricity price and meet the constrictions of the time window. In addition, if we jointly optimize the maintenance decision of charging facilities, it will inevitably lead to some unexpected modeling and solution challenges. Sixth, we assume that the charging demand is known and determined, and there is no traffic congestion.

The process of valet charging service can be regarded as a queuing system, as used by Lai and Li (2022), Xiao et al. (2020), and Kumar et al. (2022), for example. In this queuing system, the EVs that arrive at the charging station are the input sources of the system. The user uses the mobile application to call the valet charging service. Then, the charging staff picks up the car and arrives at the charging station to queue up for charging. The whole process is quite random, so we assume that the time interval for an electric car to arrive at a charging pile follows the negative exponential distribution with parameter λ . That is, the arrival process of EVs is a Poisson flow, and the average arrival rate of EVs at the charging station is λ . In addition, there are multiple charging piles at a charging station. So, the charging system is a multi-server system and the service rule is first come first service. A charging station is set to accommodate b charging piles. Each charging pile operates separately from the others. The service time of the fast charging pile follows the negative exponential distribution with the parameter μ , that is, the average service rate of one charging pile is μ . It is assumed that the service efficiency of charging piles at different charging stations is the same as following the assumption in Bao and Xie (2021). Therefore, the $M/M/b$ queuing system for the valet charging service can be summarized as follows: each charging station has b charging piles. The process of EVs arriving at the charging station for charging is a Poisson flow, and the average arrival rate is λ . EVs receive charging services based on the first-come-first-served principle, and the charging time follows the negative exponential distribution with parameter μ . Each charging pile can only provide services for one EV. Once a vehicle occupies a charging pile, other EVs will not occupy the charging pile.

Due to the randomness of the EV arrival process, we assume that both the source of EVs and the capacity of the queuing system are infinite, as recognized in Lai and Li (2022). Let n represent the number of arriving EVs. When $n < b$, it indicates that there are n charging piles in a certain charging station charging EVs at this time, and $b - n$ charging piles in the system do not provide charging services. When $n > b$, it means that the quantity of EVs arriving at this time is larger than the number of charging piles. All b charging piles are charging EVs, and there are $n - b$ EVs waiting in line for charging. When the EV has finished charging, the charging staff leaves the charging station and sends the vehicle back. Then the EV behind begins to charge.

To continuously improve the user experience level and the resource utilization efficiency of the valet charging service, while ensuring that the capacity of charging stations can meet all charging demands, an optimization model for charging station

location and demand allocation is proposed. Before establishing the mathematical model, the following definitions are given:

Definition 1 (The cost of the entire charging system). *These include the construction cost of charging facilities, and the road service cost of the charging staff.*

$$O_1 = \sum_{i=1}^m X_i \cdot C_i + \sum_{i=1}^m \sum_{j=1}^n D_j \cdot f_{ji} \cdot d_{ij} \cdot c$$

Definition 2 (User experience level). *The user experience level is quantified as the round-trip time and the average waiting time of the charging staff at the charging station, and the spent time is costed.*

$$O_2 = \sum_{i=1}^m \sum_{j=1}^n \left(D_j f_{ji} \cdot 2d_{ij} \frac{1}{v} + D_j f_{ji} \cdot W_{qi} \right)$$

This is in line with the status quo of EV valet charging service in NIO. The current valet charging service is gradually being upgraded. Through model optimization, the charging system cost and user service experience level can be balanced, and the valet charging demand can be completed in a short time at the lowest cost. In this context, we consider two optimization objectives: minimizing the cost of the entire charging system and minimizing the round-trip time and the time spent queuing up for charging of the charging staffs. Further, we combine the two sub-objectives into

Table 1 Model notations

Sets	Description
$I = \{1, 2, \dots, m\}$	Set of potential locations of fast charging station
$J = \{1, 2, \dots, n\}$	Set of all demand nodes
Parameters	Description
C_i	The construction cost of charging facilities at location i
c	The average charging staff service fee charged per unit of distance between nodes
v	The driving speed of charging staffs
λ_i	The average arrival rate of EVs at the fast charging station i
μ	The average service rate of one charging pile
a_i	The variable from 0 to $b-1$ represents the arrival state of the EV at fast charging station i
b	The number of charging piles constructed at one fast charging station
D_j	The number of demands at node j
d_{ij}	The distance between node $j \in J$ and node $i \in I$
β	The value of unit time
Decision variables	Description
X_i	Binary variable, 1 if a fast charging station is constructed at candidate location i , 0 otherwise
f_{ji}	The proportion of the charging demand at node j allocated to fast charging station i

one objective through the “value of unit time” coefficient. Table 1 includes a list of notations that are used to formulate the practical problem studied in this paper into mathematical model. The corresponding model is established as follows:

$$\min O_1 + \beta \cdot O_2 \quad (1)$$

$$s.t. W_{qi} = \left(\frac{r_i^b}{b!(b\mu)(1-\rho_i)^2} \right) P_0^i \quad \forall i = 1, 2, \dots, m \quad (2)$$

$$P_0^i = \left(\frac{r_i^b}{b!(1-\rho_i)} + \sum_{a_i=0}^{b-1} \frac{r_i^{a_i}}{a_i!} \right)^{-1} \quad \forall i = 1, 2, \dots, m \quad (3)$$

$$r_i = \frac{\lambda_i}{\mu} = \frac{\sum_{j \in J} D_j \cdot f_{ji}}{\mu} \quad \forall i = 1, 2, \dots, m \quad (4)$$

$$\rho_i = \frac{r_i}{b} \quad \forall i = 1, 2, \dots, m \quad (5)$$

$$X_i \in \{0, 1\} \quad \forall i = 1, 2, \dots, m \quad (6)$$

$$\sum_{i=1}^m f_{ji} = 1 \quad \forall j = 1, 2, \dots, n \quad (7)$$

$$0 \leq f_{ji} \leq X_i \quad \forall i = 1, 2, \dots, m, j = 1, 2, \dots, n \quad (8)$$

$$\rho_i = \frac{r_i}{b} = \frac{\sum_{j \in J} D_j \cdot f_{ji}}{b\mu} < 1 \quad \forall i = 1, 2, \dots, m \quad (9)$$

A series of relevant parameters of the charging queuing system can be obtained from the queuing theory. Equation (2) obtain the average waiting time spent by the charging staff in the charging station. Equation (3) represent the steady-state probability of the charging queuing system. Equation (5) indicate the service intensity of charging service facilities.

The objective function (1) minimizes the overall cost, including the construction cost of charging facilities, the charging staff’s road service cost, the round-trip time cost, and the average waiting time cost in charging queues, where β is the value coefficient per unit time. Constraints (6) define that X_i is a binary variable. Constraints (7) ensure that all vehicles at the demand node will be assigned to a charging station for charging, and all demands are fully satisfied. Constraints (8) ensure that only when a charging station is constructed at the location i , vehicles will be allocated to location i for charging. Constraints (9) are the conditions that the system has a

steady-state solution. That is, the average arrival rate of the system must be less than the average service rate.

3 Solution approach

The problem of EVs' charging location and allocation belongs to NP-hard problem as the objective function in the model is nonlinear. It is hard to obtain the exact solution. Due to the genetic algorithm's powerful random search capability, an improved genetic algorithm is developed to optimize the location of the charging station and the allocation ratio of the demand at each demand node to the charging station. The proposed framework of the improved genetic algorithm is as the following Fig. 1, where mainly including the steps of chromosome encoding, elitist selection, crossover and mutation, and convergence. Next, each step will be described in detail.

3.1 Chromosome encoding

The encoding operation refers to converting the phenotype into a genotype that can be processed by the genetic algorithm to match the practical problem with the genetic algorithm. This paper adopts the natural number coding method. There are m candidate locations for the charging station, and the numbers of the candidate locations are represented by natural numbers $1, 2, \dots, m$. The gene string is in the form of $a_1 a_2 a_3 \dots a_m$, its length is m , and $a_i, \forall i = 1, 2, \dots, m$ is a natural number from 1 to m . In this study, we first generate an initial population of charging station candidate locations. There are 15 coding bits representing 15 genes on each chromosome. 30 chromosomes are randomly generated, representing an initial population of 30 individuals. Then we generate the initial population of the allocation ratio of the demand at each node to the charging station. It is two-dimensionally encoded, that is, each chromosome is a 30×8 matrix. 30 matrices, that is, the initial population is 30 individuals, are generated. Each row of the matrix is normalized to satisfy the constraints.

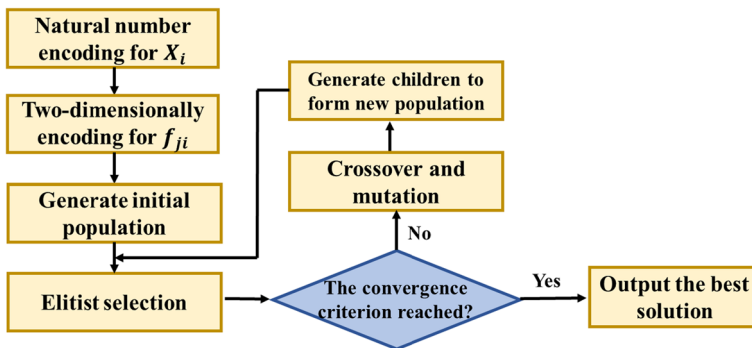


Fig. 1 The proposed framework for the improved genetic algorithm

3.2 Elitist selection

The fitness function in this study is determined according to the objective function in the model, taking the cost of the entire charging system and the value of user time occupied as the fitness function, as shown in formula (10). Another name for the fitness function is the evaluation function. The selection of the fitness function is related to the convergence speed of the genetic algorithm and whether the optimal solution can be searched.

$$f(x) = \left(\sum_{i=1}^m X_i \cdot C_i + \sum_{i=1}^m \sum_{j=1}^n D_j \cdot f_{ji} \cdot d_{ij} \cdot c \right) + \beta \cdot \left(\sum_{i=1}^m \sum_{j=1}^n (D_j f_{ji} \cdot 2d_{ij} \frac{1}{v} + D_j f_{ji} \cdot W_q) \right) \quad (10)$$

We use sorting method for individual selection operation. Sorting selection is a commonly used selection method in genetic algorithm. The sorting method is efficient and easy to implement. The basic idea of the sorting method is: calculate the fitness value of each individual in the population based on the fitness function, and arrange all the individual fitness values from large to small. The individual with the largest fitness value is chosen as the parent generation and copied to the children generation. Then, new children generations are generated after crossover and mutation operations, and the individual with the largest fitness value is selected to be copied. Therefore, in the problem, we calculate the fitness values of individuals in the children and the parent generations respectively, and sort them from small to large. We select 30 chromosomes with the top 30 target values as the new generation. Then repeat the above steps to form a new parent generation.

3.3 Crossover and mutation

The sequential crossover strategy is adopted to crossover 30 chromosomes according to a certain crossover probability to form children chromosomes. The implement steps of the sequential crossover method are as follows:

Step 1: Select the same gene start and end positions on the two parent chromosomes.

Step 2: Inherit the genes selected in the first step to the children generation, and ensure that the gene positions remain unchanged.

Step 3: Find out the position of the gene selected by Parent 2 in Parent 1, and delete them to obtain Child2-1. In the same way, find out the position of the gene selected by Parent 1 in Parent 2, and delete them to get Child2-2.

Step 4: Put the genes in Child2-2 into Child1-1 in order. Similarly, put the genes in Child2-1 into Child1-2 in order. Finally, we get the cross children generation.

An illustration example of the sequential crossover method is as Fig. 2. First, we randomly select a substring code “6 2 3 1” from Parent 1, and put it in the corresponding position of Child 1, as shown “Child1-1” in Step 2. Then, the vacant position of child 1

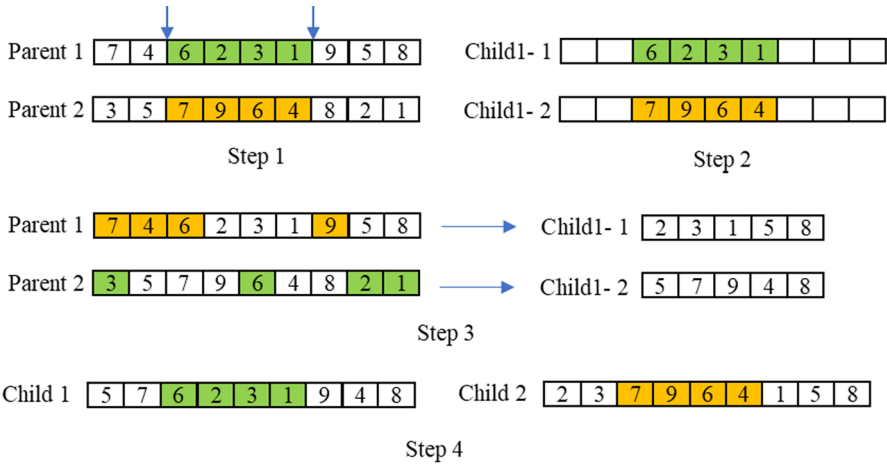


Fig. 2 The specific steps of the sequential crossover method

is selected from parent 2 in the order of parent 2 (with the existing code not repeated). For example, put the substring code “5 7 9 4 8” of parent 2 in Step 3 into the vacant position of “Child 1–1”, and finally get “Child 1” as shown in Step 4. Child 2 can be obtained in the same way.

Using a two-point mutation strategy, we select a chromosome and two mutation points on the chromosome to mutate with a certain mutation probability. The specific steps of the two-point mutation are as follows: first, two genes are selected on a parent chromosome, and the positions are represented by X and Y, respectively. Then the two selected genes are exchanged to obtain the final mutant children generation. Figure 3. demonstrates an example of the two-point mutation strategy. We exchange the position of code “9” and code “8” in the Parent and keep the other codes unchanged to obtain the Child.

The children chromosomes generated by mutation and crossover together constitute the children population.

3.4 Convergence

This study adopts the convergence criterion of the maximum number of iterations. When the number of genetic algorithm iterations reaches the previously set threshold, the iteration is terminated. The individual with the largest fitness value at this time is output, and the ideal resolution to the actual issue is attained through decoding. At the



Fig. 3 The two-point mutation strategy

same time, the number of iterations and the change trend graph of the optimal solution of each iteration are output to analyze the effectiveness of the algorithm.

4 Case study

4.1 Input data

We choose the real case of Yangpu District, Shanghai as the research case. The Yangpu District, as shown in Fig. 4, which spans a total area of 60.61 square

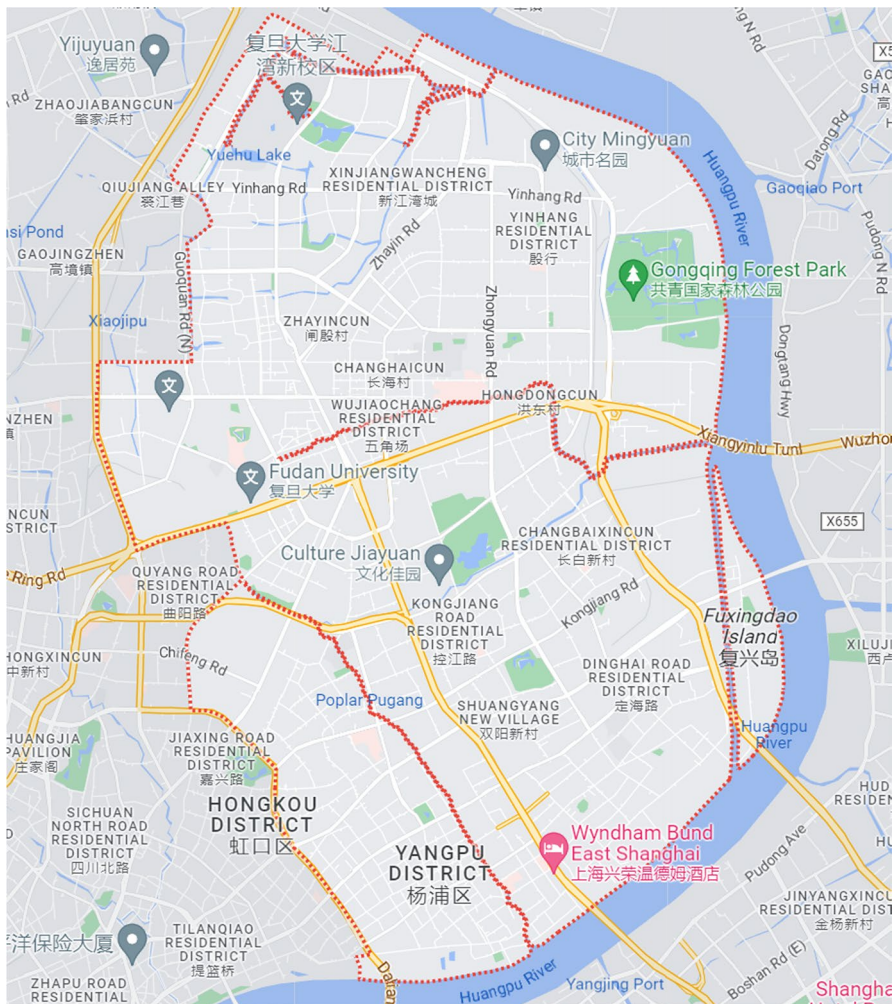


Fig. 4 The considered case area of Yangpu district, Shanghai

kilometers and carries a permanent population of over 123,000 by the end of 2021, is situated in the northeast of Shanghai’s downtown area.

Without loss of generality, we construct a simulation case that closely resembles the real case. The values that were chosen for the parameters of the developed case study are described in detail in Table 2. The data provided by NIO, EV operations literature, the EV charging facility planning literature, and pertinent online sources were used to develop the adopted parameter values (Li et al. 2021; Lai and Li 2022; Aghalari et al. 2023). Eight locations will be selected from fifteen candidate locations for charging station construction. 30 demand nodes are to be served. According to the scale in the map and combined with the scope of the whole region, the simulation area of Yangpu District, Shanghai is represented by the 11×12 plane in MATLAB. Among them, 15 charging station candidate nodes and 30 demand nodes are randomly generated and their locations in the plane are determined. As shown in Fig. 5, the red square points represent candidate charging station nodes with coordinates listed in Table 3, and the blue dots represent demand nodes with coordinates listed in Table 4. Considering practical situation of each candidate location with varying land price, Table 3 summarizes varying unit construction cost of a charging pile and total charging station construction cost in each target area. According to the historical order data provided by NIO, the total daily charging demand D_j at each demand node j are estimated and determined, as shown in Table 4. The average arriving rate of EVs λ_i is equal to the demand per hour at each demand node in Table 5, which can be obtained by averaging the daily demand to each hour. According to the coordinates of each candidate location and demand node, we use MATLAB to calculate the Euclidean distance between each candidate location and each demand node.

According to the price information provided by NIO, if the customer who is a NIO car owner has not applied for the “Energy Worry-Free” package, the unit price

Table 2 Data setting for the case study

Parameter	Value
Number of charging station candidate locations	15
Number of selected charging station locations	8
Number of demand nodes	30
The construction cost of charging facilities at location $i: C_i$	Values are varied based on land price as summarized in Table 3
The average charging staff service fee charged per unit of distance between nodes: c	10 CNY/km
The number of demands at node $j: D_j$	Values are daily demand as summarized in Table 4
The average arrival rate of EVs at the fast charging station $i: \lambda_i$	Values are the demand per hour at each demand node as summarized in Table 5
The average service rate of one charging pile: μ	2/h
The number of charging piles constructed at one fast charging station: b	106
The distance between node $j \in J$ and node $i \in I: d_{ij}$	Values are Euclidean distances between nodes
The value of unit time: β	100 CNY/h

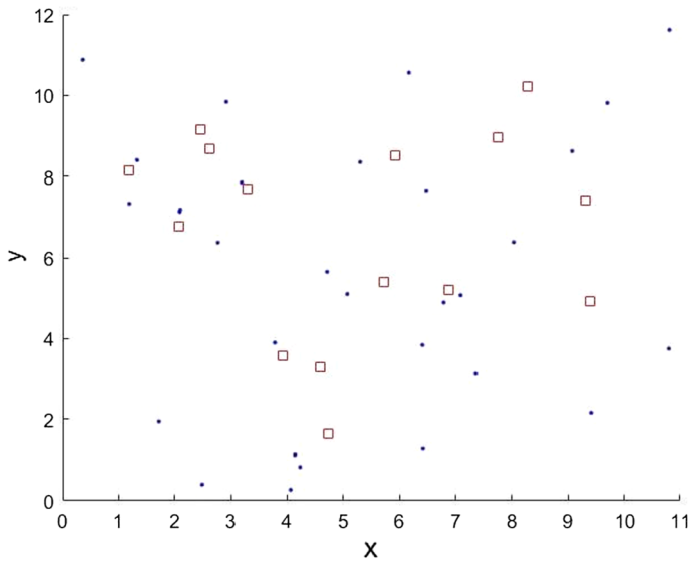


Fig. 5 Distribution simulation of demand nodes and candidate sites in Yangpu District, Shanghai

Table 3 Location and construction cost of candidate sites in Yangpu District, Shanghai

No. of potential site	X	Y	Destination area	Unit construction cost (CNY)	Total construction cost (CNY)
1	8.28	10.21	New Jiangwan Ronghui Court	3600	381,600
2	7.74	8.95	Champs Center	3700	392,200
3	2.08	6.77	Fudan University (Jiangwan New Campus)	3300	349,800
4	5.73	5.40	Capital of New Jiangwan City	3900	413,400
5	3.93	3.58	New Jiangwan City Times Garden	3600	381,600
6	5.92	8.52	Jiangwan Stadium	4100	434,600
7	4.59	3.29	Wujiaochang	4000	424,000
8	4.74	1.64	Yangpu District Government	3700	392,200
9	2.63	8.67	Obstetrics and Gynecology Hospital Affiliated to Fudan University	4000	424,000
10	3.30	7.71	Yin Xing	3400	360,400
11	1.18	8.15	Shiguang	3200	339,200
12	9.31	7.42	Huangxing Park	3300	349,800
13	6.88	5.19	Yangpu Park	3200	339,200
14	9.39	4.91	University of Shanghai for Science and Technology	3500	371,000
15	2.47	9.16	Yangpu District Central Hospital	3800	402,800

Table 4 Locations of demand nodes and associated total demands in Yangpu District, Shanghai

No. of demand node	X	Y	Number of demands	No. of demand node	X	Y	Number of demands
1	0.36	10.88	556	16	1.33	8.40	535
2	6.17	10.56	485	17	6.48	7.66	458
3	9.70	9.81	418	18	2.49	0.40	534
4	7.36	3.13	453	19	4.23	0.83	539
5	2.09	7.13	431	20	6.41	3.84	414
6	4.06	0.27	456	21	2.77	6.37	451
7	5.07	5.10	488	22	3.19	7.85	445
8	10.80	3.75	505	23	6.79	4.89	534
9	1.72	1.94	491	24	2.92	9.84	569
10	9.41	2.15	575	25	9.07	8.62	469
11	7.09	5.07	504	26	10.81	11.62	556
12	4.14	1.13	589	27	8.03	6.38	535
13	2.10	7.18	528	28	3.78	3.90	401
14	4.71	5.65	592	29	6.42	1.27	520
15	5.30	8.35	448	30	1.19	7.33	477

Table 5 Demand per hour at each demand node in Yangpu District, Shanghai

No. of demand node	Number of demands	No. of demand node	Number of demands
1	23	16	22
2	20	17	19
3	17	18	22
4	19	19	22
5	18	20	17
6	19	21	19
7	20	22	19
8	21	23	22
9	20	24	24
10	24	25	20
11	21	26	23
12	25	27	22
13	22	28	17
14	25	29	22
15	19	30	20

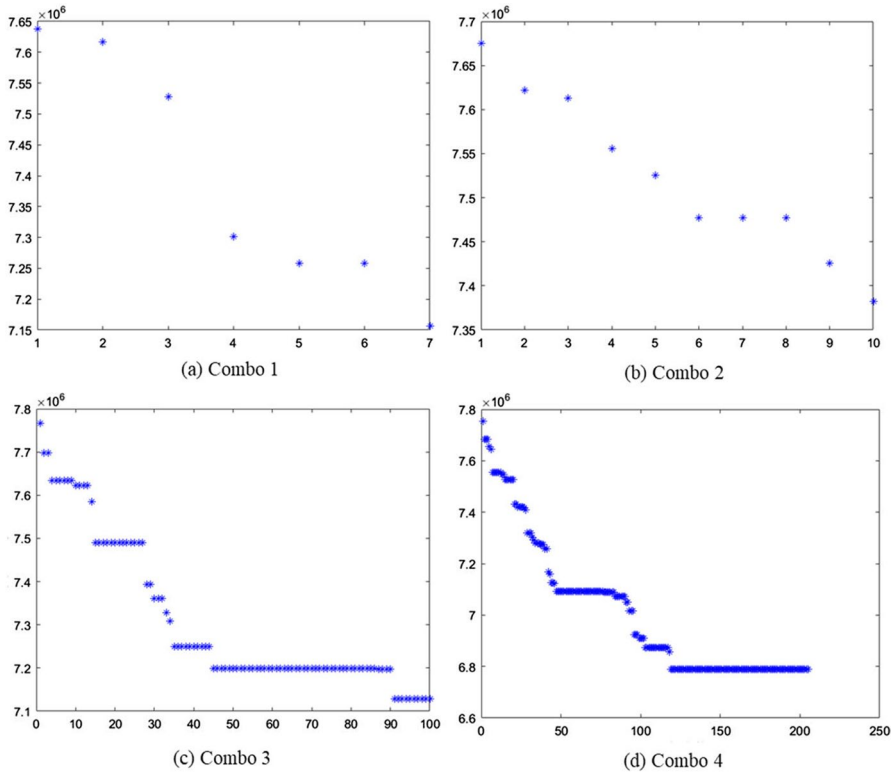


Fig. 6 Convergence of the proposed genetic algorithm

for enjoying the valet charging service is 180 CNY per time. Or if they apply for a package of 980 CNY, which includes 15 services per month, equivalent to 65.3 CNY per service. Non-NIO car owners can only purchase services in units of times, and each time of service costs 380 CNY. The service cost of the charging staff per kilometer between demand nodes and charging stations is 10 CNY/km. According to the average distance \bar{d}_{ij} between nodes and the average once service time of 118 min provided by NIO, we determine that the average service rate of one charging pile is $\mu=2$ per hour. According to the data provided in the document “Shanghai Electric Vehicle Charging Infrastructure Special Planning”, we can set that the quantity of charging piles built at a candidate location is $b=106$. The unit user time value is $\beta=100$ CNY/h.

4.2 Solution results

Based on the actual data and the real situation, we conduct numerical analysis to examine the effectiveness of the mathematical model and proposed methodology. We code the genetic algorithm designed in Sect. 3 in MATLAB. We set the fixed initial population size N to be 30, the maximum number of iterations to be 7, 10,

100 and 1000, respectively. The crossover probability p_c^1 and mutation probability p_m^1 of solving X_i are taken as 0.15 and 0.2, respectively. The crossover probability p_c^2 of solving f_{ji} is set as 0.95, 0.15. The mutation probability p_m^2 is set to be 0.35, 0.2 respectively. To investigate how different parameter combinations impact the performance of the designed genetic algorithm, we design test instances under the above-mentioned different parameter combinations. All numerical experiments are run on a personal computer with Intel Core i7-7500U CPU 2.70 GHz and 4 GB memory. Figure 6 illustrates the convergence of the optimal fitness value obtained by the genetic algorithm with the increase of the number of iterations under different parameter combinations (hereafter referred to as Combo). Table 6 summarizes the optimal objective values generated from genetic algorithm under different parameter Combos.

We can conclude from the solution results of different parameter Combos that the number of evolution generation has a great impact on the algorithm optimization performance. With the increase of the evolution generations, the optimal objective value tends to decrease gradually and the algorithm performs better. Under parameter Combo 4, the obtained solution quality is the best with the minimal optimal objective value. The optimal charging station location scheme is to build the charging stations in serial numbers 10, 11, 7, 13, 8, 5, 3, and 4, and the associated target areas are Yinhang, Shiguang, Wujiaochang, Yangpu Park, Yangpu District Government, and New Jiangwan City Times Garden, Fudan University (Jiangwan New Campus), New Jiangwan City Capital. The demand ratio of each demand node allocated to each charging station is presented as the following Table 7. The solution can ensure that all the demands of each demand node among the 30 demand nodes are fully satisfied.

Table 6 Comparison results of the solution performances under different parameter combinations

Combo	N	p_c^1	p_m^1	p_c^2	p_m^2	Maximum number of iterations	Objective values (10^6)
1	30	0.15	0.2	0.95	0.35	7	7.1567
2	30	0.15	0.2	0.15	0.2	10	7.3822
3	30	0.15	0.2	0.15	0.2	100	7.1293
4	30	0.15	0.2	0.15	0.2	1000	6.7905

4.3 Sensitivity analysis

In this section, we investigate the impact of key parameters, including charging demand level, charging capacity (e.g., the number of charging piles to be built for each charging station), and value of time, on planning decision and system cost. Different scenarios are generated by varying the key parameters based on basic value.

Table 7 The solution result of demand allocation ratio

Demand node	Decisions of the charging station locations							
	10	11	7	13	8	5	3	4
1	0.19	0.04	0.32	0.23	0.05	0.30	0.18	0.12
2	0.14	0.04	0.19	0.32	0.03	0.35	0.15	0.12
3	0.14	0.04	0.29	0.21	0.05	0.35	0.15	0.12
4	0.14	0.04	0.32	0.23	0.05	0.29	0.15	0.12
5	0.22	0.03	0.21	0.15	0.03	0.17	0.37	0.30
6	0.14	0.03	0.21	0.11	0.23	0.35	0.15	0.12
7	0.14	0.04	0.19	0.32	0.03	0.35	0.15	0.12
8	0.14	0.04	0.29	0.21	0.05	0.35	0.15	0.12
9	0.14	0.04	0.32	0.23	0.05	0.29	0.15	0.12
10	0.14	0.04	0.29	0.21	0.05	0.35	0.15	0.12
11	0.14	0.04	0.19	0.32	0.03	0.35	0.15	0.12
12	0.14	0.03	0.21	0.11	0.23	0.35	0.15	0.12
13	0.14	0.20	0.20	0.14	0.03	0.35	0.15	0.12
14	0.14	0.04	0.29	0.21	0.05	0.35	0.15	0.12
15	0.14	0.16	0.25	0.18	0.04	0.29	0.15	0.12
16	0.14	0.04	0.29	0.21	0.05	0.35	0.15	0.12
17	0.14	0.15	0.23	0.16	0.04	0.35	0.15	0.12
18	0.14	0.03	0.26	0.18	0.04	0.41	0.15	0.12
19	0.14	0.03	0.21	0.11	0.23	0.35	0.15	0.12
20	0.14	0.04	0.29	0.21	0.05	0.35	0.15	0.12
21	0.14	0.03	0.18	0.10	0.21	0.41	0.15	0.12
22	0.14	0.04	0.29	0.21	0.05	0.35	0.15	0.12
23	0.14	0.04	0.29	0.21	0.05	0.35	0.15	0.12
24	0.14	0.13	0.20	0.15	0.03	0.41	0.15	0.12
25	0.14	0.03	0.21	0.11	0.23	0.35	0.15	0.12
26	0.14	0.04	0.21	0.35	0.03	0.29	0.15	0.12
27	0.14	0.04	0.29	0.21	0.05	0.35	0.15	0.12
28	0.14	0.03	0.21	0.11	0.23	0.35	0.15	0.12
29	0.14	0.04	0.29	0.21	0.05	0.35	0.15	0.12
30	0.14	0.03	0.26	0.18	0.04	0.41	0.15	0.12

Table 8 Results under different charging demands

Scenario	Demand (EVs/h)	Overall cost (10^6 CNY)
1	Basic demand level	3.4107
2	Double the basic demand level	4.6866
3	Four times of the basic demand level	15.373

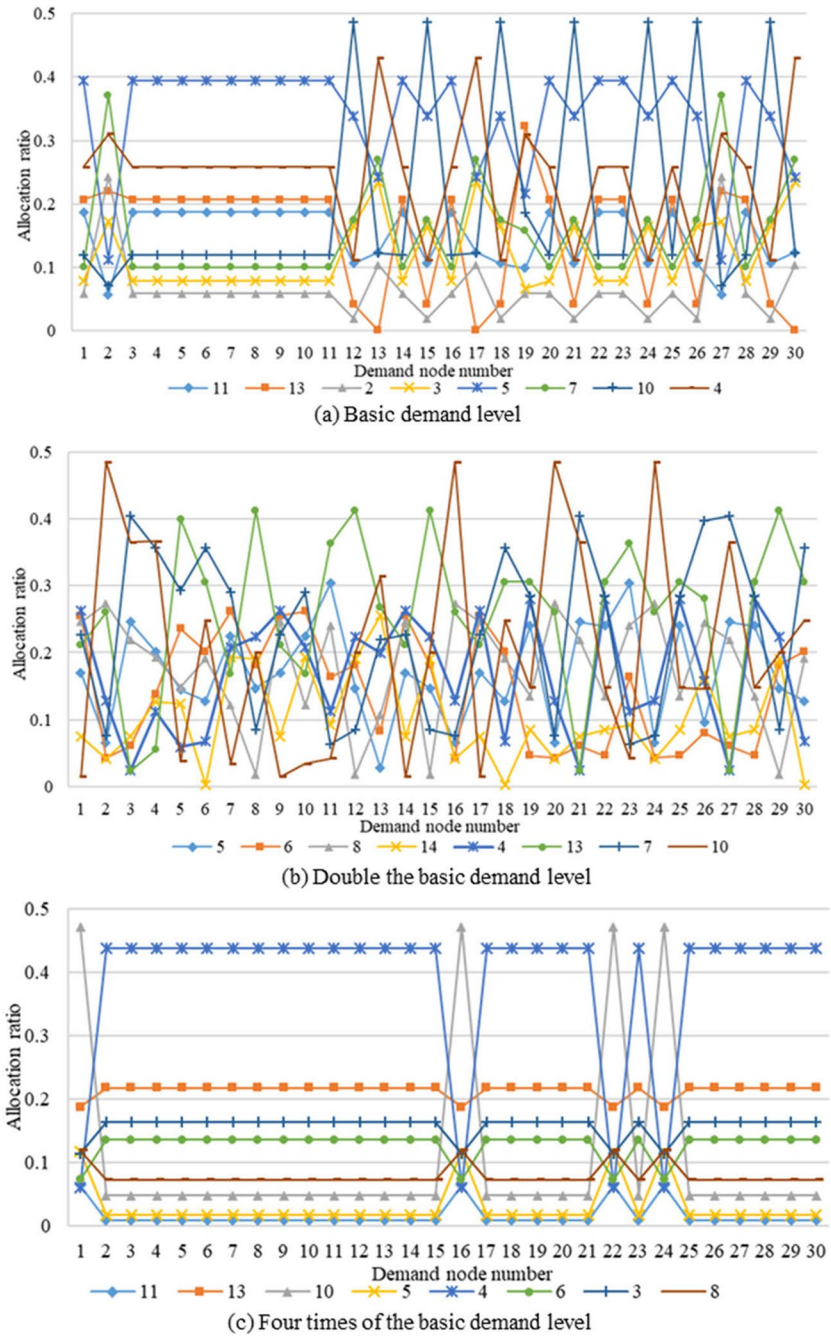


Fig. 7 Results of demand allocation ratio under **a** Basic demand level, **b** Double the basic demand level, **c** Four times of the basic demand level

(1) Charging demand level.

The current customer demand is set based on a conservative estimation that may not accurately represent the reality. In particular, with the development of battery charging and swapping technology and the improvement of charging facilities, the volume of electric vehicle users will continue to grow. Table 8 illustrates the impact of customer demand level on the overall cost. When customer demand is set to the double- and four-times quantity of the basic value, the overall cost increases 1.2759 (10^6 CNY), and 11.9623 (10^6 CNY), respectively. Figure 7 visualizes the charging station location and allocation decisions under different demand levels. If the demand level increases, then half of the locations of the selected charging stations remain unchanged, with location number 4, 5, 10, and 13. The other half of the number of charging stations to be built has a change in siting decision. Demand allocation decisions have undergone major changes. The results clearly demonstrate that the charging station location and allocation decisions under the valet charging service are highly sensitive to the demand level.

(B) Charging capacity.

Table 9 indicates the impact of the number of charging piles to be built for each charging station on the charging station location decisions and the overall system cost under the valet charging service. To run the experiments, we set the number of charging piles per charging station to 53 (half of the basic level) and 159 (1.5 times of the basic value). The results in Table 9 reveal that the charging station locations with number 3, 4, 5, 7, 10, 13 are always selected to be constructed, as the number of charging piles to be built in each charging station increases. The overall system cost is much more sensitive to the number of charging piles. For instance, when the number of charging piles increases from 53 to 159, the the overall cost increases approximately 2.8185 (10^6 CNY), and 7.2869 (10^6 CNY), respectively. For presentation brevity, we do not list the demand allocation decisions here. This experiment shows that demand allocation decisions are also susceptible to the variabilities of the number of charging piles.

Table 9 Results under different charging capacities

Scenario	Number of charging piles per charging station	Overall cost (10^6 CNY)	Charging station location decisions
1 Half of the basic value	53	0.5922	10, 13, 2, 6, 7, 4, 5, 3
2 Basic value	106	3.4107	11, 13, 2, 3, 5, 7, 10, 4
3 1.5 times of the basic value	159	7.8791	7, 13, 10, 4, 11, 15, 5, 3

Table 10 Results under different value of time

Scenario	Value of time (CNY/h)	Overall cost (10 ⁶ CNY)	Charging station location decisions
1 Basic value	100	3.4107	11, 13, 2, 3, 5, 7, 10, 4
2 1.5 times of the basic value	150	5.3606	6, 4, 10, 7, 13, 3, 11, 5
3 2 times of the basic value	200	9.4717	11, 5, 13, 6, 3, 10, 14, 4

(C) Value of time.

We conduct the final set of experiments to investigate the impact of the value of time on the charging station location and allocation decisions and the overall cost. To generate the instances, we change the value of time to 150 and 200 CNY/h, respectively, while the other parameters are kept fixed to their basic values. The experimental results indicate the demand allocation decisions and the overall cost are much more sensitive to the value of time than charging station location to that. For instance, when the value of time increases from low to high values, the overall system cost increase 1.9499 and 6.061, respectively, while 6 of the 8 charging station locations selected for construction remain unchanged with charging station location number 3, 4, 5, 7, 10, 13 (see Table 10).

4.4 Discussions

This study's main contribution is to use an improved genetic algorithm to locate charging stations and allocate demands for valet charging service by taking charging wait times and staff travel costs into account. This study lays the groundwork for intelligent transportation while promoting the use of EVs. We give company employees the smart decision-making tools and effective deployment plans they need to perform valet charging services. However, the model simplifies some practical issues when interpreting the findings and drawing to conclusions. There are many possible directions for future research on the decision model. First, the routes planning problem can be optimized jointly when multiple charging staffs are providing services simultaneously. Other potential costs, such as maintenance cost of charging infrastructures and electricity prices, can be incorporated into the decision model and can fully evaluate the operational cost. Another extension to our model pertains to considering the environmental impact of the valet charging service. According to the remaining mileage of the vehicle, the surrounding charging resources and the grid load, using the model to make the optimal decision to dispatch orders for the charging staffs, and to plan the optimal charging strategy (determining specified charging time to achieve the purpose of peak-shaving and valley-filling, and planning the shortest route), to help save energy and reduce emissions. Second, the paper assumes that each link's travel time and each node's charging demand are known and deterministic, while in reality, traffic congestion may make the travel time uncertain. The stochastic charging demand and travel time of charging staff can be considered in the model to portray EV customers' demands and travel costs more accurately.

It is helpful to develop multi-period deployment models with random demand since it might not be possible to finish building charging stations quickly due to a variety of reasons, involving the restricted budget and the current low level of demand. Third, the proposed valet charging service could be compared with other alternative solutions (e.g., conventional self-charging approaches, battery swapping mode, etc.) to fully evaluate its advantages, limitations, and cost-effectiveness. Such comparisons would contribute to the broader discussion on the future of EV charging infrastructure. Another perspective of this research is to model user acceptance and behavioral considerations. Investigating user acceptance, preferences, and behavioral aspects of the valet charging service and how to adopt this service could provide valuable insights for further improvement and refinement. The user preferences or choices for different charging approaches, such as valet charging, self-charging, and battery swapping, can be set to be exogenous with fixed proportions of different types of users. The user preferences or choices can also be regarded endogenous. In this way, the utility functions and choice model of users for different charging approaches can be incorporated into the model.

Exploring other advanced optimization algorithms (e.g., new types of hybrid heuristics and metaheuristics, adaptive algorithms, self-adaptive algorithms, island algorithms, polyploid algorithms, etc.) to solve the charging stations location and allocation problem for valet charging service addressed in this study remains an open problem. The aforementioned different types of advanced optimization algorithms have been applied as solution approaches in many different domains such as online learning, scheduling, multi-objective optimization, transportation, medicine, data classification, and others. Many researchers have proved the effectiveness of the proposed advanced optimization algorithms in the applications of aforementioned fields, especially for the more realistic large-scale problems. Zhao and Zhang (2020) proposed a learning-based algorithm that can learn to adjust strategies based on the problem features. In the case of multi-objective optimization, the proposed algorithm was found superior to compared algorithms on most of the test cases. Dulebenets (2021) explored a new Adaptive Polyploid Memetic Algorithm for the trucks scheduling of at the cross-docking terminal. The results had proved the better effectiveness of the proposed algorithm compared to the well-known state-of-the-art metaheuristics. Gholizadeh et al. (2021) proposed a scenario-based genetic algorithm for the flexible flowshop scheduling and showed its superiority over an exact optimization method and a canonical genetic algorithm. For the berth scheduling in marine container terminals, Dulebenets (2017) and Kavooosi et al. (2019) developed a novel memetic algorithm and an island-based metaheuristic algorithm, respectively. The results in Dulebenets (2017) showed that the performance of the developed memetic algorithm was better than the results reported by previous berth scheduling literature using a memetic algorithm that does not apply the deterministic parameter control strategy, typical evolutionary algorithm, simulated annealing and variable neighborhood search. Kavooosi et al. (2019) found the proposed algorithm outperformed evolutionary algorithm, particle swarm optimization, estimation of distribution algorithm and differential evolution conducted in isolation, and other metaheuristic algorithms including variable neighborhood search, tabu search and simulated annealing. Rabbani et al. (2022) developed Non-dominated Sorting Genetic Algorithm II and Multi-Objective Particle Swarm Optimization which can solve the ambulance routing problem in a short time. Even with the acquisition of

high-quality solutions, exact methodologies can be very time-consuming for practical applications. Advanced optimization algorithms (including heuristics, hybrid heuristics, metaheuristics, etc.) are of great importance for real-world large-scale problems to obtain satisfactory solutions in a quite shorter computational time as compared to exact methods. In previous literature, a variety of advanced optimization algorithms have been applied to address EV charging stations planning problem, such as genetic based algorithm (Li et al. 2016b; Tu et al. 2016), hybrid heuristic (composed of the modified Sweep heuristic, the Iterated Greedy, and the Adaptive Large Neighborhood Search algorithm in Aghalari et al. 2023; combining of Clarke and Wright saving algorithm, an iterative greedy algorithm, and an adaptive large neighborhood search with simulated annealing in Guo et al. 2022), neighborhood search heuristic (Wang et al. 2019), etc. Future research extensions may be to develop other new advanced optimization approaches such as hybrid heuristic for the decision problem addressed in this study and to conduct performance comparison of the developed improved genetic algorithm against these algorithms.

5 Conclusion

This study examines how to deploy charging stations and allocate the charging demands of the valet charging service optimally. We develop a mixed-integer non-linear program considering the characteristic of valet charging service. Based the queueing theory, we formulate the charging queueing system as queueing system, and the average charging waiting time is derived. The charging facilities construction cost (i.e., the charging piles construction cost) and service cost of charging staff (i.e., the cost of road service, round-trip time and charging waiting time) are balanced. We propose an improved heuristic using a genetic algorithm framework as the foundation to find superior station deployment and allocation plans efficiently. Numerical studies are conducted to examine the effectiveness of the proposed improved genetic algorithm in the Yangpu District of Shanghai, China. The results indicate that the modeling formulation and solution heuristic can converge efficiently and generate satisfactory deployment plans. It is necessary to conduct additional research to consider the practical limitations such as uncertainty and routes planning.

Acknowledgements This work was funded by National Natural Science Foundation of China (Grant No. 52275499), and the National Key Research and Development Program of China (No. 2022YFF0605700). Meanwhile, the authors would like to sincerely appreciate the editors and reviewers for their careful work and valuable suggestions, which significantly improved the quality of this paper.

Declarations

Conflict of interest No potential conflict of interest was reported by the author(s).

References

Asamer J, Reinthaler M, Ruthmair M, Straub M, Puchinger J (2016) Optimizing charging station locations for urban taxi providers. *Transp Res Pt A-Policy Pract* 85:233–246

- Aghalari A, Salamah D, Kabli M, Marufuzzaman M (2023) A two-stage stochastic location-routing problem for electric vehicles fast charging. *Comput Oper Res* 106:286
- Brandstätter G, Kahr M, Leitner M (2017) Determining optimal locations for charging stations of electric car-sharing systems under stochastic demand. *Transp Res Pt B-Methodol* 104:17–35
- Bao Z, Xie C (2021) Optimal station locations for en-route charging of electric vehicles in congested intercity networks: a new problem formulation and exact and approximate partitioning algorithms. *Transp Res Pt C-Emerg Technol* 133:103447
- Cavadas J, de Almeida Correia GH, Gouveia J (2015) A MIP model for locating slow-charging stations for electric vehicles in urban areas accounting for driver tours. *Transp Res Pt E-Logist Transp Rev* 75:188–201
- Chen Z, He F, Yin Y (2016) Optimal deployment of charging lanes for electric vehicles in transportation networks. *Transp Res Pt B-Methodol* 91:344–365
- Chen H, Jia Y, Hu Z, Wu G, Shen ZJM (2017) Data-driven planning of plug-in hybrid electric taxi charging stations in urban environments: a case in the central area of Beijing. In: 2017 IEEE PES Innovative Smart Grid Technol. Conf. Europe, pp 1–6.
- Cocca M, Giordano D, Mellia M, Vassio L (2019a) Free floating electric car sharing: a data driven approach for system design. *IEEE Trans Intell Transp Syst* 20(12):4691–4703
- Cocca M, Giordano D, Mellia M, Vassio L (2019b) Free floating electric car sharing design: data driven optimisation. *Pervasive Mob Comput* 55:59–75
- Chung SH, Kwon C (2015) Multi-period planning for electric car charging station locations: a case of Korean Expressways. *Eur J Oper Res* 242(2):677–687
- Dong J, Liu C, Lin Z (2014) Charging infrastructure planning for promoting battery electric vehicles: An activity-based approach using multiday travel data. *Transp Res Pt C-Emerg Technol* 38:44–55
- Dulebenets MA (2021) An adaptive polyploid memetic algorithm for scheduling trucks at a cross-docking terminal. *Inf Sci* 565:390–421
- Dulebenets MA (2017) A novel memetic algorithm with a deterministic parameter control for efficient berth scheduling at marine container terminals. *Marit Bus Rev* 2(4):302–330
- Faustino FJ, Lopes JC, Melo JD, Sousa T, Padilha-Feltrin A, Brito JA, Garcia CO (2023) Identifying charging zones to allocate public charging stations for electric vehicles. *Energy* 128436
- Guo F, Zhang J, Huang Z, Huang W (2022) Simultaneous charging station location-routing problem for electric vehicles: effect of nonlinear partial charging and battery degradation. *Energy* 250:123724
- Gholizadeh H, Fazlollahtabar H, Fathollahi-Fard AM, Dulebenets MA (2021) Preventive maintenance for the flexible flowshop scheduling under uncertainty: A waste-to-energy system. *Environ Sci Pollut Res*, pp 1–20.
- He F, Yin Y, Zhou J (2015) Deploying public charging stations for electric vehicles on urban road networks. *Transp Res Pt C-Emerg Technol* 60:227–240
- Hof J, Schneider M, Goeke D (2017) Solving the battery swap station location-routing problem with capacitated electric vehicles using an AVNS algorithm for vehicle-routing problems with intermediate stops. *Transp Res Pt B-Methodol* 97:102–112
- Hua Y, Zhao D, Wang X, Li X (2019) Joint infrastructure planning and fleet management for one-way electric car sharing under time-varying uncertain demand. *Transp Res Pt B-Methodol* 128:185–206
- Huang Y, Li S, Qian ZS (2015) Optimal deployment of alternative fueling stations on transportation networks considering deviation paths. *Netw Spat Econ* 15:183–204
- Huanqiu (2022) Tesla: More than 1,200 super charging stations have been built and opened in mainland China. Website of Huanqiu.
- Kim JG, Kuby M (2012) The deviation-flow refueling location model for optimizing a network of refueling stations. *Int J Hydrog Energy* 37(6):5406–5420
- Kim JG, Kuby M (2013) A network transformation heuristic approach for the deviation flow refueling location model. *Comput Oper Res* 40(4):1122–1131
- Kunith A, Mendelevitch R, Goehlich D (2017) Electrification of a city bus network—an optimization model for cost-effective placing of charging infrastructure and battery sizing of fast-charging electric bus systems. *Int J Sustain Transp* 11(10):707–720
- Kłos MJ, Sierpiński G (2023) Siting of electric vehicle charging stations method addressing area potential and increasing their accessibility. *J Transp Geogr* 109:103601
- Kumar N, Kumar T, Nema S, Thakur T (2022) A comprehensive planning framework for electric vehicles fast charging station assisted by solar and battery based on Queueing theory and non-dominated sorting genetic algorithm-II in a co-ordinated transportation and power network. *J Energy Storage* 49:104180

- Kavoosi M, Dulebenets MA, Abioye O, Pasha J, Theophilus O, Wang H, Kampmann R, Mikijeljević M (2019) Berth scheduling at marine container terminals: a universal island-based metaheuristic approach. *Marit Bus Rev* 5(1):30–66
- Li S, Huang Y, Mason SJ (2016a) A multi-period optimization model for the deployment of public electric vehicle charging stations on network. *Transp Res Pt C-Emerg Technol* 65:128–143
- Li X, Ma J, Cui J, Ghiasi A, Zhou F (2016b) Design framework of large-scale one-way electric vehicle sharing systems: a continuum approximation model. *Transp Res Pt B-Methodol* 88:21–45
- Li M, Jia Y, Shen Z, He F (2017) Improving the electrification rate of the vehicle miles traveled in Beijing: a data-driven approach. *Transp Res Pt A-Policy Pract* 97:106–120
- Li N, Jiang Y, Zhang ZH (2021) A two-stage ambiguous stochastic program for electric vehicle charging station location problem with valet charging service. *Transp Res Pt B-Methodol* 153:149–171
- Li Y, Wang J, Wang W, Liu C, Li Y (2023) Dynamic pricing based electric vehicle charging station location strategy using reinforcement learning. *Energy* 128284
- Lai Z, Li S (2022) On-demand valet charging for electric vehicles: economic equilibrium, infrastructure planning and regulatory incentives. *Transp Res Pt C-Emerg Technol* 140:103669
- Liu H, Wang DZ (2017) Locating multiple types of charging facilities for battery electric vehicles. *Transp Res Pt B-Methodol* 103:30–55
- Mahoor M, Hosseini ZS, Khodaei A (2019) Least-cost operation of a battery swapping station with random customer requests. *Energy* 172:913–921
- Mirchandani P, Adler J, Madsen OB (2014) New logistical issues in using electric vehicle fleets with battery exchange infrastructure. *Procedia Soc Behav Sci* 108:3–14
- Nio (2023) Respond at any time with valet charging, all-day service, no need to wait. Website of Nio.
- Ouyang X, Xu M (2022) Promoting green transportation under the belt and Road Initiative: Locating charging stations considering electric vehicle users' travel behavior. *Transp Policy* 116:58–80
- Rahman I, Vasant PM, Singh BSM, Abdullah-Al-Wadud M, Adnan N (2016) Review of recent trends in optimization techniques for plug-in hybrid, and electric vehicle charging infrastructures. *Renew Sust Energy Rev* 58:1039–1047
- Rogge M, Van der Hurk E, Larsen A, Sauer DU (2018) Electric bus fleet size and mix problem with optimization of charging infrastructure. *Appl Energy* 211:282–295
- Roni MS, Yi Z, Smart JG (2019) Optimal charging management and infrastructure planning for free-floating shared electric vehicles. *Transport Res Part D-Transport Environ* 76:155–175
- Rabbani M, Oladzad-Abbasabady N, Akbarian-Saravi N (2022) Ambulance routing in disaster response considering variable patient condition: NSGA-II and MOPSO algorithms. *J Ind Manag Optim* 18(2):1035–1062
- Shen ZJM, Feng B, Mao C, Ran L (2019) Optimization models for electric vehicle service operations: a literature review. *Transp Res Pt B-Methodol* 128:462–477
- Sun Z, Gao W, Li B, Wang L (2020) Locating charging stations for electric vehicles. *Transp Policy* 98:48–54
- Tu W, Li Q, Fang Z, Shaw SL, Zhou B, Chang X (2016) Optimizing the locations of electric taxi charging stations: a spatial-temporal demand coverage approach. *Transp Res Pt C-Emerg Technol* 65:172–189
- Varshosaz F, Moazzami M, Fani B, Siano P (2019) Day-ahead capacity estimation and power management of a charging station based on queuing theory. *IEEE Trans Ind Inform* 15(10):5561–5574
- Wu F, Sioshansi R (2017) A stochastic flow-capturing model to optimize the location of fast-charging stations with uncertain electric vehicle flows. *Transport Res Part D-Transport Environ* 53:354–376
- Wang H, Meng Q, Wang J, Zhao D (2021) An electric-vehicle corridor model in a dense city with applications to charging location and traffic management. *Transp Res Pt B-Methodol* 149:79–99
- Wang C, He F, Lin X, Shen ZJM, Li M (2019) Designing locations and capacities for charging stations to support intercity travel of electric vehicles: an expanded network approach. *Transp Res Pt C-Emerg Technol* 102:210–232
- Xi X, Sioshansi R, Marano V (2013) Simulation-optimization model for location of a public electric vehicle charging infrastructure. *Transport Res Part D-Transport Environ* 22:60–69
- Xiao D, An S, Cai H, Wang J, Cai H (2020) An optimization model for electric vehicle charging infrastructure planning considering queuing behavior with finite queue length. *J Energy Storage* 29:101317
- Yang J, Sun H (2015) Battery swap station location-routing problem with capacitated electric vehicles. *Comput Oper Res* 55:217–232

- Yang J, Guo F, Zhang M (2017a) Optimal planning of swapping/charging station network with customer satisfaction. *Transp Res Pt E-Logist Transp Rev* 103:174–197
- Yang J, Dong J, Hu L (2017b) A data-driven optimization-based approach for siting and sizing of electric taxi charging stations. *Transp Res Pt C-Emerg Technol* 77:462–477
- Zhang H, Hu Z, Xu Z, Song Y (2015) An integrated planning framework for different types of PEV charging facilities in urban area. *IEEE Trans Smart Grid* 7(5):2273–2284
- Zhang A, Kang JE, Kwon C (2017) Incorporating demand dynamics in multi-period capacitated fast-charging location planning for electric vehicles. *Transp Res Pt B-Methodol* 103:5–29
- Zhu ZH, Gao ZY, Zheng JF, Du HM (2016) Charging station location problem of plug-in electric vehicles. *J Transp Geogr* 52:11–22
- Zhao H, Zhang C (2020) An online-learning-based evolutionary many-objective algorithm. *Inf Sci* 509:1–21

Publisher's Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Springer Nature or its licensor (e.g. a society or other partner) holds exclusive rights to this article under a publishing agreement with the author(s) or other rightsholder(s); author self-archiving of the accepted manuscript version of this article is solely governed by the terms of such publishing agreement and applicable law.

Xiaoxiao Shen received the B.S. degree from College of Information Management, Nanjing Agricultural University, Nanjing, China, in 2019. She is currently pursuing the Ph.D. degree in mechanical engineering at Shanghai Jiao Tong University, Shanghai, China. Her current research interests include analysis, modeling, and decision-making optimization for operations management problems in manufacturing systems and service systems. Her technical specialties include mathematical modeling, stochastic optimization, exact optimization algorithm, intelligent optimization algorithm, statistical modeling analysis, and simulation optimization. She is a member of the Operations Research Society of China and a reviewer for *Computers & Industrial Engineering* journal.

Jun Lv received her Ph.D. in Shanghai University of Finance and Economics, and is currently associated professor in Faculty of Economics and Management at East China Normal University. Her research interests include sustainable development and operations research.

Shichang Du received the B.S. and M.S.E. degrees in mechanical engineering from the Hefei University of Technology, Hefei, China, in 2000 and 2003, respectively, and the Ph.D. degree in industrial engineering and management from Shanghai Jiao Tong University, Shanghai, China, in 2008. He was with the University of Michigan, Ann Arbor, MI, USA, from 2006 to 2007, as a Visiting Scholar. He is currently a Professor with the Department of Industrial Engineering and Management, Shanghai Jiao Tong University. He has authored/co-authored 70 papers in journals, including the *ASME Journal of Manufacturing Science* and *IEEE Transactions on Instrumentation and Measurement*. His current research interests include quality engineering, including quality control with analysis of variation flow, monitoring, and diagnosis of manufacturing process by support vector machine and Bayesian. Dr. Du's research has been supported by the National Natural Science Foundation of China, the Ministry of Science and Technology of China, and the Shanghai Association for Science and Technology. Dr. Du is currently the Area Editor of *Computers & Industrial Engineering* and the Associate Editor of *Flexible Services and Manufacturing Journal*.

Yafei Deng is a Ph.D. student in Department of Industrial Engineering and Management at Shanghai Jiao Tong University. His primary research focuses on hybrid model and data-driven model for prognostics and health management, condition monitoring, and intelligent fault diagnosis.

Molin Liu is a postgraduate in Department of Industrial Engineering and Management at Shanghai Jiao Tong University. His primary research focuses on operations research in manufacturing system.

Yulu Zhou is a postgraduate student in Department of Industrial Engineering and Management at Shanghai Jiao Tong University. She currently works on optimisation of flexible job shop scheduling problem.

Authors and Affiliations

Xiaoxiao Shen^{1,2} · Jun Lv³ · Shichang Du¹  · Yafei Deng¹ · Molin Liu¹ · Yulu Zhou¹

✉ Shichang Du
lovbin@sjtu.edu.cn

Xiaoxiao Shen
sjtusxx98@sjtu.edu.cn

Jun Lv
jlv@dbm.ecnu.edu.cn

Yafei Deng
phoenixdyf@sjtu.edu.cn

Molin Liu
toujours.molin@sjtu.edu.cn

Yulu Zhou
yuluzhou@sjtu.edu.cn

¹ Department of Industrial Engineering and Management, School of Mechanical Engineering, Shanghai Jiao Tong University, Shanghai, China

² Department of Mechanical Engineering, Politecnico di Milano, Milan, Italy

³ Faculty of Economics and Management, East China Normal University, Shanghai, China