

A Mass-Conservative Characteristic Finite Element Scheme for Convection-Diffusion Problems

Hongxing Rui · Masahisa Tabata

Received: 29 April 2008 / Revised: 31 January 2009 / Accepted: 20 February 2009 /

Published online: 5 March 2009

© Springer Science+Business Media, LLC 2009

Abstract We develop a mass-conservative characteristic finite element scheme for convection diffusion problems. This scheme preserves the mass balance identity. It is proved that the scheme is essentially unconditionally stable and convergent with first order in time increment and k -th order in element size when the P_k element is employed. Some numerical examples are presented to show the efficiency of the present scheme.

Keywords Method of characteristics · Mass-conservation · Convection-diffusion · Finite element · Error estimates

1 Introduction

Convection-diffusion problems are solved in various fields of sciences and technologies, e.g., transport problems of heat and solutes in moving fluids. In many applications the Péclet number is high, so the problems become convection dominant. In such circumstances the Galerkin finite element scheme produces easily oscillation solutions. Hence, elaborate numerical schemes based on new ideas such as upwind method, Petrov-Galerkin methods and characteristic(-curve) methods have been developed to perform stable computation. Among them the procedure of the characteristic method is natural from the physical point of view since it approximates particle movements, and it is attractive from the mathematical point of view since it symmetrizes the problem. Many authors have contributed to develop, analyse and apply characteristic finite element schemes; see [1, 3, 6–8, 13–16, 21] and references therein.

An important property that the convection-diffusion problems possess is the mass balance; the mass should be preserved if there is no source. In the framework of characteristic

H. Rui (✉)
School of Mathematics, Shandong University, Jinan, 250100, China
e-mail: hxrui@sdu.edu.cn

M. Tabata
Faculty of Mathematics, Kyushu University, Hakozaki, Higashi-ku, Fukuoka, 812-8581, Japan
e-mail: tabata@math.kyushu-u.ac.jp

methods it is not trivial to maintain this property. Some schemes have been proposed and studied from this point [1, 6, 8, 21].

In this paper we present a new characteristic finite element scheme which preserves the mass balance. Our approach is different from those taken in the previous study. Usually the characteristic method is used to approximate the material derivative term, i.e., the time derivative term plus the convection term of non-divergence form. We do not assume the velocity is incompressible. We use the divergence form and we approximate directly the time derivative term plus the divergence term (Lemma 1). Thus, it is proved that the mass balance is satisfied completely. When the equation is of divergence form like the density equation in the compressible flow field, the mass balance remains true whether the velocity is incompressible or not. Our result corresponds to it. We prove the stability and convergence with first order in time increment and k -th order in element size when the P_k element is employed.

We use the Sobolev spaces $L^2(\Omega)$ and $H^m(\Omega)$, $m \geq 1$, with norms denoted by $\|\cdot\|$ and $\|\cdot\|_m$, respectively. We also use the Sobolev space $W^{m,\infty}(\Omega)$. We use the function spaces $H^m(X) = H^m((0, T); X)$ and $C^m(X) = C^m([0, T]; X)$ for positive number T and Banach space X , whose norms are denoted by $\|\cdot\|_{H^m(X)}$ and $\|\cdot\|_{C^m(X)}$, respectively. We often omit $(0, T)$ and Ω if there is no confusion, e.g., we write $C^j(H^m)$ in place of $C^j([0, T]; H^m(\Omega))$. The symbol (\cdot, \cdot) is used for the inner products in both $L^2(\Omega)$ and $L^2(\Omega)^d$, $d = 2, 3$. We use c (with or without subscript) to denote a generic constant independent of discretization parameters h , Δt , and solutions, which can take different values at each occurrence.

The remainder of this paper is organized as follows. In Sect. 2 we present the mass-conservative characteristic finite element scheme and show the mass balance identity. In Sect. 3 we analyze the stability and prove the convergence. In Sect. 4 we give two numerical examples. After stating the conclusion, in Appendix we review two upwind finite element schemes referred in Sect. 2. The behavior of numerical solutions is also discussed when Péclet number increases.

2 A Mass-Conservative Characteristic Finite Element Scheme

Let Ω be a bounded domain in \mathbb{R}^d ($d = 2, 3$) with piecewise smooth boundary Γ , and T be a positive constant. We consider the convection-diffusion operator

$$\mathcal{L}\phi \equiv \frac{\partial \phi}{\partial t} + \nabla \cdot (u\phi - v\nabla\phi) \equiv \frac{\partial \phi}{\partial t} + u \cdot \nabla\phi + (\nabla \cdot u)\phi - v\Delta\phi, \quad (1)$$

where $v > 0$ is a diffusion coefficient and $u : \Omega \times [0, T] \rightarrow \mathbb{R}^d$ is a given velocity. We do not assume that the velocity u is incompressible. Let L be a representative length of the domain. When the Péclet number $\text{Pe} \equiv |u|L/v$ is high, For the remedy we focus on schemes based on the method of characteristics.

An important property of the operator \mathcal{L} is the mass-conservation. To describe it we consider the following initial boundary value problem; find $\phi : \Omega \times (0, T] \rightarrow \mathbb{R}$ such that

$$\mathcal{L}\phi = f \quad \text{in } \Omega \times (0, T], \quad (2a)$$

$$v \frac{\partial \phi}{\partial n} - \phi u \cdot n = g \quad \text{on } \Gamma \times (0, T], \quad (2b)$$

$$\phi(\cdot, 0) = \phi^0 \quad \text{in } \Omega, \quad (2c)$$

where $f : \Omega \times (0, T] \rightarrow \mathbb{R}$, $g : \Gamma \times (0, T] \rightarrow \mathbb{R}$, and $\phi^0 : \Omega \rightarrow \mathbb{R}$ are given functions. Let $V = H^1(\Omega)$. A corresponding weak formulation to (2) is to find $\phi : [0, T] \rightarrow V$ such that

$$\left(\frac{\partial \phi}{\partial t}(t), \psi \right) + a_1(\phi(t), \psi; u(t)) + a_0(\phi(t), \psi) = (f(t), \psi) + [g(t), \psi], \quad \forall \psi \in V, \quad (3a)$$

$$\phi(0) = \phi^0, \quad (3b)$$

where

$$\begin{aligned} a_1(\phi, \psi; u) &= -(\phi, u \cdot \nabla \psi), & a_0(\phi, \psi) &= v(\nabla \phi, \nabla \psi), \\ [\phi, \psi] &= \int_{\Gamma} \phi \psi ds. \end{aligned} \quad (4)$$

Substituting $\psi = 1$ in (3a), we can easily derive the mass balance identity for $t \in (0, T]$

$$\int_{\Omega} \phi(x, t) dx = \int_{\Omega} \phi^0(x) dx + \int_0^t dt \int_{\Omega} f(x, t) dx + \int_0^t dt \int_{\Gamma} g(x, t) ds. \quad (5)$$

This property is preserved for the conventional Galerkin finite element method as follows. Let V_h be a finite-dimensional subspace of V and Δt be a time increment. We set $N_T = \lfloor T/\Delta t \rfloor$. Let ϕ_h be the solution of the problem; find $\{\phi_h^n\}_{n=1}^{N_T} \subset V_h$ such that for $n = 1, \dots, N_T$,

$$\left(\frac{\phi_h^n - \phi_h^{n-1}}{\Delta t}, \psi_h \right) + a_1(\phi_h^n, \psi_h; u^n) + a_0(\phi_h^n, \psi_h) = (f^n, \psi_h) + [g^n, \psi_h], \quad \forall \psi_h \in V_h, \quad (6)$$

where $\phi_h^0 \in V_h$ is an approximation to ϕ^0 and the super-script n of u , f and g means that the functions are evaluated at $t = n\Delta t$. Substituting $\psi_h = 1$ in (6) and summing it up from $n = 1$ until m , we get for $m = 1, \dots, N_T$

$$\int_{\Omega} \phi_h^m dx = \int_{\Omega} \phi_h^0 dx + \Delta t \sum_{n=1}^m \left(\int_{\Omega} f^n dx + \int_{\Gamma} g^n ds \right). \quad (7)$$

This property, however, does not hold for upwind approximations which modify the convection term $u \cdot \nabla \phi$, e.g., the upwind element choice approximation (36), which corresponds to the upwind finite differencing on the triangular mesh. To realize (7) in the framework of upwind approximations has been done by a mass-conservative upwind finite element method [2], where upwind modification is done for the term $-(\phi, u \cdot \nabla \psi)$. In Appendix we review the ideas of these two approximations.

On the other hand, numerical schemes based on Petrov-Galerkin approximation satisfy (7). In the streamline upwind Petrov-Galerkin method we substitute $\psi_h + \tau u(t) \cdot \nabla \psi_h$ into ψ_h elementwise in (6) or a similar equation to it, where τ is a positive parameter of element size order [4, 11]. Therefore, by setting $\psi_h = 1$, the identity (7) is obtained.

Characteristic methods are usually derived from the approximation of material derivative

$$\mathcal{L}_0 \phi \equiv \frac{\partial \phi}{\partial t} + u \cdot \nabla \phi. \quad (8)$$

They are applicable to convection-dominated, or even purely hyperbolic problems and have an advantage that derived matrices are always symmetric. To the best of our knowledge,

however, there are no characteristic schemes which satisfy (7), a discrete version of the mass balance identity (5). Our idea is to apply the characteristic approximation to the term

$$\mathcal{L}_1 \phi \equiv \frac{\partial \phi}{\partial t} + u \cdot \nabla \phi + (\nabla \cdot u) \phi, \quad (9)$$

but not to the term (8). The present scheme we show below is proved to satisfy (7).

We assume that the velocity u has the following regularity and vanishes on the boundary. The latter assumption leads to Proposition 1 below, which makes the argument simple and clear.

Hypothesis 1 The velocity u satisfies

$$u \in C^0([0, T]; W^{1,\infty}(\Omega)), \quad u = 0 \text{ on } \partial\Omega.$$

Let $X: (0, T] \rightarrow \mathbb{R}^d$ be a solution of the ordinary differential equation,

$$\frac{dX}{dt} = u(X, t).$$

Then, we can write (8) as

$$(\mathcal{L}_0 \phi)(X(t), t) = \frac{d}{dt} \phi(X(t), t).$$

We set $t^n = n\Delta t$ for $n \in \mathbb{Z}$. Subject to an initial condition $X(t^n) = x$ we get an approximate value of X at t^{n-1} by the Euler method,

$$X_1^n(x) = x - u^n(x)\Delta t. \quad (10)$$

The following result has been proved in [15].

Proposition 1 Under Hypothesis 1 and

$$\Delta t < 1/\|u\|_{C^0(W^{1,\infty})}, \quad (11)$$

it holds

$$X_1^n(\Omega) = \Omega. \quad (12)$$

Let $\mathcal{T}_h \equiv \{K\}$ be a partition of $\bar{\Omega}$ by elements K , h be the maximum diameter, and $V_h \subset H^1(\Omega)$ be a finite element space. In the sequel, we assume that the domain Ω is polygonal, which leads to $\bigcup\{K; K \in \mathcal{T}_h\} = \bar{\Omega}$.

The mass-conservative characteristic (MCC) finite element scheme we propose reads as follows; find $\{\phi_h^n\}_{n=1}^{N_T} \subset V_h$ such that for $n = 1, \dots, N_T$,

$$\left(\frac{\phi_h^n - \phi_h^{n-1} \circ X_1^n \gamma^n}{\Delta t}, \psi_h \right) + \nu(\nabla \phi_h^n, \nabla \psi_h) = (f^n, \psi_h) + [g^n, \psi_h], \quad \forall \psi_h \in V_h, \quad (13)$$

where $\phi_h^0 \in V_h$ is an approximation to ϕ^0 , $\phi_h^{n-1} \circ X_1^n$ is a composition defined by

$$(\phi_h^{n-1} \circ X_1^n)(x) = \phi_h^{n-1}(X_1^n(x)),$$

and γ^n is the Jacobian of the transformation X_1^n ,

$$\gamma^n = \det\left(\frac{\partial X_1^n}{\partial x}\right) = \det\left(\delta_{ij} - \Delta t \frac{\partial u_i^n}{\partial x_j}\right). \quad (14)$$

Theorem 1 (Mass balance) *Let $\{\phi_h^n\}_{n=1}^{N_T}$ be the solution of (13). Under Hypothesis 1 and (11) it holds that for $m = 1, \dots, N_T$*

$$\int_{\Omega} \phi_h^m dx = \int_{\Omega} \phi_h^0 dx + \Delta t \sum_{n=1}^m \left(\int_{\Omega} f^n dx + \int_{\Gamma} g^n ds \right). \quad (15)$$

Proof Substituting $1 \in V_h$ into ψ_h in (13) and multiplying Δt , we get

$$(\phi_h^n, 1) - (\phi_h^{n-1} \circ X_1^n \gamma^n, 1) = \Delta t \{(f^n, 1) + [g^n, 1]\}.$$

By the inverse transformation of X_1^n and Proposition 1, we have

$$\int_{\Omega} \phi_h^{n-1} \circ X_1^n \gamma^n dx = \int_{\Omega} \phi_h^{n-1} dx, \quad (16)$$

which implies

$$(\phi_h^n, 1) - (\phi_h^{n-1}, 1) = \Delta t \{(f^n, 1) + [g^n, 1]\}.$$

Summing up the equations above from $n = 1$ until m , we get (15). \square

Remark 1 In the proof of Theorem 1 the numerical computation is assumed to be performed exactly. Let ϕ_{hi} be the base function at node P_i . In the real computation the integration of composite term $\phi_h^{n-1} \circ X_1^n \gamma^n \phi_{hi}$ may cause numerical errors because the integrand is not smooth on element K which the support of the integrand intersects with. If we do not use the identity (16), the term

$$E_1 \equiv \sum_{n=0}^{m-1} (\phi_h^n - \phi_h^n \circ X_1^n \gamma^n, 1)$$

should be added to the right-hand side of (15). More precisely the integration of composite terms is carried out, smaller E_1 becomes.

Remark 2 The conventional characteristics/Galerkin finite element method which approximates the material derivative term (8) leads to the scheme

$$\begin{aligned} & \left(\frac{\phi_h^n - \phi_h^{n-1} \circ X_1^n}{\Delta t}, \psi_h \right) + v(\nabla \phi_h^n, \nabla \psi_h) + ((\nabla \cdot u^n) \phi_h^n, \psi_h) \\ &= (f^n, \psi_h) + [g^n, \psi_h], \forall \psi_h \in V_h. \end{aligned} \quad (17)$$

This scheme does not satisfy the mass balance even when $\operatorname{div} u^n = 0$. Comparing to (17), the present MCC scheme (13) is simpler and of mass-conservative.

Remark 3 Neglecting the term of second order in Δt in (14), we can replace γ^n by

$$\gamma_0^n \equiv 1 - \Delta t \operatorname{div} u^n.$$

When the fluid is incompressible, γ_0^n becomes identical. Although this replacement does not affect the convergence rate shown later in Theorem 3, the quantity E_1 in Remark 1 may increase because the identity (16) holds no more.

3 Stability and Convergence

In this section we present two main theorems. The former shows the stability of scheme (13), and the latter gives error estimates.

For a set of functions $\{\phi^n\}_{n=0}^{N_T}$ we define the following norms,

$$\begin{aligned}\|\phi\|_{L^\infty(L^2)} &\equiv \max_{0 \leq n \leq N_T} \|\phi^n\|, & \|\phi\|_{L^2(L^2)} &\equiv \left(\sum_{n=0}^{N_T} \Delta t \|\phi^n\|^2 \right)^{1/2}, \\ |\phi|_{L^2(L^2)} &\equiv \left(\sum_{n=0}^{N_T} \Delta t [\phi^n, \phi^n] \right)^{1/2}.\end{aligned}\quad (18)$$

Theorem 2 (Stability) *Let $\{\phi_h^n\}_{n=0}^{N_T}$ be the solution of (13). Suppose Hypothesis 1 and (11) hold. Then, there exists a positive constant $c_1 = c_1(\|u\|_{C^0(W^{1,\infty})}, v)$ independent of h and Δt such that*

$$\|\phi_h\|_{L^\infty(L^2)} + \sqrt{\Delta t} \|\mathcal{L}_{1h} \phi_h\|_{L^2(L^2)} + \sqrt{v} \|\nabla \phi_h\|_{L^2(L^2)} \leq c_1 (\|\phi_h^0\|_{L^2} + \|f\|_{L^2(L^2)} + |g|_{L^2(L^2)}), \quad (19)$$

where

$$\mathcal{L}_{1h} \phi_h^n \equiv \frac{\phi_h^n - \phi_h^{n-1} \circ X_1^n \gamma^n}{\Delta t}.$$

When $g = 0$, c_1 is independent of v .

Proof Let δ be any small positive number. Substituting $\psi_h = \phi_h^n$ in (13), we have

$$\frac{1}{2\Delta t} (\|\phi_h^n\|^2 - \|\phi_h^{n-1} \circ X_1^n \gamma^n\|^2) + \frac{\Delta t}{2} \|\mathcal{L}_{1h} \phi_h^n\|^2 + v \|\nabla \phi_h^n\|^2 = (f_h^n, \phi_h^n) + [g_h^n, \phi_h^n]. \quad (20)$$

Since $\gamma^n \leq 1 + c\Delta t$, the inverse transformation of $X_1^n(x)$ leads to

$$\begin{aligned}\|\phi_h^{n-1} \circ X_1^n \gamma^n\|^2 &\leq (1 + c\Delta t) \int_\Omega (\phi_h^{n-1} \circ X_1^n)^2 \gamma^n dx \\ &= (1 + c\Delta t) \|\phi_h^{n-1}\|^2.\end{aligned}\quad (21)$$

The right-hand side of (20) is estimated as

$$(f_h^n, \phi_h^n) \leq \frac{1}{2\delta} \|f_h^n\|^2 + \frac{\delta}{2} \|\phi_h^n\|^2,$$

and

$$\begin{aligned}[g_h^n, \phi_h^n] &\leq \|g_h^n\|_{L^2(\Gamma)} \|\phi_h^n\|_{L^2(\Gamma)} \leq c \|g_h^n\|_{L^2(\Gamma)} \|\phi_h^n\|_{H^1(\Omega)} \\ &\leq \frac{c^2}{2v} \|g_h^n\|_{L^2(\Gamma)}^2 + \frac{v}{2} \|\phi_h^n\|_{H^1(\Omega)}^2.\end{aligned}$$

Combining these estimates with (20), we obtain

$$\begin{aligned} & \frac{1}{2\Delta t} (\|\phi_h^n\|^2 - \|\phi_h^{n-1}\|^2) + \frac{\Delta t}{2} \|\mathcal{L}_{1h}\phi_h^n\|^2 + \frac{\nu}{2} \|\nabla\phi_h^n\|^2 \\ & \leq c \|\phi_h^{n-1}\|^2 + \frac{\delta}{2} \|\phi_h^n\|^2 + \frac{1}{2\delta} \|f^n\|^2 + c_0(\nu) \|g^n\|_{L^2(\Gamma)}^2, \end{aligned} \quad (22)$$

which is equivalent to

$$\begin{aligned} & (1 - \delta\Delta t) \frac{1}{2\Delta t} (\|\phi_h^n\|^2 - \|\phi_h^{n-1}\|^2) + \frac{\Delta t}{2} \|\mathcal{L}_{1h}\phi_h^n\|^2 + \frac{\nu}{2} \|\nabla\phi_h^n\|^2 \\ & \leq \left(c + \frac{\delta}{2} \right) \|\phi_h^{n-1}\|^2 + \frac{1}{2\delta} \|f^n\|^2 + c_0(\nu) \|g^n\|_{L^2(\Gamma)}^2. \end{aligned} \quad (23)$$

Choosing

$$\Delta t \leq \frac{1}{2\delta}, \quad (24)$$

we get $1 - \delta\Delta t \geq 1/2$, which completes the proof by virtue of Gronwall's inequality. \square

Remark 4 In the proof of Theorem 2 the condition (11) is used only for (12). The condition (24) is not restrictive since we can take any small $\delta > 0$. In this sense the scheme (13) is essentially unconditionally stable.

In order to state error estimates we prepare the following hypotheses. Let Π_h be the Lagrange interpolation operator from $C^0(\bar{\Omega})$ into V_h [5].

Hypothesis 2 There exists a positive integer k such that for $\phi \in H^{k+1} \cap C^0(\bar{\Omega})$

$$\|\Pi_h\phi - \phi\|_s \leq ch^{k+1-s} \|\phi\|_{k+1} \quad (s = 0, 1).$$

Hypothesis 3 ϕ has the regularity,

$$\phi \in C^0(H^{k+1}) \cap C^1(H^k) \cap C^2(L^2).$$

Lemma 1 (Consistency) Suppose functions u and ϕ satisfy Hypotheses 1 and 3 for $k = 1$, respectively. Then, it holds that for $n = 1, \dots, N_T$

$$\left\| \frac{\partial\phi^n}{\partial t} + \nabla \cdot (u^n \phi^n) - \frac{\phi^n - \phi^{n-1} \circ X_1^n \gamma^n}{\Delta t} \right\| \leq c \Delta t \|\phi\|_{C^2(L^2) \cap C^1(H^1) \cap C^0(H^2)}.$$

Proof The left-hand side is written as $\|I_1 + I_2\|$, where

$$I_1^n = \left(\frac{\partial\phi^n}{\partial t} + u^n \cdot \nabla\phi^n \right) - \frac{\phi^n - \phi^{n-1} \circ X_1^n}{\Delta t}, \quad (25)$$

$$I_2^n = (\nabla \cdot u^n)\phi^n - \phi^{n-1} \circ X_1^n (1 - \gamma^n)/\Delta t. \quad (26)$$

We can evaluate I_1^n like [15] and get

$$\|I_1^n\| \leq c \Delta t \|\phi\|_{C^2(L^2) \cap C^1(H^1) \cap C^0(H^2)}. \quad (27)$$

From (14) we have

$$\frac{1 - \gamma^n}{\Delta t} = \nabla \cdot u^n + O(\Delta t),$$

which leads to

$$\begin{aligned}\|I_2^n\| &= \|\nabla \cdot u^n (\phi^n - \phi^{n-1} \circ X_1^n) + O(\Delta t) \phi^{n-1} \circ X_1^n\|_{L^2} \\ &\leq c \Delta t \|\phi\|_{C^0(H^1) \cap C^1(L^2)}.\end{aligned}\quad (28)$$

Combining (27) with (28), we get the result. \square

Now we show the error estimate.

Theorem 3 (Error estimate) *Let ϕ be the solutions of (2). Suppose (11) and Hypotheses 1, 2 and 3 hold for a positive integer k . Let ϕ_h be the solutions of scheme (13) subject to the initial condition*

$$\phi_h^0 = \Pi_h \phi^0.$$

Then there exists a positive constant $c_2 = c_2(\|u\|_{C^0(W^{1,\infty})}, v)$ independent of h , Δt and ϕ such that

$$\begin{aligned}\|\phi_h - \phi\|_{L^\infty(L^2)} + \sqrt{\Delta t} \|\mathcal{L}_{1h}(\phi_h - \phi)\|_{L^2(L^2)} + \sqrt{v} \|\nabla(\phi_h - \phi)\|_{L^2(L^2)} \\ \leq c_2 \left(h^k \|\phi\|_{C^0(H^{k+1}) \cap C^1(H^k)} + \Delta t \|\phi\|_{C^2(L^2) \cap C^1(H^1) \cap C^0(H^2)} \right).\end{aligned}\quad (29)$$

When $g = 0$, c_2 is independent of v .

Proof Let δ be any small positive number; (2a) is equivalent to

$$\frac{\partial \phi^n}{\partial t} + u^n \cdot \nabla \phi^n + (\nabla \cdot u^n) \phi^n - v \Delta u^n = f^n. \quad (30)$$

From (30) it holds that for any $\psi \in H^1(\Omega)$

$$\left(\frac{\phi^n - \phi^{n-1} \circ X_1^n \gamma^n}{\Delta t}, \psi \right) + v(\nabla \phi^n, \nabla \psi) = (f^n, \psi) + [g^n, \psi] - (I_1^n + I_2^n, \psi), \quad (31)$$

where I_1^n and I_2^n are defined in (25) and (26). Set $e_h^n = \phi_h^n - \Pi_h \phi^n$ and $\eta^n = \phi^n - \Pi_h \phi^n$. Substituting $\psi_h = e_h^n$ in (13) and $\psi = e_h^n$ (31), and subtracting (31) from (13), we have

$$\begin{aligned}\frac{1}{2\Delta t} (\|e_h^n\|^2 - \|e_h^{n-1} \circ X_1^n \gamma^n\|^2) + \frac{\Delta t}{2} \|\mathcal{L}_{1h} e_h^n\|^2 + v \|\nabla e_h^n\|^2 \\ = \left(\frac{e_h^n - e_h^{n-1} \circ X_1^n \gamma^n}{\Delta t}, e_h^n \right) + v(\nabla e_h^n, \nabla e_h^n) \\ = (I_1^n + I_2^n, e_h^n) + \left(\frac{\eta^n - \eta^{n-1} \circ X_1^n \gamma^n}{\Delta t}, e_h^n \right) + v(\nabla \eta^n, \nabla e_h^n).\end{aligned}\quad (32)$$

From Lemma 1 the first term of the right-hand side is estimated as

$$(I_1^n + I_2^n, e_h^n) \leq \frac{c \Delta t^2}{\delta} \|\phi\|_{C^2(L^2) \cap C^1(H^1) \cap C^0(H^2)}^2 + \frac{\delta}{4} \|e_h^n\|^2.$$

Similarly to [15] we estimate the second term of the right-hand side to obtain

$$\begin{aligned} \left(\frac{\eta^n - \eta^{n-1} \circ X_1^n \gamma^n}{\Delta t}, e_h^n \right) &= \left(\frac{\eta^n - \eta^{n-1} \circ X_1^n}{\Delta t}, e_h^n \right) + \left(\frac{\eta^{n-1} \circ X_1^n (1 - \gamma^n)}{\Delta t}, e_h^n \right) \\ &\leq \left(\left\| \frac{\eta^n - \eta^{n-1} \circ X_1^n}{\Delta t} \right\| + c \|\eta^{n-1} \circ X_1^n\| \right) \|e_h^n\| \\ &\leq \left(\left\| \frac{\eta^n - \eta^{n-1}}{\Delta t} \right\| + c \|\eta^{n-1}\|_1 + c \|\eta^{n-1}\| \right) \|e_h^n\| \\ &\leq \frac{ch^{2k}}{\delta} \|\phi\|_{C^0(H^{k+1}) \cap C^1(H^k)}^2 + \frac{\delta}{4} \|e_h^n\|^2. \end{aligned}$$

The third term is easily evaluated as

$$v(\nabla \eta^n, \nabla e_h^n) \leq cvh^k \|\phi\|_{C^0(H^{k+1})} \|\nabla e_h^n\| \leq \frac{v}{2} \|\nabla e_h^n\|^2 + cvh^{2k} \|\phi\|_{C^0(H^{k+1})}^2.$$

Combining these estimates with (32), we get

$$\begin{aligned} &\frac{1}{2\Delta t} (\|e_h^n\|^2 - \|e_h^{n-1} \circ X_1^n \gamma^n\|^2) + \frac{\Delta t}{2} \|\mathcal{L}_{1h} e_h^n\|^2 + \frac{v}{2} \|\nabla e_h^n\|^2 \\ &\leq \frac{\delta}{2} \|e_h^n\|^2 + \frac{c}{\delta} (\Delta t^2 \|\phi\|_{C^2(L^2) \cap C^1(H^1) \cap C^0(H^2)}^2 + h^{2k} \|\phi\|_{C^0(H^{k+1}) \cap C^1(H^k)}^2). \end{aligned}$$

A similar transformation from (22) to (23), the choice (24) of Δt , the discrete Gronwall inequality and Hypothesis 3 lead to

$$\begin{aligned} &\|e_h\|_{L^\infty(L^2)} + \sqrt{\Delta t} \|\mathcal{L}_{1h} e_h\|_{L^2(L^2)} + \sqrt{v} \|\nabla e_h\|_{L^2(L^2)} \\ &\leq c_2 (h^k \|\phi\|_{C^0(H^{k+1}) \cap C^1(H^k)} + \Delta t \|\phi\|_{C^2(L^2) \cap C^1(H^1) \cap C^0(H^2)}). \end{aligned} \quad (33)$$

Combining (33) with the estimate of η^n , we complete the proof. \square

4 Numerical Examples

In this section we show some numerical results to observe the efficiency of the present MCC finite element scheme. We compare numerical results of the MCC scheme (13) with those of the mass-conservative upwind FEM (39) and the conventional characteristics/Galerkin FEM (17).

In schemes (13) and (17) composite functions are integrated on elements. We approximate the integral $\int_K \phi_h^{n-1} \circ X_1^n \psi_h \gamma^n dx$ by a numerical integration formula. We use the same numerical integration method as the one in [15]. We divide the triangle K into 16 congruent small triangles, see Fig. 1. Approximating $\phi_h^{n-1} \circ X_1^n \psi_h \gamma^n$ by the linear interpolation on each small triangle and integrating the interpolated function, we get an approximate value of the integral. In the following examples we use the P_1 element. Hence, Hypothesis 2 is satisfied for $k = 1$ [5], which implies the convergence order is $O(\Delta t + h)$ by Theorem 3. As we take $\Delta t = O(h)$ in the examples, the final convergence order becomes $O(h)$.

Fig. 1 A triangle K divided into 16 congruent triangles

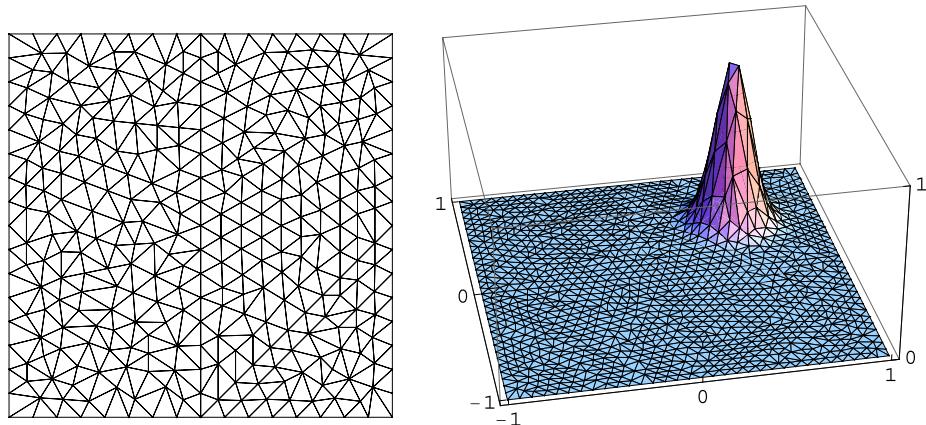
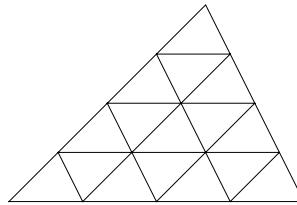


Fig. 2 A mesh ($N = 16$) and the exact solution ϕ of Example 1 at $t = 0.5$

Example 1 The data and ϕ are as follows:

$$\Omega = (-1, 1) \times (-1, 1), \quad T = 0.5,$$

$$u(x, t) = (1 + \sin(t - x_1), 1 + \sin(t - x_2))^T, \quad v = 0.01, \quad (34)$$

$$\phi(x, t) = \exp\left(-\frac{1 - \cos(t - x_1)}{v}\right) \exp\left(-\frac{1 - \cos(t - x_2)}{v}\right).$$

Then, the right-hand side f in (2a) is identically equal to 0. The velocity is not incompressible, $\nabla \cdot u \neq 0$. Although Hypothesis 1 is not satisfied, i.e., $u \neq 0$ on Γ , the value of ϕ on Γ is almost equal to zero, less than 5.0×10^{-6} , we can neglect the effect of the flux $\phi u \cdot n$ on the boundary. Dividing each side of the square into N segments,

$$N = 16, 32, 64, 128, 256,$$

we make partitions $\{\mathcal{T}_h\}$ consisting of non-uniform triangular elements; see Fig. 2. We set $h = 2/N$ and $\Delta t = h$. Figure 3 shows relative errors in $\ell^\infty(L^2)$ -norm, $\ell^2(H_0^1)$ -seminorm, and of mass at T ,

$$\frac{\|\phi_h - \Pi_h \phi\|_X}{\|\Pi_h \phi\|_X} \quad (X = \ell^\infty(L^2), \ell^2(H_0^1)), \quad \frac{|\int_\Omega \phi_h^{NT} dx - \int_\Omega \Pi_h \phi^{NT} dx|}{|\int_\Omega \Pi_h \phi^{NT} dx|}$$

by the MCC FEM (●), the conventional characteristics/Galerkin FEM (○) and the mass-conservative upwind FEM (◊). The errors of mass by the mass-conservative upwind FEM

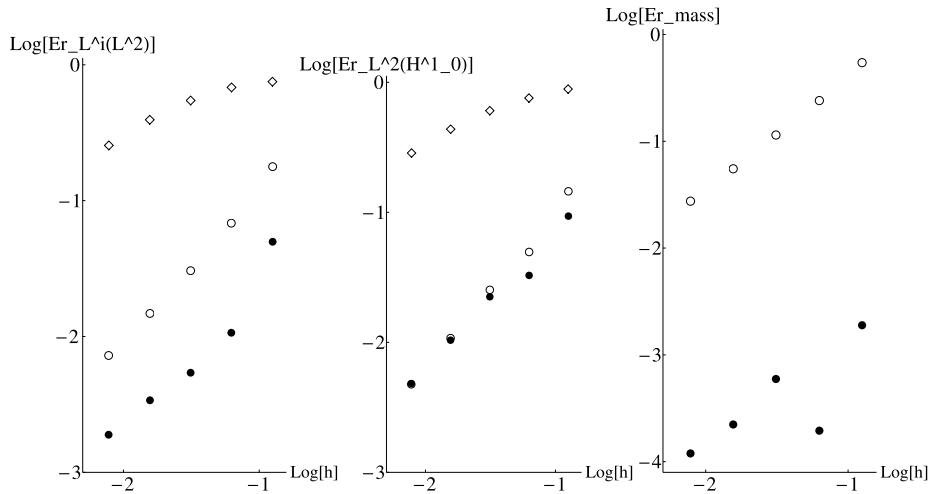


Fig. 3 Errors vs. h (Example 1). $\ell^\infty(L^2)$ -norm (left), $\ell^2(H_0^1)$ -seminorm (center), and mass (right)

Table 1 The slopes of the graphs by the results on the finest two meshes (Example 1)

Scheme	Symbol	$\ell^\infty(L^2)$	$\ell^2(H_0^1)$	Mass
(39)	◇	0.63	0.61	—
(17)	○	1.02	1.19	1.02
MCC (13)	●	0.84	1.11	0.90

(39) are too small to be plotted in the graph. We can see good convergence results of the MCC FEM in both norm and seminorm. Caused by numerical integration error, the mass balance by MCC is not preserved exactly, but is much better than (17). The slopes of the graphs obtained from the finest two meshes, $N = 128, 256$, are listed in Table 1. The theoretical convergence results $O(h)$ are reflected. When the viscosity ν decreases, the Péclet number P_e increases. In Appendix we discuss the behavior of numerical solutions when P_e increases.

Example 2 The data and ϕ are as follows,

$$\begin{aligned} \Omega &= (0, 1) \times (0, 1), \quad T = 1, \\ u(x) &= (-x_2 \sin \pi x_1 \sin \pi x_2, x_1 \sin \pi x_1 \sin \pi x_2)^T, \quad \nu = 0.01, \\ \phi(x, t) &= x_1 x_2 (1 - x_2) \cos(t + x_1 + x_2). \end{aligned}$$

The velocity is not incompressible, $\nabla \cdot u \neq 0$. By substituting the above ϕ , u and ν in (2a) and (2b), respectively, f and g are obtained; they are not equal to zero. Dividing each side of the square into N segments,

$$N = 8, 16, 32, 64, 128,$$

we make partitions $\{\mathcal{T}_h\}$ consisting of non-uniform triangular elements. We set $h = 1/N$ and $\Delta t = 0.8h$. Figure 5 shows relative errors in $\ell^\infty(L^2)$ -norm, $\ell^2(H_0^1)$ -seminorm, and of

Fig. 4 The exact solution ϕ of Example 2 at $t = 1$

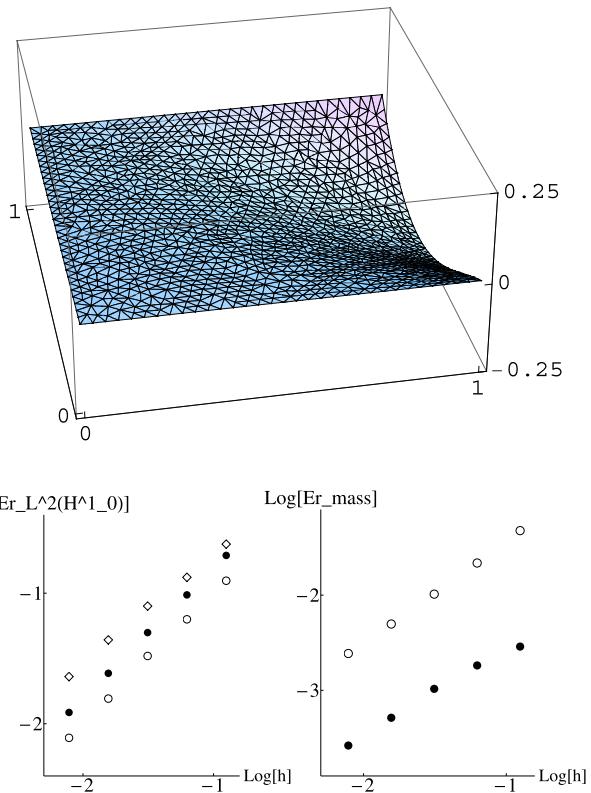


Fig. 5 Errors vs. h (Example 2). $\ell^\infty(L^2)$ -norm (left), $\ell^2(H_0^1)$ -seminorm (center), and mass (right)

Table 2 The slopes of the graphs by the results on the finest two meshes (Example 2)

Scheme	Symbol	$\ell^\infty(L^2)$	$\ell^2(H_0^1)$	Mass
(39)	◊	1.01	0.93	–
(17)	○	0.98	1.00	1.03
MCC (13)	●	0.99	1.00	0.97

mass at T by the MCC FEM (●), the conventional characteristics/Galerkin FEM (○) and the mass-conservative upwind FEM (◊). The errors of mass by the mass-conservative upwind FEM (39) are too small to be plotted in the graph. In this example the results by (17) are a little better than MCC in both norm and seminorm, but the mass balance by MCC is much better than (17). The slopes of the graphs obtained from the finest two meshes, $N = 64, 128$, are listed in Table 2. The theoretical convergence results $O(h)$ are reflected.

5 Conclusions

We have presented a new mass-conservative characteristic finite element scheme of first order in time increment. The modification from the conventional characteristics/Galerkin method is very small, i.e., only the multiplication of the Jacobian to the composite term and

the elimination of the term $(\nabla \cdot u)\phi$. The scheme is essentially unconditionally stable. We have proved the stability and convergence of order $\Delta t + h^k$, which has been recognized by numerical results for $k = 1$. In the forthcoming paper we will present a corresponding scheme of second order in time increment Δt .

Acknowledgements The first author was supported by the National Natural Science Foundation of China under Grant No. 10771124 and by the State Education Ministry of China under the Research Fund for Doctoral Program of High Education, No. 20060422006. The second author was supported by the Japan Society for the Promotion of Science under Grant-in-Aid for Scientific Research (S), No. 16104001 and by the Ministry of Education, Culture, Sports, Science and Technology of Japan under Global COE Program, Mathematics for Industry.

Appendix

A.1 Upwind Finite Element Approximations

Here we review two kinds of upwind finite element approximations developed in the early days. The one has monotone property and the other does mass-conservation property. The ideas used for these approximations are simple and natural. From them many improved upwind finite element/volume schemes have been developed. Let $\mathcal{T}_h = \{K\}$ be a partition of Ω by simplices, i.e., triangles ($d = 2$) or tetrahedron ($d = 3$).

A.1.1 The Upwind Element Choice Approximation [17]

Let $V = H_0^1(\Omega)$ and $a_1^{(\infty)}$ be the bilinear form on V defined by

$$a_1^{(\infty)}(\phi, \psi; u) = (u \cdot \nabla \phi, \psi), \quad \phi, \psi \in V. \quad (35)$$

Let $V_h \subset V$ be the P1 finite element space. The upwind element choice approximation $a_{1h}^{(\infty)}$ to $a_1^{(\infty)}$ is defined by

$$a_{1h}^{(\infty)}(\phi_h, \psi_h; u) = \sum_P u(P) \cdot \nabla \phi_h|_{K_p^u} \psi_h(P) \text{meas } D_P, \quad \phi_h, \psi_h \in V_h, \quad (36)$$

where P runs over all the nodes in Ω , K_p^u is the upwind element at P with respect to $u(P)$, and D_P is the barycentric domain at P . The definitions of K_p^u and D_P are as follows. Upwind element K_p^u is an element $K \in \mathcal{T}_h$ such that:

- (i) P is a vertex of K ,
- (ii) The vector $u(P) (\neq 0)$ with endpoint P intersects $K \setminus \{P\}$.

In the case when $u(P)$ is parallel to an edge (or face) including P , K_p^u is not uniquely defined, but even in this case the definition (36) is well-defined. Barycentric domain D_P is defined by

$$D_P = \bigcup_K \{D_P^K; P \text{ is a vertex of } K \in \mathcal{T}_h\},$$

$$D_P^K = \bigcap_Q \{x \in K; Q (\neq P) \text{ is a vertex of } K, \lambda_P(x) \geq \lambda_Q(x)\},$$

where λ_R , $R = P, Q$, is the barycentric coordinate associated with vertex R of K .

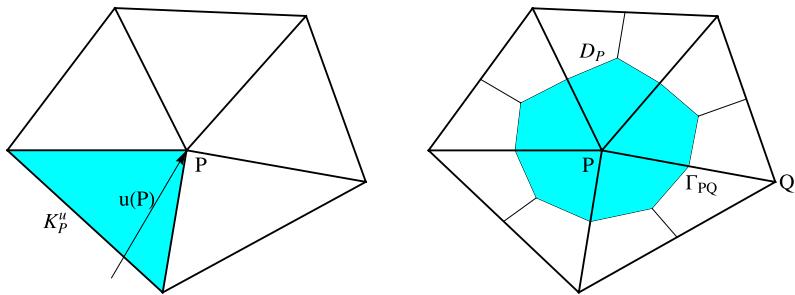


Fig. 6 Upwind element K_P^u at P (left) and the barycentric domain D_P (right)

Equation (36) was presented in 1977 and it is one of the upwind finite element approximations developed in the earliest stage. It has a similar property to the first-order upwind finite difference approximation. When the mesh \mathcal{T}_h is of weakly acute type, i.e., all angles of triangles are less than or equal to $\pi/2$ in $d = 2$, we can derive monotone finite element schemes. The solution satisfies a discrete maximum principle when the original problem has the maximum principle [10, 18]. Approximation (36) is not mass-conservative even if the definition is extended appropriately to $V_h \subset H^1(\Omega)$. (36) is extended to second- and third-order upwind approximations for high-Reynolds number flow problems [9, 19].

A.1.2 The Mass-Conservative Upwind Approximation [2]

Let $V = H^1(\Omega)$ and a_1 be the bilinear form on V defined by (4),

$$a_1(\phi, \psi; u) = -(\phi, u \cdot \nabla \psi), \quad \phi, \psi \in V.$$

Let $V_h \subset V$ be the P1 finite element space. The mass-conservative upwind approximation a_{1h} to a_1 is defined by

$$a_{1h}(\phi_h, \psi_h; u) = \sum_P \psi_h(P) \sum_{Q \in \Lambda_P} (\beta_{PQ}(u)^+ \phi_h(P) - \beta_{PQ}(u)^- \phi_h(Q)), \quad \phi_h, \psi_h \in V_h, \quad (37)$$

where P runs over all the nodes in $\bar{\Omega}$,

$$\begin{aligned} \Lambda_P &= \{Q \in \bar{\Omega}; \text{ node } Q \text{ is adjacent to } P\}, & \beta_{PQ}(u) &= \int_{\Gamma_{PQ}} u \cdot n \, ds, \\ \Gamma_{PQ} &= D_P \cap D_Q, & \beta^+ &= \max(\beta, 0), & \beta^- &= \max(-\beta, 0), \end{aligned} \quad (38)$$

and n is the outer unit normal to Γ_{PQ} from the barycentric domain D_P . (37) is derived as follows,

$$\begin{aligned} a_1(\phi, \psi; u) &= (\nabla \cdot (u\phi), \psi) - [\phi u \cdot n, \psi] \\ &= \sum_P \int_{D_P} \nabla \cdot (u\phi) \psi \, dx - [\phi u \cdot n, \psi] \\ &= \sum_P \int_{\partial D_P} n \cdot u\phi \psi \, ds - [\phi u \cdot n, \psi] \end{aligned}$$

$$\begin{aligned}
&\approx \sum_P \psi(P) \int_{\partial D_P} n \cdot u \phi \, ds - [\phi u \cdot n, \psi] \\
&\approx \sum_P \psi(P) \int_{\Gamma_{PQ}} n \cdot u \phi \, ds \\
&\approx a_{1h}(\phi, \psi; u),
\end{aligned}$$

where the relation $\beta = \beta^+ - \beta^-$ is used at the last line. A mass-conservative finite element scheme for (2) is to find $\{\phi_h^n\}_{n=1}^{N_T} \subset V_h$ such that for $n = 1, \dots, N_T$,

$$\left(\frac{\bar{\phi}_h^n - \bar{\phi}_h^{n-1}}{\Delta t}, \bar{\psi}_h \right) + a_{1h}(\phi_h^n, \psi_h; u) + \nu(\nabla \phi_h^n, \nabla \psi_h) = (f^n, \psi_h) + [g^n, \psi_h], \quad \forall \psi_h \in V_h,
\quad (39)$$

where $\phi_h^0 \in V_h$ is an approximation to ϕ^0 and $- : V_h \rightarrow L^2(\Omega)$ is a lumping operator defined by

$$\bar{\phi}_h = \sum_P \phi_h(P) \chi_P, \quad \chi_P(x) = \begin{cases} 1, & (x \in D_p), \\ 0, & (x \notin D_p). \end{cases}$$

Since a_{1h} can be written as

$$a_{1h}(\phi_h, \psi_h; u) = \sum_{\Gamma_{PQ}} (\psi_h(P) - \psi_h(Q)) (\beta_{PQ}(u)^+ \phi_h(P) - \beta_{PQ}(u)^- \phi_h(Q)), \quad \phi_h, \psi_h \in V_h,$$

it holds that $a_{1h}(\phi_h, 1; u) = 0$. Hence, substituting $\phi_h = 1$ in (39), we obtain for $m = 1, \dots, N_T$

$$\int_{\Omega} \bar{\phi}_h^m \, dx = \int_{\Omega} \bar{\phi}_h^0 \, dx + \Delta t \sum_{n=1}^m \left(\int_{\Omega} f^n \, dx + \int_{\Gamma} g^n \, ds \right). \quad (40)$$

Using the fact

$$\int_{\Omega} \bar{\phi}_h \, dx = \int_{\Omega} \phi_h \, dx, \quad \phi_h \in V_h,$$

(7) is derived from (40).

Nowadays, a_{1h} can be regarded as a vertex-centered finite volume approximation with D_P as control volume. It is extended to various schemes for the computation of hyperbolic type equations as Euler equations on unstructured meshes [9, 14, 20]. It is not necessary to take β_{PQ} exactly in (38), but is sufficient to satisfy

$$\left| \beta_{PQ} - \int_{\Gamma_{PQ}} u \cdot n \, ds \right| \leq c |PQ|^d.$$

When $\nabla \cdot u = 0$ in Ω and $u \cdot n = 0$ on Γ , the solution of (2) satisfies the maximum principle. This property is maintained by (39) with the choice (38) of β_{PQ} [2]. For the other choice of the control volume in place of D_P we refer to [10, 12].

A.2 The Behavior of Numerical Solutions when Péclet Number Increases

In Example 1, Péclet number P_e is about 566 since $v = 0.01$, the representative length $L = 2$, and the representative velocity U is about 2.83. Cell Péclet number P_c is defined by

$$P_c = \frac{hU}{v},$$

where h is the representative space-mesh length. In the computation of Example 1 they are

$$P_c = 35.4, 17.7, 8.8, 4.4, 2.2 \quad (N = 16, 32, 64, 128, 256),$$

by setting $h = 2/N$. In order to solve stationary convection-diffusion problems without numerical oscillation it is known that P_c should be less than a constant for conventional schemes, e.g., $P_c \leq 2$ for the central finite difference scheme of one-dimensional problems. For unsteady convection-diffusion problems conventional explicit schemes need the condition as well as the restriction that $v\Delta t/h^2$ should be less than a constant, e.g., $v\Delta t/h^2 \leq 1/2$ for the central finite difference scheme of one-dimensional problems. Although conventional implicit schemes are proved to be unconditionally L^2 stable in a similar way to Theorem 2, numerical results are not so good for high cell Péclet numbers as shown below.

Figure 7 shows the exact and numerical solutions of Example 1 at $t = 0.25$ when $v = 0.01$. The numerical solutions are obtained by Galerkin FEM (6) and MCC FEM (13) on a mesh ($N = 32$), which means $P_c = 17.7$. The time increment Δt is chosen to be equal to h . There is no oscillation in the result by Galerkin FEM, but the solution is too diffusive. The result by MCC FEM has a shape similar to the exact one. Figure 8 shows the corresponding

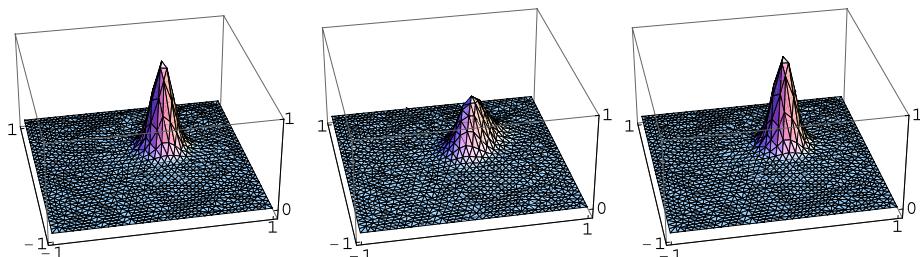


Fig. 7 The exact (left) and numerical solutions ($t = 0.25$, $v = 0.01$, $N = 32$). Galerkin FEM (6) (center) and MCC FEM (13) (right)

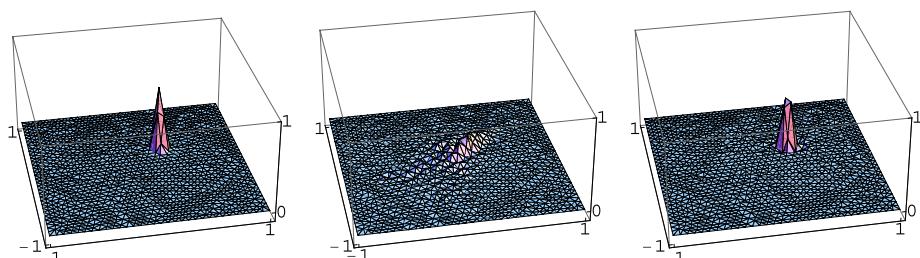


Fig. 8 The exact (left) and numerical solutions ($t = 0.25$, $v = 0.001$, $N = 32$). Galerkin FEM (6) (center) and MCC FEM (13) (right)

results when $\nu = 0.001$. The Péclet number P_e is about 5,660. The numerical solutions are solved on the same mesh ($N = 32$), which means $P_c = 177$. The cell Péclet number is very high and, from the figure of the exact solution, the problem seems not easy to be solved well on this mesh. The numerical result by Galerkin FEM is very bad and even a little oscillating. Although the result by MCC FEM has a small overshoot, a negative part on the foot of the “cone”, the shape is much better. We can see that MCC finite element scheme is robust for such high cell Péclet number problems.

References

1. Arbogast, T., Wheeler, M.F.: A characteristics-mixed finite element method for advection-dominated transport problems. *SIAM J. Numer. Anal.* **32**, 404–424 (1995)
2. Baba, K., Tabata, M.: On a conservative upwind finite element scheme for convective diffusion equations. *RAIRO Anal. Numér. (Numer. Anal.)* **15**, 3–35 (1981)
3. Boukir, K., Maday, Y., Metivet, B., Razafindrakoto, E.: A high-order characteristics/finite element method for the incompressible Navier-Stokes equations. *Int. J. Numer. Methods Fluids* **25**, 1421–1454 (1997)
4. Brooks, A.N., Hughes, T.J.R.: Streamline upwind/Petrov-Galerkin formulations for convection dominated flows with particular emphasis on the incompressible Navier-Stokes equations. *Comput. Methods Appl. Mech. Eng.* **32**, 199–259 (1982)
5. Ciarlet, P.G.: The Finite Element Method for Elliptic Problems. SIAM, New York (2002)
6. Douglas, J. Jr., Huang, T.C., Pereira, F.: The modified method of characteristics with adjusted advection. *Numer. Math.* **83**, 353–369 (1999)
7. Douglas, J., Jr., Russell, T.F.: Numerical methods for convection-dominated diffusion problems based on combining the method of characteristics with finite element or finite difference procedures. *SIAM J. Numer. Anal.* **19**, 871–885 (1982)
8. Ewing, R.E., Wang, H.: An optimal-order estimate for Eulerian-Lagrangian localized adjoint methods for variable-coefficient advection-reaction problems. *SIAM J. Numer. Anal.* **33**, 318–348 (1996)
9. Glowinski, R.: Numerical Methods for Fluids (Part 3). Handbook of Numerical Analysis, vol. IX, Ciarlet, P.G., Lions, J.L. (eds.). Elsevier, Amsterdam (2003).
10. Ikeda, T.: Maximum Principle in Finite Element Models for Convection-Diffusion Phenomena. Lecture Notes in Numerical and Applied Analysis, vol. 4. Kinokuniya/North-Holland, Tokyo (1983)
11. Johnson, C.: Numerical Solution of Partial Differential Equations by the Finite Element Method. Cambridge Univ. Press, Cambridge (1987)
12. Kanayama, H.: Discrete models for salinity distribution in a bay: Conservation laws and maximum principle. *Theor. Appl. Mech. (Univ. Tokyo Press)* **28**, 559–579 (1980)
13. Pironneau, O.: On the transport-diffusion algorithm and its application to the Navier-Stokes equations. *Numer. Math.* **38**, 309–332 (1982)
14. Pironneau, O.: Finite Element Methods for Fluids. Wiley, Chichester (1989)
15. Rui, H., Tabata, M.: A second order characteristic finite element scheme for convection diffusion problems. *Numer. Math.* **92**, 161–177 (2002)
16. Russell, T.F.: Time stepping along characteristics with incomplete iteration for a Galerkin approximate of miscible displacement in porous media. *SIAM J. Numer. Anal.* **22**, 970–1013 (1985)
17. Tabata, M.: A finite element approximation corresponding to the upwind differencing. *Memoirs Numer. Math.* **4**, 47–63 (1977)
18. Tabata, M.: L^∞ -analysis of the finite element method. In: Fujita, H., Yamaguti, M. (eds.) Numerical Analysis of Evolution Equations. Lecture Notes in Numerical and Applied Analysis, vol. 1, pp. 25–62. Kinokuniya, Tokyo (1979)
19. Tabata, M., Fujima, S.: An upwind finite element scheme for high-Reynolds-number flows. *Int. J. Numer. Methods Fluids* **12**, 305–322 (1991)
20. Viozat, C., Held, C., Mer, K., Dervieux, A.: On vertex-centered unstructured finite-volume methods for stretched anisotropic triangulations. *Comput. Methods Appl. Mech. Eng.* **190**, 4733–4766 (2001)
21. Wang, H., Dahle, H.K., Ewing, R.E., Espedal, M.S., Sharpley, R.C., Man, S.: An ELLAM scheme for advection-diffusion equations in two dimensions. *SIAM J. Sci. Comput.* **20**, 2160–2194 (1999)