



Prospects of integrating algae technologies into landfill leachate treatment

Ioannis Dogaris¹ · Ehab Ammar^{2,3} · George P. Philippidis³

Received: 17 December 2019 / Accepted: 11 February 2020 / Published online: 24 February 2020
© Springer Nature B.V. 2020

Abstract

Landfilling of municipal waste, an environmental challenge worldwide, results in the continuous formation of significant amounts of leachate, which poses a severe contamination threat to ground and surface water resources. Landfill leachate (LL) is generated by rainwater percolating through disposed waste materials and must be treated effectively before safe discharge into the environment. LL contains numerous pollutants and toxic substances, such as dissolved organic matter, inorganic chemicals, heavy metals, and anthropogenic organic compounds. Currently, LL treatment is carried out by a combination of physical, chemical, and microbial technologies. Microalgae are now viewed as a promising sustainable addition to the repertoire of technologies for treating LL. Photosynthetic algae have been shown to grow in LL under laboratory conditions, while some species have also been employed in larger-scale LL treatments. Treating leachate with algae can contribute to sustainable waste management at existing landfills by remediating low-quality water for recycling and reuse and generating large amounts of algal biomass for cost-effective manufacturing of biofuels and bioproducts. In this review, we will examine LL composition, traditional leachate treatment technologies, LL toxicity to algae, and the potential of employing algae at LL treatment facilities. Emphasis is placed on how algae can be integrated with existing technologies for biological treatment of LL, turning leachate from an environmental liability to an asset that can produce value-added biofuels and bioproducts for the bioeconomy.

Keywords Landfill leachate · Algae · Wastewater treatment · Remediation

Introduction

As human population continues to grow, so do human activities, generating increasing amounts of municipal and industrial waste. In the United States alone municipal solid waste (MSW) annual generation increased from 88.1 to 267.8 million tons between 1960 and 2017 (EPA 2019). To date, landfilling remains the most common municipal waste disposal practice worldwide. In the US 139 million tons,

comprising 52.1% of MSW generated in 2017, ended up in landfills (EPA 2019). This is due to landfilling being relatively inexpensive and technically simple compared to other disposal options, such as recycling, combustion for energy production, and composting. However, the formation of landfill leachate (LL) is an inevitable consequence of landfilling raising serious environmental concerns. For example, in the State of Florida it is estimated that 7000 gallons of LL are generated per day per acre of landfill, equivalent to about 24 million liters per hectare per year (Meeroff et al. 2016). LL contains hazardous components that can contaminate drinking water and are toxic to microbial flora and fauna (Cheung et al. 1993; Ernst et al. 1994; Ferrari et al. 1999; Lin et al. 2007; Plotkin and Ram 1984; Ward et al. 2002). As a result, contamination of ground and surface waters by LL has become a major environmental concern for governments and communities around the world. In an effort to address this issue, modern landfills are engineered with liners to protect ground water from infiltration by landfill effluents. Additionally, LL must be treated prior to its discharge to

✉ George P. Philippidis
gphilippidis@usf.edu

¹ School of Engineering Sciences in Chemistry, Biotechnology and Health, KTH Royal Institute of Technology, Stockholm, Sweden

² University of Sadat City, Genetic Engineering and Biotechnology Research Institute, El-Sadat City, Egypt

³ University of South Florida, Patel College of Global Sustainability, 4202 East Fowler Avenue, CGS 101, Tampa, FL 33620, USA

reduce the concentration of numerous pollutants. The discharge limits mandated by government agencies, such as the Environmental Protection Agency (EPA) in the US, are becoming increasingly more stringent. Consequently, there is strong interest in novel treatment methods of high efficiency, easy applicability, and long-term sustainability, like algae technologies.

In this review, we will examine the nature of LL, provide an overview of current leachate treatment technologies, analyze algal physiology in the context of its cultivation on leachate and related wastewaters, and outline the development of outdoor algal cultivation systems that can be applied to landfills to synergistically assist with leachate treatment, while generating value-added algal products for the economy. Emphasis is placed on the potential of integrating algae with existing technologies for remediation of LL, thus turning landfill leachate from an environmental liability to a low-cost bioresource for sustainable production of value-added algal bioproducts.

Landfill leachate generation and composition

Landfills are sites where municipal waste is buried and mixed with soil for disposal and decomposition purposes. Landfilling is an old process that remains the most common method of waste disposal in many countries worldwide because it is logistically and technically simple and relatively inexpensive compared to other treatment options. However, landfills are plagued by environmental issues, including the formation of leachate, which is a dark liquid formed when rainwater, inherent moisture, and water generated from waste decomposition reactions percolate through the waste and contaminate ground and surface water bodies with pollutants and toxins. The composition of LL depends on many factors including the nature of waste present at a given landfill, weather, moisture, practices applied at the landfill, and the age of leachate (Kjeldsen et al. 2002).

The lifecycle of such landfills and the composition of leachate have been reviewed extensively elsewhere (Christensen et al. 2001; Kjeldsen et al. 2002). Through the lifetime of a landfill, various decomposition reactions, chemical and biological, take place in sequential phases until the waste is fully decomposed (stabilized), resulting in a wide variability in LL composition over time at different locations even within the same landfill. Waste decomposition starts with an initial aerobic phase in which refuse is aerobically oxidized releasing carbon dioxide and heat. This phase is very short and lasts for a few days only until oxygen is depleted in the buried refuse, at which point decomposition becomes anaerobic. Under anaerobic conditions, an acidic phase takes place in which fermentation of organic compounds

prevails, resulting in the formation of organic acids (such as acetic acid) and a significant drop in pH. Generation of acids raises the ratio of biological oxygen demand (BOD) to chemical oxygen demand (COD) and increases the solubility of numerous pollutants in water, raising their concentrations in LL. Consequently, leachate becomes highly toxic and chemically more reactive in this phase. A methanogenic phase follows in which other bacteria of the natural consortium start converting the accumulated organic acids into methane and carbon dioxide, which are collectively termed biogas. Consumption of acids raises the pH, changing the conditions favorably for methanogenic bacteria to produce more methane. Meanwhile, the BOD/COD ratio decreases as acids are being consumed. At the end of methanogenesis the remaining refuse is dominated by recalcitrant matters, such as fulvic and humic acids, with the BOD/COD ratio typically dropping below 0.1. Additional phases beyond the stable methanogenic phase have been speculated (Bozkurt et al. 2000; Christensen and Kjeldsen 1995). Undoubtedly, full decomposition of the biodegradable part of MSW requires a consortium of microorganisms.

The constituents of LL can be classified into four main groups: dissolved organic matter, dissolved inorganic matter, heavy metals, and xenobiotics (Christensen et al. 2001; Kjeldsen et al. 2002). The composition and concentration of organic matter depend on the decomposition stage of the landfill. Common organic compounds found in LL range from carbohydrates, proteins, and fatty acids to the long-chain recalcitrant fulvic and humic acids (Chian and DeWalle 1977). Similarly, the composition of inorganic matter depends on the decomposition stage of the waste. Inorganic compounds include various anions (bicarbonate, chloride, phosphorus, sulfate) and cations (ammonium-N, calcium, iron, magnesium, potassium, sodium). Heavy metals, such as cadmium, chromium, copper, lead, nickel, and zinc are also present, but usually at lower concentrations, as metals get immobilized through sorption to colloids and precipitation, but they can leach through formation of complexes with dissolved organic matter (Baun and Christensen 2004). Xenobiotics, such as monoaromatic and halogenated hydrocarbons (Baun et al. 2004), are usually found at very low concentrations due to natural sorption, precipitation, and volatilization effects at the landfill, but they still pose a significant contamination risk for water resources despite efforts to limit the permissible disposal of xenobiotics in MSW landfills.

In general, the concentration of pollutants in LL decreases over time. On the contrary, ammonia released from the decomposition of organic waste remains at high levels, because there is no mechanism for degrading ammonia during the methanogenic stage (Kulikowska and Klimiuk 2008). It should be noted that ammonia toxicity is acute in its unionized form (NH_3), which happens to be the prevalent

one in leachate under the increasing pH conditions of the stable methanogenic phase (Clément and Merlin 1995; Ernst et al. 1994; Rutherford et al. 2000). As a result, ammonia is considered the most dangerous leachate component posing long-term environmental concerns to water resources.

Leachate treatment technologies

Leachate must meet certain standards before discharge into surface water, underground injection into the water table or transfer to remote treatment facilities is allowed. Transferring LL to off-site locations is both risky and adds to the treatment cost. Therefore, when applicable, on-site LL treatment is favored. A big challenge to LL treatment is the wide variation of LL composition from site to site and over time within each site. Variability of composition and the increasingly stringent discharge regulations have sparked a search for effective LL treatment methods.

The technologies employed for treatment of LL can be divided into two main categories: biological and physico-chemical. Biological methods are more effective in the presence of large loads of biodegradable matter, as in young landfills. On the other side, physico-chemical methods are employed for the removal of refractory matter that is otherwise not biodegradable in older landfills. Biological methods include aerobic and anaerobic systems operating in either suspended or attached growth modes. Physico-chemical methods include coagulation and flocculation, chemical precipitation, adsorption, chemical oxidation, air stripping, and bioelectrochemical means. Oftentimes, no single method is effective on its own, so a combination of biological and physico-chemical methods is applied. LL treatment has been extensively reviewed elsewhere (Bove et al. 2015; Gao et al. 2015; Lippi et al. 2018; Peng 2017; Renou et al. 2008; Wiszniowski et al. 2006). The main LL treatment methods are summarized in Fig. 1 and a brief overview of the most practiced methods is presented next.

Transfer for co-treatment with sewage

If economically feasible, LL can be transferred to nearby sewage treatment facilities for co-treatment (Fig. 1b). An advantage of this approach is that LL and sewage contain mostly nitrogen and phosphate, respectively, complementing each other during biological treatment. A major disadvantage is inhibition of natural decomposing microorganisms by refractory compounds and heavy metals in LL. Therefore, the ratio of LL to sewage must be optimized, which will depend largely on LL composition. A study reported that leachate should not exceed 20% of the mixture (Çeçen and Çakıroğlu 2001), whereas another study recommended 10%

unless powdered activated carbon was also used to help limit the toxicity of LL (Çeçen and Aktaş 2004).

Recirculation

Leachate recirculation through the waste of a landfill (Fig. 1a) is an inexpensive option that reportedly raises the moisture level within the landfill refuse and provides additional nutrients to degrading microorganisms, thus accelerating waste decomposition and leachate stabilization (Reinhart and Basel Al-Yousfi 1996). As in co-treatment with sewage, leachate toxicity to natural microorganisms is a major concern. Therefore, recirculation rate and frequency must be carefully controlled to avoid accumulation of microbial inhibitors in the refuse (Šan and Onay 2001; Sponza and Ağdağ 2004).

Biological treatment

Biological treatment is considered highly efficient and inexpensive compared to other treatment technologies. However, treatment efficiency is hampered by the presence of toxic compounds or high concentrations of refractory matter, which inhibit biological activity. Hence, this technology is well suited for leachate with high BOD content corresponding to BOD/COD ratios higher than 0.5, which is typical of young or immature leachates. As mentioned earlier, biodegradation of organic compounds in MSW is brought about by microorganisms first aerobically to carbon dioxide and then anaerobically to biogas. Microorganisms for LL treatment are grown either in suspension mode or in attached mode to a matrix under aerobic or anaerobic conditions (Fig. 1d). Attached growth systems are generally advantageous in terms of retaining microbial cell mass and shielding microorganisms to some extent from the detrimental effects of inhibitors.

Aerobic suspended growth systems include aerated lagoons (Maehlum 1995; Maynard et al. 1999; Mehmood et al. 2009; Robinson and Grantham 1988) and activated sludges (Wang et al. 2018), which are becoming less popular, and sequencing batch reactors (SBRs) (Lim et al. 2016; Sivic et al. 2017), which are more widely applied. SBRs allow aerobic oxidation of organics to carbon dioxide in addition to ammonia nitrogen removal through a microbial nitrification–denitrification process. Aerobic attached growth systems include trickling filters (Hongjiang et al. 2009; Langwaldt and Puhakka 2000) and moving bed biofilm reactors (MBBR) (Hajipour et al. 2011; Xiong et al. 2018) that utilize suspended porous materials, such as granular activated carbon, on which microorganisms form biofilms. Anaerobic suspended growth systems include anaerobic SBRs (Timur and Öztürk 1999; Timur et al. 2000) and up-flow anaerobic sludge blanket

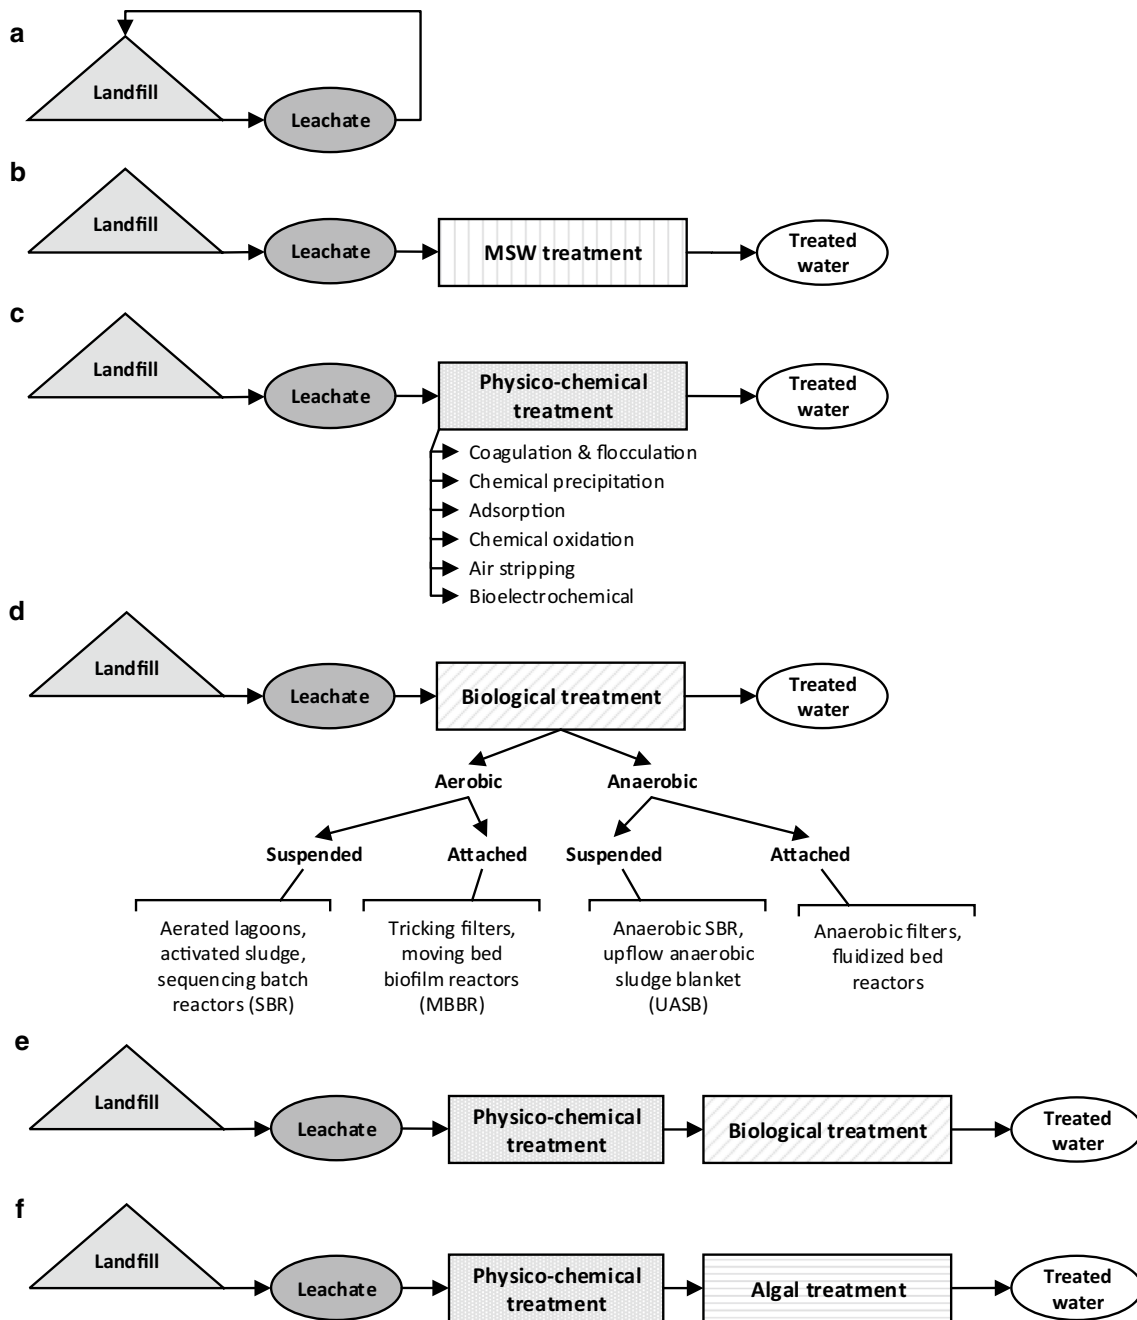


Fig. 1 Overview of main landfill leachate treatment methods: **a** recirculation; **b** mixing with municipal solid waste (MSW); **c** physico-chemical treatments; **d** biological treatments; **e** combination of

physico-chemical and biological treatments; **f** combination of physico-chemical and algal treatments

(UASB) reactors (Berrueta and Castrillón 1992; Fonseca et al. 2016; Kettunen and Rintala 1998; Timur et al. 2000; Wei et al. 2017). UASB is a relatively newer system and reportedly offers superior decomposition performance to SBR, but it remains sensitive to inhibitors. Anaerobic attached growth systems include anaerobic filters (Henry et al. 1987; Inanc et al. 2000), hybrid bed filters that are a

combination of anaerobic sludge blanket with anaerobic filter (Bello-Mendoza and Castillo-Rivera 1998; Fernández et al. 1995; Timur et al. 2000), and fluidized bed reactors (Nelson et al. 2017). The latter allows adsorption as well as biodegradation of organic matter, which makes it more effective than the former two in treating old leachates.

Physico-chemical treatment

A wide array of physical and chemical processes exists in this category (Fig. 1c), with a main goal to reduce the non-biodegradable content of leachate (Kurniawan et al. 2006). Hence, they are more suited for old leachates with high loads of refractory matter, but low loads of organic matter. Nonetheless, they can also be applied as pre-treatment or final polishing steps before LL discharge to the environment.

Coagulation-flocculation is common in LL treatment. Commonly used coagulating agents include aluminum sulfate, ferrous sulfate, ferric chloride, and ferric chlorosulfate. Iron salts are reported as more efficient than aluminum ones, but major drawbacks include sludge formation and increased iron and aluminum concentrations in leachate (Amokrane et al. 1997; Aziz et al. 2007; Ghafari et al. 2009; Tatsi et al. 2003).

Chemical precipitation is used as a pretreatment step, when leachate contains high ammonia nitrogen. It is possible to precipitate ammonia in the form of magnesium ammonium phosphate (MAP) using $\text{MgCl}_2 \cdot 6\text{H}_2\text{O}$ and $\text{Na}_2\text{HPO}_4 \cdot 12\text{H}_2\text{O}$ at $\text{Mg}^{2+}:\text{NH}_4^+:\text{PO}_4^{3-}$ molar ratio of 1:1:1 at pH 8.5–9 (Li et al. 1999). A more recent investigation recommended 1.15:1:1 molar ratio and pH of 9.5 (Zhang et al. 2009).

Adsorption can be utilized to reduce COD content, whether biodegradable or non-biodegradable, and to reduce color (Foo and Hameed 2009). Activated carbon is considered one of the best adsorbents for LL treatment. However, the need for frequent regeneration of columns and the consumption of large quantities of activated carbon are considered major process drawbacks. Typically, adsorption and biological treatments are combined. It is believed that activated carbon improves treatment by providing an attachment surface for biodegrading microorganisms and by helping cells floc (Çeçen et al. 2003; Foo and Hameed 2009).

Chemical oxidation is performed to oxidize recalcitrant matter or to enhance biodegradability prior to biological treatment. Recently, the focus has been on advanced oxidation processes (AOP) in which free radicals, mainly OH \cdot , are generated using synergistic combinations of strong oxidizing agents, such as ozone, UV, H_2O_2 , Fenton's reagent, ultrasonication, electron beam, and photocatalysts (Deng and Zhao 2015; Wang et al. 2003). In general, large doses of oxidizing agents are needed to fully oxidize (mineralize) recalcitrant matter, which means high energy consumption and treatment cost.

Air stripping has proven effective in eliminating high ammonia concentrations (Campos et al. 2013; Ferraz et al. 2013) and almost 100% removal has been reported (Silva et al. 2004). High pH is used to release ammonia gas, which is subsequently neutralized with acids to form ammonium salts. The main drawback of air stripping is the risk of

ammonia gas release into the atmosphere, if not fully contained by acid treatment.

Microbial electrochemical systems (MESs) have emerged as a promising platform technology. MESs use microbes capable of converting the chemical energy stored in organic and inorganic substrates into electrical energy through microbial anaerobic respiration. In general, a MES system consists of two main compartments, anodic and cathodic. A shared common principle in almost all MESs is that biodegradable substrates (electron donors) are oxidized at the anodic end by microorganisms releasing electrons. On the other hand, a variety of reduction-based reactions can take place at the cathodic end using various electron acceptors resulting in a range of applications, such as microbial fuel cells (MFCs) for electricity generation, microbial electrolysis cells (MECs) for production of value-added chemicals, microbial desalination cells (MDCs) for water desalination, and microbial remediation cells (MRCs) for remediation of contaminants in wastewaters. To date MESs have been successfully applied in the bioelectrochemical remediation of wastewaters, including removal and/or recovery of nitrogen, phosphorus, and perchlorate among other contaminants (Kelly and He 2014; Seveda et al. 2018) at both laboratory and pilot scale.

Finally, membrane technologies, such as microfiltration, ultrafiltration, nanofiltration and reverse osmosis are widely applied in LL treatment (Peng 2017; Renou et al. 2008; Wiszniewski et al. 2006). Microfiltration is used to remove suspended and colloidal matter. Ultrafiltration additionally allows fractionation of suspended matter based on molecular size. Nanofiltration has the advantage of removing both suspended and colloidal matter and microorganisms. These filtration techniques are usually employed as pretreatment before reverse osmosis or other treatment methods. Reverse osmosis is considered the most promising of all membrane technologies with near 100% COD removal efficiencies reported (Chianese et al. 1999; Linde et al. 1995; Ushikoshi et al. 2002). However, a major drawback of reverse osmosis and other membrane technologies is membrane fouling that necessitates downtime for cleanup or replacement. In addition, retained liquids become highly concentrated and may need further treatment before eventual disposal. All of these drawbacks raise the cost of treatment.

Technology combinations

As outlined earlier, LL is complex in nature. As a result, no sole treatment method is effective enough in stabilizing LL to meet discharge limits. Combinations of biological and physico-chemical methods in integrated multi-stage processes can provide a solution (Fig. 1e). Examples reported include: physico-chemical and biological combinations (Chemlal et al. 2014; Colombo et al. 2019; Del

Moro et al. 2013; Huang et al. 2017; Klauson et al. 2015; Oller et al. 2011; Smaoui et al. 2019), AOP combinations (Goi et al. 2009; Silveira et al. 2018; Soubh and Mokhtarani 2016), physico-chemical combinations (Amor et al. 2015; Joshi and Gogate 2019; Kılıç et al. 2007; Li et al. 2010; Ntampou et al. 2006; Pi et al. 2009; Trebouet et al. 2001), and multi-process combinations (Cammarota et al. 2009; Guo et al. 2010; Hasar et al. 2009).

Several factors are taken into account before determining which LL treatment method should be applied at a specific landfill. A key factor is the treatment cost which varies among methods (biological, physico-chemical or combinations) and even within each method depending on the composition of LL and local environmental regulations. In general, physico-chemical methods tend to be costlier than biological methods because of the higher capital cost and the maintenance cost of such facilities (Kurniawan et al. 2006). Other important factors include land cost and operating cost (Daskalopoulos et al. 1997; Heyer and Stegmann 2002; Tsagarakis et al. 2003). Typically, larger scale operations and integration with energy recovery or co-product generation lower the total cost thanks to economies of scale and co-product revenue.

Notably, because discharge limits enforced by regulatory entities are becoming more stringent over time, more competent novel treatments are always in demand. Exploiting the potential of algae in LL treatment is one such novel approach currently gaining interest. At the same time, algae are a promising renewable resource (feedstock) for producing biofuels and bioproducts. One of the biggest challenges to commercial production of algal bioproducts is the high water and energy demand. As stated earlier, LL is rich in various organic and inorganic components, which can be utilized by algae, with or without prior treatment. Hence, LL can serve as a sustainable source of water and nutrients in the manufacture of algal biofuels and bioproducts. In fact, using LL to grow algae fulfills two goals simultaneously, namely bioremediation of leachate and algal biomass and bioproduct synthesis (Dogaris et al. 2019; Matsakas et al. 2017; Rawat et al. 2011). From a sustainability standpoint, use of algae in LL treatment offers a number of advantages: valorizing low-value waste matter and wastewater, reducing potable water consumption, and co-locating bioremediation and biomass production processes, which minimizes land use and land use change from a sustainability perspective. For these reasons, growing algae on LL has recently received increased attention from researchers (Edmundson and Wilkie 2013; Kumari et al. 2016; Mustafa et al. 2012; Zhao et al. 2014), including our own work (Dogaris et al. 2019), as summarized next.

Use of algae in landfill leachate treatment

Microalgae have been previously reported to grow in LL, generally after some LL pretreatment or dilution, but mostly in small-scale experiments, while a few algal species have been explored for biological treatment of LL effluents at larger-scale outdoor ponds and raceways. Cultivating algae in landfill wastewater can accomplish a dual goal of producing algal biomass for energy and bioproducts and at the same time remediating low-quality wastewater (LL) for recycling and reuse. Next, we provide an overview of reports on the toxicity of LL to algae, the use of LL as algal nutrient source, common algal cultivation technologies that can be integrated into LL treatment facilities, and LL treatment findings using algae and algae-bacteria consortia.

Toxicity of LL to algae

Algae are organisms that grow rapidly in inexpensive media and play important ecological roles thanks to photosynthesis, but are sensitive to environmental factors. As a result, use of algae is common in environmental studies as a means of testing water toxicity and has been applied in screening wastewaters, including LL (Hassan et al. 2016). The ISO (International Association for Standardization) test 8692 was developed to assess water quality using a freshwater algal growth inhibition test with unicellular green algae (ISO 1989). Other toxicity assessments using microalgae include esterase inhibition, ATP energy loss, motility inhibition, and chlorophyll fluorescence (Hassan et al. 2016). All these tests are typically carried out in small volumes, such as shake flasks, microplate wells or glass vials. The microalgal species *Chlamydomonas variabilis*, *Chlamydomonas reinhardtii*, *Chlorella vulgaris*, *C. pyrenoidosa*, *C. kessleri*, *Monoraphidium pusillum*, *Scenedesmus quadricauda*, *S. subspicatus*, and *S. capricornutum* have been extensively used in algal toxicity assays (Hassan et al. 2016).

In general, LL toxicity to algae is a potential limitation that needs to be considered in advance of integrating algae cultivation with LL treatment. Plotkin and Ram (1984) tested the toxicity of LL on *S. capricornutum* and found that algal growth was inhibited above 10% LL load. Cheung et al. (1993) assessed the toxicity of leachates from two landfills with four different green algal species using the ISO 8692 method and found an inhibitory effect on growth at 50% LL, while reporting that susceptibility to LL increased among algae species in the order *Chlorella pyrenoidosa*, *Scenedesmus* sp., *C. vulgaris*, and *Dunaliella tertioleeta* (Cheung et al. 1993). Baun et al. (2000) tested

27 samples of leachate from a municipal landfill using *S. capricornutum* and concluded that LL groundwater collected close to the landfill was toxic, but the toxicity decreased with distance away from the landfill. Martinen et al. (2002) screened various physical–chemical treatments (nanofiltration, ammonia stripping, ozonation) to remove pollutants and then assessed the effluent toxicity on *Raphidocelis subcapitata* growth, which showed that none of the tested treatments was effective in eliminating LL toxicity to algae. Waara et al. (2003) observed acute toxicity of untreated as well as biologically treated LL to *Pseudokirchneriella subcapitata*. The use of *P. subcapitata* (also known as *S. capricornutum* or *R. subcapitata*) has become a very popular tool for monitoring the toxicity of landfill effluents (Ghosh et al. 2017). One bioassay kit based on this alga is commercially available under the name Algaltoxkit F and has been used in many LL assessment studies (Ghosh et al. 2017; Kokkali and van Delft 2014; Thomas et al. 2009).

Jemec et al. (2012) reported the use of the alga *Desmodesmus subspicatus* CCAP 276/22 as biotoxicity marker in biologically treated LL. Although an increase in algal growth at low LL concentrations was observed, *D. subspicatus* cells were inhibited at more concentrated LL. Jurkoniene et al. (2004) developed a bioassay based on enzymatic activity (ATPase) in a preserved cell fraction of the freshwater alga *Nitellopsis obtuse* to produce an “on demand” toxicity test. This algal fraction toxicity test showed that LL toxicity was decreasing with an increasing dilution with fresh water, and the results were comparable with other toxicity standard tests.

LL as algal nutrient and carbon source

The ability of algae to grow in wastewater sources depends on pH, temperature, availability of light, O₂, and CO₂, presence of inhibitors, and importantly the concentration of essential nutrients, such as nitrogen and phosphorus (Pittman et al. 2011). Reviews by Cai et al. (2013) and Gonçalves et al. (2017) describe in detail the N, P, and carbon assimilation paths in algal cells. Briefly, autotrophic algae fix CO₂ from the atmosphere via photosynthesis and take up soluble carbonates from the solution to convert them into CO₂. Then, CO₂ enters cellular metabolism and is converted into organic compounds by the enzyme rubisco (ribulose biphosphate carboxylase oxygenase). Other algae are heterotrophic, instead of autotrophic, hence being able to use organic carbon (such as sugars) or mixotrophic, using carbon from both CO₂ and organic compounds. In the case of nitrogen, only the prokaryotic algae (cyanobacteria) can fix molecular nitrogen (N₂–N) from the atmosphere and assimilate it into ammonia to meet their metabolic needs, such as protein synthesis. The eukaryotic algae, on the other hand, have the

capacity to take up only fixed forms of nitrogen in the form of ammonium (NH₄⁺), nitrate (NO₃⁻), and nitrite (NO₂⁻). Nitrate and nitrite first need to be reduced by enzymes (nitrate reductase and nitrite reductase, respectively) to ammonium, which then enters the metabolism. Phosphorus is also important in algal metabolism for energy synthesis (ATP) and nucleic acid synthesis. It enters algal cells in the form of phosphate (PO₄³⁻) by active transport and is incorporated directly into various metabolic substrates, such as ATP. The removal of PO₄-P from wastewater by algae is affected by pH and O₂, with precipitation occurring at higher pH and oxygen levels.

LL in general is reported to contain significant amounts of carbon, nitrogen, and phosphorus. Table 1 presents the compositions of reported effluents from numerous landfills in terms of organic carbon, nitrogen, and phosphorus, demonstrating that LL composition varies significantly among landfill sites and treatment technologies. Carbon content fluctuates considerably ranging from 32 to 21,475 mg L⁻¹ COD (average 3206 mg L⁻¹). NH₄⁺ seems to be the most prevalent form of nitrogen, especially in raw LL, at an average concentration of 626 mg L⁻¹ and reaching up to 2589 mg L⁻¹, followed by NO₃⁻, at an average 327 mg L⁻¹ (up to 1471 mg L⁻¹), and NO₂⁻ at an average 229 mg L⁻¹ (up to 712 mg L⁻¹). Phosphorus levels in LL are usually lower than nitrogen at 19 mg L⁻¹ on average and reaching up to 270 mg L⁻¹.

Overview of algal cultivation systems

Integration of algae into current LL treatment processes will require the use of cultivation systems. Microalgae are cultivated in open systems, such as ponds and raceways, or in closed photobioreactors (PBRs) (Fig. 2). In PBRs the use of high-cost materials of construction and peripheral equipment for providing gases (CO₂, air) and chemicals increases the capital and operating costs compared to open systems. On the other hand, the enclosed design of PBRs protects the culture from the environment (contaminants) and enables better control of growth conditions leading to higher productivity. PBRs can be constructed from rigid glass or plastic or from flexible and transparent plastic films. Many PBR designs have been reported (Fig. 2a–d), including flat panel, tubular, horizontal, inclined or vertical, spiral, manifold or serpentine, floating, membrane, and hybrid systems (Zittelli et al. 2013). Some are still in research phase, while a few have been used at commercial scale.

For economic reasons most large-scale cultivations of microalgae are in open systems (Borowitzka and Moheimani 2013; Wijffels and Barbosa 2010). A review by Borowitzka and Moheimani (2013) provides examples of large-scale open systems for algal cultivation, important operational characteristics, culture management practices, and ways to

Table 1 Compositional profile of landfill leachate effluent after conventional treatments that may serve as input to algae cultivation

Landfill location	LL treatment	Carbon (mg L ⁻¹)		Nitrogen (mg L ⁻¹)			Phosphorus (mg L ⁻¹) P-PO ₄ ³⁻	References
		TOC	COD	NH ₄ ⁺ -N	NO ₃ ⁻ -N	NO ₂ ⁻ -N		
n.a	Microfiltration	n.a	n.a	258.4	24.3	6.4	n.a	(Casazza and Rovatti 2018)
n.a	Microfiltration and biological nitrification	n.a	n.a	0	162.3	712.2	n.a	(Casazza and Rovatti 2018)
Chongqing, China	Biological effluent	550.4	341.5	105.7 ^a	142.8 ^a	n.a	5.0 ^a	(Chang et al. 2018)
Chongqing, China	Untreated	1630.4	1446.5	197.2 ^a	475.7 ^a	n.a	6.1 ^a	(Chang et al. 2019)
Hangzhou, China	Filtration and autoclaving	n.a	14,427	842.4	948 ^b	n.a	5.67 ^c	(Cheng and Tian 2013)
Junk Bay, China	Untreated	n.a	595	724	752 ^b	n.a	2.87	(Cheung et al. 1993)
Gin Drinkers' Bay, China	Untreated	n.a	140	147	152 ^b	n.a	0.34	(Cheung et al. 1993)
Junk Bay, China	Untreated	n.a	462	680	0.87 ^d	n.a	4.58	(Chu et al. 1996)
	Free stripped	n.a	317	217	1.13 ^d	n.a	1.27	
	Air stripped	n.a	339	41	1.27 ^d	n.a	1.39	
Gin Drinkers' Bay, China	Untreated	n.a	455	561	57 ^d	n.a	3.73	
	Free stripped	n.a	257	146	61 ^d	n.a	1.27	
	Air stripped	n.a	241	39	68 ^d	n.a	1.04	
Biguaçu, Santa Catarina, Brazil	Untreated	n.a	1789	1108	1471 ^b	n.a	n.a	(Costa et al. 2014)
Punta Gorda, Florida, USA	Treated effluent from confined deep well	1.0	32	<0.1	<0.1	<0.1	<0.1	(Dogaris et al. 2019)
Archer, Florida, USA	Untreated	n.a	2109.3	980	n.a	n.a	13.2	(Edmundson and Wilkie 2013)
Tunis, Tunisia	Untreated	10,920	21,475	2570	320 ^d	n.a	n.a	(El Ouaer et al. 2016; El Ouaer et al. 2019)
Tunis, Tunisia	Untreated	10,920	23,926	2589	415 ^d	n.a	n.a	(El Ouaer et al. 2017)
Taizhou, China	n.a	n.a	304	230	n.a	n.a	n.a	(Fan et al. 2018)
Slovenia	Untreated	n.a	3766	909	633	64	53	(Jemec et al. 2012)
Odayeri, Turkey	Ultrafiltration	90 ^e	386	760	800 ^b	n.a	5.42	(Khanzada and Övez 2018)
Guangzhou, China	Untreated	n.a	1280	1046	68.4	n.a	5.16	(Lin et al. 2007)
Selangor, Malaysia	Aerobic treatment	n.a	4293	152	n.a	n.a	8.2	(Mustafa et al. 2012)
Chennai, India	Pre-treated (coagulation and air-stripping)	586	1700	n.a	228 ^b	n.a	10.3	(Nair and Nagendra 2018)
Chennai, India	Coagulation and air-stripping	697	1800	182	228 ^b	n.a	7.0	(Nair et al. 2019)
Selangor, Malaysia	Nitrification	n.a	1624	n.d	549	n.d	18.3	(Nordin et al. 2017)
Northern Portugal	Aeration, biological oxidation, coagulation-flocculation, and photo-oxidation; batch 1	n.a	n.a	15	144	n.a	<0.1	(Pereira et al. 2016)
Northern Portugal	Aeration, biological oxidation, coagulation-flocculation, and photo-oxidation; batch 2	n.a	n.a	67	136	n.a	1	(Pereira et al. 2016)

Table 1 (continued)

Landfill location	LL treatment	Carbon (mg L ⁻¹)		Nitrogen (mg L ⁻¹)			Phosphorus (mg L ⁻¹) P-PO ₄ ³⁻	References
		TOC	COD	NH ₄ ⁺ -N	NO ₃ ⁻ -N	NO ₂ ⁻ -N		
Northern Portugal	Aeration, biological oxidation, coagulation-flocculation, and photo-oxidation; batch 3	n.a	n.a	75	153	n.a	1	(Pereira et al. 2016)
São Paulo, Brazil	Diluted 10 times	95.7	251.8	n.a	n.a	n.a	n.a	(Reis et al. 2016)
Northern Ireland	Untreated	n.a	n.a	88	0.1 ^d	n.a	1	(Paskuliakova et al. 2016)
Northern Ireland	Biological pretreatment and filtration	n.a	n.a	<0.05	85 ^d	n.a	0.5	(Paskuliakova et al. 2016)
Northern Ireland	Untreated	n.a	97–5030	98–2510	0.1–1280	n.a	0.05–16.5	(Paskuliakova et al. 2018a)
Northern Ireland	Untreated	n.a	290–469	261–367	0.1–89 ^d	n.a	0.9–1.2	(Paskuliakova et al. 2018b)
Phuket, Thailand (from garbage pit)	Untreated	n.a	3000–9000	593–1590	14–260	n.a	60–270	(Thongpinyochai and Ritchie 2014)
Phuket, Thailand (from base of landfill)	Untreated	n.a	32–160	132–199	14–49	n.a	5.6–36.6	(Thongpinyochai and Ritchie 2014)
West Australia	Filtered	668	1008	n.a	n.a	n.a	n.a	(Richards and Mullins 2013)
Cyprus	Filtered	n.a	9361	2568	875	362	97.5	(Tighiri and Erkurt 2019)
Shanghai, China	Filtered	294	n.a	1381	1786 ^b	n.a	3.2	(Zhao et al. 2014)

n.a. not available (not reported), *n.d.* not detected (below detection limit)

^ain mg of NH₄⁺, NO₃⁻, and PO₄³⁻, respectively

^bTotal nitrogen or Kjeldahl nitrogen

^cTotal phosphorus

^dOxidized nitrogen (N-NO₃⁻ and N-NO₂⁻)

^eApproximately (as derived by the authors from graphs included in the noted literature)

improve productivity. Open pond culture systems include simple ponds, lagoons or tanks, inclined (cascade) systems, circular (central-pivoting) ponds, and raceway ponds (Fig. 2e, f). Adequate mixing in the pond is essential to ensure that the algae do not settle (thus becoming unproductive), nutrients, pH, and O₂ are evenly distributed, and all cells get enough light exposure. However, contamination problems are often reported in open systems, which could be reduced with the use of rapidly growing algae species that outcompete contaminants and adequate mixing (Borowitzka and Moheimani 2013). Algal open cultivation systems have been employed in municipal, industrial, and agricultural wastewater treatment facilities, mainly in the form of stabilization ponds/lagoons and raceway ponds known as high rate algal ponds (HRAP). The use of HRAP in wastewater treatment enables the synergistic action of algae and bacteria for breaking down pollutants, effectively combining secondary and partial tertiary wastewater treatment (Sutherland

et al. 2015). In such symbiosis, oxygen generated by algae through photosynthesis enables aerobic bacteria to degrade organic compounds in wastewater to CO₂ that is in turn used as carbon source by the algae. Hence, photosynthesis plays a key role in algal wastewater treatment, but is subject to limitations by light availability, temperature, nutrient and carbon load, and pH (Sutherland et al. 2015).

Finally, integration of algae with microbial electrochemical systems (MESs) has also been reported (Sevda et al. 2019). One of the main advantages of bioelectrochemical remediation systems is that they combine contaminant removal and/or recovery with the production of energy and/or value-added chemicals (Wang and Ren 2013).

Therefore, the technologies utilized in large-scale cultivations of algae (e.g. open raceways) and in algal wastewater treatment (e.g. HRAP) are very similar, and the main requirements for algal growth (i.e. light, nitrogen, and phosphorus) apply to both cases. However, significant

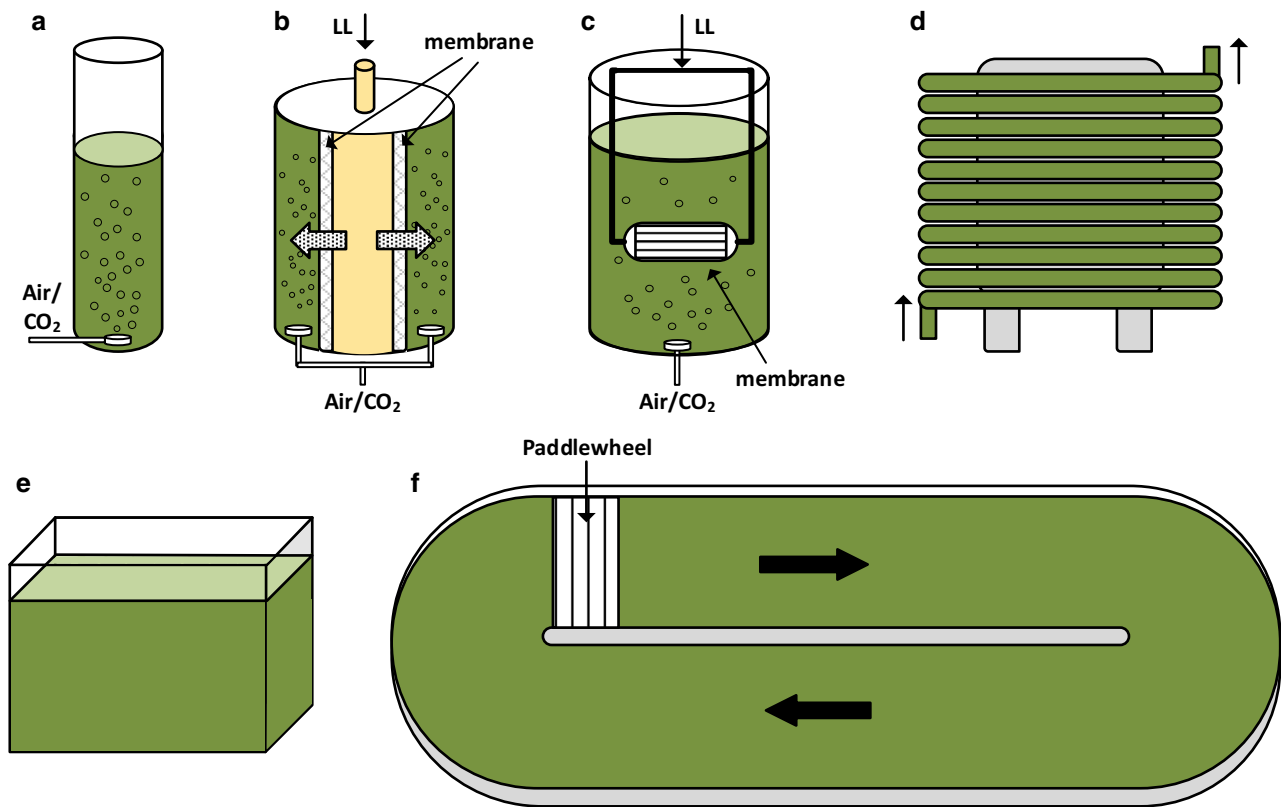


Fig. 2 Simplified schematics of algal cultivation systems reported in landfill leachate (LL) treatment trials: **a** tubular PBR; **b** membrane PBR; **c** oscillating-membrane PBR; **d** 'bio-coil' tubular PBR; **e** open tank; **f** open raceway algal pond

pre-treatment of the wastewater (e.g. filtering, air stripping or dilution with clean water) seems to be necessary to prevent extensive equipment fouling, minimize algal growth inhibition, and avoid culture crashes, as will be discussed in the following section. Another difference is the assortment of organisms present in each process: a plethora of organism types, including bacteria, protists, and fungi, may co-exist with algae in wastewater treatment operations, while single-species cultures are preferred in dedicated algal cultivations. Furthermore, it is expected that the quality of water (e.g. presence of toxic compounds, heavy metals, high solid content) will limit the end-uses of the generated algal biomass at landfills. Microalgae are a source of high-value natural compounds, such as carotenoids, antioxidants, ω -3 fatty acids, proteins, polysaccharides, which are used commercially in human food, animal feed, nutraceuticals, and cosmetics (Borowitzka 2013; Draaisma et al. 2013; Yen et al. 2013; Koller et al. 2014). These applications require 'food-grade' biomass, which necessitates a clean enough water source to avoid causing health issues to humans and animals. On the other hand, 'lower-grade' algal biomass, such as the one originating from wastewater treatment operations, can be processed to biofuels and other bio-based chemicals for industrial uses (Wijffels and Barbosa 2010; Koller et al.

2014), which can add value and generate additional income for water treatment facilities.

Algae for biological treatment of LL

Several small-scale studies have reported on the successful use of the green alga *Chlorella vulgaris* (Chlorophyta) to treat LL to effectively reduce N and P levels. Casazza and Rovatti (2018) studied the reduction of ammonia, nitrate, and nitrite levels of landfill leachate during biological denitrification treatment of LL. The growth experiments were conducted in a vertical 1.5 L PBR with air bubbling and artificial light by fluorescent lamps (Fig. 2a). High biomass concentration was attained (2 g L^{-1}) after 28 days of cultivation with almost 100% reduction of ammonia and nitrate, but partial removal of nitrite. Chang et al. (2018) adopted a membrane PBR (m-PBR) to alleviate some of the inhibitory effects of LL on algal cells (Fig. 2b). The membrane permitted only inorganic ions (such as ammonium and phosphate) to diffuse from the LL chamber to the algae chamber, hence blocking any suspended solids from passing through or the accumulation of high ammonia levels, which can be inhibitory to the algae. They also compared the nutrient removal, biomass production, and lipid profile of *C. vulgaris*

FACHB-31 grown in the m-PBR versus the traditional tubular PBR (t-PBR) using biological effluent of LL as growth medium. The m-PBR performed better than the t-PBR in terms of higher N and P removal efficiency (close to 100%), higher biomass yield (reaching close to 1 g L^{-1}), and a lipid profile with better biodiesel quality potential.

In another study by Chang et al. (2019), *C. vulgaris* FACHB-31 was cultivated in untreated LL using a t-PBR and a scalable m-PBR (Fig. 2b). The untreated LL was found to be inhibitory to algal growth with the culture dying within just two days, which was attributed to the high nitrogen concentration (particularly ammonia) and the high color value of the LL. The m-PBR seemed to alleviate these inhibitory effects, resulting in more than 2 g L^{-1} of biomass and 57.5% removal of nitrate, 83.0% of ammonia, and 100% of phosphate. Pereira et al. (2016) assessed the removal of nitrogen and phosphorus from three different batches of pretreated LL using *C. vulgaris* CCAP 211/11B grown in flasks for 10 days. The leachates had very low P content, so some tests included external addition of K_2PO_4 to support algal growth. Adding phosphorus to LL seemed to promote the growth and nutrient removal performance of *C. vulgaris*, which reached 1.7 g L^{-1} and removed up to 100% of ammonia, 27% of nitrate, and 100% of phosphate. Thongpinyochai and Ritchie (2014) tested *C. vulgaris* in 150-mL flasks for treating leachate collected from high-pollution (garbage pit) and low-pollution (landfill base) locations in the same landfill. The LL from the garbage pit was too toxic to support algal growth above a 30% load, while the performance of *C. vulgaris* in the less polluted LL was better at all loads tested. Nutrient removal after 9 days of treatment reached 65% of ammonia–nitrogen, 40% of nitrate–nitrogen, and 65% of phosphorus.

Desai (2016) investigated the use of *Chlorella* sp. in biological treatment of raw and pretreated LL at different dilutions in 1-L flasks. Nitrogenous compounds were effectively removed from both LL types, while COD remained above safe discharge levels, suggesting a multi-species treatment could be more effective. The growth of *Chlorella* sp. isolated from a clean lagoon was unhindered at 10% of untreated LL load, while culture adaptation was necessary above 30% LL load for the algae to be able to remove all the NH_4^+ -N in flask culture experiments (El Ouaer et al. 2016; El Ouaer et al. 2019). In another study by the same group using the same isolated strain and LL source, the *Chlorella* sp. population declined when raw LL was used, while slow growth was observed along with the removal of more than 60% of NH_4^+ -N (El Ouaer et al. 2017). A marine *Chlorella* sp. was cultivated in a 'Biocoil' tubular PBR (Fig. 2d), using diluted LL to assess the feasibility of reducing organic and metal loads (Reis et al. 2016). The Biocoil system comprised a 20-L tank that was connected to a 24-L tubular PBR, which was

artificially illuminated. No N and P removal information was reported, but *Chlorella* cells were able to remove 60% of total organic carbon (TOC), 68% of COD, and almost 100% of boron and iron.

Chlorella pyrenoidosa has also been utilized in treatment of LL Fan et al. (2018). reported on the treatment of a saline LL using the salt-tolerant *C. pyrenoidosa* FACHB-28 in a 30-L oscillating membrane PBR designed to reduce the biofouling of the membrane (Fig. 2c). The LL was first diluted (to about 25% load) to match the maximum salinity tolerance of the alga. *C. pyrenoidosa* grew well in diluted LL reaching 0.63 g L^{-1} and removed more than 90% of NH_4^+ -N. Lin et al. (2007) explored the feasibility of *C. pyrenoidosa* and *Chlamydomonas snowiae*, isolated from a high-ammonia leachate pond, to grow in LL and remove N and P. Flask experiments at various LL dilutions showed that algal growth was suppressed in LL loads above 10%, but removal of NH_4^+ -N and ortho-P continued to occur even at higher LL loads without significant differences between the strains. Nair et al. (2019) applied *C. pyrenoidosa* NCIM 2738 cultivation as tertiary treatment for pretreated leachate (after coagulation and air-stripping) in a 3-L tubular PBR (Fig. 2a). High algal growth was achieved (up to 2.9 g L^{-1}) and up to 86% and 96% removal of total N and phosphates, respectively, was reported.

Besides *Chlorella* species, algae belonging to the genera *Chlamydomonas*, *Scenedesmus*, and *Oscillatoria* have been isolated from landfill leachates and could be potential candidates for LL biological treatment. Cheng and Tian (2013) studied the use of *Scenedesmus* sp. CHX1 for biological treatment of LL. Leachate was filtered, sterilized, and fed to the algae in small flasks at different dilutions from 2 to 20% LL load. They reported better biomass yield (up to 0.75 g L^{-1}) and nutrient removal efficiencies (up to 95%) at lower LL loads, while 20% LL inhibited algal growth and resulted in only 16% nutrient removal. Chu et al. (1996) investigated the efficiency of two algal species, *Scenedesmus* sp. isolated from a local arable land drain and *C. pyrenoidosa* isolated from leachate runoff, for removing nutrients from leachates at two landfill sites. Flasks containing 400 mL of untreated (raw) LL were inoculated with algae and incubated for 12 days. No growth was observed in untreated LL compared to pretreated LL in which both species grew and removed up to 30% of ammonia–nitrogen and up to 94% of phosphorus. Nordin et al. (2017) examined the biomass production and nitrate removal of three algae, *Chlorella* sp., *Scenedesmus* sp. and *Oscillatoria* sp., isolated from local landfill sites. The LL used was first nitrified (in a 2-L bioreactor using activated sludge) and then fed at 10–30% load to the algae cultivated in 350-mL flasks for 14 days. Biomass production ranged from 0.09 – 0.81 g L^{-1} , while nitrate removal ranged from 13 to 84%, with the highest overall performance observed with *Oscillatoria* sp.

Edmundson and Wilkie (2013) reported the growth of *C. ellipsoidea* and *S. rubescens*, isolated from a landfill site in Florida, in raw but pH-adjusted LL. Significant biomass yield and productivity was achieved, up to 1.3 g L⁻¹ and 550 mg L⁻¹ day⁻¹, respectively, by *S. rubescens*, which was 4–5 times higher than *C. ellipsoidea* under the same conditions. Paskuliakova et al. (2016) screened algal populations from 34 isolates from different environments in Ireland, including landfill sites, for their ability to grow in LL. Cultures of *Chlamydomonas* sp. SW15aRL, which was isolated from untreated LL, achieved the highest removal of ammonia–nitrogen (up to 91% when supplemented with phosphate) and generated the most biomass. In follow-up studies using that strain, the researchers compared the effect of different types of phosphorus supplementation and LL biotoxicity reduction (Paskuliakova et al. 2018b) and evaluated the treatment of a range of LL samples collected from four different sites (Paskuliakova et al. 2018a). There was no significant difference in nutrient removal (reaching up to 83% NH₄⁺-N) or biomass yield (up to 1.2 g L⁻¹) when the *Chlamydomonas* sp. flask cultures with diluted LL (60% load) were supplemented with exogenous P (Paskuliakova et al. 2018b). However, the composition of the LL (nitrate, ammonia, phosphate, and toxic metals) seemed to greatly affect growth and nutrient removal by *Chlamydomonas* sp. SW15aRL.

Richards and Mullins (2013) investigated the use of mixed cultures of marine algae in two cylindrical PBRs (2.5 and 12.5 L, Fig. 2a) for removing toxic metals from hypersaline leachates and developed models for metal uptake kinetics. The marine species *Nannochloropsis gaditana*, *Pavlova lutheri*, *Tetraselmis chuii*, and *Chaetoceros muelleri* were exposed to filtered LL for 10 days in PBRs and the mixed culture was able to remove over 95% of metals, but no information on N and P was reported. By the end of the cultivation, *N. gaditana* and *C. muelleri* dominated the algal population and had the highest lipid content for biofuel production.

Studies on algae treatment of LL have been conducted either in flasks or in small-scale bioreactors, which are far from commercial implementation. However, there are a few reports on larger-scale outdoor cultivations ranging from 40 to 2000 L, which can serve as basis for pilot testing before commercial deployment. The authors demonstrated growth of the marine strain *Picochlorum oculatum* in pretreated LL (Dogaris et al. 2019), using a novel horizontal bioreactor (HBR), which is a modular low-cost cultivation system that resembles an enclosed raceway pond (Fig. 2f). High biomass productivity (ranging from 37 up to 256 mg L⁻¹ day⁻¹) and yield (up to 1.9 g L⁻¹) was achieved in 150-L and 2000-L HBRs operating outdoors over prolonged periods of time (19–73 days) using pretreated LL as a non-potable and low-cost water source. The HBR is currently being

scaled-up for future commercial deployment at a projected capital cost of \$25,000 per hectare (Dogaris et al. 2015). Khanzada and Övez (2018) investigated the use of mixed cultures of *C. vulgaris* and *Chlamydomonas reinhardtii* to treat ultra-filtered LL in 200-L open raceway ponds (Fig. 2f) and observed growth of both strains (up to 1.0 g L⁻¹) in LL, but no nitrate-nitrogen or ammonia–nitrogen was removed. Mustafa et al. (2012) used a mixture of five microalgae, *C. vulgaris*, *Scenedesmus quadricauda*, *Euglena gracilis*, *Ankistrodesmus convolutes*, and *Chlorococcum oviforme*, as well as lake water with natural populations of algae, to remove nutrients from treated LL in a 40-L open raceway pond (Fig. 2f) by progressively increasing the LL load (1–4% of medium replaced by LL daily). The five-species consortium achieved higher biomass production (up to 5 g L⁻¹) than the natural population, but the nutrient removal rates were similar in the two ponds, almost 100% of NH₄⁺-N and 86% of ortho-P. These pilot studies using open raceway ponds indicate that algae cultivation systems can be suitable and cost-effective for integration with conventional LL treatment processes. Open ponds (also known as HRAP) are easy to construct and to scale up and have been employed commercially in treatment of other types of wastewater, such as municipal, agricultural, and industrial wastewaters to some extent (Sutherland et al. 2015).

Table 2 summarizes the growth and pollutant removal efficiencies of algal species in LL reported in the literature. In general the studies support the prospect of using algae in LL treatment, although universal dilution and/or pretreatment (through filtration or other physico-chemical process) of the raw leachate are typically necessary for successful LL treatment. The exact performance of algae during LL and other wastewater remediation seems to depend on the species used and cultivation conditions (Cheah et al. 2016).

Algae-bacteria consortia for synergistic treatment of LL

In addition to algae strains, algae-bacteria consortia have also been studied for application to LL treatment. A consortium of synergistic microbial communities typically has the ability to regulate the processes occurring during biological treatment of wastewaters. As a result, algae-bacteria consortia can synergistically remove pollutants from wastewater by recycling the major nutrients N, P, and carbon. During such symbiotic action, phototrophic algae grow using sunlight and generate oxygen, which, in turn, is used by heterotrophic bacteria to oxidize organic matter, as mentioned earlier, thus achieving breakdown of the complex organic compounds found in LL.

Fernandes et al. (2013) studied a series of experimental stabilization ponds 5–8 m³ (Fig. 2e), filled with LL and recharged daily, in order to characterize the microbial

Table 2 Key characteristics and performance data from studies of algae cultivation for treatment of LL

Microorganism	Cultivation system and operation mode	LL type	Cultivation time (d)	Nitrogen removal			P removal	Algal growth, in g L ⁻¹ (dry basis) or cells mL ⁻¹	Biomass productivity (mg L ⁻¹ day ⁻¹)	References
				NH ₄ ⁺ -N	NO ₃ ⁻ -N	NO ₂ ⁻ -N				
<i>Chlorella vulgaris</i> CCAP 211	2 L-vertical PBR; batch	After microfiltration; supplemented with BBM	28	223 mg L ⁻¹ or 38.8 mg day ⁻¹	(+) ^a 7 mg L ⁻¹ or 1.7 mg day ⁻¹	(+) ^b 205 mg L ⁻¹ or 35.7 mg day ⁻¹	n.a	2.10 g L ⁻¹	63.8	(Casazza and Rovatti 2018)
<i>Chlorella vulgaris</i> CCAP 211	2 L-vertical PBR; batch	After microfiltration and biological nitrification; supplemented with BBM	28	n.a	5.5 mg day ⁻¹	1.1 mg day ⁻¹	n.a	2.00 g L ⁻¹	57.8	(Casazza and Rovatti 2018)
<i>Chlorella vulgaris</i> FACHB-31	Membrane PBR with two 2-L chambers; batch	Biological effluent of LL	8	135.9 mg L ⁻¹	622.1 mg L ⁻¹	n.a	15.3 mg L ⁻¹	0.95 g L ⁻¹	240	(Chang et al. 2018)
<i>Chlorella vulgaris</i> FACHB-31	2-L tubular PBR; batch	Biological effluent of LL	8	135.9 mg L ⁻¹	385.2 mg L ⁻¹	n.a	15.3 mg L ⁻¹	0.66 g L ⁻¹	150	(Chang et al. 2018)
<i>Chlorella vulgaris</i> FACHB-31	3 sets of membrane PBRs in series (in total 1.5-L for LL and 3-L for algal growth); batch	Untreated LL	12	210.5 mg L ⁻¹ (83.0%)	1211.2 mg L ⁻¹ (57.5%)	n.a	18.6 mg L ⁻¹ (100%)	2.13 g L ⁻¹	n.a	(Chang et al. 2019)
<i>Chlorella vulgaris</i> FACHB-31	3-L tubular PBR; batch	Untreated LL	2	85.2 mg L ⁻¹ (33.6%)	522.4 mg L ⁻¹ (24.8%)	n.a	7.4 mg L ⁻¹ (40.6%)	No growth	No growth	(Chang et al. 2019)
<i>Scenedesmus</i> sp. CHX1	250-mL flasks; batch	After filtration; auto-claving, and dilution (2% loading)	20	16.8 mg L ⁻¹ (84%) ^b	17.7 mg L ⁻¹ (75%) ^b	n.a	0.22 mg L ⁻¹ (80.5%) ^c	0.75 g L ⁻¹	37.5	(Cheng and Tian 2013)

Table 2 (continued)

Microorganism	Cultivation system and operation mode	LL type	Cultivation time (d)	Nitrogen removal			P removal	Algal growth, in g L ⁻¹ (dry basis) or cells mL ⁻¹	Biomass productivity (mg L ⁻¹ day ⁻¹)	References
				NH ₄ ⁺ -N	NO ₃ ⁻ -N	NO ₂ ⁻ -N				
<i>Scenedesmus</i> sp. (isolated from local arable land drain)	500-mL flasks; batch operation mode	Untreated; Gin Drinker's Bay Landfill	12	8.8%	7.3% ^d	n.a	18%	No growth	No growth	(Chu et al. 1996)
		Untreated; Junk Bay Landfill	12	5.2%	6.4% ^d	n.a	29%	No growth	No growth	
		After free stripping; Gin Drinker's Bay Landfill	12	15%	7.8% ^d	n.a	43%	10 ⁶ cells mL ^{-1e}	n.a	
		After free stripping; Junk Bay Landfill	12	12%	8.0% ^d	n.a	73%	10 ⁶ cells mL ^{-1e}	n.a	
		After air stripping; Gin Drinker's Bay Landfill	12	29%	+2.3% ^{a,d}	n.a	86%	1.2 × 10 ⁶ cells mL ^{-1e}	n.a	
		After air stripping; Junk Bay Landfill	12	31%	9.0% ^d	n.a	86%	1.2 × 10 ⁶ cells mL ^{-1e}	n.a	

Table 2 (continued)

Microorganism	Cultivation system and operation mode	LL type	Cultivation time (d)	Nitrogen removal			P removal	Algal growth, in g L ⁻¹ (dry basis) or cells mL ⁻¹	Biomass productivity (mg L ⁻¹ day ⁻¹)	References
				NH ₄ ⁺ -N	NO ₃ ⁻ -N	NO ₂ ⁻ -N				
<i>Chlorella pyrenoidosa</i> (isolated from LL runoff)	500-mL flasks; batch	Untreated; Gin Drinker's Bay Landfill	12	6.4%	5.3% ^d	n.a	18%	No growth	No growth	
		Untreated; Junk Bay Landfill	12	6.3%	+10% ^{a,d}	n.a	26%	No growth	No growth	
		After free stripping; Gin Drinker's Bay Landfill	12	15%	5.0% ^d	n.a	47%	0.8·10 ⁷ cells mL ^{-1e}	n.a	
<i>Chlorella</i> sp.	1-L flasks	After free stripping; Junk Bay Landfill	12	12%	12% ^d	n.a	71%	10 ⁷ cells mL ^{-1e}	n.a	
		After air stripping; Gin Drinker's Bay Landfill	12	32%	+6.9% ^{a,d}	n.a	94%	0.8·10 ⁷ cells mL ^{-1e}	n.a	
<i>Chlorella</i> sp.	1-L flasks	After air stripping; Junk Bay Landfill	12	26%	+6.3% ^{a,d}	n.a	81%	0.8·10 ⁷ cells mL ^{-1e}	n.a	
		Untreated; 85% load	20	1175 mg L ⁻¹ (100%)	n.a	n.a	n.a	n.a	n.a	(Desai 2016)
<i>Picochlorum oculatum</i> UTEX LB 1998	1-L flasks	Pretreated; 85% load	10	n.a	250 mg L ^{-1e} (99%)	n.a	n.a	n.a	n.a	(Desai 2016)
		Treated effluent from confined deep well	18–37	n.a	n.a	n.a	n.a	1.5–1.9 g L ⁻¹ (1.2–1.7 × 10 ⁹ cells mL ⁻¹)	37–55	(Dogaris et al. 2019)
<i>P. oculatum</i> UTEX LB 1998	2000-L floating or ground-based horizontal bioreactor; batch	Treated effluent from confined deep well	19–23	n.a	n.a	n.a	n.a	1.9 g L ⁻¹ (0.73–0.95 × 10 ⁹ cells mL ⁻¹)	75–80	(Dogaris et al. 2019)

Table 2 (continued)

Microorganism	Cultivation system and operation mode	LL type	Cultivation time (d)	Nitrogen removal			P removal	Algal growth, in g L ⁻¹ (dry basis) or cells mL ⁻¹	Biomass productivity (mg L ⁻¹ day ⁻¹)	References
				NH ₄ ⁺ -N	NO ₃ ⁻ -N	NO ₂ ⁻ -N				
<i>C. cf. ellipsoidea</i>	125-mL flasks; batch	Untreated; pH-adjusted	3	n.a	n.a	n.a	n.a	0.29 g L ⁻¹	100	(Edmundson and Wilkie 2013)
<i>S. cf. rubescens</i>	125-mL flasks; batch	Untreated; pH-adjusted	4	n.a	n.a	n.a	n.a	1.3 g L ⁻¹	550	(Edmundson and Wilkie 2013)
<i>Chlorella</i> sp. (isolated from a clean lagoon)	500-mL flasks; batch	Sterilized; 10–100% load	36	Up to 100%	n.a	n.a	n.a	up to 4.2 × 10 ⁷ cells mL ⁻¹ (for 10% load)	n.a	(El Ouaer et al. 2016)
<i>Chlorella</i> sp. (isolated from a clean lagoon)	500-mL flasks; batch	Sterilized; 10–100% load	24	Up to 90%	n.a	n.a	n.a	Up to 2.9 × 10 ⁷ cells mL ⁻¹ (for 10% load)	n.a	(El Ouaer et al. 2017)
<i>Chlorella</i> sp. (isolated from a clean lagoon)	500-mL flasks; batch	Untreated; 10% load	28	100%	n.a	n.a	n.a	3 × 10 ⁷ cells mL ⁻¹ e	n.a	(El Ouaer et al. 2019)
<i>C. pyrenoidosa</i> FACHB-28	30-L membrane PBR; batch	About 25% load	30	> 90%	n.a	n.a	n.a	0.41–0.63 g L ⁻¹	60 ^c –80	(Fan et al. 2018)
<i>C. vulgaris</i> and <i>Chlamydomonas reinhardtii</i>	500-mL bottles; batch	Ultrafiltration; 10–100% load	28–60	< 70%	No removal	n.a	n.a	0.46–1.5 g L ⁻¹	n.a	(Khanzada and Övez 2018)
<i>C. vulgaris</i> and <i>Chlamydomonas reinhardtii</i>	200-L open raceway pond; 5 runs; batch	Ultrafiltration	32–54	No removal	No removal	n.a	n.a	0.68–1.03 g L ⁻¹	160–440 (23–64 mg m ⁻² day ⁻¹)	(Khanzada and Övez 2018)
<i>C. pyrenoidosa</i> (isolated from leachate)	300-mL flasks; batch	Filtered; 10–100% load	12	5–80% ^c	n.a	n.a	5–80% ^c	Up to 4.1 × 10 ⁶ cells mL ⁻¹ (for 10% load)	n.a	(Lin et al. 2007)
<i>C. pyrenoidosa</i> (isolated from clean river)	300-mL flasks; batch	Filtered; 10–100% load	12	5–80% ^c	n.a	n.a	5–70% ^c	Up to 5.3 × 10 ⁶ cells mL ⁻¹ (for 10% load)	n.a	(Lin et al. 2007)
<i>Chlamydomonas snowiae</i> (isolated from leachate)	300-mL flasks; batch	Filtered; 10–100% load	12	5–80% ^c	n.a	n.a	5–60% ^c	Up to 1.8 × 10 ⁵ cells mL ⁻¹ (for 10% load)	n.a	(Lin et al. 2007)

Table 2 (continued)

Microorganism	Cultivation system and operation mode	LL type	Cultivation time (d)	Nitrogen removal			P removal	Algal growth, in g L ⁻¹ (dry basis) or cells mL ⁻¹	Biomass productivity (mg L ⁻¹ day ⁻¹)	References
				NH ₄ ⁺ -N	NO ₃ ⁻ -N	NO ₂ ⁻ -N				
<i>Scenedesmus quadricauda</i> UMACC 039, <i>Euglena gracilis</i> UMACC 058, <i>C. vulgaris</i> UMACC 001, <i>Ankistrodesmus convolutus</i> UMACC 101, <i>Chlorococcum oviforme</i> UMACC 110	40-L open raceway pond; semi-continuous	Pre-treated (mechanical aeration); 1–4% medium replaced with LL daily	351	99.9%	n.a	n.a	86%	Up to 5.5 g L ⁻¹	n.a	(Mustafa et al. 2012)
<i>C. pyrenoidosa</i> NCIM 2738	3-L tubular PBR; batch	Pre-treated (coagulation and air-stripping)	18	90%	86% ^b	n.a	96%	2.9 g L ⁻¹	260	(Nair et al. 2019)
<i>Oscillatoria</i> sp. (isolated from leachate)	350-mL flasks; batch	Pre-treated (nitrification); 10–30% load	14	n.a	27.8–86.5 mg L ⁻¹ or 2.0–6.2 mg L ⁻¹ day ⁻¹ (43–84%)	n.a	n.a	0.43–0.81 g L ⁻¹	44–107	(Nordin et al. 2017)
<i>Chlorella</i> sp. (isolated from leachate)	350-mL flasks; batch	Pre-treated (nitrification); 10–30% load	14	n.a	21.0–83.8 mg L ⁻¹ or 1.5–6.0 mg L ⁻¹ day ⁻¹ (13–77%)	n.a	n.a	0.09–0.43 g L ⁻¹	18–66	
<i>Scenedesmus</i> sp. (isolated from leachate)	350-mL flasks; batch	Pre-treated (nitrification); 10–30% load	14	n.a	18.3–86.9 mg L ⁻¹ or 1.3–6.2 mg L ⁻¹ day ⁻¹ (35–66%)	n.a	n.a	0.16–0.24 g L ⁻¹	37–46	
<i>C. vulgaris</i> CCAP 211/11B	1-L flasks; batch	Pre-treated; 3 LL batches; Supplemented with KH ₂ PO ₄	10	22–100%	0–27%	n.a	38–100%	0.81–1.71 g L ⁻¹	20–110	(Pereira et al. 2016)
<i>Chlorella</i> sp. (marine)	24-L tubular PBR; batch	Diluted 10 times and autoclaved	3	n.a	n.a	n.a	n.a	2.2–2.6 × 10 ⁶ cells mL ^{-1e}	n.a	(Reis et al. 2016)

Table 2 (continued)

Microorganism	Cultivation system and operation mode	LL type	Cultivation time (d)	Nitrogen removal			P removal	Algal growth, in g L ⁻¹ (dry basis) or cells mL ⁻¹	Biomass productivity (mg L ⁻¹ day ⁻¹)	References
				NH ₄ ⁺ -N	NO ₃ ⁻ -N	NO ₂ ⁻ -N				
<i>Chlamydomonas</i> sp. SW13aLS	250-mL flask; batch	Untreated; 10% load	30	0–11.4%	n.a	n.a	100%	No growth	No growth	(Paskuliakova et al. 2016)
	250-mL flask; batch	Permeate (biological pretreatment and filtration); 10% load	30	n.a	41.4% ^d	n.a	100%	0.6 mm ³ mL ^{-1e}	n.a	
<i>Scenedesmus</i> sp. OT08aTL	250-mL flask; batch	Untreated; 10% load	30	40–55% ^c	n.a	n.a	75%	No growth	No growth	
	250-mL flask; batch	Permeate (biological pretreatment and filtration); 10% load	30	n.a	20% ^{d,e}	n.a	100%	0.3 mm ³ mL ^{-1e}	n.a	
<i>Scenedesmus</i> sp. OT11aTL	250-mL flask; batch	Untreated; 10% load	30	40–50% ^c	n.a	n.a	87%	No growth	No growth	
	250-mL flask; batch	Permeate (biological pretreatment and filtration); 10% load	30	n.a	25–38% ^{d,e}	n.a	100%	0.4 mm ³ mL ^{-1e}	n.a	
<i>Chlamydomonas</i> sp. SW15aRL	250-mL flask; batch	Untreated; 10% load	30	50–92% ^c	n.a	n.a	100%	1.6 mm ³ mL ^{-1e}	n.a	
	250-mL flask; batch	Permeate (biological pretreatment and filtration); 10% load	30	n.a	5–10% ^{d,e}	n.a	100%	No growth	No growth	
<i>Chlamydomonas</i> sp. SW15aRL	150-mL flask; batch	Filtered and diluted (0–100% load)	40	16.8–133.2 mg L ⁻¹ (15–100%)	Up to 21 mg L ⁻¹ (8%) ^d	n.a	8–18 mg L ⁻¹ (25–90%) ^e	Up to 1.8 × 10 ⁶ cells mL ^{-1e} (no growth in 100% load)	n.a	(Paskuliakova et al. 2018a)

Table 2 (continued)

Microorganism	Cultivation system and operation mode	LL type	Cultivation time (d)	Nitrogen removal			P removal	Algal growth, in g L ⁻¹ (dry basis) or cells mL ⁻¹	Biomass productivity (mg L ⁻¹ day ⁻¹)	References
				NH ₄ ⁺ -N	NO ₃ ⁻ -N	NO ₂ ⁻ -N				
<i>Chlamydomonas</i> sp. SW15aRL	150-mL flask; batch	Filtered and diluted (30–60% load)	35	131 mg L ⁻¹ (83%)	0% ^{d,e}	n.a	95% ^e	1.21 g L ⁻¹	n.a	(Paskuliakova et al. 2018b)
<i>C. vulgaris</i>	150-mL flask; batch	Untreated; high-pollution leachate (garbage pit); 10–100% load	9	5–40% ^e	5–35% ^e	n.a	0–60% ^e	No growth above 30% load	n.a	(Thongpinyochai and Ritchie 2014)
<i>C. vulgaris</i>	150-mL flask; batch	Untreated; low-pollution leachate (landfill base); 10–100% load	9	20–65% ^e	10–40% ^e	n.a	18–65% ^e	Highest growth in 30% load	n.a	(Thongpinyochai and Ritchie 2014)
<i>Nannochloropsis gaditana</i> , <i>Pavlova lutheri</i> , <i>Tetraselmis chuii</i> and <i>Chetoceros muelleri</i>	2.5- and 12.5-L cylindrical PBR; batch	Filtered	10	n.a	n.a	n.a	n.a	Up to 9 × 10 ⁶ cells mL ⁻¹	n.a	(Richards and Mullins 2013)

n.a. not available

^aAccumulation of^bTotal nitrogen^cTotal phosphorus^dOxidized nitrogen^eApproximately as derived by the authors from graph

population dynamics. Through various molecular techniques and optical microscopy the researchers identified a small number of algae species, mainly belonging to the genera *Chlamydomonas* and *Cryptomonas*, while the identified bacteria species belonged to *Planctomycetales*, *Verrucomicrobiales*, *Desulfovibionaceae* (sulfate reducing bacteria), and *Pseudomonas*. Although a satisfactory removal efficiency was reported by this system (82% of ammonium and 56% of TOC), additional conventional treatment was deemed necessary to meet local limits before discharging treated LL to surface waters. In follow-up studies by the same group, where this stabilization pond system was modified to include aeration, recirculation, and filtering, higher removal rates were achieved, up to 82% of TOC and 99% of ammonia, thus meeting discharge limits (Costa et al. 2014; Martins et al. 2013). The main route of N removal was by the settling of dead or inert algae (64–79%), followed by volatilization of ammonia (12–27%), while a small part (1–6%) was attributed to assimilation by algae (Martins et al. 2013).

Kumari et al. (2016) investigated the synergistic effect of algae and bacteria on removing toxic organic compounds and heavy metals present in LL. The bacterial strain *Pae-nibacillus* sp. ISTP10, previously reported to degrade the banned insecticide endosulfan, was inoculated in 20% LL (v/v) or combined with the alga *Scenedesmus* sp. ISTGA1. The shake flask experiments showed that the algae-bacteria co-culture was more efficient in removing toxic organic compounds and heavy metals. Zhao et al. (2014) cultivated *C. pyrenoidosa* FACHB-9 in 500-mL flasks with a mixture of municipal wastewater and LL (0–20% load) to assess nutrient removal and algal lipid production. The algae-bacteria consortium was able to remove up to 90% of total nitrogen and 95% of phosphorus and accumulated up to 20.8% total lipids. Nair and Nagendra (2018) also combined LL with municipal sewage to effectively increase the bacterial load in the treatment by *C. pyrenoidosa* and observed removal of up to 70% of nitrogen and 89% of phosphate, while generating 2.8 g L⁻¹ of total microbial biomass in a 3-L tubular PBR (Fig. 2a). Tighiri and Er Kurt (2019) collected algal and bacterial populations from a wastewater treatment plant and mixed them in a 3-to-1 mass ratio to treat 10% (v/v) LL. The main microalgae identified in the consortium were the cyanobacteria *Microcystis* sp. and *Oscillatoria* sp. and the algae *Chlorella* sp., *Scenedesmus* sp., and *Stigeoclonium* sp. In the two batches of LL treatment in a 10-L PBR (Fig. 2a), 100% removal of ammonia and above 90% reduction in nitrate, COD, and phenol were reported Sardi Saavedra et al. (2016). studied the diversity of the algal communities that exist in a 300-L HRAP system (Fig. 2f) used for treating LL and identified 28 species of algae with *Chilomonas insignis* and *Euglena* sp. being the dominant ones. In their 2018 study, the researchers were able to predict the algal species

composition in response to environmental changes (Sardi Saavedra et al. 2018).

Sniffen et al. (2015) explored the use of an algae-bacteria consortium collected from a local pond for the removal of nitrogen from raw LL in 114-L open tanks (Fig. 2e). The authors reported N removal rates up to 9.2 mg L⁻¹ day⁻¹ and biomass concentration up to 0.48 g L⁻¹. However, the nitrogen removal was inhibited at initial NH₄⁺-N concentrations above 80 mg L⁻¹. They also studied nitrogen removal by algae-bacteria consortia at larger scale 1000-L raceway pond (Fig. 2f) operating in a 7-day semi-batch mode in a greenhouse and compared the results with controlled flask experiments (Sniffen et al. 2017). Biomass concentration reached up to 2.1 g L⁻¹ in the raceway pond, while N removal rate was generally lower in the larger scale system (1.6 mg L⁻¹ day⁻¹) than in the flasks (3.2 mg L⁻¹ day⁻¹). The comparison of N removal and growth rate showed a significant difference between small and larger scale, indicating the need for large-scale data to conduct techno-economic analysis of LL treatment by consortia before commercial development.

As with other industries, there is unfortunately a scarcity of published information on the performance of commercial landfills. As a result, the data compiled in Table 2 come from research studies rather than existing large-scale operations. Nevertheless, in our private conversations with landfill managers we detected an interest in considering the incorporation of algae technologies into traditional LL treatment processes. The main perceived advantage is the ability of algae to practically eliminate nitrogen and phosphorus from LL at low concentrations, hence complementing conventional physico-chemical processes that operate well at high concentrations, but become uneconomical at low concentrations. Another advantage is the ability of algae to sequester carbon dioxide released from landfill gas-powered electricity generators, hence reducing the carbon footprint (both methane and carbon dioxide) of landfills. The main drawback is the apprehension of landfill managers about the performance of algae at large scale, as the algae industry itself is still at its commercial infancy.

Conclusion

Algae have been shown to remove nitrogen, phosphorus, and other nutrients from wastewaters and thus act as a natural filtration mechanism for cleaning up polluted sources of water. In the last two decades a significant number of mostly small-scale studies has reported the ability of algae to grow in landfill leachate with simultaneous significant removal of pollutants. Almost universally, full-strength LL was inhibitory to algal growth, but when LL was diluted or pretreated or the algae were first subjected to LL adaptation, a wide range of algae species were successfully cultivated in LL

and were able to remove pollutants to a significant or full extent. Hence, by scaling up and integrating algae technologies with current treatment methods it is possible to significantly improve the effectiveness of LL treatment. However, the use of algae for treating LL has not been practiced commercially yet at landfills because it is deemed uneconomical on its own, when compared to established treatment technologies. Recent advances in the algae sector indicate that these photosynthetic organisms can serve as a promising resource for production of sustainable biofuels, such as biodiesel, aviation fuel, and biogas, and high-value bioproducts, such as nutraceuticals, cosmetics, fertilizers, animal feed, and fishmeal. As a result, if commercial LL remediation processes are integrated with large-scale outdoor algae cultivation (raceways) for biofuel/bioproduct manufacture, then potentially cost-effective and sustainable processes could be engineered and deployed at landfills around the world to combine environmental and societal benefits in the form of wastewater (LL) cleanup and CO₂ sequestration with the economic benefits derived from the production of biofuels and bioproducts with the use of LL.

Acknowledgements The financial support of the Florida Department of Agriculture and Consumer Services (Grant 26100) is gratefully acknowledged.

Author contributions GP conceived the idea for the review article, contributed, and edited it. EA performed the literature search for sections 1–3 and drafted the respective sections. ID performed the literature search and drafted the text for section 4, and prepared all figures and tables. All authors contributed to the revision of the manuscript and read and approved the final manuscript.

Compliance with ethical standards

Conflict of interest The authors declare that they have no conflict of interest.

References

- Amokrane A, Comel C, Veron J (1997) Landfill leachates pretreatment by coagulation-flocculation. *Water Res* 31:2775–2782
- Amor C, De Torres-Socias E, Peres JA, Maldonado MI, Oller I, Malato S, Lucas MS (2015) Mature landfill leachate treatment by coagulation/flocculation combined with Fenton and solar photo-Fenton processes. *J Hazard Mater* 286:261–268
- Aziz HA, Alias S, Adlan MN, Asaari A, Zahari MS (2007) Colour removal from landfill leachate by coagulation and flocculation processes. *Bioresour Technol* 98:218–220
- Baun DL, Christensen TH (2004) Speciation of heavy metals in landfill leachate: a review. *Waste Manag Res* 22:3–23
- Baun A, Jensen SD, Bjerg PL, Christensen TH, Nyholm N (2000) Toxicity of organic chemical pollution in groundwater down-gradient of a landfill (Grindsted, Denmark). *Environ Sci Technol* 34:1647–1652
- Baun A, Ledin A, Reitzel L, Bjerg PL, Christensen TH (2004) Xenobiotic organic compounds in leachates from ten Danish MSW landfills—chemical analysis and toxicity tests. *Water Res* 38:3845–3858
- Bello-Mendoza R, Castillo-Rivera M (1998) Start-up of an anaerobic hybrid (UASB/Filter) reactor treating wastewater from a coffee processing plant. *Anaerobe* 4:219–225
- Berrueta J, Castrillón L (1992) Anaerobic treatment of leachates in UASB reactors. *J Chem Technol Biotechnol* 54:33–37
- Borowitzka MA (2013) High-value products from microalgae—their development and commercialisation. *J Appl Phycol* 25:743–756. <https://doi.org/10.1007/s10811-013-9983-9>
- Borowitzka MA, Moheimani NR (2013) Open pond culture systems. In: Borowitzka M, Moheimani N. (eds) *Algae for biofuels and energy. Developments in applied phycology*, vol 5. Springer, Dordrecht, pp 133–152
- Bove D, Merello S, Frumento D, Arni SA, Aliakbarian B, Converti A (2015) A critical review of biological processes and technologies for landfill leachate treatment. *Chem Eng Technol* 38:2115–2126. <https://doi.org/10.1002/ceat.201500257>
- Bozkurt S, Moreno L, Neretnieks I (2000) Long-term processes in waste deposits. *Sci Total Environ* 250:101–121
- Cai T, Park SY, Li Y (2013) Nutrient recovery from wastewater streams by microalgae: status and prospects. *Renew Sustain Energy Rev* 19:360–369. <https://doi.org/10.1016/j.rser.2012.11.030>
- Cammarota M, Yokoyama L, Campos J (2009) Ultrafiltration, chemical and biological oxidation as process combination for the treatment of municipal landfill leachate. *Desalination Water Treat* 3:50–57
- Campos JC, Moura D, Costa AP, Yokoyama L, Araujo FVdF, Cammarota MC, Cardillo L (2013) Evaluation of pH, alkalinity and temperature during air stripping process for ammonia removal from landfill leachate. *J Environ Sci Health* 48:1105–1113
- Casazza AA, Rovatti M (2018) Reduction of nitrogen content in landfill leachate using microalgae. *Desalination Water Treat* 127:71–74
- Çeçen F, Aktaş Ö (2004) Aerobic co-treatment of landfill leachate with domestic wastewater. *Environ Eng Sci* 21:303–312
- Çeçen F, Çakıroğlu D (2001) Impact of landfill leachate on the co-treatment of domestic wastewater. *Biotechnol Lett* 23:821–826
- Çeçen F, Erdinçler A, Kiliç E (2003) Effect of powdered activated carbon addition on sludge dewaterability and substrate removal in landfill leachate treatment. *Adv Environ Res* 7:707–713
- Chang H, Quan X, Zhong N, Zhang Z, Lu C, Li G, Cheng Z, Yang L (2018) High-efficiency nutrients reclamation from landfill leachate by microalgae *Chlorella vulgaris* in membrane photobioreactor for bio-lipid production. *Bioresour Technol* 266:374–381
- Chang H, Fu Q, Zhong N, Yang X, Quan X, Li S, Fu J, Xiao C (2019) Microalgal lipids production and nutrients recovery from landfill leachate using membrane photobioreactor. *Bioresour Technol* 277:18–26
- Cheah WY, Ling TC, Show PL, Juan JC, Chang J-S, Lee D-J (2016) Cultivation in wastewaters for energy: a microalgae platform. *Appl Energy* 179:609–625
- Chemlal R, Azzouz L, Kernani R, Abdi N, Lounici H, Grib H, Mameri N, Drouiche N (2014) Combination of advanced oxidation and biological processes for the landfill leachate treatment. *Ecol Eng* 73:281–289
- Cheng H-X, Tian G-M (2013) Preliminary evaluation of a newly isolated microalga *Scenedesmus* sp. CHX1 for treating landfill leachate. In: 2013 third international conference on intelligent system design and engineering applications, pp. 1057–1060
- Cheung K, Chu L, Wong MH (1993) Toxic effect of landfill leachate on microalgae. *Water Air Soil Pollut* 69:337–349
- Chian ES, DeWalle FB (1977) Characterization of soluble organic matter in leachate. *Environ Sci Technol* 11:158–163
- Chianese A, Ranauro R, Verdone N (1999) Treatment of landfill leachate by reverse osmosis. *Water Res* 33:647–652
- Christensen TH, Kjeldsen P (1995) Landfill emissions and environmental impact: An introduction. In: 5th international landfill

- symposium, Cagliari, Italy, 1995. Environmental Sanitary Engineering Centre.
- Christensen TH, Kjeldsen P, Bjerg PL, Jensen DL, Christensen JB, Baun A, Albrechtsen HJ, Heron G (2001) Biogeochemistry of landfill leachate plumes. *Appl Geochem* 16:659–718
- Chu LM, Cheung KC, Wong MH (1996) Algal purification of pre-treated landfill. *Leachate Toxicol Environ Chem* 53:159–174
- Clément B, Merlin G (1995) The contribution of ammonia and alkalinity to landfill leachate toxicity to duckweed. *Sci Total Environ* 170:71–79
- Colombo A, Módenes AN, Trigueros DEG, da Costa SIG, Borba FH, Espinoza-Quiñones FR (2019) Treatment of sanitary landfill leachate by the combination of photo-Fenton and biological processes. *J Clean Prod* 214:145–153
- Costa RH, Martins CL, Fernandes H, Velho VF (2014) Consortia of microalgae and bacteria in the performance of a stabilization pond system treating landfill leachate. *Water Sci Technol* 70:486–494
- Daskalopoulos E, Badr O, Probert S (1997) Economic and environmental evaluations of waste treatment and disposal technologies for municipal solid waste. *Appl Energy* 58:209–255
- Del Moro G, Mancini A, Mascolo G, Di Iaconi C (2013) Comparison of UV/H₂O₂ based AOP as an end treatment or integrated with biological degradation for treating landfill leachates. *Chem Eng J* 218:133–137
- Deng Y, Zhao R (2015) Advanced oxidation processes (AOPs) in wastewater treatment. *Curr Pollut Report* 1:167–176
- Desai M (2016) The efficacy of using the microalgae *Chlorella* sp. for the treatment of hazardous landfill leachate (Doctoral dissertation). <https://pdfs.semanticscholar.org/b9fc/423f34e61a488ce44a5e54b9ec967b2f4150.pdf>. Accessed 13 Sept 2019
- Dogaris I, Welch M, Meiser A, Walmsley L, Philippidis G (2015) A novel horizontal photobioreactor for high-density cultivation of microalgae. *Bioresour Technol* 198:316–324
- Dogaris I, Loya B, Cox J, Philippidis G (2019) Study of landfill leachate as a sustainable source of water and nutrients for algal biofuels and bioproducts using the microalga *Picochlorum oculatum* in a novel scalable bioreactor. *Bioresour Technol* 282:18–27
- Draaisma RB, Wijffels RH, Slegers PM, Brentner LB, Roy A, Barbosa MJ (2013) Food commodities from microalgae. *Curr Opin Biotechnol* 24:169–177
- Edmundson SJ, Wilkie AC (2013) Landfill leachate—a water and nutrient resource for algae-based biofuels. *Environ Technol* 34:1849–1857
- El Ouaer M, Halaoui M, Trabelsi I, Hassen A (2016) Adaptation and use of *Chlorella* sp. for landfill leachate treatment. *Int J Innov Appl Stud* 14:807
- El Ouaer M, Kallel A, Kasmi M, Hassen A, Trabelsi I (2017) Tunisian landfill leachate treatment using *Chlorella* sp.: effective factors and microalgae strain performance. *Arab J Geosci* 10:457
- El Ouaer M, Turki N, Kallel A, Halaoui M, Trabelsi I, Hassen A (2019) Recovery of landfill leachate as culture medium for two microalgae: *Chlorella* sp. and *Scenedesmus* sp. *Environ Dev Sustain* 1–21
- EPA, United States Environmental Protection Agency (2019) Advancing Sustainable Materials Management: 2017 Fact Sheet.
- Ernst W, Hennigar P, Doe K, Wade S, Julien G (1994) Characterization of the chemical constituents and toxicity to aquatic organisms of a municipal landfill leachate. *Water Qual Res J* 29:89–102
- Fan Z, Qin L, Zheng W, Meng Q, Shen C, Zhang G (2018) Oscillating membrane photoreactor combined with salt-tolerated *Chlorella pyrenoidosa* for landfill leachates treatment. *Bioresour Technol* 269:134–142
- Fernández JM, Méndez RJ, Lema JM (1995) Anaerobic treatment of eucalyptus fiberboard manufacturing wastewater by a hybrid USBF lab-scale reactor. *Environ Technol* 16:677–684
- Fernandes H, Viancelli A, Martins CL, Antonio RV, Costa RH (2013) Microbial and chemical profile of a ponds system for the treatment of landfill leachate. *Waste Manag* 33:2123–2128
- Ferrari B, Radetski CM, Veber AM, Ferard JF (1999) Ecotoxicological assessment of solid wastes: a combined liquid-and solid-phase testing approach using a battery of bioassays and biomarkers. *Environ Toxicol Chem Intern J* 18:1195–1202
- Ferraz FM, Povinelli J, Vieira EM (2013) Ammonia removal from landfill leachate by air stripping and absorption. *Environ Technol* 34:2317–2326
- Fonseka H, Senewirathna P, Bandara W, Ellawala C (2016) Performance of an UASB reactor for leachate treatment under ambient temperature. In: Proceedings of the undergraduate research symposium on recent advances in civil engineering
- Foo K, Hameed B (2009) An overview of landfill leachate treatment via activated carbon adsorption process. *J Hazard Mater* 171:54–60
- Gao J, Oloibiri V, Chys M, Audenaert W, Decostere B, He Y, Van Langenhove H, Demeestere K, Van Hulle SW (2015) The present status of landfill leachate treatment and its development trend from a technological point of view. *Rev Environ Sci Bio/Technol* 14:93–122
- Ghafari S, Aziz HA, Isa MH, Zinatizadeh AA (2009) Application of response surface methodology (RSM) to optimize coagulation–flocculation treatment of leachate using poly-aluminum chloride (PAC) and alum. *J Hazard Mater* 163:650–656
- Ghosh P, Thakur IS, Kaushik A (2017) Bioassays for toxicological risk assessment of landfill leachate: a review. *Ecotoxicol Environ Saf* 141:259–270
- Goi A, Veressinina Y, Trapido M (2009) Combination of ozonation and the Fenton processes for landfill leachate treatment: evaluation of treatment efficiency. *Ozone Sci Eng* 31:28–36
- Gonçalves AL, Pires JCM, Simões M (2017) A review on the use of microalgal consortia for wastewater treatment. *Algal Res* 24:403–415
- Guo J-S, Abbas AA, Chen Y-P, Liu Z-P, Fang F, Chen P (2010) Treatment of landfill leachate using a combined stripping, Fenton, SBR, and coagulation process. *J Hazard Mater* 178:699–705
- Hajipour A, Moghadam N, Nosrati M, Shojasadati S (2011) Aerobic thermophilic treatment of landfill leachate in a moving-bed biofilm bioreactor. *J Environ Health Sci Eng* 8:3–14
- Hasar H, Unsal SA, Ipek U, Karatas S, Cinar O, Yaman C, Kınacı C (2009) Stripping/flocculation/membrane bioreactor/reverse osmosis treatment of municipal landfill leachate. *J Hazard Mater* 171:309–317
- Hassan SH, Van Ginkel SW, Hussein MA, Abskharon R, Oh SE (2016) Toxicity assessment using different bioassays and microbial biosensors. *Environ Int* 92–93:106–118
- Henry J, Prasad D, Young H (1987) Removal of organics from leachates by anaerobic filter. *Water Res* 21:1395–1399
- Heyer K, Stegmann R (2002) Leachate management: leachate generation, collection, treatment and costs. Ingenieurbüro für Abfallwirtschaft. <https://www.ifas-hamburg.de/pdf/leachate.pdf>. Accessed 05 Feb 2020
- Hongjiang L, Youcai Z, Lei S, Yingying G (2009) Three-stage aged refuse biofilter for the treatment of landfill leachate. *J Environ Sci* 21:70–75
- Huang D, Hu C, Zeng G, Cheng M, Xu P, Gong X, Wang R, Xue W (2017) Combination of Fenton processes and biotreatment for wastewater treatment and soil remediation. *Sci Total Environ* 574:1599–1610
- Inanc B, Calli B, Saatci A (2000) Characterization and anaerobic treatment of the sanitary landfill leachate in Istanbul. *Water Sci Technol* 41:223–230
- ISO (1989) Water quality—FRESH water algal growth inhibition test with *Scenedesmus subspicatus* and *Selenastrum capricornutum*. International Organization for Standardization, Geneva

- Jemec A, Tisler T, Zgajnar-Gotvaj A (2012) Assessment of landfill leachate toxicity reduction after biological treatment. *Arch Environ Contam Toxicol* 62:210–221
- Joshi SM, Gogate PR (2019) Treatment of landfill leachate using different configurations of ultrasonic reactors combined with advanced oxidation processes. *Sep Purif Technol* 211:10–18
- Jurkoniene S, Maksimov G, Darginaviciene J, Sadauskas K, Vitkus R, Manusadzianas L (2004) Leachate toxicity assessment by responses of algae *Nitellopsis obtusa* membrane ATPase and cell resting potential, and with Daphtoxkit F magna test. *Environ Toxicol* 19:403–408
- Kelly PT, He Z (2014) Nutrients removal and recovery in bioelectrochemical systems: a review. *Bioresour Technol* 153:351–360
- Kettunen RH, Rintala JA (1998) Performance of an on-site UASB reactor treating leachate at low temperature. *Water Res* 32:537–546
- Khanzada ZT, Övez S (2018) Growing fresh water microalgae in high ammonium landfill leachate. *Am J Mech Appl* 6:50–61
- Kılıç MY, Kestioglu K, Yonar T (2007) Landfill leachate treatment by the combination of physicochemical methods with adsorption process. *J Biol Environ Sci* 1:37–43
- Kjeldsen P, Barlaz MA, Rooker AP, Baun A, Ledin A, Christensen TH (2002) Present and long-term composition of MSW landfill leachate: a review. *Crit Rev Environ Sci Technol* 32:297–336
- Klauson D, Kivi A, Kattel E, Klein K, Viisimaa M, Bolobajev J, Velling S, Goi A, Tenno T, Trapido M (2015) Combined processes for wastewater purification: treatment of a typical landfill leachate with a combination of chemical and biological oxidation processes. *J Chem Technol Biotechnol* 90:1527–1536
- Kokkali V, van Delft W (2014) Overview of commercially available bioassays for assessing chemical toxicity in aqueous samples. *TrAC Trend Anal Chem* 61:133–155
- Koller M, Muhr A, Braunegg G (2014) Microalgae as versatile cellular factories for valued products. *Algal Res* 6:52–63. <https://doi.org/10.1016/j.algal.2014.09.002>
- Kulikowska D, Klimiuk E (2008) The effect of landfill age on municipal leachate composition. *Bioresour Technol* 99:5981–5985
- Kumari M, Ghosh P, Thakur IS (2016) Landfill leachate treatment using bacto-algal co-culture: an integrated approach using chemical analyses and toxicological assessment. *Ecotoxicol Environ Saf* 128:44–51
- Kurniawan TA, Lo W-H, Chan GY (2006) Physico-chemical treatments for removal of recalcitrant contaminants from landfill leachate. *J Hazard Mater* 129:80–100
- Langwaldt J, Puhakka J (2000) On-site biological remediation of contaminated groundwater: a review. *Environ Pollut* 107:187–197
- Li X, Zhao Q, Hao X (1999) Ammonium removal from landfill leachate by chemical precipitation. *Waste Manag* 19:409–415
- Li W, Hua T, Zhou Q, Zhang S, Li F (2010) Treatment of stabilized landfill leachate by the combined process of coagulation/flocculation and powder activated carbon adsorption. *Desalination* 264:56–62
- Lim CK, Seow TW, Neoh CH, Nor MHM, Ibrahim Z, Ware I, Sarip SHM (2016) Treatment of landfill leachate using ASBR combined with zeolite adsorption technology. *3 Biotech* 6:195
- Lin L, Chan GY, Jiang BL, Lan CY (2007) Use of ammoniacal nitrogen tolerant microalgae in landfill leachate treatment. *Waste Manag* 27:1376–1382
- Linde K, Jönsson A-s, Wimmerstedt R (1995) Treatment of three types of landfill leachate with reverse osmosis. *Desalination* 101:21–30
- Lippi M, Ley MBRG, Mendez GP, Junior RAFC (2018) State of art of landfill leachate treatment: literature review and critical evaluation. *Cienc Nat* 40:78
- Maehlum T (1995) Treatment of landfill leachate in on-site lagoons and constructed wetlands. *Water Sci Technol* 32:129–135
- Martins CL, Fernandes H, Costa RH (2013) Landfill leachate treatment as measured by nitrogen transformations in stabilization ponds. *Bioresour Technol* 147:562–568
- Marttinen S, Kettunen R, Sormunen K, Soimasuo R, Rintala J (2002) Screening of physical–chemical methods for removal of organic material, nitrogen and toxicity from low strength landfill leachates. *Chemosphere* 46:851–858
- Matsakas L, Gao Q, Jansson S, Rova U, Christakopoulos P (2017) Green conversion of municipal solid wastes into fuels and chemicals. *Electron J Biotechnol* 26:69–83
- Maynard H, Ouki S, Williams S (1999) Tertiary lagoons: a review of removal mechanisms and performance. *Water Res* 33:1–13
- Meeroff DE, Lakner J, Coffman N (2016) Safe discharge of landfill leachate to the environment. Year 2 final report. Hinkley Center for Solid and Hazardous Waste Management, Gainesville, FL. <https://labs.civil.fau.edu/MeeroffSafeDischargeYr2Final-11073.pdf>. Accessed 05 Dec 2019
- Mehmood M, Adetutu E, Nedwell D, Ball AS (2009) In situ microbial treatment of landfill leachate using aerated lagoons. *Bioresour Technol* 100:2741–2744
- Mustafa E-M, Phang S-M, Chu W-L (2012) Use of an algal consortium of five algae in the treatment of landfill leachate using the high-rate algal pond system. *J Appl Phycol* 24:953–963
- Nair AT, Nagendra SS (2018) *Chlorella Pyrenoidosa* mediated phycoremediation of landfill leachate. In: International conference on impact of global atmospheric changes on natural resources (IGACNR), 2018 Bengaluru, Karnataka, India pp 65–68.
- Nair AT, Senthilnathan J, Nagendra SMS (2019) Application of the phycoremediation process for tertiary treatment of landfill leachate and carbon dioxide mitigation. *J Water Process Eng* 28:322–330
- Nelson MJ, Nakhla G, Zhu J (2017) Fluidized-bed bioreactor applications for biological wastewater treatment: a review of research and developments. *Engineering* 3:330–342
- Nordin N, Yusof N, Samsudin S (2017) Biomass production of *Chlorella* sp., *Scenedesmus* sp., and *Oscillatoria* sp. in nitrified landfill leachate. *Waste Biomass Valoriz* 8:2301–2311
- Ntampou X, Zouboulis A, Samaras P (2006) Appropriate combination of physico-chemical methods (coagulation/flocculation and ozonation) for the efficient treatment of landfill leachates. *Chemosphere* 62:722–730
- Oller I, Malato S, Sánchez-Pérez J (2011) Combination of advanced oxidation processes and biological treatments for wastewater decontamination—a review. *Sci Total Environ* 409:4141–4166
- Paskuliakova A, Tonry S, Touzet N (2016) Phycoremediation of landfill leachate with chlorophytes: phosphate a limiting factor on ammonia nitrogen removal. *Water Res* 99:180–187
- Paskuliakova A, McGowan T, Tonry S, Touzet N (2018a) Microalgal bioremediation of nitrogenous compounds in landfill leachate—the importance of micronutrient balance in the treatment of leachates of variable composition. *Algal Res* 32:162–171
- Paskuliakova A, McGowan T, Tonry S, Touzet N (2018b) Phycoremediation of landfill leachate with the chlorophyte *Chlamydomonas* sp. SW15aRL and evaluation of toxicity pre and post treatment. *Ecotoxicol Environ Saf* 147:622–630
- Peng Y (2017) Perspectives on technology for landfill leachate treatment. *Arab J Chem* 10:S2567–S2574
- Pereira SF, Goncalves AL, Moreira FC, Silva TF, Vilar VJ, Pires JC (2016) Nitrogen removal from landfill leachate by microalgae. *Int J Mol Sci* 17:1926
- Pi K, Li Z, Wan D, Gao L (2009) Pretreatment of municipal landfill leachate by a combined process. *Process Saf Environ Prot* 87:191–196
- Pittman JK, Dean AP, Osundeko O (2011) The potential of sustainable algal biofuel production using wastewater resources. *Bioresour Technol* 102:17–25

- Plotkin S, Ram NM (1984) Multiple bioassays to assess the toxicity of a sanitary landfill leachate. *Arch Environ Contam Toxicol* 13:197–206
- Rawat I, Kumar RR, Mutanda T, Bux F (2011) Dual role of microalgae: phycoremediation of domestic wastewater and biomass production for sustainable biofuels production. *Appl Energy* 88:3411–3424
- Reinhart DR, Basel Al-Yousfi A (1996) The impact of leachate recirculation on municipal solid waste landfill operating characteristics. *Waste Manag Res* 14:337–346
- Reis C, Loures C, Castro H, Rós P, Santos J, Filho H, Silva M (2016) Microalgae assisted bioremediation of landfill leachate using a biocoil reactor: evaluation of operational conditions using taguchi experimental design. *Br J Environ Clim Chang* 6:299–308
- Renou S, Givaudan J, Poulain S, Dirassouyan F, Moulin P (2008) Landfill leachate treatment: review and opportunity. *J Hazard Mater* 150:468–493
- Richards RG, Mullins BJ (2013) Using microalgae for combined lipid production and heavy metal removal from leachate. *Ecol Model* 249:59–67
- Robinson HD, Grantham G (1988) The treatment of landfill leachates in on-site aerated lagoon plants: experience in Britain and Ireland. *Water Res* 22:733–747
- Rutherford L, Matthews S, Doe K, Julien G (2000) Aquatic toxicity and environmental impact of leachate discharges from a municipal landfill. *Water Qual Res J* 35:39–58
- Šan I, Onay TT (2001) Impact of various leachate recirculation regimes on municipal solid waste degradation. *J Hazard Mater* 87:259–271
- Sardi Saavedra A, Pena Salamanca EJ, Madera Parra CA, Ceron Hernandez VA (2016) Diversidad de las comunidades de algas asociadas a un sistema algal de alta tasa fotosintética para la biorremediación de lixiviados de rellenos sanitarios. *Latin Am J Aquat Res* 44:113–120
- Sardi Saavedra A, Madera Parra C, Peña EJ, Cerón VA, Mosquera J (2018) Grupos funcionales fitoplanctónicos en una laguna algal de alta tasa usada para la biorremediación de lixiviados de rellenos sanitarios. *Acta Biológ Colombiana* 23:295–303
- Sevda S, Sreekishnan T, Pous N, Puig S, Pant D (2018) Bioelectroremediation of perchlorate and nitrate contaminated water: a review. *Bioresour Technol* 255:331–339
- Sevda S, Garlapati VK, Sharma S, Bhattacharya S, Mishra S, Sreekrishnan T, Pant D (2019) Microalgae at niches of bioelectrochemical systems: a new platform for sustainable energy production coupled industrial effluent treatment. *Bioresour Technol Rep* 7:100290
- Silva A, Dezotti M, SantAnna GL Jr (2004) Treatment and detoxification of a sanitary landfill leachate. *Chemosphere* 55:207–214
- Silveira JE, Zazo JA, Pliego G, Casas JA (2018) Landfill leachate treatment by sequential combination of activated persulfate and Fenton oxidation. *Waste Manag* 81:220–225
- Sivic A, Atanasova N, Puig S, Griessler Bulc T (2017) Ammonium removal in landfill leachate using SBR technology: dispersed versus attached biomass. *Water Sci Technol* 77:27–38
- Smaoui Y, Bouzid J, Sayadi S (2019) Combination of air stripping and biological processes for landfill leachate treatment. *Environ Eng Res* 25:80–87
- Sniffen KD, Sales CM, Olson MS (2015) Nitrogen removal from raw landfill leachate by an algae–bacteria consortium. *Water Sci Technol* 73:479–485
- Sniffen KD, Price JR, Sales CM, Olson MS (2017) Influence of scale on biomass growth and nutrient removal in an algal–bacterial leachate treatment system. *Environ Sci Technol* 51:13344–13352
- Soubh A, Mokhtarani N (2016) The post treatment of composting leachate with a combination of ozone and persulfate oxidation processes. *Rsc Adv* 6:76113–76122
- Sponza DT, Ağdağ ON (2004) Impact of leachate recirculation and recirculation volume on stabilization of municipal solid wastes in simulated anaerobic bioreactors. *Process Biochem* 39:2157–2165
- Sutherland DL, Howard-Williams C, Turnbull MH, Broady PA, Craggs RJ (2015) Enhancing microalgal photosynthesis and productivity in wastewater treatment high rate algal ponds for biofuel production. *Bioresour Technol* 184:222–229
- Tatsi A, Zouboulis A, Matis K, Samaras P (2003) Coagulation–flocculation pretreatment of sanitary landfill leachates. *Chemosphere* 53:737–744
- Thomas DJ, Tyrrel SF, Smith R, Farrow S (2009) Bioassays for the evaluation of landfill leachate toxicity. *J Toxicol Environ Health B* 12:83–105
- Thongpinyochai S, Ritchie RJ (2014) Using *Chlorella vulgaris* to decrease the environmental effect of garbage dump leachates. *J Bioremediat Biodegrad* 5:1
- Tighiri HO, Erkurt EA (2019) Biotreatment of landfill leachate by microalgae–bacteria consortium in sequencing batch mode and product utilization. *Bioresour Technol* 286:121396
- Timur H, Öztürk I (1999) Anaerobic sequencing batch reactor treatment of landfill leachate. *Water Res* 33:3225–3230
- Timur H, Öztürk I, Altınbaş M, Arıkan O, Tuyluoğlu B (2000) Anaerobic treatability of leachate: a comparative evaluation for three different reactor systems. *Water Sci Technol* 42:287–292
- Trebouet D, Schlumpf J, Jaouen P, Quemener F (2001) Stabilized landfill leachate treatment by combined physicochemical–nanofiltration processes. *Water Res* 35:2935–2942
- Tsagarakis K, Mara D, Angelakis A (2003) Application of cost criteria for selection of municipal wastewater treatment systems. *Water Air Soil Pollut* 142:187–210
- Ushikoshi K, Kobayashi T, Uematsu K, Toji A, Kojima D, Matsumoto K (2002) Leachate treatment by the reverse osmosis system. *Desalin* 150:121–129
- Waara S, Allard A, Ek M, Svenson A (2003) Chemical and toxicological characterization of landfill leachate after treatment in a pilot scale plant using different treatment methods. In: *Proceedings Sardinia, 2003, ninth international waste management and landfill symposium, Cagliari, Italy, 6–10 October 2003*.
- Wang H, Ren ZJ (2013) A comprehensive review of microbial electrochemical systems as a platform technology. *Biotechnol Adv* 31:1796–1807
- Wang F, Smith DW, El-Din MG (2003) Application of advanced oxidation methods for landfill leachate treatment—a review. *J Environ Eng Sci* 2:413–427
- Wang K, Li L, Tan F, Wu D (2018) Treatment of landfill leachate using activated sludge technology: a review. *Archaea* 2018
- Ward ML, Bitton G, Townsend T, Booth M (2002) Determining toxicity of leachates from Florida municipal solid waste landfills using a battery-of-tests approach. *Environ Toxicol Int J* 17:258–266
- Wei D, Xufei L, Qingxi Z, Jiagen Z, Jin'an W, Weijun Z, Chengjun W (2017) Application of UASB reactor in leachate treatment of Beijing Asuwei waste sanitary landfill site. *Meteorol Environ Res* 8(1)
- Wijffels RH, Barbosa MJ (2010) An outlook on microalgal biofuels. *Science* 329:796
- Wiszniewski J, Robert D, Surmacz-Gorska J, Miksch K, Weber J (2006) Landfill leachate treatment methods: a review. *Environ Chen Lett* 4:51–61
- Xiong J, Zheng Z, Yang X, He J, Luo X, Gao B (2018) Mature landfill leachate treatment by the MBBR inoculated with biocarriers from a municipal wastewater treatment plant. *Process Saf Environ Prot* 119:304–310
- Yen H-W, Hu IC, Chen C-Y, Ho S-H, Lee D-J, Chang J-S (2013) Microalgae-based biorefinery—from biofuels to natural products. *Bioresour Technol* 135:166–174. <https://doi.org/10.1016/j.biortech.2012.10.099>

- Zhang T, Ding L, Ren H (2009) Pretreatment of ammonium removal from landfill leachate by chemical precipitation. *J Hazard Mater* 166:911–915
- Zhao X, Zhou Y, Huang S, Qiu D, Schideman L, Chai X, Zhao Y (2014) Characterization of microalgae-bacteria consortium cultured in landfill leachate for carbon fixation and lipid production. *Bioresour Technol* 156:322–328
- Zittelli GC, Biondi N, Rodolfi L, Tredici MR (2013) Photobioreactors for mass production of microalgae. In: Richmond A, Hu Q (eds)

Handbook of Microalgal Culture, 2nd edn. Wiley, Oxford, pp 225–266

Publisher's Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.