## **CORRECTION**

## Correction to: Optimizing Process Parameters of As-Homogenized Mg-Gd-Y-Zn-Zr Alloy in Isothermal Uniaxial Compression on the Basis of Processing Maps via Prasad Criterion and Murty Criterion

Qiang Chen, Li Hu 📵, Mingao Li, Yong Chen, Laixin Shi, Tao Zhou, and Mingbo Yang

Published online: 23 October 2023

Correction to: JMEPEG (2022) 31:2257–2266 https://doi.org/10.1007/s11665-021-06305-y

Acknowledgment of an image source was inadvertently omitted from the caption of Fig. 7. The caption should read as follows:

The original article can be found online at https://doi.org/10.1007/s11665-021-06305-y.

Qiang Chen, Southwest Technology and Engineering Research Institute, Chongqing 400039, China; Li Hu, Mingao Li, Laixin Shi, Tao Zhou, and Mingbo Yang, College of Material Science and Engineering, Chongqing University of Technology, Chongqing 400054, China; Yong Chen, Key Laboratory of Advanced Manufacturing Technology for Automobile Parts, Ministry of Education, Chongqing University of Technology, Chongqing 400054, China. Contact e-mail: huli@cqut.edu.cn.

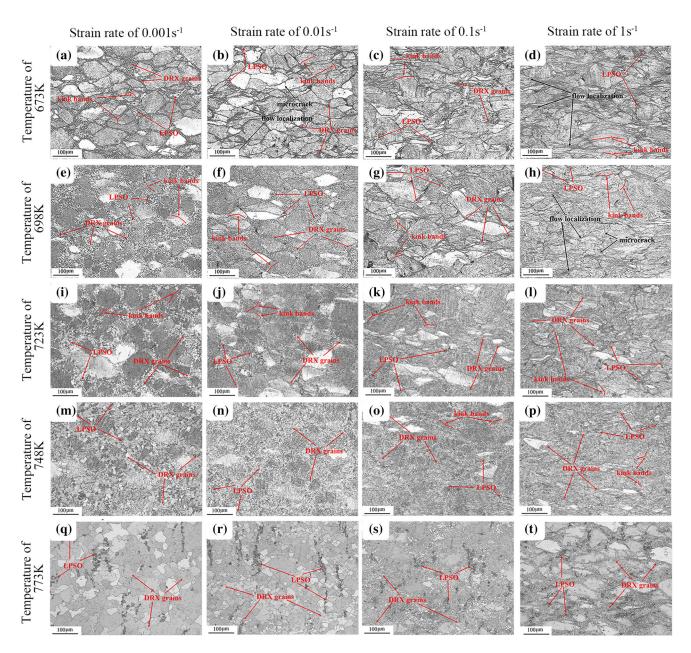


Fig. 7 Microstructures of as-homogenized Mg-8.5Gd-4.5Y-0.8Zn-0.4Zr alloy compressed to the true strain of 0.70: **a–d** At temperature of 673 K; **e–h** At temperature of 698 K; **i–l** At temperature of 723 K; **m–p** At temperature of 748 K; **q–t** At temperature of 773 K. Reprinted from *Journal of Magnesium and Alloys*, Vol 11, Li Hu, Mengwei Lang, Laixin Shi, Mingao Li, Tao Zhou, Chengli Bao, and Mingbo Yang, Study on hot deformation behavior of homogenized Mg8.5Gd 4.5Y 0.8Zn0.4Zr alloy using a combination of strain compensated Arrhenius constitutive model and finite element simulation method, Pages No. 1016–1028, Copyright 2023, with permission from Elsevier

**Publisher's Note** Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.