



CORRECTION

## Correction to: Correlation between platinum–aluminide coating features and tensile behavior of nickel-based superalloy Rene<sup>®</sup>80

Mohammad Mehdi Barjesteh, Seyed Mehdi Abbasi\* , Karim Zangeneh Madar, Kourosh Shirvani

© The Nonferrous Metals Society of China and Springer-Verlag GmbH Germany, part of Springer Nature 2019

**Correction to: Rare Met.**

<https://doi.org/10.1007/s12598-019-01293-4>

In the original publication, Fig. 12 was published incorrectly. The correct version of Fig. 12 is given in this correction.

The original article was corrected.


---

The original article can be found online at <https://doi.org/10.1007/s12598-019-01293-4>.

---

M. M. Barjesteh, S. M. Abbasi\*, K. Z. Madar  
Metallic Materials Research Center, Malek Ashtar University of  
Technology (MUT), Tehran 158751774, Iran  
e-mail: sma\_abbasi@mut.ac.ir

K. Shirvani  
Department of Advanced Materials and New Energies, Iranian  
Research Organization for Science and Technology (IROST),  
Tehran 3313193685, Iran

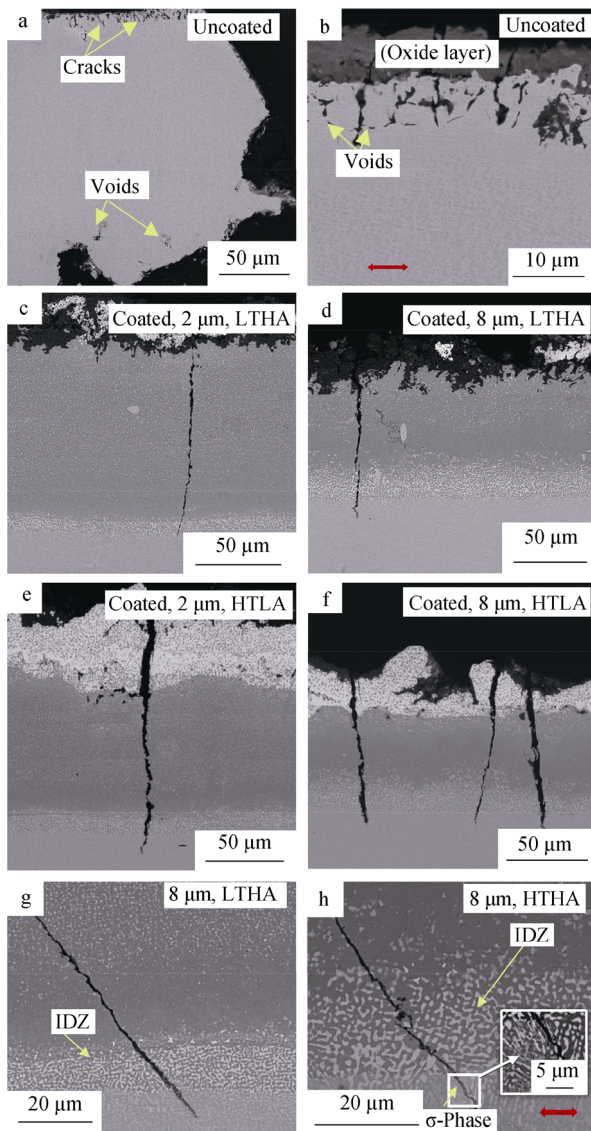

**Fig. 12** SEM images of fracture surface (longitudinal section): uncoated tensile samples with **a** fracture end and **b** cracks initiated from oxide layer; coated samples with platinum layer thicknesses of **c** 2  $\mu\text{m}$  and **d** 8  $\mu\text{m}$  in LTHA and **e** 2  $\mu\text{m}$  and **f** 8  $\mu\text{m}$  in HTLA methods; IDZ for samples with platinum layer thickness of 8  $\mu\text{m}$  in **g** LTHA and **h** HTLA methods (inset being image of needle-like  $\sigma$  phase)