

Dynamic response of structure with tuned mass friction damper

Alka Y. Pisal¹ · R. S. Jangid²

Received: 5 May 2015 / Accepted: 21 September 2016 / Published online: 1 October 2016
© The Author(s) 2016. This article is published with open access at Springerlink.com

Abstract The effectiveness of tuned mass friction damper (TMFD) in suppressing the dynamic response of the structure is investigated. The TMFD is a damper which consists of a tuned mass damper (TMD) with linear stiffness and pure friction damper and exhibits non-linear behavior. The response of the single-degree-of-freedom (SDOF) structure with TMFD is investigated under harmonic and seismic ground excitations. The governing equations of motion of the system are derived. The response of the system is obtained by solving the equations of motion, numerically using the state-space method. A parametric study is also conducted to investigate the effects of important parameters such as mass ratio, tuning frequency ratio and slip force on the performance of TMFD. The response of system with TMFD is compared with the response of the system without TMFD. It was found that at a given level of excitation, an optimum value of mass ratio, tuning frequency ratio and damper slip force exist at which the peak displacement of primary structure attains its minimum value. It is also observed that, if the slip force of the damper is appropriately selected, the TMFD can be a more effective and potential device to control undesirable response of the system.

Keywords TMFD · Harmonic excitation · Seismic excitation · Mass ratio · Tuning frequency ratio · Slip force · Optimum parameters

Introduction

The tuned mass damper (TMD) is the most popular and widely used device to control vibration in civil and mechanical engineering applications ranging from small rotating machines to tall civil engineering structures. Its basic purpose is to reduce the response of main system by tuning an additional vibrating mass to a frequency close to the resonant frequency of the main system. The vibration of main system causes the TMD to vibrate out of phase with the main system in resonance condition so that the vibrational energy is dissipated through the damping of the TMD. Similar to the TMD, friction damper (FD) were found to be very efficient, not only for rehabilitation and strengthening of existing structures but also for the design of structures to resist excessive vibrations (Colajanni and Papia 1995; Qu et al. 2001; Mualla and Belev 2002; Pasquin et al. 2004). Lee et al. (2008) have shown that the seismic design of the bracing-friction damper system for the retrofitting of a damaged building is very effective for the structural response reduction of the building. The FD dissipates energy through sliding, i.e., due to friction between adjoining surfaces. As the energy dissipation of friction damper depends on the relative displacement within the device and is not sensitive to the relative velocity, it is considered as hysteretic device. When compared to other passive dampers, it has advantages of simple mechanism, economical, less maintenance and powerful energy dissipation ability.

✉ Alka Y. Pisal
alka.y.pisal@gmail.com

R. S. Jangid
rsjangid@civil.iitb.ac.in

¹ Department of Civil Engineering, D. Y. Patil College of Engineering, Akurdi, Pune 411044, Maharashtra, India

² Department of Civil Engineering, Indian Institute of Technology Bombay, Powai, Mumbai 400076, Maharashtra, India

The effectiveness of a TMD and a FD to control structural responses caused by different types of excitations is now well established. The first study of the performance of a system with TMD was published by Ormondroyd and Den Hartog (1928). They had studied the response of an undamped linear SDOF system with undamped TMD and viscously damped TMD, under the sinusoidal excitation. Further, the fundamental theory of tuned vibration absorber has been presented in the classical work presented by Den Hartog (1956). Ormondroyd and Den Hartog (1928) developed the ‘fixed point theory’ for viscously damped TMD. Snowdon (1959) extended this theory to system having complex stiffness. Since the applications of TMD are wide, numerous variations of initial TMD have been conceptualized. However, with the exception of few, they emerge to be bound to the assumption of a linear behavior of the primary and secondary system. On the other hand, in several applications, a non-linear behavior of the primary and secondary system has been bound to take into account; first due to noticeable non-linear behavior of primary as well as secondary system; and second, the non-linear behavior of secondary system results in a better performance of the damping device in terms of construction, installation and maintenance.

Inaudi and Kelly (1995) proposed a TMD with the damping provided by two friction devices acting perpendicular to the direction of motion of TMD. The system was non-linear and showed a level of efficiency comparable to that of viscous damper. Abe (1996) considered a structure with a bi-linear behavior to which a TMD with bi-linear hysteretic damper is attached. Ricciardelli and Vickery (1999) considered a SDOF system to which a TMD with linear stiffness and dry friction damping was attached. The system was analyzed for harmonic excitation, and the design criteria for friction TMD system were proposed. Lee et al. (2005) performed a feasibility study of tunable FD and showed that proper sizing of the mass and the fulfillment of the damper criteria, allows the designer to use the benefit of FD and TMD. Almazan et al. (2007) studied and proposed a bi-directional and homogeneous TMD for passive control of vibrations. TMD with non-linear viscous damping has been studied by Rudinger (2007). Gewei and Basu (2010) analyzed dynamic characteristics of SDOF system with friction-tuned mass damper, using harmonic and static linearization solution. Pisal and Jangid (2015) studies seismic response of multi-story structure with multiple tuned mass friction dampers.

Literature review reveals that exclusive and extensive work have been done in the research areas related to TMD and FD; but the tuned mass friction damper (TMFD) has been explored by very few authors. The present study specifically addresses the working of TMFD. The advantage of TMFD is that it can work as an FD when mass is

slipping and as an added mass when the mass is in stick state. In this paper, the performance of a TMFD attached to a damped linear SDOF structure is investigated under seismic and harmonic excitations. The specific objectives of the study are: (1) to formulate the equations of motion and develop solution procedure for the response of SDOF structure with TMFD, under harmonic and seismic excitations, numerically; (2) to investigate the existence of different modes of vibration; (3) to investigate the influence of important parameters such as mass ratio, tuning frequency ratio and damper slip force on the performance of TMFD; (4) to obtain the optimum values of important parameters such as tuning frequency ratio and damper slip force for different mass ratios of TMFD; and (5) to compare the response of SDOF structure attached with TMFD to the response of same structure without TMFD.

Modeling of SDOF structure with TMFD

The system arrangement considered for the study consists of two-degree-of-freedom (2-DOF) system as shown in Fig. 1. m_p , k_p and c_p represent the mass, linear stiffness and viscous damping of primary structure, respectively.

The natural frequency of the primary structure can be shown as:

$$\omega_n = \sqrt{k_p/m_p} \quad (1)$$

The damping ratio and time period of the primary structure can be shown as:

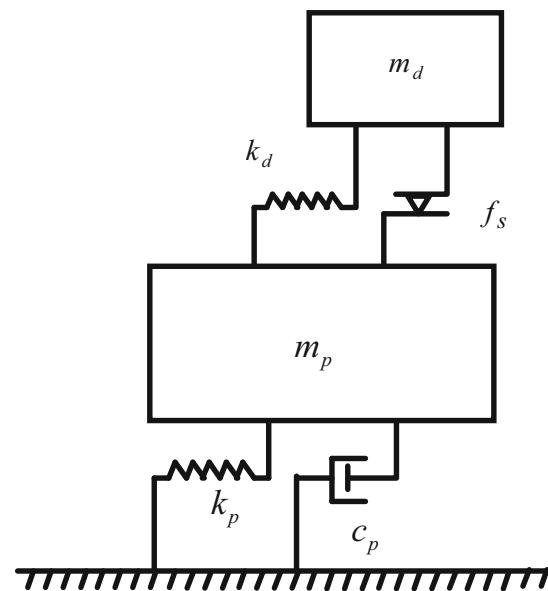


Fig. 1 SDOF structure with TMFD

$$\xi_p = c_p/2\sqrt{k_p m_p} \tag{2}$$

$$T_n = 2\pi/\omega_n \tag{3}$$

The secondary system termed as TMFD has a mass m_d , linear stiffness k_d and a friction damper with slip force f_s . The friction force mobilizing in the damper has ideal Coulomb-friction characteristics as shown in Fig. 2.

The natural frequency of TMFD can be shown as:

$$\omega_d = \sqrt{k_d/m_d} \tag{4}$$

The mass ratio and tuning frequency ratio of the two systems are defined as:

$$\mu = m_d/m_p \tag{5}$$

$$f = \omega_d/\omega_n \tag{6}$$

where μ represents the mass ratio; and f represents the tuning frequency ratio.

Governing equations of motion and solution procedure

The governing equations of motion of 2-DOF system, when subjected to dynamic excitations are expressed as:

$$m_p \ddot{x}_p + c_p \dot{x}_p + k_p x_p + k_d(x_p - x_d) = -m_p \ddot{x}_g(t) + f_s \operatorname{sgn}(\dot{x}_d - \dot{x}_p), \tag{7a}$$

$$m_d \ddot{x}_d - k_d(x_p - x_d) = -m_d \ddot{x}_g(t) - f_s \operatorname{sgn}(\dot{x}_d - \dot{x}_p), \tag{7b}$$

where $(x_d - x_p)$ can be termed as stroke or displacement of the damper and ‘sgn’ denotes the signum function.

Equations (7) can be written in matrix form as:

$$M \ddot{X}(t) + C \dot{X}(t) + K X(t) = E \ddot{x}_g(t) + B F_s(t) \tag{8}$$

$$X(t) = \begin{Bmatrix} x_p(t) \\ x_d(t) \end{Bmatrix}, \tag{9}$$

where $x_p(t)$ and $x_d(t)$ denote the displacement relative to the ground, of the primary and secondary system, respectively; M , C and K denote the mass, damping and stiffness

matrix of the configured system, respectively; E and B are placement matrices for the excitation force and friction force, respectively; $X(t)$, $\dot{X}(t)$ and $\ddot{X}(t)$ are the relative displacement, velocity and acceleration vector of the configured system, respectively; $\ddot{x}_g(t)$ denotes the ground acceleration; and $F_s(t)$ denotes the friction force provided by the TMFD. These matrices are expressed as:

$$M = \begin{bmatrix} m_p & 0 \\ 0 & m_d \end{bmatrix} \tag{10}$$

$$C = \begin{bmatrix} c_p & 0 \\ 0 & 0 \end{bmatrix} \tag{11}$$

$$K = \begin{bmatrix} k_p + k_d & -k_d \\ -k_d & k_d \end{bmatrix} \tag{12}$$

$$F_s = f_s \operatorname{sgn}(\dot{x}_d - \dot{x}_p) \tag{13}$$

where \dot{x}_d denotes the velocity of TMFD and \dot{x}_p denotes the velocity of the primary structure. The damper forces are calculated using the hysteretic model proposed by Constantinou et al. (1990), using Wen’s equation (Wen 1976), which is expressed as:

$$F_s = f_s Z_h \tag{14}$$

where f_s is the limiting friction force or slip force of the damper and Z_h is the non-dimensional hysteretic component which satisfies the following first-order non-linear differential equation,

$$q_h \frac{dZ_h}{dt} = A_h (\dot{x}_d - \dot{x}_p) - \beta_h |(\dot{x}_d - \dot{x}_p)| Z_h |Z_h|^{n_h-1} - \tau_h (\dot{x}_d - \dot{x}_p) |Z_h|^{n_h}, \tag{15}$$

where q_h represents the yield displacement of frictional force loop, and A_h, β_h, τ_h and n_h are non-dimensional parameters of the hysteretic loop which control the shape of the loop. These parameters are selected in such a way that it provides typical Coulomb-friction damping. The recommended values of these parameters are taken as $q_h = 0.0001$ m, $A_h = 1$, $\beta_h = 0.5$, $\tau_h = 0.05$, and $n_h = 2$, (Bhaskararao and Jangid 2006a). The hysteretic displacements component Z_h is bounded by peak values of ± 1 to account for the conditions of sliding and non-sliding phases. The limiting friction force or slip force of the friction damper is expressed in the normalized form by R_f , which can be expressed as:

$$R_f = \frac{f_s}{m_d \cdot g}, \tag{16}$$

where g represents the acceleration due to gravity.

The governing equations of motion shown by Eq. (8) are solved using the state-space method (Hart and Wong 2000; Lu 2004) and re-written as:

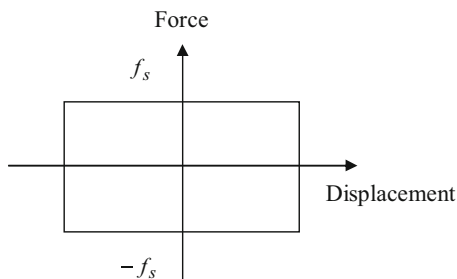


Fig. 2 Modeling of force in friction damper

$$\dot{Z}(t + 1) = AZ(t + 1) + E\ddot{x}_g(t + 1) + BF_s(t + 1), \quad (17)$$

$$Z(t) = \begin{Bmatrix} x_p(t) \\ x_d(t) \\ \dot{x}_p(t) \\ \dot{x}_d(t) \end{Bmatrix}, \quad (18)$$

where vector $Z(t)$ denotes the state of the structure; A represents the system matrix that is composed of mass, stiffness and damping matrices of the configured system and can be expressed as:

$$A = \begin{bmatrix} 0 & I \\ M^{-1}K & M^{-1}C \end{bmatrix}, \quad (19)$$

where I denotes the identity matrix.

Eq. (17) is further discretized in time domain assuming the excitation and control forces to be constant within any time interval; the solution may be written in an incremental form (Hart and Wong 2000; Lu 2004) as,

$$Z(j + 1) = A_d Z(j) + E_d \ddot{x}_g(j) + B_d F_s(j), \quad (20)$$

where (j) and $(j + 1)$ denote that the variables are evaluated at the (j) th and $(j + 1)$ th time step.

$$B_d = A^{-1} (A_d - I) B \quad (21a)$$

$$E_d = A^{-1} (A_d - I) E \quad (21b)$$

Also, $A_d = e^{A\Delta t}$ denotes the discrete-time system matrix with Δt as the time interval.

Numerical study

For the numerical study, the damping ratio of the SDOF structure is taken as 2 %. The natural frequency of the SDOF structure is considered to be 2 Hz which indicates that the fundamental time period of the structure is 0.5 s. The total mass of primary structure, m_p , is taken as 10,000 kg.

Numerical study for harmonic excitation

The response of primary structure with TMFD is investigated under harmonic ground excitation. The harmonic excitation is taken as $\ddot{x}_g(t) = 0.1 g \sin(4\pi t)$. Also, the influence of parameters such as mass ratio μ , tuning frequency ratio f and friction force f_s on the response of the system is investigated by varying mass m_d and natural frequency ω_d of the TMFD, respectively. The response quantity considered for the study is peak value of displacement amplification factor R_d of the primary structure as the stresses in the structural members are directly proportional to the displacement of the structure. R_d is a

dimensionless quantity which can be defined as the ratio of peak displacement response, x_p , to the peak static displacement response, x_{pst} , of the primary structure.

The value of the stiffness of the structure is chosen such as to provide fundamental time period of 0.5 s. For the present study, the results are obtained with time interval, $\Delta t = 0.02$. The number of iteration in each time step is taken as 200 to determine the incremental frictional force in the TMFD.

Effect of TMFD and excitation frequency

Figure 3 depicts the comparison of peak displacement amplification factor, R_d of the primary structure with TMFD and without TMFD for different values of R_f . To investigate the effect of excitation frequency, the value of ω_n is kept constant and value of excitation frequency ω is varied.

In case of controlled system with a high value of normalized slip force ($R_f = 5$), the TMFD and primary structure behave as a rigidly connected structure and no relative motion between the damper and primary structure takes place. Thus, TMFD behaves as an additional mass, resulting in a modified SDOF system having response similar to the uncontrolled system but having lower resonant frequency. Similarly, in case of controlled system with a lower value of normalized slip force (for e.g. $R_f = 0.01$), the two peaks are observed in the response curve of the system. It shows that the system is behaving as a 2-DOF system and relative motion between the two systems occurs. Also, there exists a ranges of excitation frequencies at which the system behaves as a modified SDOF system (i.e., as an additional mass) and its

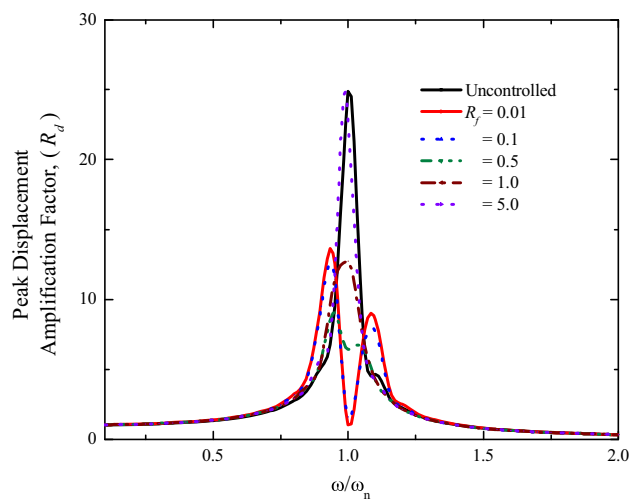


Fig. 3 Comparison of peak displacement amplification factor, R_d of structure with and without TMFD

responses are higher than the 2-DOF system, and outside this range, the response of modified SDOF system has response lower than 2-DOF system. Thus, there exists a range of excitation frequencies at which the response can be controlled by modified SDOF system, and outside this range, the response can be controlled by 2-DOF system.

To confirm the periodic behavior of the system with sliding interface under harmonic ground excitation, as reported by many researchers in the past (Westermo and Udawadia 1982; Younis and Tadjbakhsh 1984; Matsui et al. 1991; Iura et al. 1992; Bhaskararao and Jangid 2006b), time variation of velocities of the two system (i.e., $\dot{x}_p(t)$ and $\dot{x}_d(t)$) is plotted in Fig. 4, for three different values of normalized damper slip force. The parameters considered for the study are $\mu = 0.02$, $\zeta_p = 0.02$, $\omega/\omega_n = 1$ and $f = 1$. It is observed from the figure that for relatively higher value of R_f , both systems vibrate together with same value of \dot{x}_p and \dot{x}_d (i.e., similar response), known as stick mode (ref Fig. 4a), which shows that TMFD is working as an additional mass. However, the value of R_f decreases the response and mode of vibration changes from stick to stick–slip mode (Fig. 4b, c), which shows that TMFD is working as FD. Hence, the system with TMFD subjected to harmonic excitation responds in two different periodic

modes, namely stick mode and stick–slip mode, depending on the system parameters and level of excitation. The similar observations are noticed in the hysteretic loop of the system for different values of normalized damper slip force as shown in Fig. 5. In this figure, vertical lines show the stick state of the damper, while the slip state is recognized by horizontal lines. Thus, the system with TMFD responds in two different periodic modes, namely, stick mode and stick–slip mode, depending on the system parameters and level of excitation under harmonic excitation.

Effect of friction force

To investigate the effect of damper slip force, the variation of peak displacement amplification factor, R_d of primary structure is plotted against the normalized damper friction force, R_f in Fig. 6. The value of R_f is varied from 0.01 to 1, for different values of mass ratio and tuning frequency ratio. It is observed from Fig. 6 that peak displacement amplification factor, R_d of the primary structure decreases with increase in the value of R_f for all values of μ and f up to certain point, and after that, it gradually increases. It shows that there exists an optimum value of slip force for

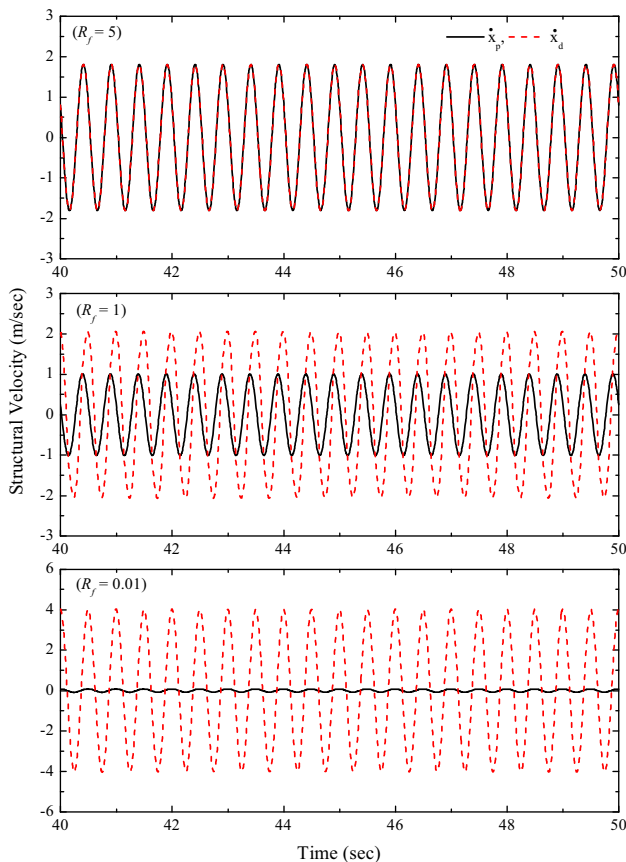


Fig. 4 Velocity response of structure with TMFD


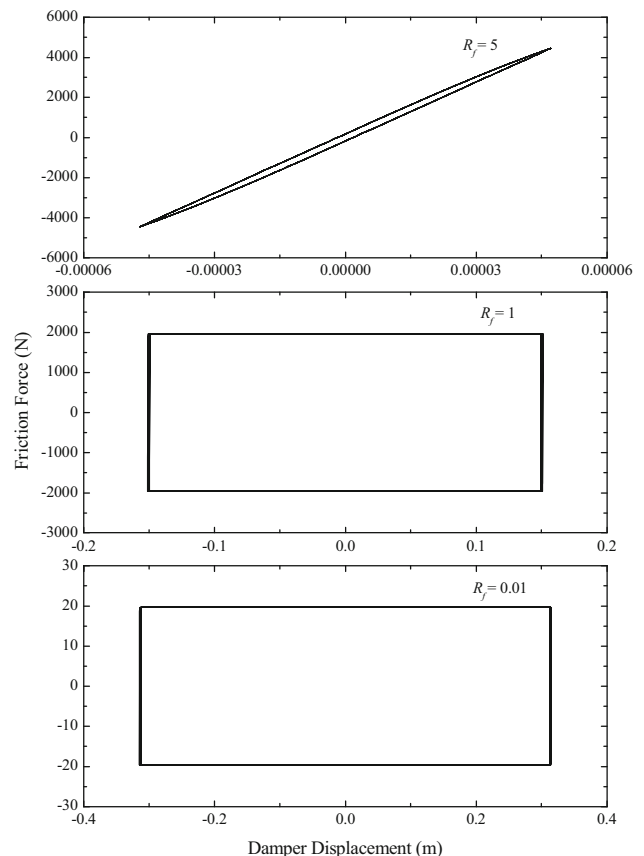


Fig. 5 Hysteretic loops for structure with TMFD

Fig. 6 Variation of peak displacement amplification factor, R_d with normalized damper slip force

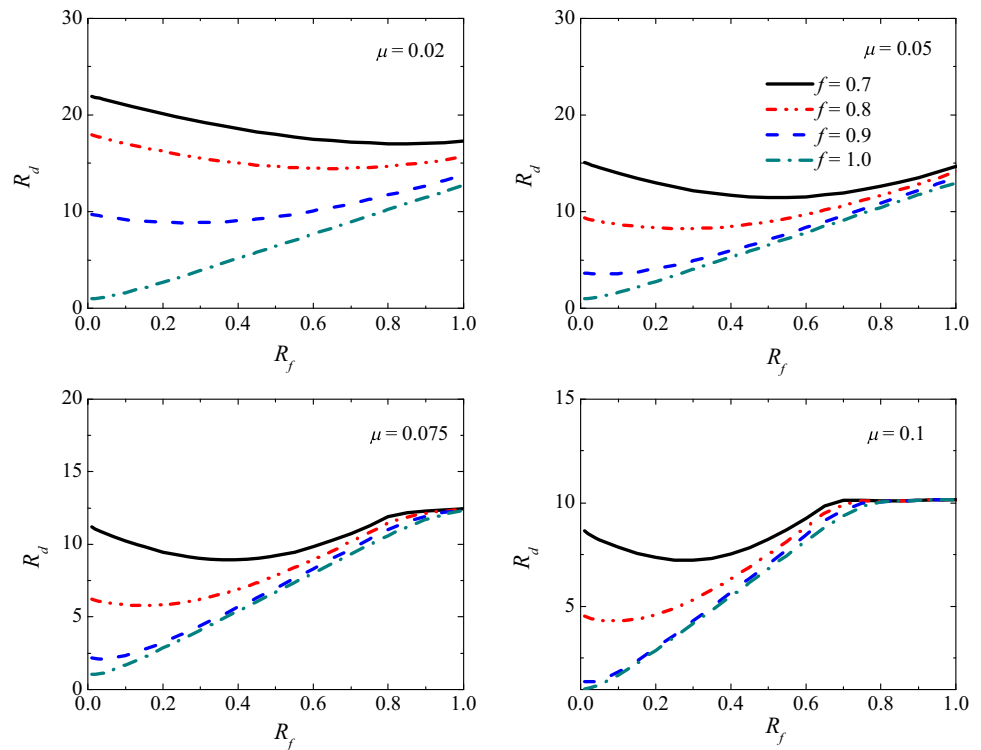

which the R_d of primary structure attains its minimum value implying that at this value, TMFD is very effective in controlling the response of the primary system. It is also observed that as the value of mass ratio and tuning frequency ratio increases, the value of R_f tends to decrease with the higher reduction in the value of R_d . Thus, an optimum value of R_f exists, at which the response of the system decreases significantly, and at this value of R_f , TMFD is very effective in controlling the response of the primary structure.

Effect of tuning frequency ratio

The effect of tuning frequency ratio on the peak displacement amplification factor, R_d of the primary structure is shown in Fig. 7. The response of the primary system is plotted for different values of mass ratio and normalized slip force by varying f from 0.1 to 2. For this purpose, ω_n is kept constant and ω_d is varied. It is observed that the peak value of R_d of the primary structure decreases with increase in tuning frequency ratio up to certain value and further increases with increase in tuning frequency ratio. The optimum value of tuning frequency ratio is lying in the range 0.9–1, depending on the mass ratio following the inverse relationship with the mass ratio. It shows that there exists an optimum value of tuning frequency ratio at which system has its minimum response. It is also observed that there is a reduction in the value of R_d with respect to the

value of normalized slip force. Thus, at an optimum value of tuning frequency ratio, the response of the primary structure reduces to its maximum value.

Effect of mass ratio

The effect of mass ratio on peak displacement amplification factor, R_d of primary structure is studied in Fig. 8 by plotting the peak value of R_d of primary structure against the mass ratio, μ for different values of tuning frequency ratio and normalized slip force. It is observed that there is significant reduction in the value of R_d with the increase in the value of mass ratio up to a certain point for all values of slip force R_f , and after that, it tends to be a constant value. This indicates that there is no advantage in increasing the mass ratio beyond 10 % and, at maximum up to 15 %. Also, as the value of tuning frequency ratio increases, there is reduction in the value of R_d . Hence, at an optimum value of mass ratio, the response of the primary structure reduces significantly.

Optimum parameters

It is observed from the numerical study that there exists a range of optimum values of controlling parameters which influences the performance of TMFD. If the optimum values of influencing parameters are chosen appropriately, there is significant reduction in response of the primary

Fig. 7 Variation of peak displacement amplification factor, R_d with tuning frequency ratio


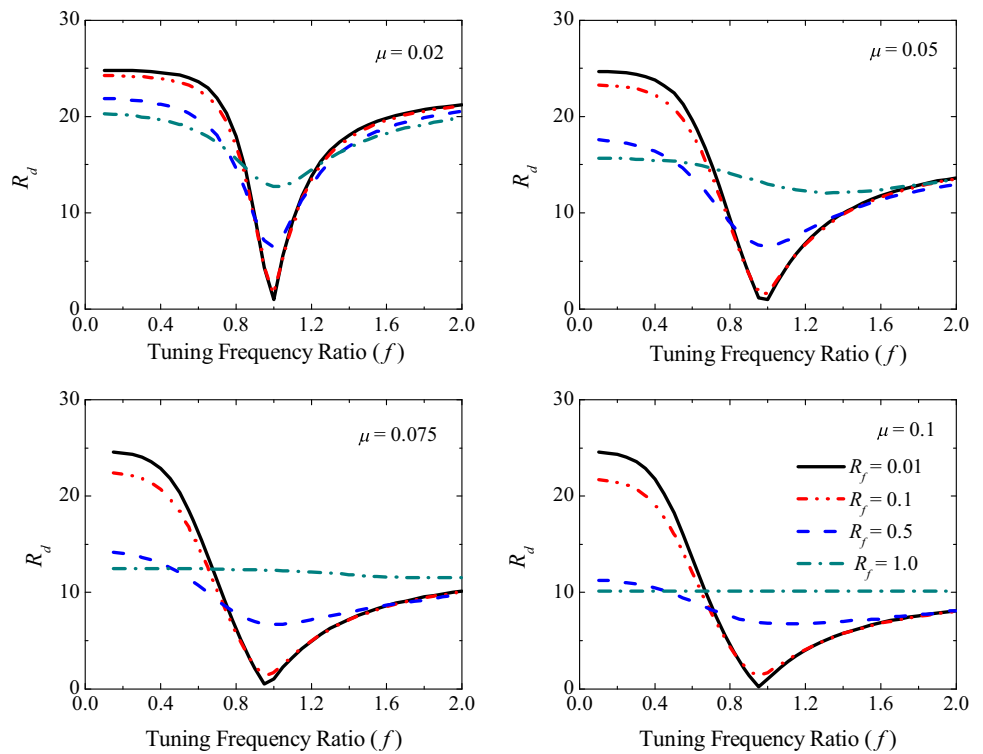


Fig. 8 Variation of peak displacement amplification factor, R_d with mass ratio

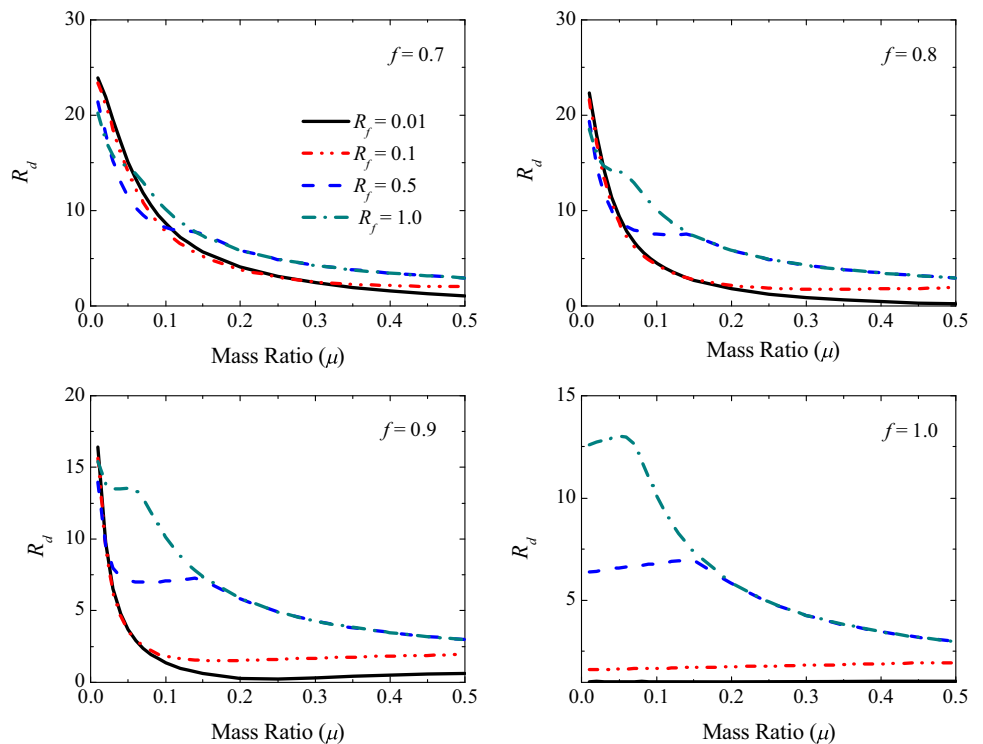

structure and the TMFD works effectively. It is also observed that these parameters are inter-related, i.e., the value of one parameter changes with respect to the value of other parameter. Thus, the optimum values of the tuning

frequency ratio and normalized slip force are found out for the different values of mass ratio along with the percentage reduction in the value of R_d as mentioned in Table 1. It is observed from the table that as the value of mass ratio

Table 1 Optimum parameters of TMFD for harmonic ground excitation

Mass ratio (μ)	Tuning ratio (f)	Normalized slip force (R_f)	Peak displacement amplification factor for controlled system (R_d)	Peak displacement amplification factor for uncontrolled system (R_d)	Percentage reduction in response (%)
0.005	1	0.02	1.0278	24.8685	95.87
0.01	1	0.01	1.0161	24.8685	95.91
0.015	1	0.01	1.0210	24.8685	95.89
0.02	1	0.01	1.0395	24.8685	95.82
0.025	1	0.01	1.0296	24.8685	95.86
0.03	1	0.01	1.0259	24.8685	95.87
0.035	1	0.01	1.0272	24.8685	95.87
0.04	1	0.01	1.0209	24.8685	95.89
0.045	1	0.01	1.0211	24.8685	95.89
0.05	1	0.01	1.0253	24.8685	95.88
0.055	1	0.01	1.0194	24.8685	95.90
0.06	1	0.01	1.0236	24.8685	95.88
0.065	1	0.01	1.0256	24.8685	95.88
0.07	1	0.01	1.0222	24.8685	95.89
0.075	1	0.01	1.0256	24.8685	95.88
0.08	1	0.01	1.0269	24.8685	95.87
0.085	1	0.01	1.0212	24.8685	95.89
0.09	1	0.01	1.0234	24.8685	95.88
0.095	1	0.01	1.0254	24.8685	95.88
0.1	1	0.01	1.0200	24.8685	95.90
0.105	1	0.01	1.0218	24.8685	95.89
0.11	1	0.01	1.0236	24.8685	95.88
0.115	0.9	0.01	1.0609	24.8685	95.73
0.12	0.9	0.01	0.9810	24.8685	96.06
0.125	0.9	0.01	0.9041	24.8685	96.36
0.13	0.9	0.01	0.8356	24.8685	96.64
0.135	0.9	0.01	0.7716	24.8685	96.90
0.14	0.9	0.01	0.7122	24.8685	97.14
0.145	0.9	0.01	0.6551	24.8685	97.37
0.15	0.9	0.01	0.5986	24.8685	97.59

increases, the optimum value of tuning frequency ratio decreases and the optimum value of normalized slip force is almost constant. Also, with the proper selection of optimum values of controlling parameters, response can be reduced to 97 %. Thus, by selecting appropriate optimum values of controlling parameters, higher efficiency of TMFD with higher response reduction can be achieved.

Numerical study for earthquake excitation

In this section, the response of primary structure with TMFD is investigated under earthquake excitations. The earthquake time histories along with their peak ground acceleration (PGA) and components which are used for this study are represented in Table 2. The earthquake ground

motions and their corresponding fast Fourier transform (FFT) plots are shown in Figs. 9 and 10, respectively.


The important parameters on which the efficiency of TMFD depends such as mass ratio, tuning frequency ratio and slip force are discussed here. The efficiency of TMFD is investigated by comparing the response of the structure without TMFD (also known as uncontrolled system) to the response of the structure with TMFD (also known as controlled system). For this purpose, the input parameters of the primary structure are kept constant and parameters of the TMFD are varied.

The value of the stiffness of the structure is chosen such that it provides fundamental time periods of 0.25, 0.50 and 1.00 s, respectively. For the present study, the results are obtained with the interval, $\Delta t = 0.02, 0.01$, respectively.



Table 2 Details of earthquakes considered for numerical study

Earthquake	Recording station	Component	Duration (s)	PGA (g)
Imperial Valley (19th May 1940)	El Centro Array # 9	I—ELC 180	40	0.313
Landers 28th June 1992	Lucerne Valley	LCN 275	48.125	0.721
Kobe 16th January 1995	Japan Meteorological Agency (JMA) 99999 KJMA	KJM 000	48	0.82

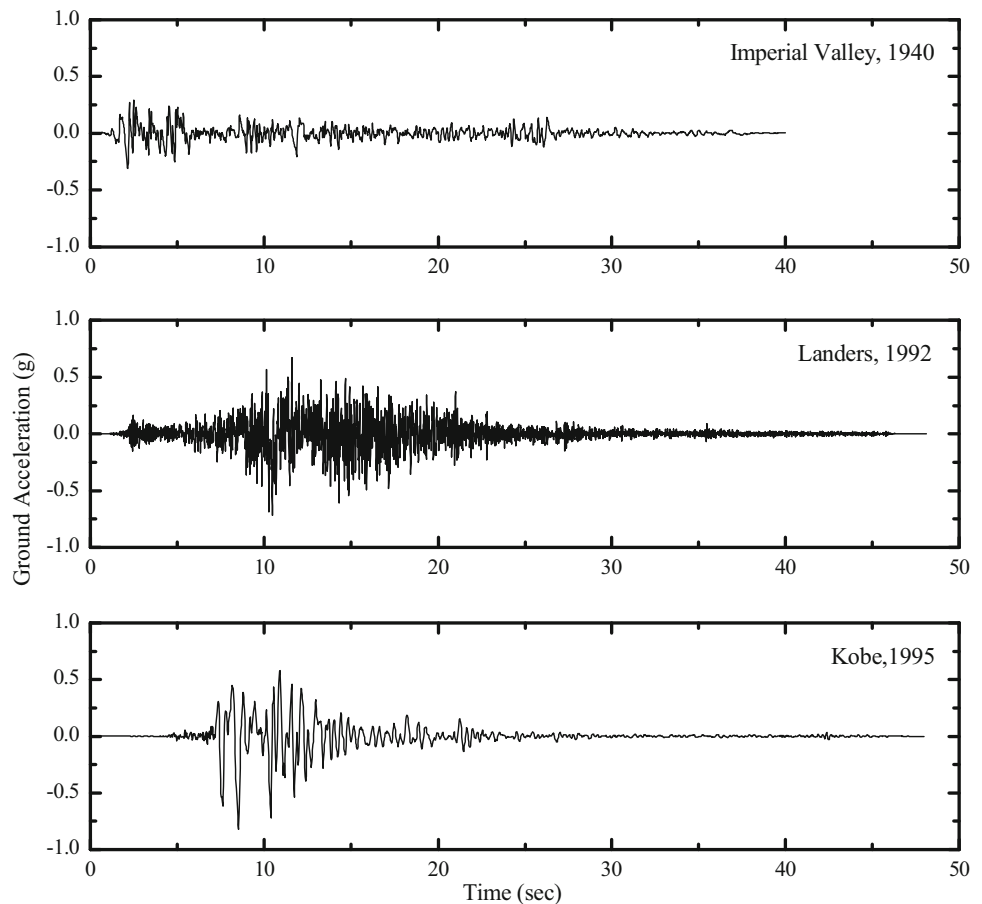Fig. 9 Acceleration time histories of selected earthquake ground motions

The number of iterations in each time step is taken as 50–200 to determine the incremental frictional force of the TMFD.

Effect of mass ratio

The effect of mass ratio on the performance of TMFD is studied by plotting the peak displacement response of the structure against the varying mass ratio in Fig. 11. The time periods of the primary structure considered for the study are 0.25, 0.50 and 1.00 s, respectively, which represents the variation from stiff to flexible structure. It is observed that the peak response of the structure for the considered earthquake excitations reduces with increase in the mass ratio up to a certain point, and after that, it reduces

marginally. This indicates that there is no advantage in increasing the mass ratio beyond this point. It is also observed that the optimum value of mass ratio changes with respect to the type of structure. Thus, it is visible from Fig. 11 that at an optimum value of mass ratio, the response of the primary structure reduces significantly.

Effect of tuning frequency ratio

Figure 12 shows the variation of peak displacement response of the primary structure against the tuning frequency ratio, f for different values of the fundamental time period of the primary structure. For this study, the time period of primary structure is kept constant, while the time period of the TMFD is varied in such a way that f

Fig. 10 FFT amplitudes of selected earthquakes

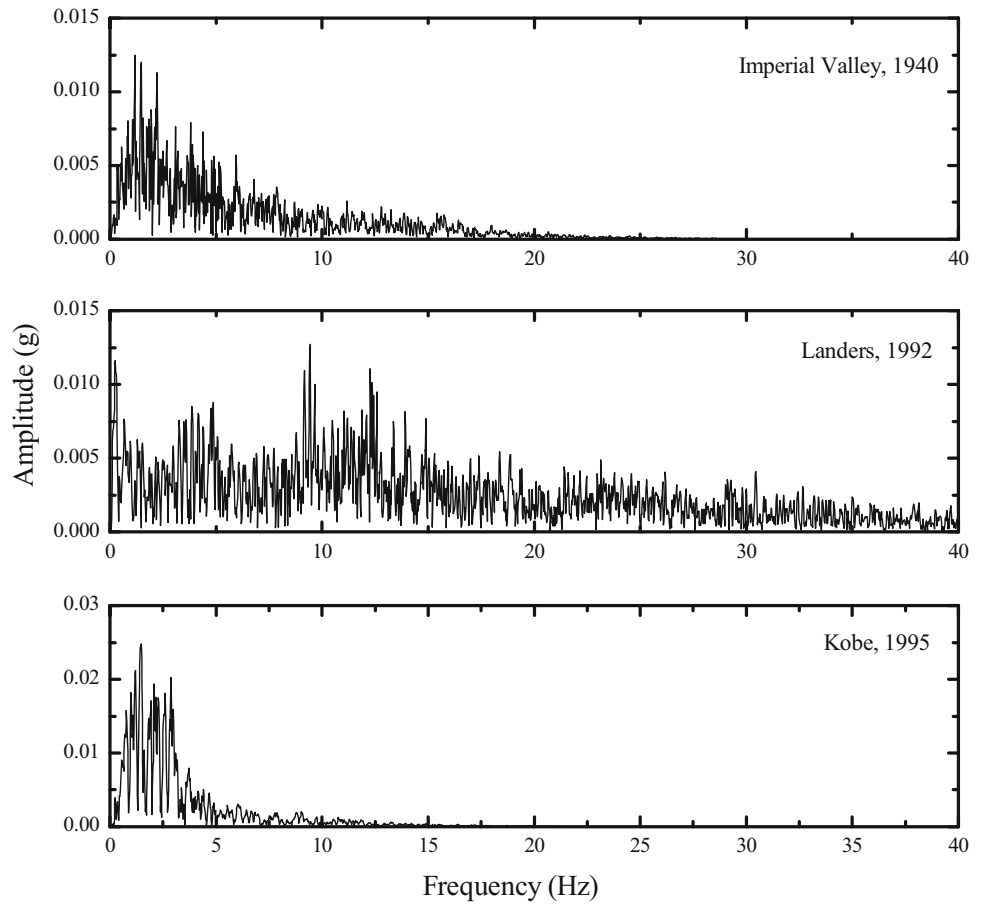


Fig. 11 Variation of peak displacement with mass ratio
 a Imperial Valley, 1940,
 b Landers, 1992; c Kobe, 1995


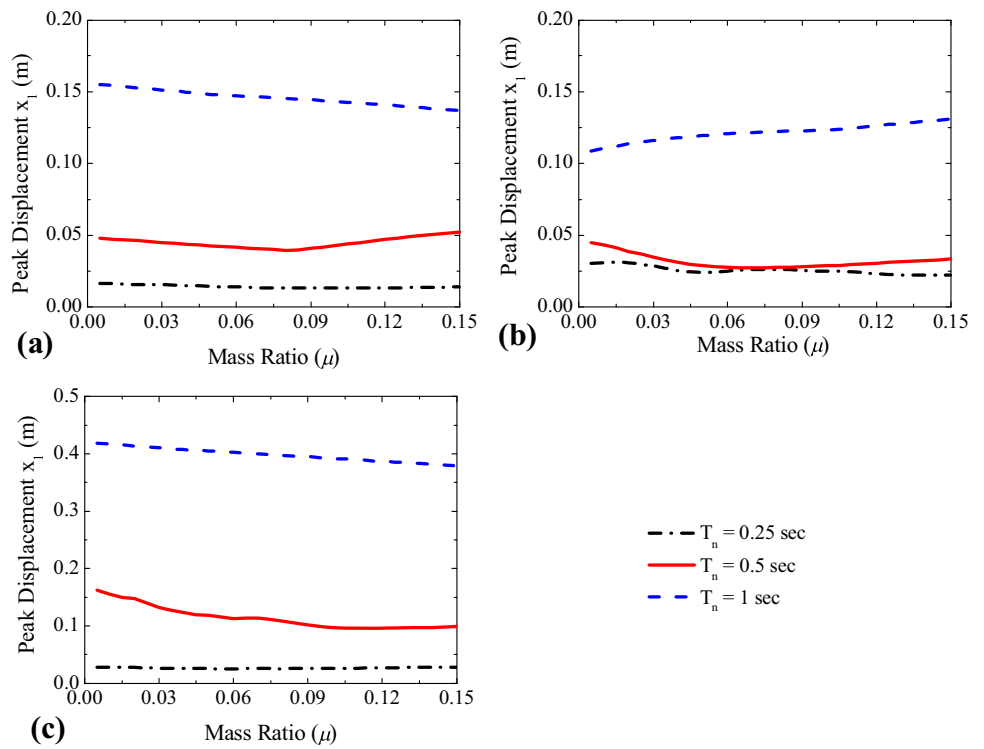


Fig. 12 Variation of peak displacement with tuning frequency ratio **a** Imperial Valley, 1940; **b** Landers, 1992; **c** Kobe, 1995

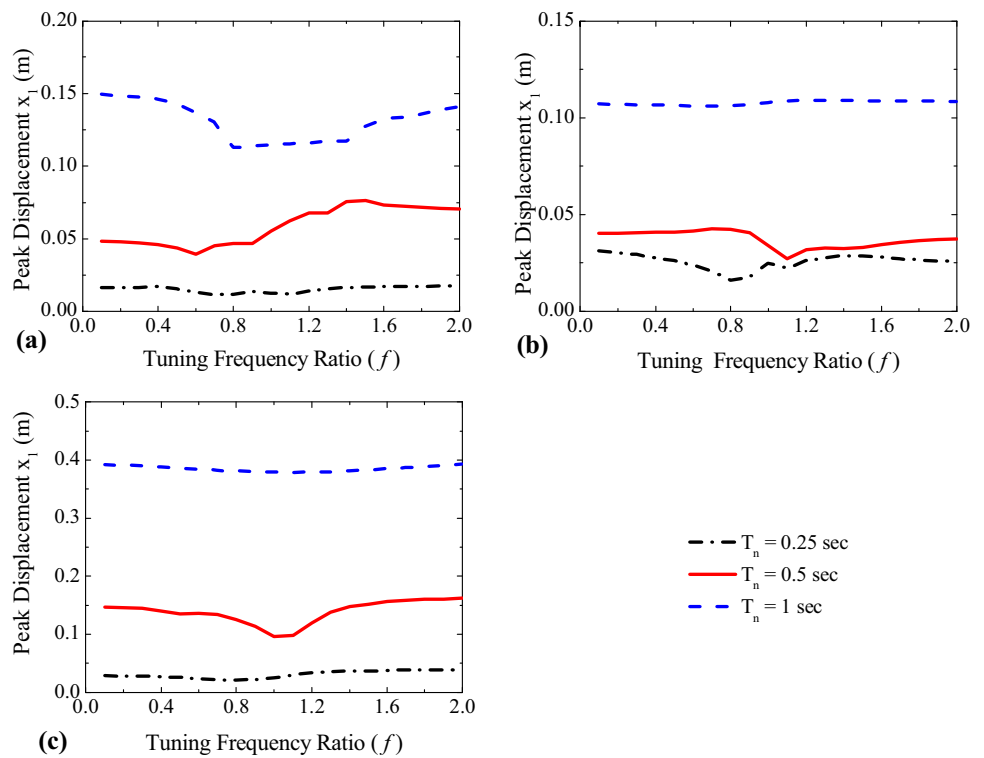

varies from 0.1 to 2. It is noted from the figure that there is reduction in peak displacement of the structure when f is in the range of 0.8–1.0. Further, at the tuning frequency ratio which is far from this range, the values of peak responses are higher. This reveals that at an optimum value of tuning frequency ratio, the response of the primary structure reduces to its minimum value.

Effect of friction force

To investigate the effect of normalized damper friction force, the variation of peak displacement of main structure is plotted with respect to the varying normalized friction force, R_f in Fig. 13. It is observed that the peak displacement response of the structure decreases with increase in friction force of the damper up to a certain point, and after that, it again increases with increase in the value of friction force, R_f . It shows that an optimum value of normalized slip force exists at which the system reaches its minimum response. It is also observed that the range of variation of slip force depends on the characteristics of an earthquake. Further, there is more reduction in the peak displacement of the flexible structure as compared to the reduction in peak displacement of stiff structure. This indicates that TMFD is more beneficial in reducing the response of the flexible structure in comparison to the stiff structure. Thus, an optimum value of R_f exists at which the response of the system decreases significantly, and at this value of R_f ,

TMFD is very effective in controlling the response of the primary structure. Also, the range of variation of slip force depends on the characteristics of an earthquake. TMFD is more beneficial in reducing the response of the flexible structure as compared to the stiff structure.

Optimum parameters

It is observed from the numerical study that there exists a range of optimum values of parameters such as friction force, mass ratio and tuning frequency ratio, which influences the performance of TMFD. If the optimum values of these parameters are selected appropriately, there is significant reduction in response of the primary structure and the TMFD works effectively. It is also observed that the variation in the range of optimum values of controlling parameters of the system depends on the dynamic characteristics of earthquakes. Thus, the optimum values of the tuning frequency ratio and normalized slip force were found out for the different values of mass ratio along with the percentage reduction in the peak value of displacement for considered earthquakes. These parameters are presented in Tables 3, 4 and 5 for Imperial Valley (1940), Landers (1995) and Kobe (1995) earthquakes, respectively. It is observed from these tables that as the value of mass ratio increases, the optimum value of tuning frequency ratio decreases and, on the other hand, the optimum value of R_f increases. Further, the optimum values of the parameters

Fig. 13 Variation of peak displacement with R_f **a** Imperial Valley, 1940; **b** Landers, 1992; **c** Kobe, 1995

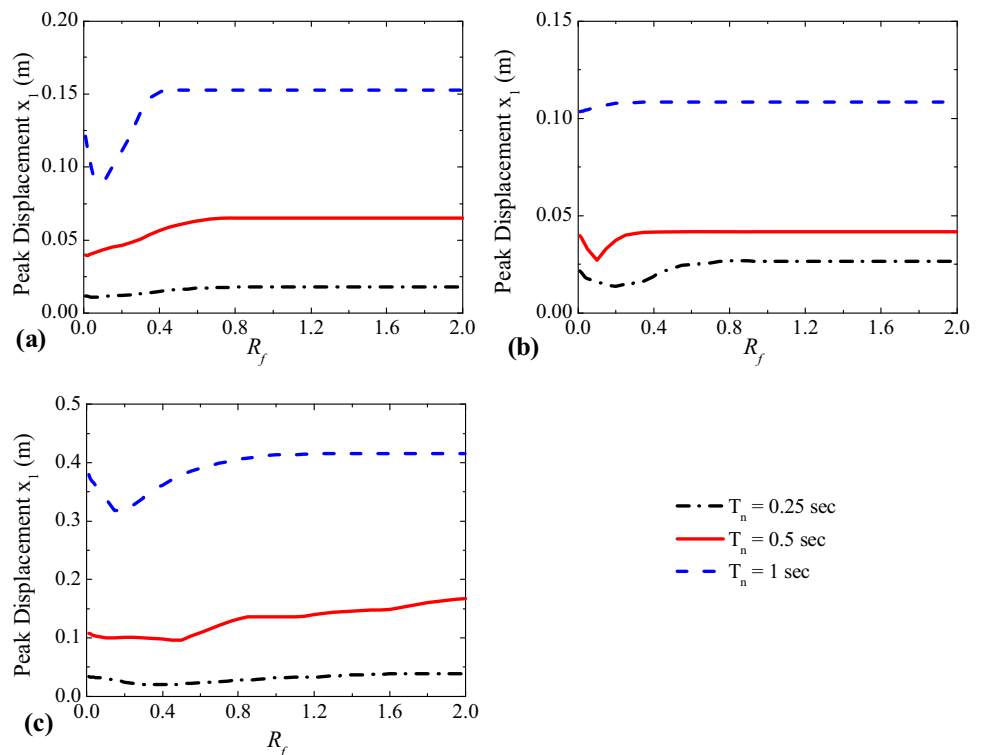


Table 3 Optimum parameters of TMFD for Imperial Valley (1940) earthquake

Mass ratio (μ)	Tuning ratio (f)	Normalized slip force (R_f)	Peak displacement of uncontrolled system (m)	Peak displacement of controlled system (m)	Percentage reduction in response (%)
0.005	0.9	0.01	0.0485	0.0470	3.0639
0.01	0.9	0.01	0.0485	0.0458	5.5500
0.015	0.9	0.01	0.0485	0.0441	9.0224
0.02	0.9	0.01	0.0485	0.0428	11.6582
0.025	0.9	0.01	0.0485	0.0429	11.5892
0.03	0.9	0.01	0.0485	0.0431	11.0444
0.035	0.7	0.01	0.0485	0.0417	13.9927
0.04	0.7	0.01	0.0485	0.0410	15.5004
0.045	0.7	0.01	0.0485	0.0406	16.3281
0.05	0.7	0.01	0.0485	0.0408	15.8206
0.055	0.7	0.01	0.0485	0.0414	14.6593
0.06	0.6	0.01	0.0485	0.0415	14.3831
0.065	0.6	0.01	0.0485	0.0410	15.4852
0.07	0.6	0.01	0.0485	0.0404	16.5801
0.075	0.6	0.01	0.0485	0.0399	17.6680
0.08	0.6	0.02	0.0485	0.0396	18.4213
0.085	0.6	0.03	0.0485	0.0398	17.8678
0.09	0.6	0.03	0.0485	0.0396	18.3480
0.095	0.6	0.04	0.0485	0.0400	17.5000
0.1	0.6	0.04	0.0485	0.0401	17.3497

mentioned in these tables are used to depict the comparison of displacement time history of primary structure without TMFD and with TMFD for the Imperial Valley (1940),

Landers (1992) and Kobe (1995) earthquake, respectively, in Fig. 14. It is observed that the displacement response of the primary structure without TMFD is relatively high. On


Table 4 Optimum parameters of TMFD for Landers (1992) earthquake

Mass ratio (μ)	Tuning ratio (f)	Normalized slip force (R_f)	Peak displacement of uncontrolled system (m)	Peak displacement of controlled system (m)	Percentage reduction in response (%)
0.005	1.3	0.01	0.0326	0.0443	26.43
0.01	1.2	0.05	0.0331	0.0443	25.23
0.015	1.2	0.05	0.0327	0.0443	26.08
0.02	1.2	0.05	0.0322	0.0443	27.27
0.025	1.2	0.05	0.0323	0.0443	27.16
0.03	1.2	0.05	0.0326	0.0443	26.49
0.035	1.2	0.05	0.0324	0.0443	26.74
0.04	1.2	0.05	0.0326	0.0443	26.46
0.045	1.2	0.1	0.0327	0.0443	26.24
0.05	1.2	0.1	0.0328	0.0443	25.97
0.055	1.2	0.1	0.0323	0.0443	27.17
0.06	1.1	0.1	0.0275	0.0443	37.92
0.065	1.1	0.1	0.0272	0.0443	38.47
0.07	1.1	0.1	0.0272	0.0443	38.66
0.075	1.1	0.1	0.0272	0.0443	38.52
0.08	1.1	0.1	0.0274	0.0443	38.21
0.085	1.1	0.1	0.0276	0.0443	37.63
0.09	1.1	0.1	0.0280	0.0443	36.87
0.095	1.1	0.1	0.0283	0.0443	36.13
0.1	1.1	0.1	0.0287	0.0443	35.26

Table 5 Optimum parameters of TMFD for Kobe (1995) earthquake

Mass ratio (μ)	Tuning ratio (f)	Normalized slip force (R_f)	Peak displacement of uncontrolled system (m)	Peak displacement of controlled system (m)	Percentage reduction in response (%)
0.005	1.1	0.1	0.1539	0.1735	11.32
0.01	1.1	0.1	0.1409	0.1735	18.80
0.015	1.1	0.2	0.1377	0.1735	20.67
0.02	1.1	0.3	0.1323	0.1735	23.73
0.025	1.1	0.3	0.1266	0.1735	27.06
0.03	1.1	0.3	0.1264	0.1735	27.16
0.035	1.1	0.3	0.1381	0.1735	20.40
0.04	1.1	0.3	0.1458	0.1735	15.95
0.045	1.1	0.3	0.1498	0.1735	13.64
0.05	1.1	0.3	0.1473	0.1735	15.09
0.055	1.1	0.3	0.1497	0.1735	13.73
0.06	1.1	0.3	0.1483	0.1735	14.54
0.065	1.1	0.3	0.1497	0.1735	13.70
0.07	1	0.3	0.1107	0.1735	36.18
0.075	1	0.3	0.1101	0.1735	36.56
0.08	1	0.3	0.1071	0.1735	38.24
0.085	1	0.3	0.1047	0.1735	39.66
0.09	1	0.5	0.1019	0.1735	41.27
0.095	1	0.5	0.0996	0.1735	42.61
0.1	1	0.5	0.0977	0.1735	43.67

Fig. 14 Comparison of displacement response time history of main structure with and without TMFD

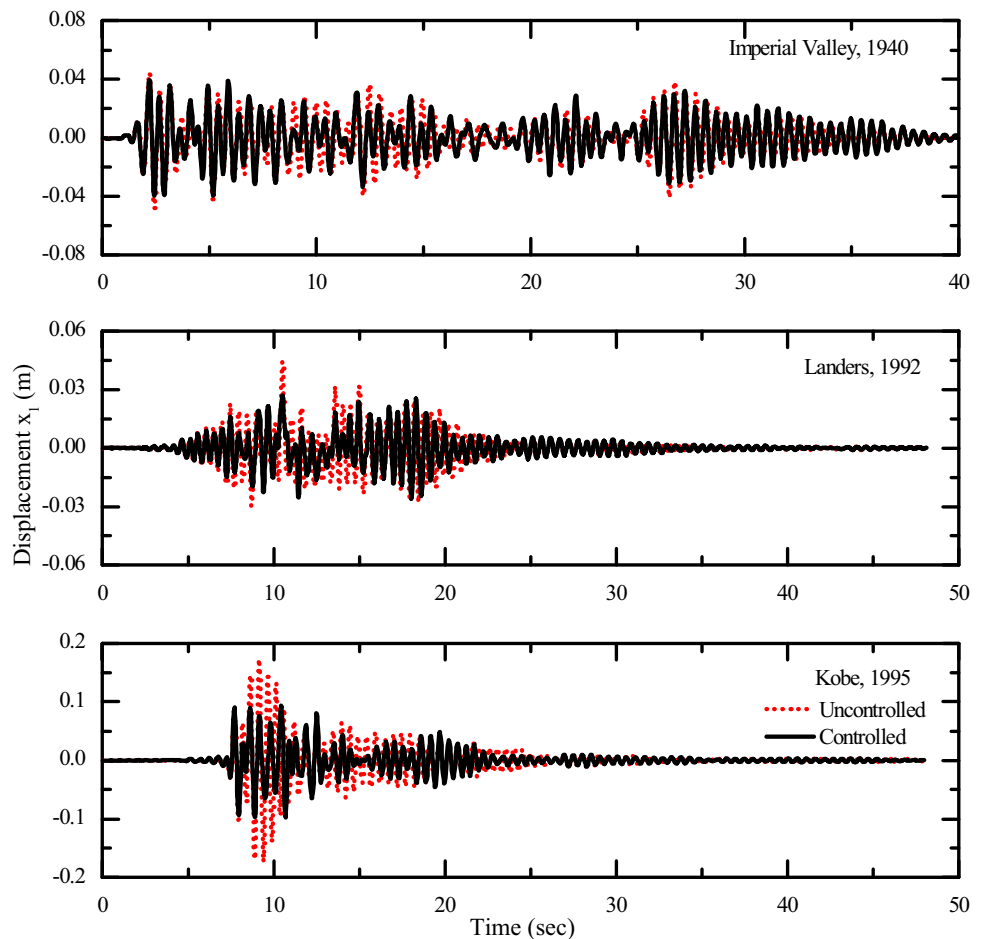

the other hand, the response of the primary structure with TMFD is significantly less. Thus, TMFD can be a more effective and potential device to control response of the structure, if optimum parameters are appropriately selected.

Conclusions

The response of an SDOF structure with TMFD is investigated for harmonic and earthquake excitation. The governing differential equations of motion are solved numerically, using the state-space method, to find out the response of system in different modes of vibration. The parametric study is also conducted to investigate the fundamental characteristics of the TMFD and the effect of important parameters such as mass ratio, tuning frequency ratio and friction force on the efficiency of TMFD. The peak displacement amplification factor and peak displacement response of the main structure are considered to study the performance of TMFD for harmonic and seismic excitation, respectively. On the basis of trends of results obtained, the following conclusions are drawn:

1. There exists a range of excitation frequencies at which the response can be controlled by modified SDOF system, and outside this range, the response can be controlled by 2-DOF system.
2. The system with TMFD subjected to harmonic or earthquake excitation responds in two different periodic modes, namely, stick mode and stick-slip mode, depending on the system parameters and level of excitation.
3. An optimum value of R_f exists, at which the response of the system decreases significantly, and at this value of R_f , TMFD is very effective in controlling the response of the primary structure. In case of earthquake excitation, the range of variation of slip force depends on the characteristics of an earthquake. Also, the optimum value of R_f increases with the increase in value of mass ratio.
4. At an optimum value of tuning frequency ratio, the response of the primary structure reduces to its minimum value. As the value of mass ratio increases, the optimum value of tuning frequency ratio decreases.
5. At an optimum value of mass ratio, the response of the primary structure reduces significantly.



6. TMFD is more beneficial in reducing the response of the flexible structure as compared to the stiff structure.
7. TMFD can be a more effective and potential device to control the response of the structure, if optimum parameters are appropriately selected.

Open Access This article is distributed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.

References

- Abe M (1996) Tuned mass dampers for structures with bilinear hysteresis. *J Eng Mech ASCE* 122:797–800
- Almazan JL, De la Llera JC, Inaudi JA, Lopez-Garcia D, Izquierdo LE (2007) A bidirectional and homogenous tuned mass damper: a new device for passive control of vibrations. *Eng Struct* 29(7):1548–1560
- Bhaskararao AV, Jangid RS (2006a) Seismic analysis of structures connected with friction dampers. *Eng Struct* 28:690–703
- Bhaskararao AV, Jangid RS (2006b) Harmonic response of structures connected with a friction dampers. *J Sound Vib* 292:710–725
- Colajanni P, Papia M (1995) Seismic response of braced frames with and without friction dampers. *Eng Struct* 17:129–140
- Constantinou M, Mokha A, Reinhorn A (1990) Teflon bearing in base isolation, Part II: modeling. *J Struct Eng ASCE* 116:455–474
- Den Hartog JP (1956) *Mechanical vibrations*. McGraw-Hill, New York
- Gewei Z, Basu B (2010) A Study on friction-tuned mass damper: harmonic solution and statistical linearization. *J Vib Control* 17:721–731
- Hart GC, Wong K (2000) *Structural dynamics for structural engineers*. Wiley, New York
- Inaudi JA, Kelly JM (1995) Mass damper using friction-dissipating devices. *J Eng Mech ASCE* 121:142–149
- Iura M, Matsui K, Kosaka I (1992) Analytical expressions for three different modes in harmonic motion of sliding structures. *Earthq Eng Struct Dyn* 21:757–769
- Lee JH, Berger E, Kim JH (2005) Feasibility study of a tunable friction damper. *J Sound Vib* 283:707–722
- Lee SK, Park JH, Moon BW, Min KW, Lee SH, Kim J (2008) Design of a bracing-friction damper system for seismic retrofitting. *Smart Struct Syst* 4(5):685–696
- Lu LY (2004) Predictive control of seismic structures with semi-active friction dampers. *Earthquake Eng Struct Dynam* 33:647–668
- Matsui K, Iura M, Sasaki T, Kosaka I (1991) Periodic response of a rigid block resting on a footing subjected to harmonic excitation. *Earthquake Eng Struct Dynam* 20:683–697
- Mualla IH, Belev B (2002) Performance of steel frames with a new friction damper device under earthquake excitation. *Eng Struct* 24:365–371
- Ormondroyd J, Den Hartog JP (1928) The theory of the dynamic vibration absorber. *Trans. ASME, APM-50*, pp 9–22
- Pasquin C, Leboeuf N, Pall RT, Pall AS (2004) Friction dampers for seismic rehabilitation of Eaton's building. In: Montreal, 13th World Conference on Earthquake Engineering, Paper No. 1949
- Pisal AY, Jangid RS (2015) Seismic response of multi-story structure with multiple tuned mass friction dampers. *Int J Adv Struct Eng* 7:81–92
- Qu WL, Chen ZH, Xu YL (2001) Dynamic analysis of wind-excited truss tower with friction dampers. *Comput Struct* 79:2817–2831
- Ricciardelli F, Vickery BJ (1999) Tuned vibration absorbers with dry friction damping. *Earthquake Eng Struct Dynam* 28:707–723
- Rudinger F (2007) Tuned mass damper with non linear viscous damping. *J Sound Vib* 300(3–5):932–948
- Snowdon JC (1959) Steady state behavior of the dynamic absorber. *J Acoust Soc Am* 31:1096–1103
- Wen YK (1976) Method for random vibration of hysteretic systems. *J Eng Mech Div ASCE* 102(2):249–263
- Westermo B, Udawadia F (1982) Periodic response of sliding oscillator system to harmonic excitation. *Earthquake Eng Struct Dynam* 11:135–146
- Younis CJ, Tadjbakhsh IG (1984) Response of sliding rigid structure to base excitation. *J Eng Mech ASCE* 110:417–432

