



Cite as
Nano-Micro Lett.
(2021) 13:97

Published online: 23 March 2021
© The Author(s) 2021

Correction to: Interface Engineering of CoS/ CoO@N-Doped Graphene Nanocomposite for High-Performance Rechargeable Zn–Air Batteries

Yuhui Tian^{1,2}, Li Xu^{1,2} ✉, Meng Li², Ding Yuan^{1,2}, Xianhu Liu³, Junchao Qian⁴,
Yuhai Dou², Jingxia Qiu¹, Shanqing Zhang^{1,2} ✉

Correction to: Nano-Micro Lett. (2021) 13:3
<https://doi.org/10.1007/s40820-020-00526-x>

In the original publication, the label text “Pt/C” in Fig. 5 should be “Pt/C + IrO₂”. In Fig. 5d, the X-axis label “Potential (V vs. RHE)” should be replaced with “Specific capacity (mAh g⁻¹)”. In Fig. 5e, the Y-axis label “Potential (V vs. RHE)” should be replaced with “Voltage (V)”. In Fig. 5g,

the X-axis label “Time (h)” should be replaced with “Cycle number (n)”. The Y-axis label “ ΔE (V vs. RHE)” should be replaced with “Voltage (V)”. The number “1.4” and “1.6” should be replaced with 1.6 and 2.0, respectively. The corresponding data analysis and conclusions in the manuscript are not affected and thus not to be changed. The correct Fig. 5 is provided in this correction.

The original article can be found online at <https://doi.org/10.1007/s40820-020-00526-x>.

✉ Li Xu, xulichem@ujs.edu.cn; Shanqing, Zhang, s.zhang@griffith.edu.au

¹ Institute for Energy Research, School of Chemistry and Chemical Engineering, Key Laboratory of Zhenjiang, Jiangsu University, Zhenjiang 212013, People’s Republic of China

² Centre for Clean Environment and Energy, School of Environment and Science, Gold Coast Campus, Griffith University, Gold Coast, QLD 4222, Australia

³ Key Laboratory of Materials Processing and Mold (Zhengzhou University), Ministry of Education, Zhengzhou, People’s Republic of China

⁴ Jiangsu Key Laboratory for Environment Functional Materials, Suzhou University of Science and Technology, Suzhou 215009, People’s Republic of China



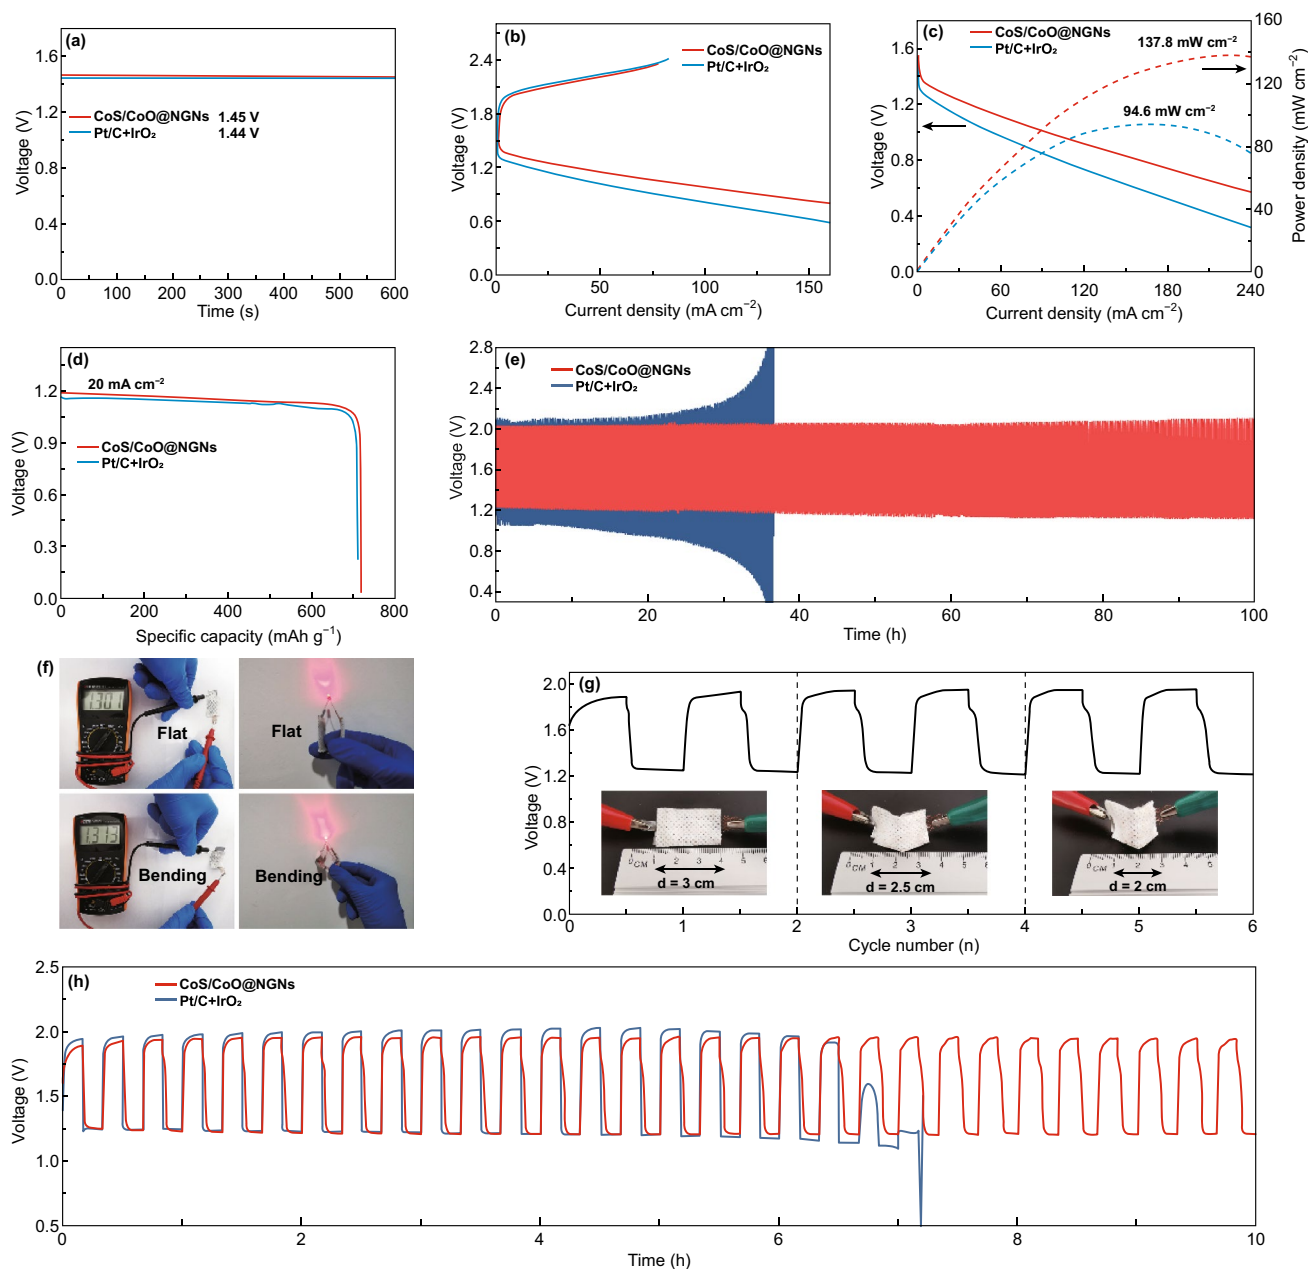


Fig. 5 Open circuit plots of assembled aqueous ZABs. **b** Discharge and charge polarization curves of aqueous ZABs. **c** The corresponding power density plots of aqueous ZABs. **d** Specific capacities of aqueous ZABs at 20 mA cm^{-2} . **e** Long-term discharge-charge cycling performances at 10 mA cm^{-2} . **f** Photograph of the open-current voltage for the single flexible quasi-solid-state ZAB, and a red LED powered by two batteries connected in series under flat and bending conditions. **g** The discharge-charge cycling curve of the flexible quasi-solid-state ZAB with CoS/CoO@NGNs air electrode under different bending conditions. **h** Discharge-charge cycling curves of flexible quasi-solid-state ZABs at 1 mA cm^{-2}

Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence,

unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.